

A NEW FRAMEWORK FOR SPATIAL MODELING AND SYNTHESIS OF GENOME SEQUENCE

Salman Mohamadi, Farhang Yeganegi, Hamidreza Amindavar

Department of Electrical Engineering, Amirkabir University of Technology, Tehran, Iran
S.mohamadi100@aut.ac.ir, Farhang.yeganegi@aut.ac.ir, Hamidami@aut.ac.ir

ABSTRACT

This paper provides a framework in order to statistically model sequences from human genome, which is allowing a formulation to synthesize gene sequences. We start by converting the alphabetic sequence of genome to decimal sequence by Huffman coding. Then, this decimal sequence is decomposed by HP filter into two components, trend and cyclic. Next, a statistical modeling, ARIMA-GARCH, is implemented on trend component exhibiting heteroskedasticity, autoregressive integrated moving average (ARIMA) to capture the linear characteristics of the sequence and later, generalized autoregressive conditional heteroskedasticity (GARCH) is then appropriated for the statistical nonlinearity of genome sequence. This modeling approach synthesizes a given genome sequence regarding to its statistical features. Finally, the PDF of a given sequence is estimated using Gaussian mixture model, and based on estimated PDF, we determine a new PDF presenting sequences that counteract statistically the original sequence. Our strategy is performed on several genes as well as HIV nucleotide sequence and corresponding results is presented.

Index Terms— Statistical modeling, Genome sequence synthesizing, ARIMA model, GARCH model, Biological functionality counteraction, Human Immunodeficiency Virus (HIV)

1. INTRODUCTION

Considering the increasingly enormous amount of human and also animals genomic data and assuming that genome sequences could also be treated as a discrete signal, raise the idea that signal processing can play an important role in interpreting the genome information [1, 2]. Here we analyze and model genome sequence which is represented by sequence of letters from a four-character alphabet including of the letters A, T, C, and G; each one representing one of four distinct nucleotides named cytosine (C), thymine (T), adenine (A), guanine (G). Also A, T, G and C are called base pairs of gene sequence. DNA strand is divided into genes and intergenic subsequences noting that genes are responsible for protein synthesis. Therefore in order to process a sub

sequence of DNA, here a sequence demonstrating a gene, we need to convert the sequence of alphabet to a sequence of binary or decimal numbers [3]. A variety of methods have been used to convert the sequence of alphabet to desirable decimal sequence which can be found in [2–4]. Sequence of any particular gene, is a reference to possessing necessary information in order to create a specific protein; so any time that a new protein is going to come into existence, a translation system start to translate the gene information letter by letter. In this sense, we can suppose that we are facing a microscopic communication system that to transfer information. Therefore in the procedure of translating genome sequence, it can be inferred that genome sequence is the source of information transmission during genome sequence biological translation [5, 6] and based on this fact, we suggest a source coding method for converting the gene sequence to a decimal sequence. After providing a digital signal for any given gene of genome sequence, since frequently have been observed that genome sequence demonstrate cyclic pattern [7], a powerful tools named HP filter will be applied to this decimal sequence to decompose it to trend component and Cyclic component. Cyclic present periodic patterns of signal, but trend provide the main trend of signal. Also it is important to note that cyclic component shows a time invariant variance but trend component shows an entirely time variant variance, it can be seen in Fig. 2. Finally based on ARIMA-GARCH model, modeling and synthesis of genome sequences, is done for a number of original genes sequences. This paper is organized as follows, the preprocessing of the genome sequence, ARIMA and ARCH/GARCH modeling of the genome sequence, PDF estimation and some simulations and at the end, some concluding remarks.

2. PROBLEM STATEMENT AND FORMULATION

In order for statistical modeling of a genome sequence on a computer, decimal numbers are preferred, on the other hand, Huffman coding is a variable-length coding commonly accepted for lossless data compression providing a short binary sequence; in entropy sense, easily converted to a decimal number. By so doing, a discrete signal like a time series is created of a genome sequence that measures the status of genetic

alphabets over time and space which later would be used for spatial modeling. There is no evidence as to the created sequence is stationary, in order to convert this non-stationary series to stationary, in fact, having a look into the genome structure, because genome sequence includes too many sub sequences such as sequences of genes which are randomly arranged from statistical point of view [8]; ARIMA modeling is utilized that captures the best linear forecast for the genome sequence. In order to model, the recipe of the frequency of how the alphabets in a genome sequence converted to each other a statistical measure of the dispersion can be adopted, volatility is the measure of time-varying variance; which is the first order non-linearity characteristics of a time series, and it has been modeled through ARCH/GARCH method. As we demonstrate that the trend component of genome sequence possesses volatility clustering reflecting more recent changes and fluctuations in the genome time series.

2.1. PREPROCESSING

2.1.1. Huffman coding

There are two types of coding algorithm in terms of code length which are fixed length code and variable length code. Along with all the advantageous that variable length coding has, they may not be uniquely decodable. In fact, in coding theory, a specific type of code called "prefix code" can be uniquely decoded. The other aspect of coding algorithm that is really important is the average code length. In information theory literature, it can be seen that the average code length has a lower bound called "Entropy". Also, this bound can be achieved using a prefix variable length code called "Huffman code" where it has shown a promising results in the literature [9, 12]. The output from Huffman's algorithm can be viewed as a variable-length code table for encoding a source symbol. The algorithm derives this table from the estimated probability or frequency of occurrence (weight) for each possible value of the source symbol. In other words, in this method, probability of symbols (here A, T, G and C) are taken into account to prepare a code specifically efficient for the alphabetic sequence we want to encode it [13]. As in [14] have been demonstrated, Huffman coding would serve as good compression code for genome sequence, virtually because of presenting sequence-specific or here, gene-specific coding, meaning that with this method, entropy of each of the nucleotides, A, T, G and C, individually affect the coding procedure of that sequence. Therefore by this method, the task of converting the sequence of A, T, G and C, to a digital signal would be performed efficiently [14]. With Huffman method, we map [A T G C] to decimal numbers in vector $N = [0 \ 1 \ 2 \ 3]$, noting it has been seen that different mappings, result in the same ways, so we can map [A T G C] to any other vector made up from 0, 1, 2 and 3.

2.1.2. Hodrick-Prescott (HP) filtering

Hodrick-Prescott filter (HP filter) captures a smooth trend carrying the most valuable information of signals rather than powerful hidden cyclic pattern [15, 16]. The HP filter is a fine approximation to an ideal high-pass filter, which outputs two components named cyclic and trend. The genome sequence converted to a decimal sequence can be decomposed into two components: a trend and cycle components, and a remainder component that may not be captured denoted as noise. This is a problem of interest in the statistical modeling, extraction of trend and hidden periodicity from a time series which may seem not to carry valuable information. However this question remains unaddressed that why we should use this decomposition. Cyclic component is about time invariance part of signal, therefore once we aim at modeling the signal with a model capturing time varying variance, we may decompose the signal into time variant and time invariant components and just model the first component. In section 4 we explain in more detail how we use formulation of our model and also intact cyclic component of certain gene to synthesize it. The trend is the component of a genome sequence that provides the low frequency statistical characteristics, whereas the cyclical component that refers to the fluctuations around the trend. In a genome sequence, the cyclic component does not convey a significant information, in entropy sense. In Fig. 1 Huffman encoded sequences of cyclic and trend are shown for a limited number of base pairs (letters of alphabetic sequence) of gene. Furthermore, their time varying variance to support the idea that HP filter is effective in this application, additional to above argument, it is helpful to consider that trend component presents that component of signal with fluctuating time varying variance, meaning that trend possesses the heteroskedasticity while cyclic component presents those of almost constant time invariance variance, meaning cyclic is a homoskedastic process; as it is shown in Fig. 2. Heteroskedasticity characteristics of genome sequence refers to the circumstance in which the variability of the trend component cannot be predicted by any predictor if equal ranges of genome sequence are observed, on the other hand, a prediction of genome sequence is possible if unequal ranges of trend values are observed.

2.2. ARIMA-ARCH/GARCH modeling

2.2.1. ARIMA Model

A genome sequence possesses some properties that exist among all other genes in a linear sense, from the standpoint of forecasting these properties ARIMA modeling allows linear prediction of future values of genome sequence based on these properties. ARIMA models are applied in cases that data shows non-stationarity, in order to reduce non-stationarity. Via applying an initial differencing step, corresponding to the integrated part of the model, ARIMA reduces

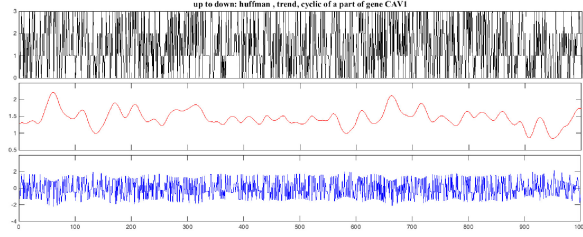


Fig. 1. Huffman encoded decimal sequence of 1000 base pairs (letter) of gene CAV1, trend Component and Cyclic Component of this decimal sequence, horizontal axis represents base pair and vertical axis represents amplitude .

the non-stationarity [17]. The ARIMA(p ; d ; q) is described by

$$\left(1 - \sum_{k=1}^p a_k L^k\right) (1 - L)^d X_n = \left(1 + \sum_{k=1}^q b_k L^k\right) \epsilon_n \quad (1)$$

where X_n , here is the decimal sequence corresponding to gene sequence, n is the number corresponding to the location of base pairs in the sequence of gene, for example X_{128} refers to the decimal number in the 128th location of gene that corresponds to the type of base pair that has occupied this location of gene sequence.

ACCCACATTCCCCTCTCCA..."128thbasepair"... Moreover L is the lag operator, the a_k are the parameters of the autoregressive part of the model, the b_k are the parameters of the moving average part and the ϵ_n are error terms. The error terms ϵ_n are generally assumed to be independent, identically distributed variables sampled from a normal distribution with zero mean. Here p is the order of AR, and q the order of MA, and d is the order of differencing [18].

Table 1. Parameters of the ARIMA models; N is the number of base pairs (letter) of sequence of gene CAV1 .

Model	N	AIC _c
ARIMA(1,1,1)	38400	-5.1563e+05
ARIMA(2,1,1)	38400	-5.1568e+05
ARIMA(2,1,2)	38400	-5.1616e+05
ARIMA(1,1,2)	38400	-5.1533e+05
ARIMA(2,2,2)	38400	-5.1601e+05
ARIMA(2,2,1)	38400	-5.1586e+05
ARIMA(1,2,2)	38400	-5.1583e+05
ARIMA(1,2,1)	38400	-5.1558e+05

Table 2. Parameters of the ARCH and GARCH models; N also is the length of residual of ARIMA model which is equal to the size of gene CAV1, here we see GARCH(1,1) is the best of all due to the smallest AIC_c.

Model	N	AIC _c
ARCH(0)	38400	-2.889e+05
ARCH(1)	38400	-2.8913e+05
ARCH(2)	38400	-2.9221e+05
ARCH(3)	38400	-2.9614e+05
ARCH(4)	38400	-2.9905e+05
ARCH(5)	38400	-3.1421e+05
ARCH(6)	38400	-3.2228e+05
ARCH(7)	38400	-3.3633e+05
ARCH(8)	38400	-3.4689e+05
ARCH(9)	38400	-3.5656e+05
GARCH(1,1)	38400	-3.9555e+05

2.2.2. ARCH or GARCH Modeling

Most straight forward of time varying power of random sequences is ARCH/GARCH; it means that these processes best model the sequences of time varying power or variance. ARCH/GARCH process mostly and also first time, used in economic time series modeling, because its profound mathematics allow to cover precisely most of fluctuations in those signals. Here because of lack of space, we just present a brief introduction, for further information and also example of biological application of these two, refer to [17, 18] [15,14]. For a given digital signal y_n , we can model it using GARCH(p , q), if $E\{y_n\} = 0$ and

$$y_n = \sqrt{h_n} \epsilon_n \quad (2)$$

$$h_n = a_0 + \sum_{i=1}^p a_i y_{n-i}^2 + \sum_{j=1}^q b_j h_{n-j} \quad (3)$$

Where h_n is the conditional variance of y_n , $a_0 > 0$, $a_i \geq 0$, $b_j \geq 0$ and $\{\epsilon_n\}$ is a sequence of independent identically distributed zero mean with variance one random variables, often assumed to be a standard normal random variable [18]. ARCH or GARCH process, with an ability to model volatility, would be used to model the volatility of the digital signal to reflect changes and fluctuations in gene sequence [19].

3. FITTING THE BEST ARIMA-GARCH MODEL

To perform our method, we selected 18 genes that have most interaction in human breast cancer; the sequence of each gene is downloaded from United State National Center for Biotech-

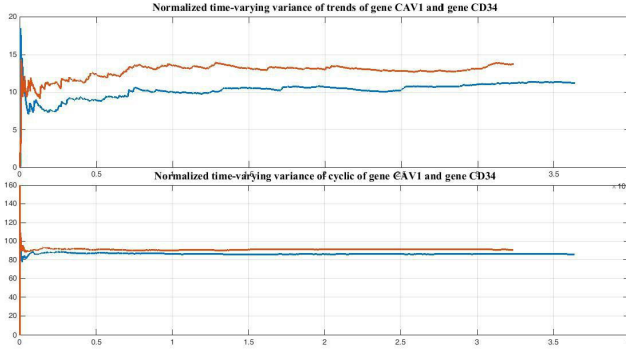


Fig. 2. Normalized Time Varying Variance of Trend and Cyclic components of the two genes, CAV1 (blue) and CD34 (orange); horizontal axis represents base pairs (unit*10000) and vertical axis represents amplitude.

nology Information¹. These genes are as in table 3. Having the preprocessed digital signal, corresponding to each gene sequence, now different ARIMA(p; d; q) models are fitted and the corresponding AICc are computed as in Table 1. Best ARIMA for sample gene, CAV1 is ARIMA(2,1,2). When it comes to fit a ARCH/GARCH model, firstly ARCH test should be used to verify the existence of heteroskedasticity in the data. For all 18 genes this test has been performed on residual of ARIMA model individually and confirmed the issue. After that, best orders are extracted through AIC. Finally a mathematical formulation resulting from modeling is attained.

4. RESULTS

4.1. Modeling the sequences of 18 genes of human genome

Order of ARIMA model for each gene is selected based on best AIC. Best ARCH/GARCH model, is then fitted to residuals of ARIMA. Results of sample gene, gene CAV1, are presented in tables and figures. For all of genes we achieved mathematical formulation extracted from ARIMA-GARCH modeling; here 15 out of 18 genes are modeled by formulation of ARIMA(2,1,2)-GARCH(1,1) model, only the coefficients of formula differs from gene to gene. Among 18 genes, except for three genes PPARG, NGFR and PLA2G2A, best ARIMA was ARIMA(2,1,2) and for all 18 genes, GARCH(1,1) was selected as the best order of GARCH. For these three, PPARG, NGFR and PLA2G2, best ARIMAs were respectively ARIMA(2,2,2), ARIMA(2,2,2) and ARIMA(1,2,2). Fitting these best models, allow us to synthesize artificial gene sequence for any given original gene, that possess the linear and nonlinear characteristics of the original gene.

¹<https://www.ncbi.nlm.nih.gov/gene/>

4.2. Synthesizing the new sequences

According to the formulation provided at 2.2 and 2.3; we can formulate ARIMA-GARCH model [18]. For all genes, coefficients of the formula of ARIMA-GARCH modeling are extracted; here for gene CAV1 with ARIMA(2,1,2)-GARCH(1,1) we have:

$$\begin{aligned} h_n + X_n - X_{n-1} = & (-0.4369)(X_{n-1} - X_{n-2}) \\ & + (0.1312)(X_{n-2} - X_{n-3}) \\ & + (-0.1334)\epsilon_{n-1} + (-0.8718)\epsilon_{n-2} \\ & + (0.8991)\epsilon_{n-1}^2 + (0.0189)h_{n-1} \\ & + (7.40609e - 06) \end{aligned}$$

Where h_n is synthesized sequence of Trend component of the artificial sequence, which is going to be synthesized completely, and X_n is the sequence of Trend component of the original gene and ϵ_n the error term. Then we add h_n to the cyclic component of the original gene to complete the synthesis procedure, which provides us a new decimal sequence for any given original sequence. The latter, using Huffman decoding, we convert the synthesized sequence, that is decimal, to alphabetic sequence.

$$\{d_1, d_2, d_3, \dots, d_m\} \Rightarrow \{b_1, b_2, b_3, \dots, b_m\}$$

d_1, d_2, \dots, d_m are the decimal numbers resulting from synthesis and $b_1, b_2, b_3, \dots, b_m$ are the corresponding base pairs of the synthesized gene which are achieved by converting the decimal sequence to alphabetic sequence. Sample of 120 synthesized base pairs (from 1332 to 1452), which is randomly selected from whole sequence of synthesized gene base on gene FGF2 are as follow :

```
ACGCCCCGCGAGGCTGGTTGGCCGGGGCGGGGGCCA
TGCCCGCGAGCGTGTCGGCGGCCGAGGCCGGCGCC
GTAGGACGGCGGCTCAAAGCGGGCTCCATCGACTC
GCAGATCTCGGGGG
```

It is noteworthy to mention that in the sense of practical application, the above formulation equips us so that we can synthesize new sequences based on a certain genomic sequence, which is useful in some application such as genomic sequence PDF estimation, because for PDF estimation we need to provide enough ensemble of the genomic sequence, which this formulation can deal with.

4.3. PDF estimation for the counteracting an original sequence

Suppose we take an original sequence of genome or a virus equivalent to a vector; in order to plausibly estimate its empirical PDF, we are required to have access on an infinite ensemble of this vector whereas, in our instance, such scenario is impractical, and even if we provide enough ensemble for a genomic sequence; i.e. random vector, next dilemma is the high-dimensionality issue of its PDF representation. For instance to estimate PDF of a virus such as HIV with the length 9181

Table 3. List of 18 new sequences, which are synthesized using Huffman decoding based on original genes; N is the length of the new sequence which is the same length as of original gene

Original gene	N	Original gene	N
IGFBP6	4910	TGFBR3	225993
NGFR	19728	EGR1	3826
ESR1	472929	FOS	3461
DLC1	521250	IGF1	85920
CD34	30431	NTRK2	358613
CAV1	38401	PLA2G2A	5009
PPARG	183646	ERBB4	1163439
FGF2	71529	IL6	6561

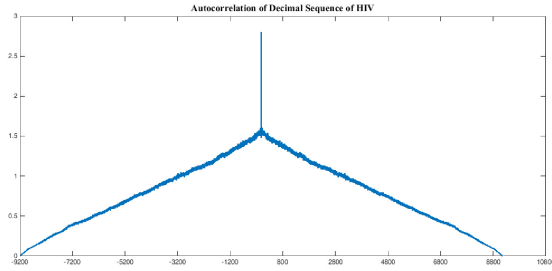


Fig. 3. HIV Sequence Autocorrelation, as we see, even at heavy lags, the sequence is highly correlated.

can be represented in such dimension. Therefore, *theoretical* PDF estimation strategy must be sought. In this regard, we propose Gaussian Mixture Model (GMM) [21] to model the decimal sequence provided by Huffman coding for genome or a virus such as HIV sequence. Since this sequence and generally genomic sequences are highly correlated as seen in Fig.3, we estimate a two dimensional marginal PDF; as we see in Fig.4, using GMM of the original sequence of length N .

$$p(x) = \sum_{i=1}^M w_i \mathcal{N}(x, \mu_i, \Sigma_i), \quad 0 < w_i < 1 \quad (4)$$

where $p(x) = p(x_1, x_2)$ is the two dimensional marginal probability density function of a genomic sequence modeled by a GMM of order M of Gaussian kernels, $\mathcal{N}(x, \mu_i, \Sigma_i)$, whose mean vectors and covariance matrices are denoted by μ_i and Σ_i , respectively. We assume the PDF for the vector $x' = (x'_1, x'_2)$ counteracting the original sequence x is also modeled by a GMM as follows

$$p(x') = \sum_{i=1}^M w_i \mathcal{N}(x', \mu_i, \Sigma'_i), \quad 0 < w_i < 1 \quad (5)$$

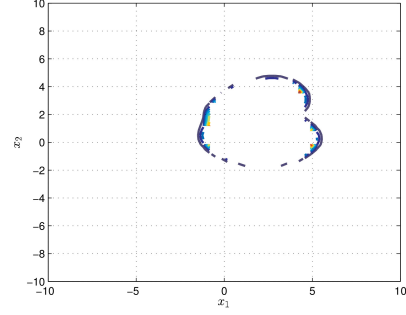


Fig. 4. Gaussian mixture approximation to PDF of HIV sequence.

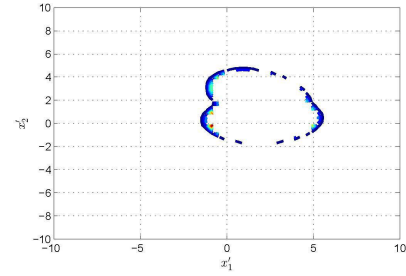


Fig. 5. Gaussian mixture approximation to PDF of highly uncorrelated HIV sequence; this PDF could be considered as the basis for searching sequences that are statistically negatively correlated to the HIV sequence, i.e. the more similarity between PDF of given sequence and this PDF, the more counteraction against HIV statistical treatment and probably its biological functionality [20]

that only differs in covariance matrices Σ' which is related to Σ according to

$$\Sigma_{ii'} = \Sigma_{ii}, \quad \Sigma_{ij'} = -\Sigma_{ij}, \quad i \neq j, \quad (6)$$

that is, the diagonal entries of both covariance matrices are the same but their off-diagonal entries are opposite in sign to rationalize the utmost negative statistical correlation tying x and x' . PDF of highly uncorrelated targeted sequence for HIV nucleotide sequence is also shown in Fig.5

5. CONCLUSION

In this paper, a new framework is presented in which, firstly we propose a preprocessing step to prepare 18 genomic sequences for further statistical modeling. Then perform second step, statistical modeling, to capture linear and nonlinear characteristics of genomic sequence. Furthermore, we propose an approach to synthesize a new sequences based on our modeling for sequences of several original genes of the genome sequence and finally using GMM for PDF estimation, at first PDF of a given sequence such as HIV is estimated and based on that, another PDF is estimated which relates to the

sequences with highly negative statistical correlation against the original sequence PDF, here HIV. This negative statistical correlation would suggest biological functional counteraction.

6. REFERENCES

- [1] Mai S Mabrouk, Safaa M Naeem, and Mohamed A El-dosoky, "Different genomic signal processing methods for eukaryotic gene prediction: A systematic review," *Biomedical Engineering: Applications, Basis and Communications*, vol. 29, no. 01, pp. 1730001, 2017.
- [2] PP Vaidyanathan and Byung-Jun Yoon, "The role of signal-processing concepts in genomics and proteomics," *Journal of the Franklin Institute*, vol. 341, no. 1, pp. 111–135, 2004.
- [3] Bihter Das and Ibrahim Turkoglu, "A novel numerical mapping method based on entropy for digitizing dna sequences," *Neural Computing and Applications*, pp. 1–9, 2017.
- [4] Muhammaed Talha Naseem, KR Aravind Britto, Mustafa Musa Jaber, VS Balaji, G Rajkumar, K Narasimhan, V Elamaram, et al., "Preprocessing and signal processing techniques on genomic data sequences," *Biomedical Research*, pp. 1–1, 2017.
- [5] Martin Bossert, "Information-and communication theory in molecular biology," 2017.
- [6] M Thangavel, P Varalakshmi, and R Sindhuja, "A comparative study on dna-based cryptosystem," in *Handbook of Research on Recent Developments in Intelligent Communication Application*, pp. 496–528. IGI Global, 2017.
- [7] Svetlana A Shabalina, Aleksey Y Ogurtsov, and Nikolay A Spiridonov, "A periodic pattern of mrna secondary structure created by the genetic code," *Nucleic Acids Research*, vol. 34, no. 8, pp. 2428–2437, 2006.
- [8] Jingli Zhao, Shuling Li, Lijuan Wang, Li Jiang, Runqing Yang, and Yuehua Cui, "Genome-wide random regression analysis for parent-of-origin effects of body composition allometries in mouse," *Scientific Reports*, vol. 7, pp. 45191, 2017.
- [9] Pothuraju Rajarajeswari and Allam Apparao, "Dnabit compress–genome compression algorithm," *Bioinformation*, vol. 5, no. 8, pp. 350, 2011.
- [10] Shanika Kuruppu, Simon J Puglisi, and Justin Zobel, "Optimized relative lempel-ziv compression of genomes," in *Proceedings of the Thirty-Fourth Australasian Computer Science Conference-Volume 113*. Australian Computer Society, Inc., 2011, pp. 91–98.
- [11] Armando J Pinho, António JR Neves, Carlos AC Bastos, and Paulo JSG Ferreira, "Dna coding using finite-context models and arithmetic coding," in *2009 IEEE International Conference on Acoustics, Speech and Signal Processing*. IEEE, 2009, pp. 1693–1696.
- [12] Farhang Yeganegi, Vahid Hassanzade, and SM Ahadi, "Comparative performance evaluation of svd-based image compression," in *Electrical Engineering (ICEE), Iranian Conference on*. IEEE, 2018, pp. 464–469.
- [13] Jin He, Xuewen Ding, and Li Li, "The practice of application-oriented personnel training in the course of information theory and coding," *DEStech Transactions on Social Science, Education and Human Science*, , no. eemt, 2017.
- [14] Anas Al-Okaily, Badar Almarri, Sultan Al Yami, and Chun-Hsi Huang, "Toward a better compression for dna sequences using huffman encoding," *Journal of Computational Biology*, vol. 24, no. 4, pp. 280–288, 2017.
- [15] Torben Mark Pedersen, "The hodrick–prescott filter, the slutzky effect, and the distortionary effect of filters," *Journal of Economic Dynamics and Control*, vol. 25, no. 8, pp. 1081–1101, 2001.
- [16] Pierre-Alain Bruchez, "A modification of the hp filter aiming at reducing the end-point bias," *Swiss Financial Administration, Working Paper*, 2003.
- [17] Tim Bollerslev, "Generalized autoregressive conditional heteroskedasticity," *Journal of econometrics*, vol. 31, no. 3, pp. 307–327, 1986.
- [18] Salman Mohamadi, Hamidreza Amindavar, and SM Ali Tayanarian Hosseini, "Arima-garch modeling for epileptic seizure prediction," in *Acoustics, Speech and Signal Processing (ICASSP), 2017 IEEE International Conference on*. IEEE, 2017, pp. 994–998.
- [19] Salman Mohamadi, Farhang Yeganegi, and Nasser M Nasrabadi, "Detection and statistical modeling of birth-death anomaly," *arXiv preprint arXiv:1906.11788*, 2019.
- [20] Hulin Wu, "Statistical methods for hiv dynamic studies in aids clinical trials," *Statistical methods in medical research*, vol. 14, no. 2, pp. 171–192, 2005.
- [21] Zoran Zivkovic, "Improved adaptive gaussian mixture model for background subtraction," in *Pattern Recognition, 2004. ICPR 2004. Proceedings of the 17th International Conference on*. IEEE, 2004, vol. 2, pp. 28–31.