

---

# Towards Cover Song Detection with Siamese Convolutional Neural Networks

---

Marko Stamenovic <sup>1</sup>

## Abstract

A cover song, by definition, is a new performance or recording of a previously recorded, commercially released song. It may be by the original artist themselves or a different artist altogether and can vary from the original in unpredictable ways including key, arrangement, instrumentation, timbre and more. In this work we propose a novel approach to learning audio representations for the task of cover song detection. We train a neural architecture on tens of thousands of cover-song audio clips and test it on a held out set. We obtain a mean precision@1 of 65% over mini-batches, ten times better than random guessing. Our results indicate that Siamese network configurations show promise for approaching the cover song identification problem.

## 1. Introduction

The proliferation of cheap digital media creation tools and free web based publishing platforms has led to an ever-expanding universe of audio-visual content. Although much of this content is original in nature, a stunning amount is cover material. For example, a recent search of a popular video sharing site for the term Beatles cover turned up 3.97 million matches. Over their entire career, The Beatles released a total of 257 songs. Applications of cover song detection include copyright infringement detection and content-based music recommendation among others.

Classical approaches to cover-song detection use feature extraction combined with a distance metric. Chroma features, which globally bin spectral semitone energy, are widely used as input feature representations. Ellis (Ellis, 2006) used beat-synchronous chroma features and cross-correlation to detect cover songs. Ellis and Cotton (Ellis & Cotton, 2007) built on this work by tuning the cross correlation results and the tempo estimation. Serra et al. (Serrà et al., 2008) used

dynamic time warping to align a chroma-based features before similarity evaluation. More recently, Silva et al. (Silva et al., 2016) used an approach based on subsequence comparisons, Seetharaman and Rafii (Seetharaman & Rafii, 2017) proposed a method based on a two-dimensional Fourier transform of a binarized constant-Q spectrogram, and there have been a wide variety of approaches based on feature and sensor network fusion (Chen et al., 2017; Tralie, 2017).

There is less literature with respect to machine learning approaches. Chang et al. (Chang et al., 2017) use a chroma self-similarity matrix as input to convolutional neural network and frame the problem as a classification task. Humphrey et al. (Humphrey et al., 2013) use sparse-coding with two-dimensional Fourier magnitude coefficients extracted from chroma features.

In this work we propose a Siamese convolutional network (convnet) based approach to cover song detection. First, we train the network to predict whether a pair of songs is a cover pair or not. We then use the trained network as a feature extractor to generate feature vectors which we use to calculate cover-song similarity.

Our approach differs from previous approaches to cover-song detection in that, outside of our initial time-spectral representation, the bulk of our feature extraction is done using machine learning rather than hand-tuned features.

## 2. Related Work

Siamese networks have been used since the early 1990s for learning similarity representations. The networks are referred to as “Siamese” networks because they consist of two identical sub-networks used to extract task-salient feature representations from the two input items to be compared. Baldi and Chauvin (Baldi & Chauvin, 1993) propose Siamese network for fingerprint recognition. Bromley et al. (Bromley et al., 1994) describe such a network for verifying written signatures on a pen-input tablet.

There has been much work done in recent years using CNN’s on spectro-temporal audio representations for classification tasks (Hershey et al., 2017; Gemmeke et al., 2017; Choi et al., 2017). Siamese networks have been applied to audio tasks as well, including by Zhang and Duan (Zhang & Duan, 2017) for search by vocal imitation.

<sup>1</sup>Bose Corporation, Boston, MA, USA. Correspondence to: Marko Stamenovic <marko\_stamenovic@bose.com>.

### 3. Overview

#### 3.1. Dataset

Our raw data consists of 64 Kbps 22.5 kHz MP3s from 7-Digital preview clips of songs in the Second-Hand-Songs Dataset (SHS) (Bertin-Mahieux et al., 2011a) train set, which is a subset of the Million Song Dataset (MSD) (Bertin-Mahieux et al., 2011b). Preview clips range from 30 to 60 seconds of the song pulled from random parts of the the track. The SHS contains a training set of 12,960 unique song clips, divided into 4,128 cliques, or version-groups of the same original song. For example there may be 5 versions of the same song, which would make up one clique. Overall, the dataset contains 24,986 cover-song pairs. During training we stochastically generate an equal amount of non-cover-song pairs by sampling songs from SHS which do not appear in the same clique. This amounts to 49,972 total song-pairs evenly split between cover-song pairs and non-cover-song pairs. We hold out 1000 song pairs as a validation set.

#### 3.2. Input Representation

We use a time-frequency log-spectral representation of the audio based on the Constant Q Transform (CQT) (Brown et al., 1992) which we extract using the Librosa python toolbox (McFee et al., 2017). The CQT is a transform with a logarithmic frequency resolution, mirroring the Western music scale and the human auditory perception of music. We use a time resolution corresponding to approximately 0.23 seconds per time frame and a frequency resolution of one semi-tone per frequency bin spanning 7 octaves from C1 (32Hz) to B7 (3951 Hz).

#### 3.3. Network Architecture and Hyperparameters

Our network consists of a Siamese convolutional architecture shown in Figure 1. We train the model with a NVidia Titan X GPU for 5 epochs and a mini-batch size of 16 using the ADAM optimizer to update weights. To prevent overfitting, a dropout factor of 0.5 is used on the fully connected layers in addition to an L2 regularization lambda factor of 0.005.

#### 3.4. Objective Function

To formalize the problem, our network is trying to learn a feature extraction function  $f$  between two query songs  $x_a$  and  $x_b$  to classify them as either a cover or non cover-song pair. Let  $v_a, v_b = f(x_a, x_b)$ , where  $v_a, v_b$  are the output representations of  $x_a$  and  $x_b$ , respectively, and  $f$  is the convnet feature extractor. We then pass the output representations to a comparison function  $p$ , shown below, where  $\sigma$  is the sigmoidal activation function and  $\alpha$  is an additional learned parameter weighting the importance of

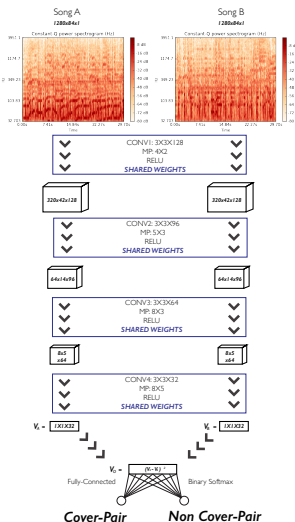


Figure 1. Network architecture and hyperparameters of the proposed algorithm.

each index of  $p$ . This comparison function computes the final similarity score between the output representations and fuses the Siamese network.

$$p(x_a, x_b) = \sigma \sum_j \alpha_j (v_a^{(j)} - v_b^{(j)})^2$$

Our objective function is a binary cross-entropy loss  $\mathcal{L}(x_a, x_b)$  on the true labels  $y(x_a, x_b)$  and output of the network  $p$ , where we assume  $y(x_a, x_b) = 1$  for each cover-song pair and  $y(x_a, x_b) = 0$  for each non cover-song pair.

$$\mathcal{L}(x_a, x_b) = y(x_a, x_b) \log p(x_a, x_b) + (1 - y(x_a, x_b)) \log(1 - p(x_a, x_b))$$

#### 3.5. Evaluation

Performance of the network is evaluated by extracting features from the penultimate layer of the network and measuring cosine distance. We use a metric of mean precision at one (Prec@1) over a mini-batch size of 16. If a song is nearer to its cover pair than any other song in the mini-batch, we score it as correct and vice-versa.

### 4. Results

Our best configuration yields a a Prec@1 score of 65.0% over a mini-batch of 16. Since we evaluate over a mini-batch size of 16, random guessing would yield a Prec@1 of 0.0625%.

Table 1. Mean precision at one; our system compared to other published results. Note that ours is evaluated and averaged over mini-batches of 16 on the SHS while the other results use the MIREX Mixed Collection for evaluation.

SYSTEM	PREC@1
(ELLIS & COTTON, 2007)	49.7
(BELLO, 2007)	45.8
(SERRÀ ET AL., 2008)	73.3
(CHEN ET AL., 2017)	<b>76.6</b>
OURS	65.0

We compare our results on the SHS subset to various published results on the US Pop Music Collection Cover Song dataset (Mixed Collection) from MIREX (Downie et al., 2010) in Table 1. This dataset consists of 30 cliques, each with 11 different versions, for a total of 330 songs.

We evaluate a variety of convolutional network structures inspired by (Choi et al., 2016) by varying the amount of filters per layer and whether the amount of filters per layer is increasing or decreasing proportional to network depth. We find that in general for this task starting with a large amount of filters at the input layer and gradually decreasing yields better performance. We also find that the network tends to overfit quickly, which is why we employ a relatively high rate of dropout and L2 regularization.

## 5. Conclusion and Future Work

In this work we show a novel machine-learning based approach to the cover song detection task, evaluate different network configurations to find a best suited architecture and provide code to reproduce our experiments<sup>1</sup>. In future work we would like to better evaluate the network to more closely match work done in the cover song detection space. We are also interested in exploring network structures such as attention that can map similarities between different temporal pieces of audio, triplet networks, and data augmentation.

## References

- Baldi, Pierre and Chauvin, Yves. Neural networks for fingerprint recognition. *Neural Comput.*, 5(3):402–418, May 1993. ISSN 0899-7667. doi: 10.1162/neco.1993.5.3.402. URL <http://dx.doi.org/10.1162/neco.1993.5.3.402>.
- Bello, Juan Pablo. Audio-based cover song retrieval using approximate chord sequences: testing shifts, gaps, swaps and beats. In *Int. Symp. on Music Information Retrieval* (ISMIR, pp. 239–244, 2007).
- Bertin-Mahieux, Thierry, Ellis, Daniel P.W., Whitman, Brian, and Lamere, Paul. The million song dataset. In *Proceedings of the 12th International Conference on Music Information Retrieval (ISMIR 2011)*, 2011a.
- Bertin-Mahieux, Thierry, Ellis, Daniel P.W., Whitman, Brian, and Lamere, Paul. The million song dataset. In *Proceedings of the 12th International Conference on Music Information Retrieval (ISMIR 2011)*, 2011b.
- Bromley, Jane, Guyon, Isabelle, LeCun, Yann, Säckinger, Eduard, and Shah, Roopak. Signature verification using a “siamese” time delay neural network. In Cowan, J. D., Tesauro, G., and Alspector, J. (eds.), *Advances in Neural Information Processing Systems 6*, pp. 737–744. Morgan-Kaufmann, 1994. URL <http://papers.nips.cc/paper/769-signature-verification-using-a-siamese-time-delay-neural-network.pdf>.
- Brown, J.C., Puckette, M., of Technology. Media Laboratory. Vision, Massachusetts Institute, and Group. Modeling. *An Efficient Algorithm for the Calculation of a Constant Q Transform*. M.I.T. Media Lab Vision and Modeling Group technical report. Vision and Modeling Group, Media Laboratory, Massachusetts Institute of Technology, 1992. URL <https://books.google.com/books?id=rao7HQAACAAJ>.
- Chang, Sungkyun, Lee, Juheon, Choe, Sang Keun, and Lee, Kyogu. Audio cover song identification using convolutional neural network. *CoRR*, abs/1712.00166, 2017. URL <http://arxiv.org/abs/1712.00166>.
- Chen, Ning, Li, Wei, and Xiao, Haidong. Fusing similarity functions for cover song identification. 77, 02 2017.
- Choi, Keunwoo, Fazekas, George, and Sandler, Mark B. Automatic tagging using deep convolutional neural networks. *CoRR*, abs/1606.00298, 2016. URL <http://arxiv.org/abs/1606.00298>.
- Choi, Keunwoo, Fazekas, György, Sandler, Mark B., and Cho, Kyunghyun. Transfer learning for music classification and regression tasks. *CoRR*, abs/1703.09179, 2017. URL <http://arxiv.org/abs/1703.09179>.
- Downie, J. Stephen, Ehmann, Andreas F., Bay, Mert, and Jones, M. Cameron. *The Music Information Retrieval Evaluation eXchange: Some Observations and Insights*, pp. 93–115. Springer Berlin Heidelberg, Berlin, Heidelberg, 2010. ISBN 978-3-642-11674-2. doi: 10.1007/978-3-642-11674-2\_5. URL [https://doi.org/10.1007/978-3-642-11674-2\\_5](https://doi.org/10.1007/978-3-642-11674-2_5).

<sup>1</sup><https://github.com/markostam/coverSongs-dual-convnet>

- Ellis, Daniel P. W. Identifying 'cover songs' with beat-synchronous chroma features. In *Music Information Retrieval Evaluation eXchange 2006*, 2006.
- Ellis, Daniel P. W. and Cotton, Courtenay V. The 2007 labrosa cover song detection system. In *Music Information Retrieval Evaluation eXchange 2007*, 2007.
- Gemmeke, Jort F., Ellis, Daniel P. W., Freedman, Dylan, Jansen, Aren, Lawrence, Wade, Moore, R. Channing, Plakal, Manoj, and Ritter, Marvin. Audio set: An ontology and human-labeled dataset for audio events. In *Proc. IEEE ICASSP 2017*, New Orleans, LA, 2017.
- Hershey, Shawn, Chaudhuri, Sourish, Ellis, Daniel P. W., Gemmeke, Jort F., Jansen, Aren, Moore, Channing, Plakal, Manoj, Platt, Devin, Saurous, Rif A., Seybold, Bryan, Slaney, Malcolm, Weiss, Ron, and Wilson, Kevin. Cnn architectures for large-scale audio classification. In *International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2017. URL <https://arxiv.org/abs/1609.09430>.
- Humphrey, Eric J., Nieto, Oriol, and Bello, Juan P. Data driven and discriminative projections for large-scale cover song identification. In *Proceedings of the 14th International Society for Music Information Retrieval Conference*, November 4-8 2013. [http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/246\\_Paper.pdf](http://www.ppgia.pucpr.br/ismir2013/wp-content/uploads/2013/09/246_Paper.pdf).
- McFee, Brian, McVicar, Matt, Nieto, Oriol, Balke, Stefan, Thome, Carl, Liang, Dawen, Battenberg, Eric, Moore, Josh, Bittner, Rachel, Yamamoto, Ryuichi, Ellis, Dan, Stoter, Fabian-Robert, Repetto, Douglas, Waloschek, Simon, Carr, CJ, Kranzler, Seth, Choi, Keunwoo, Viktorin, Petr, Santos, Joao Felipe, Holovaty, Adrian, Pimenta, Waldir, and Lee, Hojin. librosa 0.5.0, February 2017. URL <https://doi.org/10.5281/zenodo.293021>.
- Seetharaman, P. and Rafii, Z. Cover song identification with 2d fourier transform sequences. In *2017 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 616–620, March 2017. doi: 10.1109/ICASSP.2017.7952229.
- Serrà, Joan, Gómez, Emilia, Herrera, Perfecto, and Serra, Xavier. Chroma binary similarity and local alignment applied to cover song identification. *IEEE Transactions on Audio, Speech and Language Processing*, 16:1138–1151, 08/2008 2008. ISSN 1558-7916. doi: 10.1109/TASL.2008.924595. URL <files/publications/jserraTSALP08.pdf>.
- Silva, Diego Furtado, Yeh, Chin-Chia Michael, Batista, Gustavo E. A. P. A., and Keogh, Eamonn J. Simple: Assessing music similarity using subsequences joins. In *Proceedings of the 17th International Society for Music Information Retrieval Conference, ISMIR 2016, New York City, United States, August 7-11, 2016*, pp. 23–29, 2016. URL [https://wp.nyu.edu/ismir2016/wp-content/uploads/sites/2294/2016/07/099\\_Paper.pdf](https://wp.nyu.edu/ismir2016/wp-content/uploads/sites/2294/2016/07/099_Paper.pdf).
- Tralie, Christopher J. Early MFCC and HPCP fusion for robust cover song identification. *CoRR*, abs/1707.04680, 2017. URL <http://arxiv.org/abs/1707.04680>.
- Zhang, Y. and Duan, Z. Iminet: Convolutional semi-siamese networks for sound search by vocal imitation. In *2017 IEEE Workshop on Applications of Signal Processing to Audio and Acoustics (WASPAA)*, pp. 304–308, Oct 2017. doi: 10.1109/WASPAA.2017.8170044.