Topological properties of basins of attraction and expressiveness of width bounded neural networks

Hans-Peter Beise

Department of Computer Science Trier University of Applied Sciences beise@hochschule-trier.de

Steve Dias Da Cruz Basics & Mathematical Models IEE S.A.

steve.dias-da-cruz@iee.lu

Abstract

In Radhakrishnan et al. [2020], the authors empirically show that autoencoders trained with usual SGD methods shape out basins of attraction around their training data. We consider network functions of width not exceeding the input dimension and prove that in this situation basins of attraction are bounded and their complement cannot have bounded components. Our conditions in these results are met in several experiments of the latter work and we thus address a question posed therein. We also show that under some more restrictive conditions the basins of attraction are path-connected. The tightness of the conditions in our results is demonstrated by means of several examples. Finally, the arguments used to prove the above results allow us to derive a root cause why scalar-valued neural network functions that fulfill our bounded width condition are not dense in spaces of continuous functions.

1 Introduction

In the context of artificial neural networks, the term associative memory describes the ability of certain networks to allow the retrieval of stored data via the activation of associated features. The research on associative memory in this context has a long history dating back to the early seventies [Anderson, 1972, Kohonen, 1972, Nakano, 1972] and is mainly associated with network types known as Hopfield networks [Hopfield, 1982]. The theoretical foundations of Hopfield networks have been intensively studied and, as for instance, their capacity to store data and convergence of data retrieval are understood to large extents [McEliece et al., 1987, Bruck, 1990]. For recent developments we refer to Krotov and Hopfield [2016], Demircigil et al. [2017] and Ramsauer et al. [2020]. An autoencoder, on the other hand, is a type of neural network that, in its original form, is designed to learn an efficient data encoding. For this purpose it generates an encoding of the data and reconstructs them from the latter simultaneously during training. By now, there exists a huge number of different types of autoencoders and they have been omnipresent in deep learning applications in recent years. We refer to Bank et al. [2020], Goodfellow et al. [2016] and the references therein. In Radhakrishnan et al. [2020] the authors report the empirical finding that autoencoders trained with standard stochastic gradient descent (SGD) methods implement an associative memory of their training data. In a series of experiments, they demonstrate that the iterative application of a trained autoencoder on (perturbed) input data, very robustly converges to an example from the training data. That is, for an autoencoder F and a training sample x^* , it is observed that $F^k(x) \to x^*$ as $k \to \infty$, where F^k means the k-fold iterative application of F, for all x in some subset $B(x^*)$ of the input space, called basin of attraction. These training examples hence constitute attractive points of the autoencoder and can be retrieved by iterative application of F. These findings reveal a bias away from an approximation of the identity in the vicinity of the training data towards basins of attraction. A similar observation was made in Zhang et al. [2019]. In the last work, the authors show that different architectures exhibit different biases between the extreme cases of the identity function and constant functions when trained to reconstruct the training data. These works give another perspective on the inductive biases of gradient descent in deep learning [Neyshabur et al., 2014, Soudry et al., 2018, Gunasekar et al., 2018, Belkin et al., 2019]. In this work we consider neural networks having widths that do not exceed the input dimension, and mainly study topological properties of basins of attraction in this situation. The arguments in the proofs of the former allow us to directly derive results on the expressiveness of network functions in this bounded width setting, c.f. Park et al. [2021] for an overview. Our main contributions are summarized next:

- For autoencoders in the above bounded width setting and with continuous, monotonically increasing activation we show: If such an autoencoder has at least one weight matrix with rank strictly less than the dimension of the input data space, then every basin of attraction is unbounded. We further show that, without the last condition on the rank, the complement of a basin of attraction of such an autoencoder cannot have bounded components.
- For autoencoders with square, full-rank weight matrices and with continuous, monotonically increasing and surjective activation functions, such as leaky ReLU, we show that every basin of attraction is path-connected.
- We show that scalar valued network functions in our bounded width setting restricted to some bounded input set, take their maximum (and minimum) value on the boundary of this bounded set. This can be interpreted as a root cause why these networks are not dense in the space of continuous functions with respect to uniform convergence [Johnson, 2018].

Our conditions on the autoencoders in the first of the latter points are covered by several experiments reported in Radhakrishnan et al. [2020] and we thereby, as discussed later, address questions formulated in the latter work. We further give examples that show that the conditions in our results are tight or cannot be dropped without substitute.

Let us introduce the following notation: Let $\|\cdot\|$ denote the Euclidean norm, and for $x\in\mathbb{R}^n$, let $U_\varepsilon(x):=\{y\in\mathbb{R}^n:\|x-y\|<\varepsilon\}$, where $\varepsilon>0$. For a set $D\subset\mathbb{R}^n$, we denote by D° the set of interior points, i.e. the set of all $x\in D$ such that $U_\varepsilon(x)\subset D$ for some sufficiently small $\varepsilon>0$. By \overline{D} we mean the closure of D, i.e. D together with its accumulation points. Let $\partial D=\overline{D}\setminus D^\circ$ be the boundary of D, where $M\setminus B$ means the difference $\{x:x\in M,x\notin B\}$ for two sets M,B. The application of a mapping f on set M means $f(M):=\{f(x):x\in M\}$. For $x_1,x_2\in\mathbb{R}^n$, we denote by $\mathrm{CH}(x_1,x_2)$ the convex hull of these points, which is equal to line segment that connects x_1 and x_2 . For $x\in\mathbb{R}^n$ and $M\subset\mathbb{R}^n$ let $\mathrm{Dist}(x,M):=\inf_{y\in M}\|x-y\|$. For $v\in\mathbb{R}^n$ and $f\in\{1,\dots,n\}$, we write $f\in \mathbb{R}^n$ and $f\in \mathbb{R}^n$ is defined component wise: $f\in \mathbb{R}^n$ is defined accordingly.

As we are concerned with connectivity of subsets in \mathbb{R}^n , we recall the following definitions.

Definition 1. Let $C \subset \mathbb{R}^n$.

- 1. Then C is said to be **connected** if there are no disjoint open sets $U, D \subset \mathbb{R}^d$ such that $C \subset U \cup D$, and $C \cap U \neq \emptyset$ and $C \cap D \neq \emptyset$. For a given $M \subset \mathbb{R}^n$, $C \subset M$ is said to be a (connected) component of M, when C is connected and every $\tilde{C} \subset M$ with $C \subset \tilde{C}$ and $\tilde{C} \setminus C \neq \emptyset$ is non connected.
- 2. The set C is called **path-connected** if for every pair $x_1, x_2 \in C$, there exist a continuous path $\gamma : [0,1] \to C$ such that $\gamma(0) = x_1$ and $\gamma(1) = x_2$.

Note that path-connectivity implies connectivity. We consider neural network functions $F := F_L : \mathbb{R}^{n_0} \to \mathbb{R}^{n_L}$, recursively defined by

$$F_k(x) := \begin{cases} \phi(W_k x + b_k) & \text{for } k = 1\\ \phi(W_k F_{k-1}(x) + b_k) & \text{for } k \in \{2, ..., L - 1\}\\ W_k F_{k-1}(x) + b_k & \text{for } k = L. \end{cases}$$
 (1)

In the above definition, we have $W_j \in \mathbb{R}^{n_j \times n_{j-1}}$ (weights), $b_j \in \mathbb{R}^{n_j}$ (bias), for j = 1, ..., L, and $\phi : \mathbb{R} \to \mathbb{R}$, called activation function. Furthermore, let

$$\alpha_j(x) := W_j x + b_j, \ j = 1, ..., L.$$
 (2)

We call n_j the width of layer j = 1, ..., L. The width of the network is defined as $\max\{n_j : j = 1, ..., L\}$ and L is called the depth of the network.

2 Preliminaries from dynamical systems

In this section we introduce the notions from the field of dynamical systems that are use in the sequel. We refer to Strogatz [2018] for a comprehensive introduction. Let $f: \mathbb{R}^n \to \mathbb{R}^n$ be some continuous mapping and let f^k denote the k-fold composition of f and f^{-k} designates the corresponding inverse image.

Definition 2. A point $x^* \in \mathbb{R}^n$ is called an **attractive point** if there exists an open neighbourhood \mathcal{O} of x^* such that for all $x \in \mathcal{O}$, $f^k(x) \to x^*$ as $k \to \infty$.

Note that, by the fact that we assume f to be continuous, every attractive point x^* must be a fix point, i.e. $f(x^*) = x^*$, whereas the converse implication is obviously not true.

Definition 3. Let x^* be an attractive point, then the set of points x such that $f^k(x) \to x^*$ as $k \to \infty$ is called the **basin of attraction** of x^* and is denoted by $B(x^*)$.

We would like to mention that the notation introduced above covers only a limited number of cases that can in principle occur in such dynamical systems. For example, we restrict our investigation to the case of separated attractive points, whereas in general, a set of points could be attractive (in some sense), as for instance for the famous Lorenz-attractor. According to the discussion in Milnor [1985] it is not easy to give a general, sound definition of what is meant by attractor. We also assume that the basin of attraction contains an open neighborhood of the attractive point, whereas there could also be cases where a point is attractive only in certain directions. The definitions given in this section cover the empirical discoveries that we target to address here.

3 Related work

From a wider perspective we make contributions to the theoretical understanding of associative memory of neural networks. In classical Hopfield networks, which are the most studied objects in this context, the data retrieval update rules use discontinuous activation functions, usually the sign function, whereas in contrast our proofs use continuity arguments at several places. In this respect our results are separated from the latter theory. A continuous update rule for a Hopfield type network has recently been proposed in Ramsauer et al. [2020]. Our investigation focuses on the associative memories of autoencoders and is motivated by the discoveries in Radhakrishnan et al. [2020], see Zhang et al. [2019] for a related study. Associative memories learned by autoencoders are also investigated in Jiang and Pehlevan [2020]. In the latter work, the authors derive theoretical results on a mechanism that can explain the occurrence of attractive fix points of certain autoencoders in the infinite width limit. Our results assume bounded width neural network functions and we also make contributions on the expressiveness of such functions. In this respect, this work is related to recent research on approximation properties of network functions in the bounded width regime [Hanin and Sellke, 2017, Hanin, 2019, Johnson, 2018, Kidger and Lyons, 2020, Park et al., 2021]. The conditions needed in Theorem 6 are inspired by results on connectivity of decision regions [Nguyen et al., 2018] in the context of deep learning. However, our proof uses different arguments that allow us to impose less restrictive conditions on the activation functions. From a general mathematical perspective, the investigations in this work can also be assigned to the field of topological dynamics [Vries, 2014].

4 Topological properties of basins of attraction

In this section, we present our main results. We consider neural network functions $F:\mathbb{R}^{n_0}\to\mathbb{R}^{n_0}$, called **autoencoders**. In applications, autoencoders are usually trained to approximate the identity in the sense that $\|F(x)-x\|$ is small (or the deviation in terms of some other distance) on a certain subset in \mathbb{R}^{n_0} . As already mentioned in the introduction, it has been discovered in Radhakrishnan et al. [2020] that training with usual SGD-type methods leads to autoencoders that shape out basins of attraction with training examples as attractive points in the input space. For basins of attraction of autoencoders we show the following:

Theorem 4. Let F be an autoencoder of width at most n_0 with continuous, monotonically increasing activation function and assume that $\min\{\text{Rank}(W_j): j=1,...,L\} < n_0$. If x^* is an attractive point, then every component of $B(x^*)$ is unbounded.

Note that $B(x^*)$ in the last result can be unconnected, c.f. Section 6. The following result can be interpreted as a counterpart of Theorem 4.

Theorem 5. Let F be an autoencoder of width at most n_0 and with continuous, monotonically increasing activation function. If x^* is an attractive point, then $\mathbb{R}^{n_0} \setminus B(x^*)$ has no bounded component.

Proof. (Theorem 4) To show the result by contradiction, we assume that for some attractive point x^* , the basin of attraction $B(x^*)$ has a bounded component C. According to Definition 1 we can find an open set D such that $C \subset D$ and $D \cap B(x^*) \setminus C = \emptyset$, hence $\partial D \subset \mathbb{R}^{n_0} \setminus B(x^*)$, i.e. the points on ∂D are not attracted by x^* . Since C is bounded we can assume D to be bounded. Let us define $D_0 := D$, $D_k := \phi(\alpha_k(D_{k-1}))$, and, for some $x \in C$, $x_k = F_k(x)$ for k = 1, ..., L. If $W_1, ..., W_k$ are full rank, square matrices, then $\alpha_j, j = 1, ..., k$ are homeomorphisms (bijective and continuous) so that together with Lemma 9 we can conclude that $\partial \phi(\alpha_j(D_{j-1})) \subset \phi(\alpha_j(\partial D_{j-1}))$ for j = 1, ..., k, and hence

$$\partial D_k = \partial F_k(D) \subset F_k(\partial D). \tag{3}$$

Then we either have $x_k \in D_k^\circ$ or $x_k \in \partial D_k$. In the last case, (3) implies $x_k \in F_k(\partial D)$ so that there is some $y \in \partial D$ with $F_k(y) = x_k$ and thus F(x) = F(y). But this would contradict the fact that ∂D does not intersect with $B(x^*)$. For the remaining case that $x_k \in D_k^\circ$, assume that $\operatorname{Rank}(W_{k+1}) < n_0$, which will happen eventually by assumption. We then find $v \neq 0$ in the null-space of W_{k+1} and, considering $x_k \in D_k^\circ$ together with (3), we can choose a $\lambda \in \mathbb{R}$ such that

$$y_k = x_k + \lambda v \in F_k(\partial D), \tag{4}$$

(Note that $F_k(\partial D)$ is compact, thus bounded, since it is the image of a compact set under a continuous mapping). Then $W_{k+1}x_k + b_{k+1} = W_{k+1}y_k + b_{k+1}$ so that we can choose a $y \in F_k^{-1}(\{y_k\}) \cap \partial D$, with F(y) = F(x), which again contradicts $\partial D \cap B(x^*) = \emptyset$.

Proof. (Theorem 5) To show the assertion by contradiction, let us assume that for some attractive point x^* , there exists a bounded component C of $\mathbb{R}^{n_0}\setminus B(x^*)$. Then by Definition 1, there is an open set $D\subset\mathbb{R}^{n_0}$ such that $C\subset D$ and $D\cap\mathbb{R}^{n_0}\setminus (B(x^*)\cup C)=\emptyset$. This gives $\partial D\subset B(x^*)$ where ∂D can be assumed to be compact since C is bounded. For the case that all weight matrices are full-rank, square matrices, we have that α_j for j=1,...,m are homeomorphisms and hence map boundary point to boundary points. Together with Lemma 9 this can be applied iteratively to all layers and finally gives $\partial F(D)\subset F(\partial D)$ and thus $\partial F^k(D)\subset F^k(\partial D)$ for all $k\in\mathbb{N}$. Taking into account that $\partial D\subset B(x^*)$, we can conclude that for sufficiently large k and sufficiently small $\varepsilon>0$

$$\partial F^k(D) \subset F^k(\partial D) \subset U_{\varepsilon}(x^*) \subset B(x^*).$$

But according to $F(C) \subset F(D)$, this implies $F^k(C) \subset U_{\varepsilon}(x^*) \subset B(x^*)$, which is impossible since C is assumed to be a component of $\mathbb{R}^{n_0} \setminus B(x^*)$. In the remaining case that at least one weight matrix has rank strictly less than n_0 , we can argue in the same way as is done to obtain (4) in the proof of Theorem 4. For some arbitrary $x \in C$, this provides a $y \in \partial D$ with F(y) = F(x), which contradicts $C \cap B(x^*) = \emptyset$.

Theorem 6. Let F be an autoencoder with monotonically increasing activation function ϕ , such that $\phi(\mathbb{R}) = \mathbb{R}$ (i.e. surjective). Let further all W_j , j = 1, ..., L, be full rank, square matrices. If x^* is an attractive point of F, then $B(x^*)$ is path-connected.

To proof this theorem, we next formulate three auxiliary results.

Lemma 7. Let $x_1, x_2 \in \mathbb{R}^n$ and $\phi : \mathbb{R} \to \mathbb{R}$ monotonic such that $\phi(x_1) \in U_{\varepsilon}(y)$ and $\phi(x_2) \in U_{\varepsilon}(y)$ for some $y \in \mathbb{R}^n$ and $\varepsilon > 0$. Then $\phi(x) \in U_{\varepsilon\sqrt{n}}(y)$ for every $x \in \mathrm{CH}(x_1, x_2)$.

Proof. By the monotonicity of ϕ , we have for every $\lambda \in [0,1]$ and every component $j \in \{1,...,n\}$

$$\min\{(\phi(x_1))_{(j)}, (\phi(x_2))_{(j)}\} \le (\phi(\lambda x_1 + (1-\lambda)x_2))_{(j)} \le \max\{(\phi(x_1))_{(j)}, (\phi(x_2))_{(j)}\}.$$
 (5)

Since by assumption, for all $j \in \{1,...,n\}$ we have $|(\phi(x_1))_{(j)} - y_{(j)}| < \varepsilon$ and $|(\phi(x_2))_{(j)} - y_{(j)}| < \varepsilon$, we can conclude from (5) that $|(\phi(\lambda x_1 + (1-\lambda)x_2))_{(j)} - y_{(j)}| < \varepsilon$ for j = 1,...,n and hence, by the definition of the euclidean norm, we obtain $\|\phi(\lambda x_1 + (1-\lambda)x_2) - y\| < \varepsilon\sqrt{n}$.

Lemma 8. Let $\phi : \mathbb{R} \to \mathbb{R}$ be monotonic with $\phi(\mathbb{R}) = \mathbb{R}$ (surjective) and $D \subset \mathbb{R}^n$ open and path-connected. Then the inverse image $\phi^{-1}(D)$ under the component-wise application of ϕ is path connected.

Proof. For $x_1, x_2 \in \phi^{-1}(D)$ let $y_1 = \phi(x_1), y_2 = \phi(x_2)$ and $\gamma: [0,1] \to D$ a continuous path with $\gamma(0) = y_1, \gamma(1) = y_2$. Let $\varepsilon > 0$ be so small that $U_{\varepsilon\sqrt{n}}(\gamma(t)) \subset D$ for all $t \in [0,1]$, which is possible since $\gamma([0,1])$ is compact and D is open. Consider a partitioning $0 = t_1 < t_2 < \ldots < t_m = 1$ such that $\|\gamma(t_j) - \gamma(t_{j+1})\| < \varepsilon$, for $j = 1, \ldots, m-1$. Since $\phi(\mathbb{R}) = \mathbb{R}$ we have that ϕ (applied component-wise) is surjective from \mathbb{R}^n to \mathbb{R}^n , which deduces that for every $j \in \{2, \ldots, m-1\}$ we can choose some $v_l \in \phi^{-1}(\{\gamma(t_j)\})$. We further set $v_1 := x_1 \in \phi^{-1}(\{y_1\})$ and $v_m := x_2 \in \phi^{-1}(\{y_2\})$. Then by construction, Lemma 7 yields that the range of $\mathrm{CH}(v_j, v_{j+1})$ under ϕ is a subset of $U_{\varepsilon\sqrt{n}}(\gamma(t_j)) \subset D$, for $j = 1, \ldots, m-1$, showing that $\mathrm{CH}(v_j, v_{j-1})$ is contained in $\phi^{-1}(D)$. The concatenation of the line segments $\mathrm{CH}(v_1, v_2)$, $\mathrm{CH}(v_2, v_3)$,..., $\mathrm{CH}(v_{m-1}, v_m)$ gives a continuous path connecting x_1, x_2 in $\phi^{-1}(D)$.

Proof. (Theorem 6) Let x^* be an attractive point of F. Since x^* is an inner point of $B(x^*)$, we can find an $\varepsilon>0$ such that $U_\varepsilon(x^*)\subset B(x^*)$. Taking into account that all weight matrices are assumed to be square and have full rank, deduces that we can apply Lemma 17 from the appendix (D) to every α_j , j=1,...,L. The iterative application of Lemma 17 and Lemma 8 from the last layer to the first layer yields that $F^{-1}(U_\varepsilon(x^*))$ is path connected, and hence so are $F^{-k}(U_\varepsilon(x^*))\subset B(x^*)$ for all $k\in\mathbb{N}$. Thus, given $x_1,x_2\in B(x^*)$ and a common $k\in\mathbb{N}$ such that $F^k(x_1)\in U_\varepsilon(x^*)$ and $F^k(x_2)\in U_\varepsilon(x^*)$, we obtain that x_1,x_2 can be connected by a path in $F^{-k}(U_\varepsilon(x^*))\subset B(x^*)$. \square

The following lemma contains a main observation for the proof of Theorem 4, Theorem 5.

Lemma 9. Let $\phi : \mathbb{R} \to \mathbb{R}$ be a continuous and monotonically increasing function, and $D \subset \mathbb{R}^n$ a bounded set. Then $\partial \phi(D) \subset \phi(\partial D)$.

Note that $\partial \phi(D) = \phi(\partial D)$ in the before result does not hold true in general.

Proof. We show that $y \in \partial \phi(D)$ implies $y \in \phi(\partial D)$. To this end let (y_m) be a sequence in $\phi(D)$ with $y_m \to y$ as $m \to \infty$. For every $m \in \mathbb{N}$ we choose some $x_m \in \phi^{-1}(\{y_m\}) \cap D$. The resulting sequence (x_m) is bounded since D is bounded and thus has a convergent sub-sequence by the Bolzano-Weierstrass theorem. Without restriction we may assume $x_m \to x \in \overline{D}$ as $m \to \infty$. Then by continuity, $\phi(x_m) \to \phi(x) = y$ as $m \to \infty$. Thus, if $x \in \partial D$, we directly have $y \in \phi(\partial D)$. For the remaining case that $x \in D^\circ$, we use a homotopy type argument, wherein, as elsewhere in this work, functions of a scalar variable are applied to vectors component-wise without using an extra notation. Let

$$H(x,\lambda) := (1-\lambda)x + \lambda\phi(x)$$
 for $\lambda \in [0,1]$.

Then H(x,0)=x and $H(x,1)=\phi(x)$ and it can be directly verified that $(x,\lambda)\mapsto H(x,\lambda)$ is continuous. The monotonicity of ϕ implies that for every fixed $\lambda\in[0,1]$, the mapping $x\mapsto H(x,\lambda)$ is component wise monotonically increasing and component wise strictly monotonically increasing if also $\lambda<1$. We thus have that for fixed $\lambda\in[0,1)$, the mapping $x\mapsto H(x,\lambda)$ is a homeomorphism (i.e. continuous and bijective onto $H(D,\lambda)$). The continuity of H together with the fact that the $\phi(x_m)$ converge to y imply that for every sequence (λ_m) in [0,1) with $\lambda_m\to 1$ as $m\to\infty$, we have $H(x_m,\lambda_m)\to y$ as $m\to\infty$. Let us fix such a sequence (λ_m) for the sequel of the proof. Since D° is open and $x\in D^\circ$, the fact that $x\mapsto H(x,\lambda_m)$ is a homeomorphism for every m implies that $H(D^\circ,\lambda_m)$ is open, so that $H(x_m,\lambda_m)$ is automatically an inner point of $H(D^\circ,\lambda_m)$. With a similar argument we have $\partial H(D,\lambda_m)=H(\partial D,\lambda_m)$ for all $m\in\mathbb{N}$, so that

$$\varepsilon_m := \mathrm{Dist}(H(x_m, \lambda_m), H(\partial D, \lambda_m)) = \mathrm{Dist}(H(x_m, \lambda_m), \partial H(D, \lambda_m)).$$

If there would exist a lower bound $\varepsilon_m \geq \delta > 0$ for all $m \in \mathbb{N}$, we would have $U_{\delta}(H(x_m, \lambda_m)) \subset H(D, \lambda_m)$ for all $m \in \mathbb{N}$, so that by continuity of H

$$U_{\delta}(y) = U_{\delta}(H(x,1)) \subset H(D,1) = \phi(D).$$

But this contradicts the fact that $y \in \partial \phi(D)$. The before argument can be applied to every subsequence and it thus follows $\varepsilon_m \to 0$ as $m \to \infty$. Again by continuity of H, we obtain

$$\operatorname{Dist}(H(x_m, \lambda_m), H(\partial D, 1)) = \operatorname{Dist}(H(x_m, \lambda_m), \phi(\partial D)) \to 0 \text{ as } m \to \infty.$$

Since $\lim_{m \to \infty} H(x_m, \lambda_m) = y$, we have shown that $y \in \phi(\partial D)$.

5 Discussion

Our investigations in Section 4 are formally restricted to the case that $F^k(x) \to x^*$ as $k \to \infty$. If (m_k) is some sub-sequence of the positive integers with $F^{m_k}(x) \to x^*$ as $k \to \infty$, it is natural to ask whether the results from this section still hold true, when the definition of basin of attraction is generalised accordingly to

$$B(x^*, (m_k)) := \{ x \in \mathbb{R}^{n_0} : \lim_{k \to \infty} F^{m_k}(x) = x^* \}.$$
 (6)

The proofs in Section 4 can be carried out without difficulty in the similar way for such a case and we hence remark:

Remark 10. For a fixed sub-sequence of positive integers (m_k) , and corresponding basins of attraction defined in Eq. (6), Theorem 4, Theorem 5 and Theorem 6 still hold true.

As findings from Radhakrishnan et al. [2020] constitute the starting point of our investigation, we next place the results from Section 4 in the context of this work.

- 1. It is conjectured in the above work that the partitioning produced by basins of attraction is closely related to the tessellation produced by 1-NN (nearest neighbor) classifiers. Theorem 4 shows that this would have limited validity in the bounded width setting: Assume the origin, is surrounded by data points of sufficient density on the unit sphere, then every point outside the unit-sphere would not be associated to the origin according to the 1-NN classification. But in case that the conditions from Theorem 4 are fulfilled, the basin of attraction for the origin would need to be unbounded. Theorem 5 and Theorem 6 on the other hand show, that in the bounded width setting, both, basins of attraction and 1-NN neighborhoods (with respect to usual distances) share the property of being path-connected and do not enclose a component of the respective complement.
- 2. The assumptions of Theorem 4 and Theorem 5 are satisfied in several experiments with fully-connected networks reported in the above work, c.f. Table 5, and (in appendix) Table S1, S2 therein. The conditions of Theorem 6 are more restrictive and are not exactly met in the experiments of this work.
- 3. In Radhakrishnan et al. [2020], it is also shown that autoencoders can, even more effectively, be trained to memorize sequences of training examples, called **discrete limit cycle**. We refer to Radhakrishnan et al. [2020] for the definition. From Remark 10 it follows that our results in Section 4 can also be interpreted in the context of such limit cycles.

In contrast to conventional update rules in Hopfield networks, in Ramsauer et al. [2020] the following continuous update formula is proposed: $\xi_{k+1} = X \operatorname{softmax}(\beta X^T \xi_k)$. Therein, the stored key pattern are arranged column-wise in $X \in \mathbb{R}^{n_0 \times N}$, $\beta > 0$ and ξ_0 is the vector of input features. The corresponding network function $\xi \mapsto X \operatorname{softmax}(\beta X^T \xi)$ is related to those considered in this work. A crucial difference is that softmax does not fit to our situation, which is why our results do not cover the case of the former, even if $N \leq n_0$. Nevertheless, we think that it is natural to ask for topological properties of basins of attraction of such Hopfield networks. Interestingly, it turns out as a consequence of Ramsauer et al. [2020, Theorem 1, Theorem 2], that discrete limit cycles, as in Radhakrishnan et al. [2020], can not occur for this type of Hopfield networks (except those of trivial length one).

6 An autoencoder of width $\leq n_0$ with unconnected basin of attraction

In this section an autoencoder $F: \mathbb{R}^2 \to \mathbb{R}^2$ of depth six and width two and with a unconnected basin of attraction is constructed. The activation function in this example is monotonic but not

surjective, which hence shows that the surjectivity assumption in Theorem 6 cannot be dropped without any substitute. Further examples showing the tightness of conditions in Section 4 are given in the appendix A.

Example 1. The target is the construction of a non path-connected basin of attraction for $x^* := (-1, 1)^T$. We refer to Figure 1 for a depiction of the following construction. Let

$$\phi(x) = \begin{cases} -1 & \text{for } x < -1 \\ x & \text{for } x \in [-1, 1] \\ 1 & \text{for } x > 1. \end{cases}$$

be the activation function. We define $W_1 = 2I_2$ (recall that I_2 is the 2×2 identity matrix) and $b_1 = (0,0)^T$. The application of $2I_2$ expands $[-1,1] \times [-1,1]$ to $[-2,2] \times [-2,2]$ which implies that the subsequent application of ϕ maps the points of an open neighborhood of x^* to x^* , which is finally needed to have a basin of attraction in accordance with Definition 2. Recall the notations in Eq. (1) and Eq. (2). We then have

$$F_1(\mathbb{R}^2) =: Q_1 = [-1, 1] \times [-1, 1].$$
 (7)

And for

$$S_{1} := \{(x_{1}, x_{2})^{T} \in \mathbb{R}^{2} : x_{1} \leq -1/2 \text{ and } x_{2} \geq 1/2\}$$

$$S_{2} := \{(x_{1}, x_{2})^{T} \in \mathbb{R}^{2} : x_{1} \geq 1/2 \text{ and } x_{2} \geq 1/2\}$$

$$S_{3} := \{(x_{1}, x_{2})^{T} \in \mathbb{R}^{2} : x_{1} \geq 1/2 \text{ and } x_{2} \leq -1/2\}$$

$$S_{4} := \{(x_{1}, x_{2})^{T} \in \mathbb{R}^{2} : x_{1} \leq -1/2 \text{ and } x_{2} \leq -1/2\}$$

$$S_{2,4} := \text{CH}((-1/2, -1/2)^{T}, (1/2, 1/2)^{T}),$$

$$(8)$$

we have $F_1(S_1) = (-1,1)^T$, $F_1(S_2) = (1,1)^T$, $F_1(S_3) = (1,-1)^T$, $F_1(S_4) = (-1,-1)^T$ and $F_1(S_{2,4}) = S_{2,4}$. For the sequel of this example let $R_\alpha \in \mathbb{R}^{2 \times 2}$ be the rotation matrix, that rotates a vector counter clockwise by an angle of α and preserves its length. Next, let $W_2 := 2^{-1/2}R_{-\pi/4}$ and $b_2 := (-2,0)^T$, then

$$\alpha_2(Q_1) = \{ (x_1, x_2)^T \in \mathbb{R}^2 : |x_1 + 2| + |x_2| \le 1 \}, \tag{9}$$

so that

$$F_2(\mathbb{R}^2) =: Q_2 = CH((-1, 1)^T, (-1, -1)^T).$$
 (10)

Let us summarize the the status of the construction. The following hold true

$$S_1 \subset F_2^{-1}(\{(-1,1)^T\}), \ S_2 \cup S_4 \cup S_{2,4} \subset F_2^{-1}(\{(-1,0)^T\}), \ S_3 \subset F_2^{-1}(\{(-1,-1)^T\}).$$

We also observe that the inverse images $F_2^{-1}(\{(-1,1)^T\})$ and $F_2^{-1}(\{(-1,-1)^T\})$ are not path-connected since they are separated by $S_2 \cup S_4 \cup S_{2,4}$. Our next goal is to map the endpoints of Q_2 to a common point without compressing the whole line segment to that point. To this end let $W_3 := R_{\pi/4}$ and $b_3 := R_{\pi/4}(1,0)^T + (-1,-1)^T$. Then

$$\alpha_3(Q_2) = \operatorname{CH}\left(\begin{pmatrix} -2^{-1/2} - 1 \\ 2^{-1/2} - 1 \end{pmatrix}, \begin{pmatrix} 2^{-1/2} - 1 \\ -2^{-1/2} - 1 \end{pmatrix} \right), \tag{11}$$

and from there one can conclude that $F_3(\mathbb{R}^2) =: Q_3 =: Q_{3,1} \cup Q_{3,2}$ with

$$Q_{3,1} := \operatorname{CH}\left(\begin{pmatrix} -1 \\ 2^{-1/2} - 1 \end{pmatrix}, \begin{pmatrix} -1 \\ -1 \end{pmatrix} \right), \ Q_{3,2} := \operatorname{CH}\left(\begin{pmatrix} -1 \\ -1 \end{pmatrix}, \begin{pmatrix} 2^{-1/2} - 1 \\ -1 \end{pmatrix} \right). \tag{12}$$

Next, set $W_4 := R_{\pi/4}$ and $b_4 := R_{\pi/4} (1,1)^T + (-1,-1)^T$, which gives

$$\alpha_4(Q_3) = \operatorname{CH}\left(\begin{pmatrix} -3/2 \\ -1/2 \end{pmatrix}, \begin{pmatrix} -1 \\ -1 \end{pmatrix}\right) \bigcup \operatorname{CH}\left(\begin{pmatrix} -1 \\ -1 \end{pmatrix}, \begin{pmatrix} -1/2 \\ -1/2 \end{pmatrix}\right). \tag{13}$$

And we then have $F_4(\mathbb{R}^2) =: Q_4 = Q_{4,1} \cup Q_{4,2}$, where

$$Q_{4,1} := \operatorname{CH}\left(\begin{pmatrix} -1\\ -1/2 \end{pmatrix}, \begin{pmatrix} -1\\ -1 \end{pmatrix}\right), Q_{4,2} := \operatorname{CH}\left(\begin{pmatrix} -1\\ -1 \end{pmatrix}, \begin{pmatrix} -1/2\\ -1/2 \end{pmatrix}\right). \tag{14}$$

For the fifth layer define $W_5 := I_2$ and $b_5 := (2,0)^T$, so that

$$F_5(Q_4) =: Q_5 = \operatorname{CH}\left(\begin{pmatrix} 1\\ -1 \end{pmatrix}, \begin{pmatrix} 1\\ -1/2 \end{pmatrix}\right). \tag{15}$$

Let us summarize again the status of the construction:

$$S_1 \cup S_3 \subset F_5^{-1}(\{(1,-1/2)^T\}), S_2 \cup S_4 \cup S_{2,4} \subset F_5^{-1}(\{(1,-1)^T\}).$$

The final layer shall be defined to map Q_5 to the line segment that connects $(-1,1)^T$ with the origin, where $(1,-1)^T$ is mapped to $(0,0)^T$ and $(1,-1/2)^T$ is mapped to $(-1,1)^T$. This is accomplished by defining $W_6 = 2^{3/2}R_{\pi/4}$, $b_6 = 2^{3/2}R_{\pi/4}$ $(-1,1)^T$. The final network function is then given by $F(x) = W_6F_5(x) + b_6$.

From the construction in the latter example it turns out that:

- 1. $F(x^*) = x^*$ and $S_1 \cup S_3 \subset B(x^*)$.
- 2. $S_2 \cup S_4 \cup S_{2,4} \subset F^{-1}(\{(0,0)^T\})$ and since $(0,0)^T$ is also a fix point of F, we can conclude $(S_2 \cup S_4 \cup S_{2,4}) \cap B(x^*) = \emptyset$.
- 3. The latter shows that $B(x^*)$ cannot be path-connected since points from S_1 are separated from points in S_3 by $S_2 \cup S_4 \cup S_{2,4}$.
- 4. The remaining set $S_0 := \mathbb{R}^2 \setminus (S_1 \cup S_2 \cup S_3 \cup S_4 \cup S_{2,4})$ is mapped by F to the open line segment $\tilde{Q} := \mathrm{CH}((-1,1)^T,(0,0)^T) \setminus \{(-1,1)^T,(0,0)^T\}$. A subsequent application of F then maps the points in $\mathrm{CH}((-1,1)^T,(-1/2,1/2)^T)$ to x^* . The iterative application of this reasoning shows that every point in $\mathrm{CH}((-1,1)^T,(0,0)^T)$ is attracted by x^* , except for $(0,0)^T$ since $F((0,0)^T) = (0,0)^T$. This shows that $F^k(x) \to x^*$ as $k \to \infty$ for all $x \in S_0$ and thus $S_0 \subset B(x^*)$.
- 5. It is clear that appending a layer to F, wherein the $\mathbb{R}^{2\times 2}$ -weight matrix has every entry equal to 1/2 and the bias is zero, will give the same mapping as it does not affect $F(\mathbb{R}^2)$. This shows that in the situation of Theorem 4 the basin of attraction can have several components.

7 Approximation in the bounded width setting

In this section, we show that the arguments in the proofs of Theorem 4 and Theorem 5 directly allow to derive results on the approximation capabilities of scalar-valued network functions in our bounded width situation. It is shown in Johnson [2018], see also Beise et al. [2021], that network functions $F:\mathbb{R}^{n_0}\to\mathbb{R}$ of width $\leq n_0$ are not dense in the space of continuous functions, say on the unit cube, with respect to uniform convergence, whereas for network functions of width $> n_0$ this is possible [Hanin, 2019, Park et al., 2021]. We next formulate a kind of maximum principle that reveals a root cause why universal approximation in the aforementioned width bounded setting is not possible.

Theorem 11. Let $F : \mathbb{R}^{n_0} \to \mathbb{R}$ be a neural network of width not exceeding n_0 and with continuous, monotonically increasing activation function ϕ , and let D be some bounded subset of \mathbb{R}^{n_0} . Then

$$\max\{F(x): x \in \overline{D}\} = \max\{F(x): x \in \partial D\}.$$

Proof. The arguments given in the proof of Theorem 5 yield $\partial(F_{L-1}(D)) \subset F_{L-1}(\partial D)$ for both cases, either $W_1,...,W_{L-1}$ are square and have full rank or that at least one of them has rank strictly less than n_0 . The assertion then follows since, as an affine function, α_L takes its maximum value on $\partial(F_{L-1}(D))$.

Note that, considering -F instead of F, the latter result also implies that the minimum value is taken on ∂D . Theorem 11 implies that universal uniform approximation is impossible on bounded sets with non-empty interior. Even more, it can be concluded that:

Corollary 12. 1. If F is as in Theorem 11 and F(x) = a for all $x \in \partial D$ and some fixed $a \in \mathbb{R}$, then F(x) = a for all $x \in D$.

2. Let D be some bounded subset of \mathbb{R}^{n_0} such that $\partial U \subset D$ and $D \cap U \neq \emptyset$ for some non-empty open set $U \subset \mathbb{R}^n$. Then any function $f:D \to \mathbb{R}$, that takes its maximum on $D \cap U$ and not on ∂U cannot be approximated uniformly with arbitrary accuracy by network functions considered in Theorem 11.

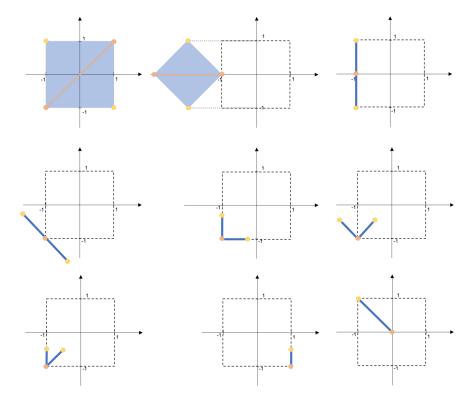


Figure 1: Input progression through the layers of F from Example 1. Yellow sets/points depict the range of S_1, S_3 , red sets/points depict the range of $S_2, S_4, S_{2,4}$, c.f. Eq. (8), and blue depicts the range of the input space \mathbb{R}^2 . The blue set in the different sub figures show the following: Upper row, from left to right: $F_1(\mathbb{R}^2)$ Eq. (7), $\sigma_2(Q_1)$ Eq. (9), $F_2(\mathbb{R}^2)$ Eq. (10); Middle row, from left to right: $\sigma_3(Q_2)$ Eq. (11), $F_3(\mathbb{R}^2)$ Eq. (12), $\sigma_4(Q_3)$ Eq.(13); Lower row, from left to right: $F_4(\mathbb{R}^2)$ Eq. (14), $F_5(\mathbb{R}^2)$ Eq.(15), $F(\mathbb{R})$

Despite the limitations induced by Theorem 11, network functions of width $\leq n_0$ may still allow some weaker kind of universal approximation on subsets of the input space. We next give such a result for ReLU network functions, i.e. network functions where ϕ is the *rectified linear unit*, shortly ReLU, defined by $t \mapsto \max\{t, 0\}$.

Proposition 13. Let $M=K_1\cup K_2$, with disjoint compact sets $K_1,K_2\subset \mathbb{R}^{n_0}$ such that for some $c\in \mathbb{R}^{n_0}$ and some linearly independent $v_1,...,v_{n_0}\in \mathbb{R}^{n_0}$ the set K_1 is contained in the sector

$$S := \{ x \in \mathbb{R}^{n_0} : x = c + \sum_{j=1}^{n_0} \lambda_j v_j, \, \lambda_j > 0 \}$$

and $K_2 \subset \mathbb{R}^{n_0} \setminus \overline{S}$. Then for every function $f: M \to \mathbb{R}$ that takes constant values on K_1 and K_2 , respectively, there exists a ReLU network function of width equal to n_0 and depth L=4 such that f(x) = F(x) for every $x \in M$.

The proof of Proposition 13 is constructive and can be found in Appendix D. Numerical experiments highlighting the limitations and edge cases, together with an interesting evolution per network layer are reported in Appendix B.

To us it is unclear whether the assumptions on the mutual location of the compact components in Proposition 13 can be significantly weakened. Increasing the depth will certainly allow more complex configurations. However, from Theorem 11 is clear that K_2 cannot completely enclose K_1 when the width is upper bounded by n_0 , regardless of how many layers the net contains.

The results in this section lead to the following *question*: Is it possible to uniformly approximate arbitrary continuous functions on the unit sphere (in \mathbb{R}^{n_0}) with arbitrary accuracy by network functions as they are considered in Theorem 11?

8 Conclusion

In this work we prove topological properties of basins of attractions of autoencoders that have a width that does not exceed the input dimension. It is shown that in this setting a basin of attraction is unbounded and its complementary set cannot have bounded components. The first of the latter results also requires that at least one weight matrix has rank strictly less than the input dimension. We also show that under certain stricter conditions, basins of attractions need to be path-connected. By means of examples it is further demonstrated that our conditions are tight, or cannot be dropped without substitute. We bring our results into context of recent results [Radhakrishnan et al., 2020] where it is empirically observed that autoencoders implement an associative memory of their training data and thus shape out basins of attraction in the data space. We argue that our results provide some first answers on a question formulated in the latter work for the case of the network architectures taken under consideration herein. This covers several experiments reported in Radhakrishnan et al. [2020]. Finally, we utilize the arguments from our proofs on basins of attraction to show a result that reveals a root cause why network functions of width $\leq n_0$ from \mathbb{R}^{n_0} to \mathbb{R} cannot be dense in the spaces of continuous functions.

References

- James A Anderson. A simple neural network generating an interactive memory. *Mathematical biosciences*, 14(3-4):197–220, 1972.
- Dor Bank, Noam Koenigstein, and Raja Giryes. Autoencoders. arXiv preprint arXiv:2003.05991, 2020.
- Hans-Peter Beise, Steve Dias Da Cruz, and Udo Schröder. On decision regions of narrow deep neural networks. *Neural Networks*, 140:121–129, 2021.
- Mikhail Belkin, Daniel Hsu, Siyuan Ma, and Soumik Mandal. Reconciling modern machine-learning practice and the classical bias-variance trade-off. *Proceedings of the National Academy of Sciences*, 116(32):15849–15854, 2019.
- Jehoshua Bruck. On the convergence properties of the hopfield model. *Proceedings of the IEEE*, 78 (10):1579–1585, 1990.
- Mete Demircigil, Judith Heusel, Matthias Löwe, Sven Upgang, and Franck Vermet. On a model of associative memory with huge storage capacity. *Journal of Statistical Physics*, 168(2):288–299, 2017.
- Alhussein Fawzi, Seyed-Mohsen Moosavi-Dezfooli, Pascal Frossard, and Stefano Soatto. Classification regions of deep neural networks. *arXiv preprint arXiv:1705.09552*, 2017.
- Ian Goodfellow, Yoshua Bengio, and Aaron Courville. Deep Learning. MIT Press, 2016. http://www.deeplearningbook.org.
- Suriya Gunasekar, Jason Lee, Daniel Soudry, and Nathan Srebro. Implicit bias of gradient descent on linear convolutional networks. *arXiv* preprint arXiv:1806.00468, 2018.
- Boris Hanin. Universal function approximation by deep neural nets with bounded width and ReLU activations. *Mathematics*, 7(10):992, 2019.
- Boris Hanin and Mark Sellke. Approximating continuous functions by ReLU nets of minimal width. *arXiv preprint arXiv:1710.11278*, 2017.
- John J Hopfield. Neural networks and physical systems with emergent collective computational abilities. *Proceedings of the national academy of sciences*, 79(8):2554–2558, 1982.
- Yibo Jiang and Cengiz Pehlevan. Associative memory in iterated overparameterized sigmoid autoencoders. In *International Conference on Machine Learning*, pages 4828–4838. PMLR, 2020.
- Jesse Johnson. Deep, skinny neural networks are not universal approximators. In *International Conference on Learning Representations (ICLR)*, 2018.
- Patrick Kidger and Terry Lyons. Universal approximation with deep narrow networks. In *Conference on Learning Theory (COLT)*, pages 2306–2327, 2020.
- Teuvo Kohonen. Correlation matrix memories. *IEEE transactions on computers*, 100(4):353–359, 1972.
- Dmitry Krotov and John J Hopfield. Dense associative memory for pattern recognition. *Advances in neural information processing systems*, 29:1172–1180, 2016.
- Robert McEliece, Edwardc Posner, Eugener Rodemich, and Santhosh Venkatesh. The capacity of the hopfield associative memory. *IEEE transactions on Information Theory*, 33(4):461–482, 1987.
- John Milnor. On the concept of attractor. In *The theory of chaotic attractors*, pages 243–264. Springer, 1985.
- Kaoru Nakano. Associatron-a model of associative memory. IEEE Transactions on Systems, Man, and Cybernetics, SMC-2(3):380–388, 1972.

- Behnam Neyshabur, Ryota Tomioka, and Nathan Srebro. In search of the real inductive bias: On the role of implicit regularization in deep learning. *arXiv* preprint arXiv:1412.6614, 2014.
- Quynh Nguyen, Mahesh Chandra Mukkamala, and Matthias Hein. Neural networks should be wide enough to learn disconnected decision regions. In *International Conference on Machine Learning (ICML)*, 2018.
- Sejun Park, Chulhee Yun, Jaeho Lee, and Jinwoo Shin. Minimum width for universal approximation. In *International Conference on Learning Representations (ICLR)*, 2021.
- Adityanarayanan Radhakrishnan, Mikhail Belkin, and Caroline Uhler. Overparameterized neural networks implement associative memory. *Proceedings of the National Academy of Sciences*, 117 (44):27162–27170, 2020.
- Hubert Ramsauer, Bernhard Schäfl, Johannes Lehner, Philipp Seidl, Michael Widrich, Thomas Adler, Lukas Gruber, Markus Holzleitner, Milena Pavlović, Geir Kjetil Sandve, et al. Hopfield networks is all you need. *arXiv preprint arXiv:2008.02217*, 2020.
- Daniel Soudry, Elad Hoffer, Mor Shpigel Nacson, Suriya Gunasekar, and Nathan Srebro. The implicit bias of gradient descent on separable data. *The Journal of Machine Learning Research*, 19 (1):2822–2878, 2018.
- Steven H Strogatz. *Nonlinear dynamics and chaos with student solutions manual: With applications to physics, biology, chemistry, and engineering.* CRC press, 2018.
- Jan Vries. Topological dynamical systems. de Gruyter, 2014.
- Chiyuan Zhang, Samy Bengio, Moritz Hardt, Michael C Mozer, and Yoram Singer. Identity crisis: Memorization and generalization under extreme overparameterization. *arXiv* preprint arXiv:1902.04698, 2019.

A Additional examples on the tightness of conditions in Section 4

The following example shows that Theorem 4 does not hold without the condition $\min\{\text{Rank}W_j: j=1,...,l\} < n_0$.

Example 2. Let

$$\phi(x) = \begin{cases} 2x + 1/4 & \text{for } x < 0\\ 1/2x + 1/4 & \text{for } x \in [0, 1]\\ 2(x - 1) + 3/4 & \text{for } x > 1, \end{cases}$$

then $\phi(x)$ as fix points at x = -1/4, x = 1/2, x = 5/4 and

$$\lim_{m \to \infty} \phi^m(x) = \begin{cases} -\infty & \text{for } x < -1/4 \\ 1/2 & \text{for } x \in (-1/4, 5/4) \\ +\infty & \text{for } x > 5/4. \end{cases}$$

Hence, with $W_2 = W_1 = I_2$ the autoencoder $x \mapsto W_2\phi(W_1x)$ has $(-1/4, 5/4) \times (-1/4, 5/4)$ as the basin of attraction of $x^* = (1/2, 1/2)$.

In the next example, an autoencoder from \mathbb{R} to \mathbb{R} of width two, with a unconnected basin of attraction, is constructed. As it maps form \mathbb{R} to \mathbb{R} , the latter implies that the complement of the said basin of attraction has a bounded component. This shows that the width condition in Theorem 4, Theorem 5 cannot be dropped.

Example 3. Let

$$\phi(x) = \begin{cases} 1/4x & \text{for } x < 0\\ x & \text{for } x \ge 0 \end{cases}$$


be a leaky ReLU activation function and let

$$f_1(x) = \phi(2(x-1)) + 3/4$$
 and $f_2(x) = -\phi(3(x-5)) - 27/8$.

Then $f=f_1+f_2$ has fix points at $x^*=1/2$, $y^*=7/2$ and $z^*=83/16$. The derivative of f in a neighborhood of x^* equals -1/4 which shows that x^* is an attractive fix point, c.f. Strogatz [2018]. Since y^* , z^* are themselves fix points we have y^* , $z^* \notin B(x^*)$. However, for $\tilde{x}=79/8$ we have $f(\tilde{x})=1/2$ and hence $\tilde{x}\in B(x^*)$. Without figuring out the exact basin of attraction $B(x^*)$, we can conclude that $B(x^*)$ is not path-connected and, as $x^* < y^* < z^* < \tilde{x}$, the complement of $B(x^*)$ has a bounded component. It is directly seen that f can be written as a network function of width two and depth two.


B Numerical Experiments

We provide numerical results to illustrate that neural networks learn transformations similar to the construction of our theoretical derivations in the proof of Proposition 13. We formulate a toy example consisting of several (6 or 8) pair-wise disjoint balls of the same class encasing a center ball of a different class. The border balls use a radius of 0.125 and a subset of the centres (0.25, 0.25), (0.5, 0.25), (0.75, 0.25), (0.25, 0.5), (0.75, 0.5), (0.25, 0.75), (0.5, 0.75) and (0.75, 0.75) while the center ball uses a radius of 0.01 and the center (0.5, 0.5). We generated randomly and uniformly 2000 data points for each border ball, however, as the classes would hence be unbalanced, we generated as many data points for the center ball as there are in total for the border balls. We used a multilayer perceptron (MLP) consisting of 4 layers, all of width 2, and the ReLU activation function (as stated in the proposition). For illustration purposes, we used an input dimension of 2. We used a batch size of 16, the Adam optimizer with a learning rate of 0.001 and we trained each model for 500 epochs using the mean-squared error (MSE) as our cost function. The different datasets and results are reported in Fig. 2. We rate an experiment as successful when the universal uniform approximation condition tends to zero. It can be observed in Fig. 2 (a) that, when the conditions of Proposition 13 are fulfilled, the neural network can approximate the function correctly and the different layers are learning transformations similar to the constructions in the proof. When the conditions are violated, as is shown in Fig. 2 (b), the universal uniform approximation condition does not tend to zero and the intermediate layer transformations need to violate the constructions in the proof. Additional results are reported in Fig. 3.

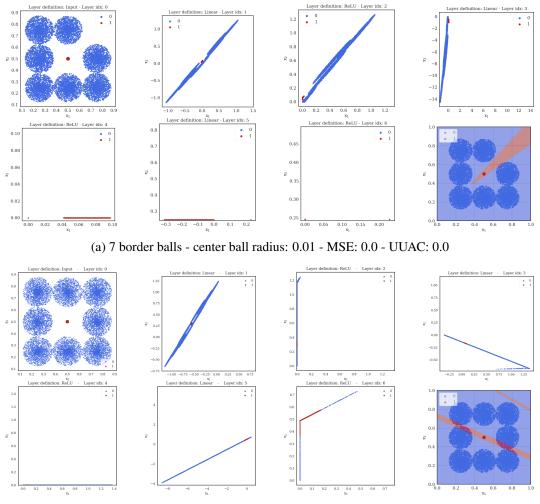


(b) 8 border balls - center ball radius: 0.01 - MSE: 0.01135 - UUAC: 1.08494

Figure 2: Datasets (a) and (b) together with the learned transformations by each activation function and layer. When the conditions of Proposition 13 are fulfilled (a), the transformations are similar to the construction in the proof. Otherwise (b), the construction in the proof is violated. We report the final decision regions, the mean-square error (MSE) and the universal uniform approximation condition (UUAC). Each subplot's title describes the function which was applied to the previous subplot's data.

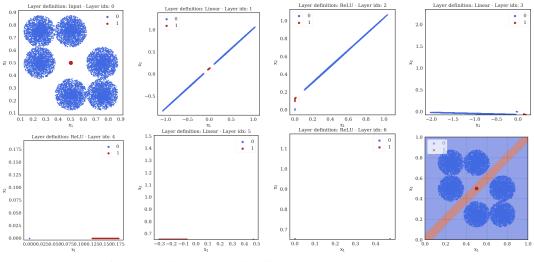

(a) 6 border balls - center ball radius: 0.01 - MSE: 0.0 - UUAC: 0.0

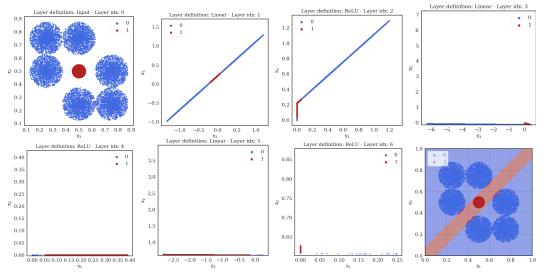

(b) 6 border balls - center ball radius: 0.05 - MSE: 0.00026 - UUAC: 0.99092

Figure 3: Additional results for Fig. 2. Different input datasets (a) and (b) together with the resulting transformations by each activation function and each layer learned by the neural network after 500 epochs. We also report the final decision regions, the mean-square error (MSE) and the universal uniform approximation condition (UUAC). When the conditions of Proposition 13 are fulfilled (a), the learned transformations are similar to the construction in the proof of Theorem 2. When the condition of Theorem is violated (b), the intermediate layers also violate the construction in the proof. The title of each subplot describes the function which is applied to the data of the previous subplot to form the data of the current subplot.

C Decision regions

In this short section it is shown that similar arguments as in the proof of Theorem 6 can be used for an alternative proof of a known result on the connectivity of decision regions Nguyen et al. [2018].

Definition 14. For a network function $F = (F_{(1)}, ..., F_{(n_L)}) : \mathbb{R}^{n_0} \to \mathbb{R}^{N_L}$ and $j \in \{1, ..., n_L\}$, the set $C_j := \{x \in \mathbb{R}^{n_0} : F_{(j)}(x) > F_{(k)}(x), \text{ for all } k \neq j\}$ is called the decision region (for class j).

Decision regions are empirically investigated in Fawzi et al. [2017], wherein the authors observe for the case of ImageNet networks that two examples from the same class can be connected by a continuous path through the corresponding decision region. The authors in Nguyen et al. [2018] derive theoretical results that explain the above observation for the case of so called pyramidal networks. We reformulate a result from Nguyen et al. [2018] in a slightly generalised form, as we impose monotonicity of the activation function instead of strict monotonicity, and give an alternative proof based on results from Section 4.

Theorem 15 (c.f. Theorem 3.10, [Nguyen et al., 2018]). Let F be a neural network function such that $n_0 \ge n_1 \ge ... \ge n_L$ and each weight matrix has full rank. If the activation function ϕ is continuous, monotonically increasing and satisfies $\phi(\mathbb{R}) = \mathbb{R}$, then every decision region is path-connected.

Proof. Without loss of generality we consider the decision region of the first class, i.e. j=1 in Definition 14. Then $D_{L-1}:=\{x\in\mathbb{R}^{n_{L-1}}:(\pmb{\alpha}_L(x))_{(1)}>(\pmb{\alpha}_L(x))_{(j)},\,j=2,...,n_L\}$ is convex and hence path-connected and, by continuity, open. By Lemma 8 the inverse image $\tilde{D}_{L-1}:=\phi^{-1}(D_{L-1})$ is path-connected, and is open by continuity. We can propagate these inverse images through the network by recursively defining $D_{j-1}:=\pmb{\alpha}_j^{-1}(\tilde{D}_j),\,\tilde{D}_j:=\phi^{-1}(D_j)$ for j=L-1,...,1. We then have that each D_{j-1} is path connected by Lemma 17 (in the appendix), which is applicable since the weight matrices are assume to have full rank, and open by continuity, and each \tilde{D}_j is path-connected by Lemma 8 and open by continuity. As D_0 is the decision region of the first class (c.f. Definition 14), this proofs the assertion.

D Auxiliary results and proofs

The following results is the main tool for the constructive proof of Proposition 13.

Lemma 16. Let K, M be two compact sets in \mathbb{R}^{n_0} that are strictly separable by a linear hyper surface. Then there exists an ReLU network function $F: \mathbb{R}^{n_0} \to \mathbb{R}^{n_0}$ of width equal n_0 and depth L=2, such that F(K) is a single vector in $\mathbb{R}^{n_0} \setminus M$ and F(x)=x for all $x \in M$. Moreover, F can be arranged in a way that given $\varepsilon > 0$

$$\min_{x \in K} ||F(K) - x|| < \varepsilon.$$

In what follow, span $(v_1,...,v_k)$ designates the linear hull of some vectors $v_1,...,v_k$.

Proof. (Lemma 16) Let us remind that $e_1,...,e_{n_0}$ are the standard basis vectors in \mathbb{R}^{n_0} . By assumption, there is a $v \in \mathbb{R}^{n_0}$, with $\|v\| = 1$ and a $q \in \mathbb{R}$ such that $v^T x > q$ for $x \in K$ and $v^T x < q$ for $x \in M$. For a given $\varepsilon > 0$ we may assume that the linear hyper surface defined by $v, q, H := \{x \in \mathbb{R}^{n_0} : v^T x = q\}$ is so near to K that for some $a \in K$ that realizes the minimum distance of K to H we have

$$v^T a = q + \varepsilon/2. \tag{16}$$

Indeed, otherwise we can shift the hyper surface accordingly by increasing q. Then, by the fact that $\|v\|=1$, (16) means that a has a distance equal to $\varepsilon/2$ to H and $\tilde{a}:=a-\varepsilon/2$ $v\in H$ is the unique vector in H that realizes this distance. Let $V_1\in\mathbb{R}^{n_0\times n_0}$ such that $x\mapsto V_1x$ implements a length preserving rotation that maps v to $-e_1$. Then $x\mapsto V_1x-V_1\tilde{a}$ maps H to $\mathrm{span}(e_2,...,e_{n_0})$ and $K_1:=V_1K-V_1\tilde{a}$ is contained in the half space of vectors with negative first component and with $a_1:=V_1a-V_1\tilde{a}=-\varepsilon/2\,e_1$, and $M_1:=V_1M-V_1\tilde{a}$ is contained in the half space of vectors with positive first component. By compactness of K_1 and M_1 , we can find $u_1,...,u_{n_0}\in$

span $(e_2,...,e_{n_0})$, such that for a $\delta > 0$, $-u_1 - \delta e_1,...,-u_{n_0} - \delta e_1$ are linearly independent and such that with δ sufficiently small

$$K_1 \subset S^- := \{ x \in \mathbb{R}^{n_0} : x = \sum_{j=1}^{n_0} \lambda_j (-u_j - \delta e_1), \, \lambda_j > 0 \}$$

$$M_1 \subset S^+ := \{ x \in \mathbb{R}^{n_0} : x = \sum_{j=1}^{n_0} \lambda_j (u_j + \delta e_1), \ \lambda_j > 0 \}.$$

Let $V_2 \in \mathbb{R}^{n_0 \times n_0}$ such that $x \mapsto V_2 x$ maps $-u_j - \delta e_1$ to $-e_j$ for $j=1,...,n_0$. Then, by linearity, every $u_j + \delta e_1$ is mapped to e_j for $j=1,...,n_0$. Thus S^- is mapped to the cone of vectors having negative components only, and S^+ is mapped to the cone of vectors having positive components only. Hence, the application of ReLU maps all of V_2K_1 to 0 and maps V_2M_1 identically. We can now apply the inverse of the affine mappings which will map V_2M_1 back to M, i.e. for

$$F(x) := V_1^{-1} V_2^{-1} \text{ReLU}(V_2(V_1 x - V_1 \tilde{a})) + \tilde{a}.$$

With this F we have F(M)=M and $F(K)=F(a)=\tilde{a}$. Note that by (16) and the definition of \tilde{a}

$$\min_{x \in K} ||x - F(a)|| = \varepsilon/2 < \varepsilon$$

which concludes the proof.

Proof. (Proposition 13) Let V be the matrix that results from the concatenation of the columns $v_1,...,v_{n_0}$ and set $W_1:=-V^{-1}$ and $b_1:=W_1(-c)$. Then the mapping $x\mapsto W_1x$ maps the v_j to $-e_j,\ j=1,...,n_0$ and $W_1K_1+b_1$ is a subset of

$$S^{-} := \{ x \in \mathbb{R}^{n_0} : x = \sum_{j=1}^{n_0} \lambda_j(-e_j), \, \lambda_j > 0 \}$$

and $W_1K_2+b_1\subset\mathbb{R}^{n_0}\setminus\overline{S^-}$. Thus, the one layer network function $F_1(x):=\mathrm{ReLU}(W_1x+b_1)$ maps all $x\in K_1$ to 0 and $x\in K_2$ are mapped to

$${x \in \mathbb{R}^{n_0} : x = \sum_{j=1}^{n_0} \lambda_j e_j, \ \lambda_j \ge 0} \setminus {0}.$$

Hence, with a sufficiently small q > 0, $F_1(K_1)$ and $F_1(K_2)$ are strictly separated by the linear hyper surface

$$\{x \in \mathbb{R}^{n_0} : (1, 1, ..., 1)x = q\}.$$

The twofold application of Lemma 16 yields two network functions that can be concatenated to a three layer network function $F_2:\mathbb{R}^{n_0}\to\mathbb{R}^{n_0}$ with $F_2(x)=W_4\operatorname{ReLU}(W_3\operatorname{ReLU}(W_2x+b_2)+b_3)+b_4$ and such that $F_2(F_1(K_1))$ and $F_2(F_1(K_2))$ are two distinct vectors u_1,u_2 in \mathbb{R}^{n_0} , respectively. For a given $f:M\to\mathbb{R}$ that takes constant values on K_1 and K_2 , say $a_1,a_2\in\mathbb{R}$, respectively, we attach an affine layer $x\mapsto w^Tx+b_5$, where $w\in\mathbb{R}^{n_0}$, $b_5\in\mathbb{R}$ such that $w^Tu_1+b_5=a_1$ and $w^Tu_2+b_5=a_2$. This mapping is integrated in the final layer of $F_2\circ F_1$ and finally gives

$$F(x) = w^{T} W_{4} \operatorname{ReLU}(W_{3} \operatorname{ReLU}(W_{2} \operatorname{ReLU}(W_{1}x + b_{1}) + b_{2}) + b_{3}) + w^{T} b_{4} + b_{5}.$$

The following result is a more or less direct consequence of linearity, but for the sake of clarity we fix the assertion in a lemma.

Lemma 17. Let $\alpha : \mathbb{R}^n \to \mathbb{R}^m$, $\alpha(x) = Wx + b$, where $W \in \mathbb{R}^{m \times n}$, $b \in \mathbb{R}^m$, be a surjective, affine mapping, and $D \subset \mathbb{R}^m$ open and path-connected. Then the inverse image $\alpha^{-1}(D)$ is path-connected.

Proof. Let $y_1,y_2\in D$ and $x_1\in \pmb{\alpha}^{-1}(y_1),\,x_1\in \pmb{\alpha}^{-1}(y_2),$ which can be assumed to exist by surjectivity. Then there is a continuous $\gamma:[0,1]\to D$ with $\gamma(0)=y_1,\gamma(1)=y_2$ and since D is open we can assume that γ is piece-wise linear. Otherwise it can be approximated with sufficient accuracy by such a path in D. Let us for a moment assume γ consists of only one linear piece. That is γ traces out the linear line segment $\mathrm{CH}(y_1,y_2)$. Then by basic properties of affine mappings $\pmb{\alpha}(\mathrm{CH}(x_1,x_2))=\mathrm{CH}(y_1,y_2)$ showing $\mathrm{CH}(x_1,x_2)\subset \pmb{\alpha}^{-1}(D)$ so that x_1,x_2 can be connected by a linear path in $\pmb{\alpha}^{-1}(D)$. The general case that γ consist of several linear pieces can be directly obtained by concatenation of the resulting linear paths. \square