

PLAYING THROUGH A NOISY CHANNEL (AND KNOWING IT)

NICOLÁS A. CAPITELLI AND MELINA L. PRIVITELLI

ABSTRACT. In this note we discuss a theory of combinatorial games that involve transmitting the moves through a noisy channel that can introduce errors during the transmission. Players are aware of this interference and incorporate this variable into the game: the valid move is the received one, regardless of whether it is the other player's sent move (as long as it is a valid move in the original game; otherwise, a retransmission is requested). Players know the probability of introducing an error through communication and can play a non-optimal (but valid) move that maximizes their chances of winning. We present some examples and provide the basic definitions and results of this type of games.

1. INTRODUCTION

This article proposes a theory of combinatorial games played through noisy channels. Let G be a combinatorial game and suppose that both players encode their moves (in the same way) and transmit them through a noisy channel that can introduce errors during the transmission. The players are aware of this situation and they both accept the received move as the valid move, regardless of whether it is the other player's transmitted move (as long as it is a valid move in the original game; otherwise, the receiver asks for retransmission). The probability of sending a move from a given position and receiving a (possibly different) one is known to the players, who can play a non-optimal move of G that maximizes their chances of winning in this new game.

This short note presents some examples of this new type of games and provides the basic definitions and results of this theory. Before we introduce a general framework, we outline some toy examples involving classical games. The main reference for combinatorial games is [1] (see also [2, §1]). All games considered are impartial and under normal play rule.

1-pile *Nim*. Consider firstly a 1-pile *Nim* of 3 chips. The way we specify the error in a transmission of a move is as follows: the number of chips in the heap (in a given position) will be codified in binary numbers; thus, the initial state of 3 chips is encoded by 11. A given move is transmitted specifying the number of chips left in the heap after that move. For example, from the position of 3 chips (11) one can transmit 10, 01 or 00, the only valid moves at this position. We let p be the probability of making an error in a single digit (interchanging the 0 and 1). Recall that if an invalid move of the original game (from the actual position) is received, the player asks for retransmission.

We make a preliminary analysis of this game to show the methodology that will be used. We study the probability N_{11} of winning for Player I for every possible move from 11. Suppose first we remove the entire pile (thus transmitting 00). Since the valid moves from position 11 are $\{00, 01, 10\}$ then the probability that Player II receives 00 is $\frac{1-p}{1+p}$

2020 *Mathematics Subject Classification.* 91A46, 91A05, 91A60.

Key words and phrases. Combinatorial games, playing through a noisy channel.

This work was partially supported by the University of Luján (Resolución REC 224/19) and the Department of Basic Sciences, UNLu (CDD-CB 148/18).

and the probability that she receives 10 or 01 is $\frac{p}{1+p}$ in each case. Thus the probability $N_{11}(00)$ that Player I wins by transmitting the move 00 is:

$$\begin{aligned} N_{11}(00) &= P(\text{I wins} \mid \text{II receives } 00) \cdot \left(\frac{1-p}{1+p}\right) + \\ &\quad P(\text{I wins} \mid \text{II receives } 01) \cdot \left(\frac{p}{1+p}\right) + \\ &\quad P(\text{I wins} \mid \text{II receives } 10) \cdot \left(\frac{p}{1+p}\right) \end{aligned} \quad (1)$$

Now, $P(\text{I wins} \mid \text{II receives } 00) = 1$ and $P(\text{I wins} \mid \text{II receives } 01) = 0$ (since the only valid move of II is to play 00). Let's look into $P(\text{I wins} \mid \text{II receives } 10)$. The two valid plays for II in this case are $\{00, 01\}$. If II plays 00 then

$$\begin{aligned} P(\text{I wins} \mid \text{II receives } 10) &= P((\text{I wins} \mid \text{II receives } 10) \mid \text{I receives } 00) \cdot P(\text{I receives } 00) \\ &\quad + P((\text{I wins} \mid \text{II receives } 10) \mid \text{I receives } 01) \cdot P(\text{I receives } 01) \\ &= 0 \cdot (1-p) + 1 \cdot p \\ &= p. \end{aligned}$$

Analogously, if II plays 01 then $P(\text{I wins} \mid \text{II receives } 10) = 1-p$. Hence, replacing in (1) we obtain that the probability of winning for Player I if he transmits 00 (removes the entire pile) is

$$N_{11}(00) = \begin{cases} \frac{1-p+p^2}{1+p} & p \leq 1/2 \\ 1-p & p \geq 1/2. \end{cases}$$

In the same manner, we can compute the probability of winning for Player I if he plays 01 (removes two chips) and 10 (removes one chip):

$$N_{11}(01) = \begin{cases} p & p \leq 1/2 \\ \frac{p-p^3}{1-p+p^2} & p \geq 1/2 \end{cases} \quad N_{11}(10) = \begin{cases} \frac{2p-3p^2+p^3}{1-p+p^2} & p \leq 1/2 \\ 1-p & p \geq 1/2. \end{cases}$$

We conclude that the probability N_{11} of winning for Player I from position 11 (three chips) is

$$N_{11} = \begin{cases} \frac{1-p+p^2}{1+p} & p \leq 1/2 \quad (00) \\ \frac{p-p^3}{1-p+p^2} & p \geq 1/2 \quad (01). \end{cases} \quad (2)$$

We have specified the optimal moves in the rightmost column of Equation (2). Note that when $p = \frac{1}{2}$, the resulting game is a fair chance game (all moves being optimal).

This inductive argument can be applied to analyze the general case of a heap with $k \in \mathbb{N}$ chips (see Section 3 below).

Chomp! Consider now *Chomp!* and let $p \in [0, 1]$ denote the probability of hitting accurately the targeted square and $p_{ij} \in [0, 1]$ the chance of hitting square of row i and column j , where $p + \sum_{i,j} p_{ij} = 1$. Figure 1 shows some examples of possible distributions for $n \times m$ bars. In this example, the error introduced in the transmission of the move can be interpreted as a real-life situation when a player wants to chop the bar at a given square but the breaking happens unwillingly at a different square.

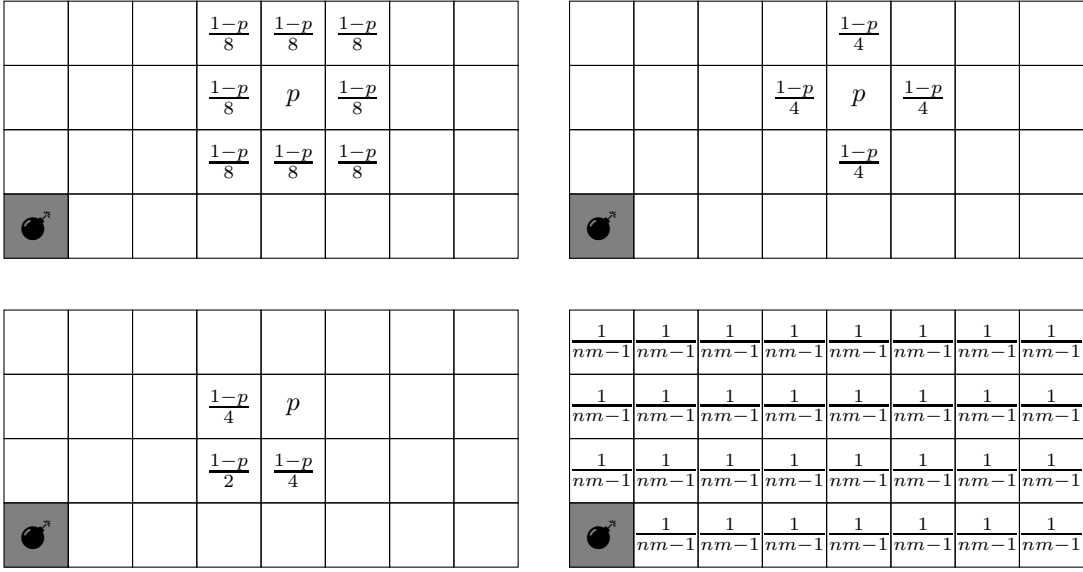


Figure 1. Examples of possible error probability distribution in *Chomp!* (squares where probability is 0 are left in blank). **Top left:** equiprobable distribution among the squares sharing an edge or a vertex with the targeted square. **Top right:** equiprobable distribution among the squares sharing an edge with the targeted square. **Bottom right:** equiprobable distribution among every possible move (from every position).

For example, consider the 2×2 case for the error distribution pictured in the top left example of Figure 1; that is, the probability of chopping the bar at the targeted square is p and the probability of chopping it at a different square is only non-zero for a neighboring square (one that shares an edge or a vertex with the targeted square), and this probability is evenly distributed among all neighbors (see Figure 2 for an example of a distribution of a square not located in the center of the bar). Clearly, the chance $N_{\blacksquare}$ for Player 1 to win from position $\blacksquare$ is 0. Also, the chance for Player 1 to win from positions $\blacksquare\blacksquare$ or $\blacksquare\blacksquare$ is $N_{\blacksquare\blacksquare} = N_{\blacksquare\blacksquare} = 1$. Furthermore, since any valid move from $\blacksquare\blacksquare$ is a winning position, then $N_{\blacksquare\blacksquare} = 0$. We compute the probability that Player I wins for the three possible moves from $\blacksquare\blacksquare$ (the $\times$ marks the sent move).

- Probability if Player I plays $\begin{smallmatrix} \times & \blacksquare \\ \blacksquare & \blacksquare \end{smallmatrix} = (1 - N_{\blacksquare\blacksquare})p + (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} + (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} = \frac{1-p}{2}$.
- Probability if Player I plays $\begin{smallmatrix} \blacksquare & \times \\ \blacksquare & \blacksquare \end{smallmatrix} = (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} + (1 - N_{\blacksquare\blacksquare})p + (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} = \frac{1-p}{2}$.
- Probability if Player I plays $\begin{smallmatrix} \blacksquare & \blacksquare \\ \blacksquare & \times \end{smallmatrix} = (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} + (1 - N_{\blacksquare\blacksquare})\frac{1-p}{2} + (1 - N_{\blacksquare\blacksquare})p = p$.

Therefore, the probability $N_{\blacksquare\blacksquare}$ that Player I wins from position $\blacksquare\blacksquare$ is

$$N_{\blacksquare\blacksquare} = \max \left\{ p, \frac{1-p}{2} \right\} = \begin{cases} \frac{1-p}{2} & 0 \leq p \leq 1/3 \quad \begin{smallmatrix} \blacksquare & \times \\ \blacksquare & \blacksquare \end{smallmatrix} \quad \begin{smallmatrix} \times & \blacksquare \\ \blacksquare & \blacksquare \end{smallmatrix} \\ p & 1/3 \leq p \leq 1 \quad \begin{smallmatrix} \blacksquare & \blacksquare \\ \blacksquare & \times \end{smallmatrix} \end{cases} \quad (3)$$

Note that for $p = \frac{1}{3}$ we have that $N_{\blacksquare\blacksquare} = \frac{1}{3}$ for every move. That is, the game is a chance game (favoring Player II).

0	$\frac{1-p}{2}$	
	$\frac{1-p}{2}$	p

$\frac{1-p}{3}$	$\frac{1-p}{3}$	
	p	$\frac{1-p}{3}$

$\frac{1-p}{3}$	p	
	$\frac{1-p}{3}$	$\frac{1-p}{3}$

p	$\frac{1-p}{2}$	
	$\frac{1-p}{2}$	0

Figure 2. Probability distribution for the shown case

In the same manner one can analyze the cases $\blacksquare\square$, $\blacksquare\square$ and $\blacksquare\square$ to solve the 2×3 case. The probability distribution for the case $\blacksquare\square$ is given in Figure 2.

2. A GENERAL FRAMEWORK

Throughout this section we let $G = (V, E)$ denote a progressively bounded directed graph. Recall that the *set of followers* of $v \in V$ is the set $F(v) = \{w \in V \mid (v, w) \in E\}$. For $e \in E$ we let $t(e) \in V$ denote the tail of e and if $e, e' \in E$ are such that $t(e) = t(e')$ we shall write $e \sim e'$. If $v \in V$ we put $E_v = \{e \in E \mid t(e) = v\}$. A standard reference for graph theory is [3].

DEFINITION. Let $G = (V, E)$ be a combinatorial game. A *move error distribution* ψ over G is a map $\psi : E \times E \rightarrow [0, 1]$ satisfying:

- $\psi(e, e') = 0$ if $e \not\sim e'$.
- For every fixed $e \in E$, $\sum_{e' \sim e} \psi(e, e') = 1$.

Since ψ only takes non-zero values for pairs of arrows in E_v we shall write $\psi_v(w, u)$ for $\psi((v, w), (v, u))$.

For G seen as the graph of a combinatorial game, the distribution $\psi(e, e')$ represents the probability of sending the move e and receiving e' from the position $t(e) = t(e')$.

REMARK 1. Note that having a move error distribution over G is equivalent to a collection $\{\psi_v\}_{v \in V}$ of maps $\psi_v : F(v) \times F(v) \rightarrow [0, 1]$ satisfying $\sum_{u \in F(v)} \psi_v(w, u) = 1$ for every $w \in F(v)$. Also, if the edges in G are ordered, say $E = \{e_1, \dots, e_r\}$, then a move error distribution ψ over G can be expressed in terms of the stochastic matrix $D \in \mathbb{R}^{r \times r}$ defined by $D_{ij} = \psi(e_i, e_j)$. Actually, it is straightforward that $D \in \mathbb{R}^{r \times r}$ is the matrix associated to a move error distribution ψ over G if and only if D is stochastic and $D_{ij} = 0$ whenever $e_i \not\sim e_j$.

For a digraph $G = (V, E)$ and a move error distribution ψ over G we define a two person win-lose (perfect information) game G_ψ by the following rules:

- (1) Player I moves first from the starting position of G .
- (2) Players alternate moves.
- (3) At position $v \in V$, the player whose turn it is to move chooses a position $w \in F(v)$. The definite move $u \in F(v)$ (officially) played is then randomly chosen with probability given by $\psi_v(w, u)$.
- (4) The player who is confronted with a terminal position at his turn, loses.

EXAMPLE 2. For every $v \in V$ let

$$\psi_v(w, u) = \begin{cases} 1 & w = u \\ 0 & \text{otherwise} \end{cases}$$

Then $G_\psi = G$. That is, combinatorial games are a particular case of these type of games.

EXAMPLE 3. The move error distribution for a 1-pile *Nim* with k chips with the error specified as in the case exhibited in Section 1 can be seen to be

$$\psi_k(s, r) = \frac{p^{d_H(s, r)} \cdot (1 - p)^{n - d_H(s, r)}}{\sum_{i=0}^{k-1} p^{d_H(s, i)} \cdot (1 - p)^{n - d_H(s, i)}},$$

where p is the probability of introducing an error in a single digit, $d_H(s, r)$ is the Hamming distance between the binary representation of s, r and n is the number of digits in the binary representation of k .

EXAMPLE 4. Let G be the digraph of the 1-pile *Nim* with more than one chip. Write v_i for the vertex representing the position with i chips on the heap ($0 \leq i \leq n$) and let $\psi_{v_i}(w, u) = \frac{1}{i}$ (equiprobable error move distribution) for $i \neq 0$. Then G_ψ is a fair chance game (see Lemma 7).

Consider a game G_ψ . For each $v \in V$ let $N_v : F(v) \rightarrow [0, 1]$ be the function $N_v(w)$ that gives the probability of winning for the Next player from position $v \in G_\psi$ if it plays (sends) the move $v \rightarrow w$. Furthermore, let

$$N_v = \begin{cases} \max_{u \in F(v)} \{N_v(u)\} & v \text{ is not terminal} \\ 0 & v \text{ is terminal} \end{cases}$$

be the probability of winning for the Next player from position $v \in G_\psi$. To solve the game G_ψ is to find, for every position $v \in G_\psi$:

- N_v and
- the optimal move from v .

As it was exemplified in the toy games presented in Section 1, we have the following inductive argument to compute $N_v(w)$ for each $w \in F(v)$:

$$\begin{aligned} N_v(w) &= \sum_{u \in F(v)} P(\text{I wins} \mid \text{II receives } u) \cdot P(\text{II receives } u) \\ &= \sum_{u \in F(v)} (1 - P(\text{II wins from } u)) \cdot P(\text{II receives } u) \\ &= \sum_{u \in F(v)} (1 - N_u) \cdot \psi_v(w, u) \end{aligned} \tag{4}$$

REMARK 5. We can characterize the positions $v \in G_\psi$ such that $N_v = 0$ or $N_v = 1$. Indeed,

$$N_v = N_v(w) = \sum_{u \in F(v)} (1 - N_u) \cdot \psi_v(w, u)$$

for some $w \in F(v)$. Thus, if $N_v = 0$ then either $N_u = 1$ or $\psi_v(w, u) = 0$ in each term of the sum. In particular, if $\psi_v(w, u) > 0$ for each $w, u \in F(v)$ then $N_v = 0$ if and only if $N_u = 1$ for every $u \in F(v)$. A similar argument can be applied to the case $N_v = 1$ (making use of the fact that $\sum_{u \in F(v)} \psi_v(w, u) = 1$): $N_v = 1$ if and only if $N_u = 0$ for every $u \in F(v)$.

In terms of analyzing a game G_ψ , we may always assume that $\psi(e, e') > 0$ whenever $e \sim e'$. Indeed, every move error distribution can be slightly altered to take non-zero values (for arrows sharing a tail) as the following result states. In what follows $|X|$ represents the cardinality of the set X .

PROPOSITION 6. *Given a game G_ψ and a real number $\epsilon > 0$ there exists a move error distribution ψ' over G such that:*

- (1) $\psi'(e, e') > 0$ for every $e \sim e'$.
- (2) $|N_v - N'_v| < \epsilon$ for every $v \in V$
- (3) *The optimal move from v in G_ψ and $G_{\psi'}$ coincide for every $v \in G$.*

Proof. Define $\psi'_v(w, u) = \psi_v(w, u) + \frac{\epsilon}{|F(v)|}$. Since $N_u = N'_u$ for every terminal vertex $u \in G$, we may assume that $|N_w - N'_w| < \epsilon$ for every $w \in F(v)$. Then, by (4),

$$N'_v(w) - N_v(w) = \sum_{u \in F(v)} (1 - N_u) \cdot \frac{\epsilon}{|F(v)|} \leq \sum_{u \in F(v)} \frac{\epsilon}{|F(v)|} = \epsilon.$$

By the definition of ψ' , $N'_v(w) \geq N'_v(u)$ if and only if $N_v(w) \geq N_v(u)$ whenever $w, u \in F(v)$, which proves (2) and (3). $\square$

In analogy with the classical theory, we shall call a position $v \in G_\psi$ such that $N_v = 0$ a P -position and a position $w \in G_\psi$ such that $N_w = 1$ an N -position. Furthermore, a position $u \in G_\psi$ such that $0 < N_u < 1$ will be called an O -position.

Some combinatorial games can be converted into chance games with the use of a convenient move error distribution. As it was pointed out in Section 1, the 1-pile *Nim* of three chips is a (fair) chance game for $p = \frac{1}{2}$ and *Chomp!* is an (unfair) chance game for $p = \frac{1}{3}$. The following result gives a sufficient condition for an equiprobable move error distribution to determine a fair chance game.

LEMMA 7. *Suppose $\psi_v(w, u) = \frac{1}{n}$ for every $w, u \in F(v)$ and every $v \in V$ (equiprobable function) where n is the outdegree of v . Suppose additionally that $|\{u \in F(v) : N_u = 0\}| = |\{u \in F(v) : N_u = 1\}|$ whenever $N_v \neq 0, 1$. Then: $N_v = \frac{1}{2}$ whenever $N_v \neq 0, 1$. In particular, if the starting position v is such that $N_v \neq 0, 1$ then G_ψ is a fair chance game.*

Proof. Suppose v is such that $N_v \neq 0, 1$. Using Equation (4) and the fact that $|\{u \in F(v) : N_u = 0\}| = \frac{1}{2}|\{u \in F(v) : N_u = 0\}| + \frac{1}{2}|\{u \in F(v) : N_u = 1\}|$ we have by an inductive argument that for any $w \in F(v)$:

$$\begin{aligned} N_v(w) &= \frac{1}{n} \sum_{u \in F(v)} (1 - N_u) \\ &= \frac{1}{n} \left(\sum_{N_u=0} 1 + \sum_{N_u=\frac{1}{2}} (1 - N_u) \right) \\ &= \frac{1}{n} \left(\sum_{N_u=0} \frac{1}{2} + \sum_{N_u=1} \frac{1}{2} + \sum_{N_u=\frac{1}{2}} \frac{1}{2} \right) \\ &= \frac{1}{2n} \sum_{u \in F(v)} 1 = \frac{1}{2}. \end{aligned}$$

$\square$

Note that (general n -heaps) *Nim* fulfills the hypotheses of Lemma 7 (provided the number of chips in at least one heap is greater than 1). Indeed, the N -positions are those with only an odd number of piles of 1 chip and the P -positions are those with only an even

number of piles of 1 chip. An O -position $(n_1, \dots, n_k)$ has a follower which is an N -position or a P -position only if it is of the form

$$\left(\underbrace{(*, \dots, *)}_{0\text{'s and } 1\text{'s}}, n, \underbrace{(*, \dots, *)}_{0\text{'s and } 1\text{'s}} \right)$$

for some $n \geq 2$, which has exactly one follower which is an N -position and one which is a P -position. Hence, we have established the following result.

COROLLARY 8. *The $(n\text{-piles}) \text{ Nim}_\psi$, for an equiprobable ψ , is a fair chance game for any non- P non- N starting position.*

On the other hand, *Chomp!* does not fulfill the properties of Lemma 7 (consider the position $\boxplus$).

3. 1-PILE NIM REVISITED

In this section we briefly retake the case of 1-pile *Nim* (of k chips) presented in Section 1. This example turns out to be a (non-trivial) interesting game for general k . Recall that the number of chips in a given position is encoded by its binary representation and a given move is transmitted specifying the number of chips left in the heap under that move. Let $N_k(p)$ denote the probability of winning from a heap of size k and probability p of making an error in a single digit. Equation (4) and Example 3 gives us for this case:

$$N_k(p) = \max_{0 \leq s \leq k-1} \sum_{i=0}^{k-1} (1 - N_i) \cdot \frac{p^{d_H(s,i)} \cdot (1-p)^{n-d_H(s,i)}}{\sum_{j=0}^{k-1} p^{d_H(s,j)} \cdot (1-p)^{n-d_H(s,j)}} \quad (5)$$

where $d_H(s, r)$ is the Hamming distance between the binary representation of s and r , and n is the number of digits in the binary representation of k . Clearly, $N_0(p) = 0$ and $N_1(p) = 1$ for every p . Also, it is straightforward to see that

$$N_2(p) = \begin{cases} 1-p & p \leq \frac{1}{2} \\ p & p \geq \frac{1}{2} \end{cases}.$$

We already found $N_3(p)$ in Section 1 (see Equation (2)). Using Equation (5) we computed $N_k(p)$ (and the corresponding optimal moves) for $p = \frac{i}{100}$ ($0 \leq i \leq 100$) for each $k = 4, \dots, 10$. This data is presented in the Appendix.

Many information and conjectures can be inferred from these cases. Firstly, we note that cases $5 \leq k \leq 10$ already show the non-triviality of this game for $p \geq \frac{1}{2}$. For example, for 5 chips the optimal move is 3 for $p < 0.76$ and 4 for $p > 0.77$. A similar situation arises for the cases of 6 and 7 chips, but with the presence of the move 0 for $0.76 < p < 0.78$. Cases of 9 and 10 chips show this kind behavior for the moves 7, 8 and 4 for $p < 0.74$, $0.75 < p < 0.81$ and $p > 0.82$ respectively. Also, cases of 5, 6 and 7 chips give Player I a probability of winning under $\frac{1}{2}$ for $0.69 < p < 0.80$. For the cases of 9 and 10 chips, this happens for $0.73 < p < 0.82$. We also note that the game of 10 chips is a rather fair game for every $p \geq 0.30$, in the sense that $|P(\text{I wins}) - P(\text{II wins})| < 0.01$.

The following conjectures are based on these consistent evidences.

CONJECTURE 9. *For $p \leq \frac{1}{2}$ and $k \geq 1$, $N_k(p) \geq \frac{1}{2}$ and the optimal play is (transmitting the) removal the entire pile.*

CONJECTURE 10. *If $k = 2^n$ then $N_k(p) \geq \frac{1}{2}$ for all k . The optimal move for $p \geq \frac{1}{2}$ is (transmitting) $k - 1$.*

Conjecture 9 is trivially true for a neighborhood of 0; however, these computations show that it may also be valid for values near $\frac{1}{2}$. On the other hand, Conjecture 10 seems related to Conjecture 9 based on the fact that the move $11 \dots 1$ is a valid move only when the number of chips is a power of 2.

4. FUTURE WORK

In this paper we have presented some elementary examples of combinatorial games through noisy channels in order to evidence the mechanics of these type of games, but this theory offers a broad range of interesting examples. Even for a given (fixed combinatorial game), the possibilities of different error distribution are huge.

Next is a short list of possible future directions and open problems of this theory.

- (1) As it was pointed out in Section 3, the general case of 1-pile *Nim* with the given error distribution is non-trivial for $p \geq \frac{1}{2}$. Aside from the conjectures stated in the aforementioned section, what other formal results can be obtained for this game? Additionally, the case for $k = 10$ chips was a rather fair game for $p \geq 0.30$. Does this happen consistently for large values of k (with the exception of the case $k = 2^n$)? If so, does the bound on p approaches 0?
- (2) How can the particular error distribution presented for 1-pile *Nim* be extended for arbitrary number of piles? It would also be interesting to study 1-pile subtraction games with different subtraction sets.
- (3) Analyze the general case of *Chomp!* for the error distribution presented studied in Section 1. Additionally, defining an error distribution which emulates a real-life situation would be interesting.
- (4) In Lemma 7 we gave sufficient conditions on a combinatorial game for a move error distribution to determine a (fair) chance game. Does every combinatorial game admit a move error function that makes it a (fair or unfair) chance game?
- (5) Is there a reciprocal result for the previous item? is it possible to model chance games by a G_ψ ? If not, which chance games can be modeled by a G_ψ ?

REFERENCES

- [1] E. R. Berlekamp, J. H. Conway and R. K. Guy. *Winning Ways for Your Mathematical Plays*. AK Peters (2001).
- [2] T. S. Ferguson. *Course in Game Theory*. World Scientific (2020).
- [3] D. B. West. *Introduction to graph theory*. Vol. 2 (1996). Upper Saddle River, NJ. Prentice hall.

APPENDIX

The following tables contain the results for $N_k(p)$ for $p = \frac{i}{100}$ ($0 \leq i < 100$) for each $4 \leq k \leq 10$ and the optimal move (opt) in every case.

1-pile *Nim* of 4 chips

p	$N_4(p)$	opt.	p	$N_4(p)$	opt.	p	$N_4(p)$	opt.
0.00	1.000000000000000	0	0.34	0.560586029850746	0	0.68	0.586586699386503	3
0.01	0.980200970297030	0	0.35	0.554527777777778	0	0.69	0.594317058643938	3
0.02	0.960807529411765	0	0.36	0.548805647058824	0	0.70	0.602329113924051	3
0.03	0.941824640776699	0	0.37	0.543412978102190	0	0.71	0.610622642236494	3
0.04	0.923256615384615	0	0.38	0.538342956521739	0	0.72	0.619198204408818	3
0.05	0.905107142857143	0	0.39	0.533588618705036	0	0.73	0.628057153568315	3
0.06	0.887379320754717	0	0.40	0.529142857142857	0	0.74	0.637201640416047	3
0.07	0.870075682242991	0	0.41	0.524998425531915	0	0.75	0.646634615384615	3
0.08	0.853198222222222	0	0.42	0.521147943661972	0	0.76	0.656359827788650	3
0.09	0.836748422018349	0	0.43	0.517583902097902	0	0.77	0.666381822092599	3
0.10	0.820727272727273	0	0.44	0.514298666666667	0	0.78	0.676705931434090	3
0.11	0.805135297297297	0	0.45	0.511284482758621	0	0.79	0.687338268552931	3
0.12	0.789972571428571	0	0.46	0.508533479452055	0	0.80	0.698285714285714	3
0.13	0.775238743362832	0	0.47	0.506037673469388	0	0.81	0.709555903793878	3
0.14	0.760933052631579	0	0.48	0.503788972972973	0	0.82	0.721157210699202	3
0.15	0.747054347826087	0	0.49	0.501779181208054	0	0.83	0.733098729304925	3
0.16	0.733601103448276	0	0.50	0.500000000000000	0 - 3	0.84	0.745390255083179	3
0.17	0.720571435897436	0	0.51	0.501865111585122	3	0.85	0.758042263610315	3
0.18	0.707963118644068	0	0.52	0.504120904051173	3	0.86	0.771065888130968	3
0.19	0.695773596638655	0	0.53	0.506758115061926	3	0.87	0.784472895929643	3
0.20	0.684000000000000	0	0.54	0.509767595529537	3	0.88	0.798275663685152	3
0.21	0.672639157024793	0	0.55	0.513140365448505	3	0.89	0.812487151978716	3
0.22	0.661687606557377	0	0.56	0.516867668789809	3	0.90	0.827120879120879	3
0.23	0.651141609756098	0	0.57	0.520941027155915	3	0.91	0.842190894455942	3
0.24	0.640997161290323	0	0.58	0.525352291909043	3	0.92	0.857711751295337	3
0.25	0.631250000000000	0	0.59	0.530093694499406	3	0.93	0.873698479623489	3
0.26	0.621895619047619	0	0.60	0.535157894736842	3	0.94	0.890166558711318	3
0.27	0.612929275590551	0	0.61	0.540538026768141	3	0.95	0.907131889763780	3
0.28	0.604346000000000	0	0.62	0.546227742543171	3	0.96	0.924610768718802	3
0.29	0.596140604651163	0	0.63	0.552221252575303	3	0.97	0.942619859305799	3
0.30	0.588307692307692	0	0.64	0.558513363825364	3	0.98	0.961176166462668	3
0.31	0.580841664122137	0	0.65	0.565099514563107	3	0.99	0.980297010200990	3
0.32	0.573736727272727	0	0.66	0.571975806085611	3	1.00	1.000000000000000	3
0.33	0.566986902255639	0	0.67	0.579139031197843	3			

1-pile *Nim* of 5 chips

p	$N_5(p)$	opt.	p	$N_5(p)$	opt.	p	$N_5(p)$	opt.
0.00	1.000000000000000	0	0.34	0.538378409631035	0	0.68	0.500759915549947	3
0.01	0.970786197337449	0	0.35	0.534315852002716	0	0.69	0.497265951711815	3
0.02	0.943091115962430	0	0.36	0.530527329304674	0	0.70	0.493156839970864	3
0.03	0.916837570430568	0	0.37	0.526999767177495	0	0.71	0.488405052149257	3
0.04	0.891952582197463	0	0.38	0.523720747786677	0	0.72	0.482985031466283	3
0.05	0.868367115581316	0	0.39	0.520678476706606	0	0.73	0.476873163748067	3
0.06	0.846015834025134	0	0.40	0.517861751152074	0	0.74	0.470047726738993	3
0.07	0.824836874780745	0	0.41	0.515259929459493	0	0.75	0.462488819320215	3
0.08	0.804771640337804	0	0.42	0.512862901725567	0	0.76	0.454178272731180	3
0.09	0.785764605097556	0	0.43	0.510661061516108	0	0.77	0.458703309461914	4
0.10	0.767763135946622	0	0.44	0.508645278562259	0	0.78	0.468243744571022	4
0.11	0.750717325523173	0	0.45	0.506806872365420	0	0.79	0.478894674819673	4
0.12	0.734579837089105	0	0.46	0.505137586635825	0	0.80	0.490681753889675	4
0.13	0.719305760029194	0	0.47	0.503629564492966	0	0.81	0.503629901582421	4
0.14	0.704852475093482	0	0.48	0.502275324358930	0	0.82	0.517763357526783	4
0.15	0.691179528583823	0	0.49	0.501067736478247	0	0.83	0.533105736675273	4
0.16	0.678248514760955	0	0.50	0.500000000000000	0 - 4	0.84	0.549680086540498	4
0.17	0.666022965815711	0	0.51	0.501070416268233	3	0.85	0.567508946127860	4
0.18	0.654468248808124	0	0.52	0.502253599482662	3	0.86	0.586614406523029	4
0.19	0.643551469031949	0	0.53	0.503506651859789	3	0.87	0.607018173094491	4
0.20	0.633241379310345	0	0.54	0.504785783917968	3	0.88	0.628741629272713	4
0.21	0.623508294771747	0	0.55	0.506046540093826	3	0.89	0.651805901868526	4
0.22	0.614324012693864	0	0.56	0.507244031580279	3	0.90	0.676231927894525	4
0.23	0.605661737038733	0	0.57	0.508333173548720	3	0.91	0.702040522854742	4
0.24	0.597496007333362	0	0.58	0.509268923745336	3	0.92	0.729252450469917	4
0.25	0.589802631578947	0	0.59	0.51006519335504	3	0.93	0.757888493808341	4
0.26	0.582558622897398	0	0.60	0.510501708817498	3	0.94	0.787969527795738	4
0.27	0.575742139647192	0	0.61	0.510710975841583	3	0.95	0.819516593081930	4
0.28	0.569332428761651	0	0.62	0.510591751855934	3	0.96	0.852550971247286	4
0.29	0.563309772081838	0	0.63	0.510102614656897	3	0.97	0.887094261338058	4
0.30	0.557655435473617	0	0.64	0.509203470145971	3	0.98	0.923168457726796	4
0.31	0.552351620534156	0	0.65	0.507855714885242	3	0.99	0.960796029301990	4
0.32	0.547381418707442	0	0.66	0.506022377390005	3			
0.33	0.542728767641403	0	0.67	0.503668236493154	3			

1-pile *Nim* of 6 chips

p	$N_6(p)$	opt.	p	$N_6(p)$	opt.	p	$N_6(p)$	opt.
0.00	1.0000000000000000	0	0.34	0.531756701939471	0	0.68	0.500472484097763	3
0.01	0.970692972347877	0	0.35	0.528088160342963	0	0.69	0.498292591887115	3
0.02	0.942743593518538	0	0.36	0.524709179484254	0	0.70	0.495703534969049	3
0.03	0.916109116423990	0	0.37	0.521603755313847	0	0.71	0.492674171482722	3
0.04	0.890746574252241	0	0.38	0.518756579699146	0	0.72	0.489171796778423	3
0.05	0.866612986459500	0	0.39	0.516153014394268	0	0.73	0.485162013120185	3
0.06	0.843665537794019	0	0.40	0.513779065174457	0	0.74	0.480608610487901	3
0.07	0.821861733310791	0	0.41	0.511621356208230	0	0.75	0.475473458786294	3
0.08	0.801159532007875	0	0.42	0.509667104733469	0	0.76	0.471666277251390	0
0.09	0.781517461425464	0	0.43	0.507904096097467	0	0.77	0.474970849783124	0
0.10	0.762894715293047	0	0.44	0.506320659215518	0	0.78	0.477090034522646	0
0.11	0.745251236083839	0	0.45	0.504905642497838	0	0.79	0.480657745012594	4
0.12	0.728547784135385	0	0.46	0.503648392090427	0	0.80	0.491391715498081	4
0.13	0.712745994817701	0	0.47	0.502538719871882	0	0.81	0.503379004638392	4
0.14	0.697808425072723	0	0.48	0.501566899045015	0	0.82	0.516656044333983	4
0.15	0.683698590508804	0	0.49	0.500723624359553	0	0.83	0.531256610337795	4
0.16	0.670380994109437	0	0.50	0.500000000000000	0 - 5	0.84	0.547211693331240	4
0.17	0.657821147504473	0	0.51	0.500706668813307	3	0.85	0.564549384879275	4
0.18	0.645985585653237	0	0.52	0.501474017435610	3	0.86	0.583294778427640	4
0.19	0.634841875700767	0	0.53	0.502273575022701	3	0.87	0.603469885352901	4
0.20	0.624358620689655	0	0.54	0.503077572338349	3	0.88	0.625093565931604	4
0.21	0.614505458739625	0	0.55	0.503858938046591	3	0.89	0.648181474959709	4
0.22	0.605253058244056	0	0.56	0.504591270291603	3	0.90	0.672746021628479	4
0.23	0.596573109576377	0	0.57	0.505248784419111	3	0.91	0.698796343148910	4
0.24	0.588438313748844	0	0.58	0.505806238134201	3	0.92	0.726338291514030	4
0.25	0.580822368421053	0	0.59	0.506238835794856	3	0.93	0.755374432697453	4
0.26	0.573699951615074	0	0.60	0.506522113897183	3	0.94	0.785904057507351	4
0.27	0.567046703457774	0	0.61	0.506631810107021	3	0.95	0.817923203247663	4
0.28	0.560839206238349	0	0.62	0.506543718425531	3	0.96	0.851424685282569	4
0.29	0.555054963039850	0	0.63	0.506233533237653	3	0.97	0.886398137555695	4
0.30	0.549672375177270	0	0.64	0.505676685078808	3	0.98	0.922830061081694	4
0.31	0.544670718651206	0	0.65	0.504848170966394	3	0.99	0.960703879404200	4
0.32	0.540030119804954	0	0.66	0.503722382080647	3			
0.33	0.535731530353961	0	0.67	0.502272931449153	3			

1-pile *Nim* of 7 chips

p	$N_7(p)$	opt.	p	$N_7(p)$	opt.	p	$N_7(p)$	opt.
0.00	1.0000000000000000	0	0.34	0.526712631117538	0	0.68	0.500322194046992	3
0.01	0.970599775046155	0	0.35	0.523414748265526	0	0.69	0.498832380898230	3
0.02	0.942396479764310	0	0.36	0.520409623011161	0	0.70	0.497051625384310	3
0.03	0.915382570289968	0	0.37	0.517678406448673	0	0.71	0.494952099960270	3
0.04	0.889546123947318	0	0.38	0.515203115898888	0	0.72	0.492503325626898	3
0.05	0.864871357070144	0	0.39	0.512966614693382	0	0.73	0.489671882997926	3
0.06	0.841339106925162	0	0.40	0.510952590266876	0	0.74	0.486421112010412	3
0.07	0.818927278955552	0	0.41	0.509145530875737	0	0.75	0.482710798816568	3
0.08	0.797611260644012	0	0.42	0.507530701231860	0	0.76	0.485668294927295	0
0.09	0.777364303356898	0	0.43	0.506094117314358	0	0.77	0.487531502509508	0
0.10	0.758157873576055	0	0.44	0.504822520596365	0	0.78	0.488761800555490	0
0.11	0.739961974954502	0	0.45	0.503703351900788	0	0.79	0.489647199317731	0
0.12	0.722745442648168	0	0.46	0.502724725076914	0	0.80	0.492023516195469	4
0.13	0.706476211379879	0	0.47	0.501875400669447	0	0.81	0.503153251532731	4
0.14	0.691121558685305	0	0.48	0.501144759732606	0	0.82	0.515649141270697	4
0.15	0.676648324774991	0	0.49	0.500522777924400	0	0.83	0.529558199754849	4
0.16	0.663023110423200	0	0.50	0.500000000000000	0 - 6	0.84	0.544922806676699	4
0.17	0.650212454264204	0	0.51	0.500501405668828	3	0.85	0.561780267849546	4
0.18	0.638182990841022	0	0.52	0.501039303939003	3	0.86	0.580162406542849	4
0.19	0.626901590711292	0	0.53	0.501593642128842	3	0.87	0.600095190006182	4
0.20	0.616335483870968	0	0.54	0.502145436254512	3	0.88	0.621598395388394	4
0.21	0.606452367709536	0	0.55	0.502676666691200	3	0.89	0.644685318766780	4
0.22	0.597220500661255	0	0.56	0.503170154973435	3	0.90	0.669362530454037	4
0.23	0.588608782666111	0	0.57	0.503609423392782	3	0.91	0.695629679157600	4
0.24	0.580586823502337	0	0.58	0.503978539037176	3	0.92	0.723479346938030	4
0.25	0.573125000000000	0	0.59	0.504261943862990	3	0.93	0.752896956262018	4
0.26	0.566194503092659	0	0.60	0.504444272301620	3	0.94	0.783860729783535	4
0.27	0.559767375611960	0	0.61	0.504510157780690	3	0.95	0.816341702825695	4
0.28	0.553816541678445	0	0.62	0.504444029389835	3	0.96	0.850303787887821	4
0.29	0.548315828491198	0	0.63	0.504229899746876	3	0.97	0.885703889878334	4
0.30	0.543239981269422	0	0.64	0.503851144926449	3	0.98	0.922492070184656	4
0.31	0.538564672050849	0	0.65	0.503290277104315	3	0.99	0.960611757145824	4
0.32	0.534266503005141	0	0.66	0.502528710351019	3			
0.33	0.530323004875406	0	0.67	0.501546519782557	3			

1-pile *Nim* of 8 chips

p	$N_8(p)$	opt.	p	$N_8(p)$	opt.	p	$N_8(p)$	opt.
0.00	1.0000000000000000	0	0.34	0.524612804610651	0	0.68	0.545970522741199	7
0.01	0.970598833846604	0	0.35	0.521406933601757	0	0.69	0.551487714535159	7
0.02	0.942389401420633	0	0.36	0.518505160268744	0	0.70	0.557369402493409	7
0.03	0.915360139631172	0	0.37	0.515887477804983	0	0.71	0.563623154253780	7
0.04	0.889496262043453	0	0.38	0.513534665147680	0	0.72	0.570257107763081	7
0.05	0.864780139230876	0	0.39	0.511428281459389	0	0.73	0.577280136997554	7
0.06	0.841191648430970	0	0.40	0.509550658712716	0	0.74	0.584702023073867	7
0.07	0.818708494842189	0	0.41	0.507884892608764	0	0.75	0.592533630732249	7
0.08	0.797306506713112	0	0.42	0.506414832046128	0	0.76	0.600602594822888	7
0.09	0.776959906202603	0	0.43	0.505125067343732	0	0.77	0.608278367758439	7
0.10	0.757641557828904	0	0.44	0.504000917407404	0	0.78	0.616362314527341	7
0.11	0.739323196177174	0	0.45	0.503028416016869	0	0.79	0.624949521874582	7
0.12	0.721975634398376	0	0.46	0.502194297396741	0	0.80	0.633885460850028	7
0.13	0.705568954907076	0	0.47	0.501485981222039	0	0.81	0.643390677082934	7
0.14	0.690072683571240	0	0.48	0.500891557195910	0	0.82	0.653576092787472	7
0.15	0.675455948582760	0	0.49	0.500399769324345	0	0.83	0.664483974784802	7
0.16	0.661687625102613	0	0.50	0.500000000000000	0 - 7	0.84	0.676156671381491	7
0.17	0.648736466688604	0	0.51	0.500436904581148	7	0.85	0.688636469765496	7
0.18	0.636571224435853	0	0.52	0.501046472699034	7	0.86	0.7019654662606918	7
0.19	0.625160754689915	0	0.53	0.501847386028536	7	0.87	0.716185424862204	7
0.20	0.614474116129032	0	0.54	0.502856988669459	7	0.88	0.731337701547140	7
0.21	0.604480656954820	0	0.55	0.504091334869875	7	0.89	0.747463107001658	7
0.22	0.595150092879173	0	0.56	0.505565243543001	7	0.90	0.764601835923839	7
0.23	0.586452576548713	0	0.57	0.507292359676206	7	0.91	0.782793386206581	7
0.24	0.578358759006144	0	0.58	0.509285222725594	7	0.92	0.802076493373566	7
0.25	0.570839843750000	0	0.59	0.511555342072545	7	0.93	0.822489076185915	7
0.26	0.563867633919946	0	0.60	0.514113279592087	7	0.94	0.844068192781701	7
0.27	0.557414573103620	0	0.61	0.516968739349510	7	0.95	0.866850006520864	7
0.28	0.551453780232595	0	0.62	0.520130664403962	7	0.96	0.890869760541145	7
0.29	0.545959079009054	0	0.63	0.523607340658660	7	0.97	0.916161759888739	7
0.30	0.540905022280874	0	0.64	0.527406507659348	7	0.98	0.942759359972066	7
0.31	0.536266911760715	0	0.65	0.531535476208216	7	0.99	0.970694959999281	7
0.32	0.532020813464196	0	0.66	0.536001252631791	7			
0.33	0.528143569222991	0	0.67	0.540810669520000	7			

1-pile *Nim* of 9 chips

p	$N_9(p)$	opt.	p	$N_9(p)$	opt.	p	$N_9(p)$	opt.
0.00	1.0000000000000000	0	0.34	0.518262761732905	0	0.68	0.509144456974512	7
0.01	0.961463689059601	0	0.35	0.515891437042707	0	0.69	0.507994483162382	7
0.02	0.925714854865882	0	0.36	0.513749079142168	0	0.70	0.506362575836614	7
0.03	0.892555115718419	0	0.37	0.511818737036820	0	0.71	0.504195793422533	7
0.04	0.861800459693348	0	0.38	0.510084557986085	0	0.72	0.501441845463981	7
0.05	0.833280167872822	0	0.39	0.508531707780837	0	0.73	0.498049464133065	7
0.06	0.806835823954958	0	0.40	0.507146297078745	0	0.74	0.493968713994267	7
0.07	0.782320402321224	0	0.41	0.505915313406114	0	0.75	0.494867111212136	8
0.08	0.759597427518426	0	0.42	0.504826558463766	0	0.76	0.497821177670566	8
0.09	0.738540198871533	0	0.43	0.503868590401166	0	0.77	0.498527897767072	8
0.10	0.719031074602000	0	0.44	0.503030670747445	0	0.78	0.499081310833092	8
0.11	0.700960810400090	0	0.45	0.502302715710484	0	0.79	0.499549378806328	8
0.12	0.684227947902335	0	0.46	0.501675251575765	0	0.80	0.498283360840050	8
0.13	0.668738248967435	0	0.47	0.501139373955443	0	0.81	0.492137510167114	8
0.14	0.654404172034408	0	0.48	0.500686710655004	0	0.82	0.493999659131848	4
0.15	0.641144387193056	0	0.49	0.500309387940143	0	0.83	0.503018216706902	4
0.16	0.628883326904786	0	0.50	0.500000000000000	0 - 8	0.84	0.513381495431082	4
0.17	0.617550769586695	0	0.51	0.500330897707461	7	0.85	0.525213413675264	4
0.18	0.607081453517770	0	0.52	0.500769807250321	7	0.86	0.538647686215078	4
0.19	0.597414718746771	0	0.53	0.501316264271457	7	0.87	0.553828497286445	4
0.20	0.588494174879890	0	0.54	0.501965547475858	7	0.88	0.570911216553804	4
0.21	0.580267392805219	0	0.55	0.502708589199123	7	0.89	0.590063164210829	4
0.22	0.572685618572755	0	0.56	0.503531924038620	7	0.90	0.611464432757310	4
0.23	0.565703507795013	0	0.57	0.504417680663694	7	0.91	0.635308774505980	4
0.24	0.559278879066028	0	0.58	0.505343621393305	7	0.92	0.661804565593515	4
0.25	0.553372485017123	0	0.59	0.506283233340655	7	0.93	0.691175859231122	4
0.26	0.547947799737529	0	0.60	0.507205873870280	7	0.94	0.723663543169917	4
0.27	0.542970821387984	0	0.61	0.508076971802325	7	0.95	0.759526618922542	4
0.28	0.538409888926774	0	0.62	0.508858284254791	7	0.96	0.799043623234907	4
0.29	0.534235511951170	0	0.63	0.509508207276950	7	0.97	0.842514215715755	4
0.30	0.530420212733727	0	0.64	0.509982136551689	7	0.98	0.890260960500799	4
0.31	0.526938379603046	0	0.65	0.510232872502421	7	0.99	0.942631334470157	4
0.32	0.523766130883026	0	0.66	0.510211062215078	7			
0.33	0.520881188663901	0	0.67	0.509865668770588	7			

1-pile *Nim* of 10 chips

p	$N_{10}(p)$	opt.	p	$N_{10}(p)$	opt.	p	$N_{10}(p)$	opt.
0.00	1.0000000000000000	0	0.34	0.515986747898906	0	0.68	0.506243912340789	7
0.01	0.961373214942922	0	0.35	0.513829757735945	0	0.69	0.505444353101728	7
0.02	0.925387510371752	0	0.36	0.511895367145471	0	0.70	0.504326155763247	7
0.03	0.891889095669790	0	0.37	0.510165455691893	0	0.71	0.502851476132970	7
0.04	0.860730110105349	0	0.38	0.508623162214997	0	0.72	0.500980500118853	7
0.05	0.831768873555499	0	0.39	0.507252799339745	0	0.73	0.498671219672190	7
0.06	0.804870029884031	0	0.40	0.506039773660101	0	0.74	0.495879185289652	7
0.07	0.779904602727989	0	0.41	0.504970511299173	0	0.75	0.495024240460744	8
0.08	0.756749980325377	0	0.42	0.504032388554559	0	0.76	0.497880341589778	8
0.09	0.735289843374940	0	0.43	0.503213667345749	0	0.77	0.498563162671519	8
0.10	0.715414047681967	0	0.44	0.502503435189430	0	0.78	0.499100611755258	8
0.11	0.697018471449004	0	0.45	0.501891549438331	0	0.79	0.499557628502662	8
0.12	0.680004835464169	0	0.46	0.501368585529541	0	0.80	0.498310555123772	8
0.13	0.664280503078354	0	0.47	0.500925788998944	0	0.81	0.493158988111763	4
0.14	0.649758265708432	0	0.48	0.500555031029276	0	0.82	0.497956124025164	4
0.15	0.636356118625309	0	0.49	0.500248767310239	0	0.83	0.500974546772401	4
0.16	0.623997030956689	0	0.50	0.500000000000000	0 - 9	0.84	0.504081230576504	4
0.17	0.612608713132263	0	0.51	0.500261812403564	7	0.85	0.507234676173584	4
0.18	0.602123384404734	0	0.52	0.500602372387189	7	0.86	0.510385910285879	4
0.19	0.592477542577477	0	0.53	0.501018622272505	7	0.87	0.513477621370211	4
0.20	0.583611737645137	0	0.54	0.501504398760598	7	0.88	0.516443217717742	4
0.21	0.575470350695362	0	0.55	0.502050584940021	7	0.89	0.519205802667897	4
0.22	0.568001379118405	0	0.56	0.502645282224030	7	0.90	0.521677060956118	4
0.23	0.561156228918087	0	0.57	0.503273996908791	7	0.91	0.523756049257639	4
0.24	0.554889514705414	0	0.58	0.503919835298864	7	0.92	0.525327882780600	4
0.25	0.549158867778929	0	0.59	0.504563700779711	7	0.93	0.526262308259416	4
0.26	0.543924752548549	0	0.60	0.505184485875500	7	0.94	0.526412151855156	4
0.27	0.539150291437597	0	0.61	0.505759252250835	7	0.95	0.525611628227441	4
0.28	0.534801098297382	0	0.62	0.506263391820508	7	0.96	0.523674494335699	4
0.29	0.530845120286660	0	0.63	0.506670762628907	7	0.97	0.520392028276994	4
0.30	0.527252488101950	0	0.64	0.506953793938036	7	0.98	0.515530809576837	4
0.31	0.523995374391582	0	0.65	0.507083555988218	7	0.99	0.508830272700490	4
0.32	0.521047860144447	0	0.66	0.507029791117002	7			
0.33	0.518385808812154	0	0.67	0.506760904270997	7			

(N. A. Capitelli) UNIVERSIDAD NACIONAL DE LUJÁN, DEPARTAMENTO DE CIENCIAS BÁSICAS, ARGENTINA

Email address: ncapitelli@unlu.edu.ar

(M. L. Privitelli) INSTITUTO DE CIENCIAS, UNIVERSIDAD NACIONAL GENERAL SARMIENTO

Email address: mprivite@ungs.edu.ar