

Subword Sampling for Low Resource Word Alignment

Ehsaneddin Asgari^{*,†}, Masoud Jalili Sabet^{*,◇}, Philipp Dufter[◇], Christopher Ringlstetter[†], Hinrich Schütze[◇]

[◇] Center for Information and Language Processing, LMU Munich, Germany

[†] NLP Expert Center, Data:Lab, Volkswagen AG, Munich, Germany

ehsaneddin.asgari@volkswagen.de masoud@cislmu.org

Abstract

Annotation projection is an important area in NLP that can greatly contribute to creating language resources for low-resource languages. Word alignment plays a key role in this setting. However, most of the existing word alignment methods are designed for a high resource setting in machine translation where millions of parallel sentences are available. This amount reduces to a few thousands of sentences when dealing with low-resource languages failing the existing established IBM models. In this paper, we propose *subword sampling-based alignment* of text units. This method’s hypothesis is that the aggregation of different granularities of text for certain language pairs can help word-level alignment. For certain languages for which gold-standard alignments exist, we propose an iterative Bayesian optimization framework to optimize selecting possible subwords from the space of possible subword representations of the source and target sentences. We show that the subword sampling method consistently outperforms word-level alignment on six language pairs: English-German, English-French, English-Romanian, English-Persian, English-Hindi, and English-Inuktitut. In addition, we show that the hyperparameters learned for certain language pairs can be applied to other languages at no supervision and consistently improve the alignment results. We observe that using 5K parallel sentences together with our proposed subword sampling approach, we obtain similar F1 scores to the use of 100K’s of parallel sentences in existing word-level fast-align/eflomal alignment methods.

1 Introduction

Annotation projection is an important area in Natural Language Processing (NLP), which aims to

exploit existing linguistic resources of a particular language for creating comparable resources in other languages (usually low resource languages) using a mapping of words across languages. More precisely, annotation projection is a specific use of parallel corpora, corpora containing pairs of translated sentences from language l_s to l_t . In annotation projection, a set of labels available for language l_s is projected to language l_t via alignment links (the mapping between words in parallel corpora of l_s and l_t). L_s labels can either be obtained through manual annotation or through an analysis module that may be available for l_s , but not for l_t . The label here can be interpreted broadly, including, e.g., part of speech labels, morphological tags and segmentation boundaries, sense labels, mood labels, event labels, syntactic analysis, and coreference (Yarowsky et al., 2001; Diab and Resnik, 2002; Agić et al., 2016).

Language resource creation for low-resource languages, for the purpose of automatic text analysis can create financial, cultural, scientific, and political value. For instance, the creation of a sentiment lexicon for a low resource language would be an excellent help for customer reviews analysis in big corporations having branches all over the world, where 7000 languages are spoken, or such a resource can be used to predict stock market movements from social media in a low resource setting. Furthermore, such resources can contribute to creating knowledge (Östling, 2015; Asgari and Schütze, 2017) for linguists, which pure scientific value aside, the linguistic knowledge can be incorporated into machine learning models for natural language understanding as well.

The mapping between words across languages as a basis for annotation projection is automatically generated using statistical word alignment, modeled on parallel corpora. This means that given parallel corpora for a set of languages and linguis-

* Equal contribution

tic resources for only one language, we can automatically create resources for the other languages through annotation projection. One of the main challenges for annotation projection is that corpora are often relatively small for low resource languages. The existing IBM-based alignment models work well for high-resource settings, but they fail in the low-resource case (Poerner et al., 2018). The most popular dataset for low resource alignment, the Bible Parallel Corpus, containing a large number (1000+) of languages, are characteristically low-resource, i.e., having only around 5000-10000 parallel sentences per language pair. This paper aims to introduce a framework to reliably relate linguistic units, words, or subwords, in a low resource parallel corpus, based on sampling from the space of possible subwords.

2 Methods

2.1 Dataset

We work on the word alignment gold standards from the WPT 2003 and 2005 shared tasks on word alignment. Those language pairs include French, Hindi, Romanian, and Inuktitut always paired with English. In addition, we add English-Persian and English-German. As per the standard scenario in the word alignment literature, we compute an alignment model on an independent corpus of training materials. To simulate a low-resource scenario, we sample the number of parallel training sentences down to 5000, except for Hindi with 3000 sentence pairs. This is the order of magnitude in training data when dealing with low-resource languages contained, e.g., in the Bible Parallel Corpus. In addition, we experiment on mid-resource cases when using the complete set of available training sentences in English-Romanian, English-Inuktitut, English-Persian, in which their complete set is neither low-resource nor contain more than 1M parallel sentences. See Table 1 for details on the data.

2.2 Evaluation

We evaluate word alignments with F_1 score computed by

$$\text{prec} = \frac{|A \cap P|}{|A|}, \text{rec} = \frac{|A \cap S|}{|S|}, F_1 = \frac{2 \text{ prec rec}}{\text{prec} + \text{rec}},$$

where $|A|$ is the set of predicted alignment edges, $|S|$ the set of sure and $|P|$ the set of possible alignment edges. Note that $S \subset P$, and both are known from the gold standard.

2.3 Sentence subword space

For splitting text into subwords, we use Byte-Pair-Encoding by Sennrich et al. (2016). The BPE algorithm for a certain random seed and a given vocabulary size (analogous to the number of character merging steps) breaks a sentence into a unique sequence of subwords. Continuing the merging steps would result in the enlargement of the subwords, resulting in fewer tokens.

Hypothesis: Let $S_{pq} = \bigcup_{j=1}^N (s_p^{(j)}, s_q^{(j)})$ be a collection of N parallel paired sentences in the language pair l_p and l_q . We assume that for a certain S_{pq} there exists an optimal segmentation scheme constructed by accumulation of different granularities of (l_p, l_q) , ξ^* , among all possible segmentation schemes (ξ 's), which depends on the morphological structures of this language pair.

The space of possible segmentations of a sentence s , denoted as $\Phi_l(s)$ for language l , is created by variations in the segmentation by varying the number of merging steps.

In this notation $\Phi_l(s) = \bigcup_{i=1}^{M_l} \Phi_l^{(i)}(s)$, where $\Phi_l^{(k)}(s)$ refers to a specific vocabulary size selection for the segmentation of s considering the first k merging steps in the BPE algorithm for language l . M_l is the maximum number of merging steps in l . We define Φ_{pq} as the set of all possible segmentation pairs in language pair l_p and l_q :

$$\Phi_{pq} = \bigcup_{i=1}^{M_{l_1}} \Phi_p^{(i)} \times \bigcup_{i=1}^{M_{l_2}} \Phi_q^{(i)}$$

When we deal with a single language, to explore the possible segmentations, Monte Carlo sampling from Φ_l can be used to have different views on the segmentation, where the likelihood of certain segmentation $\Phi_l^{(k)}$ is proportional to the number of sentences affected in the corpus by introducing the k^{th} merging step, as proposed in (Asgari et al., 2019a; Asgari, 2019; Asgari et al., 2019b) for the segmentation of protein and DNA sequences. However, in the alignment problem, we deal with a 2D space (can be represented as a grid as in Figure 4) of possibilities for the vocabulary sizes ($\approx$ the number of merging steps in BPE) of l_p and l_q . The inclusion of each cell in this grid introduces new instances to the parallel corpus, potentially transferring a low-resource setting to a high-or-mid resource setting. In this high resource setting, the subwords of a certain sentence are assigned in T ways (the number of cells we select from the

Lang.	Gold				Parallel Training	
	Standard	# Sentences	$ S $	$ P \setminus S $	Data	# Sentences
English-German	EuroParl-based ^a	508	9612	921	EuroParl (Koehn, 2005)	1920k
English-Persian	(Tavakoli and Faili, 2014)	400	11606	0	TEP (Pilevar et al., 2011)	600k
English-French	WPT2003, (Och and Ney, 2000),	447	4038	13400	Hansards (Germann, 2001)	1130k
English-Hindi	WPT2005 ^b	90	1409	0	Emille (McEnery et al., 2000)	3k
English-Inuktitut	WPT2005 ^b	75	293	1679	Legislative Assembly of Nunavut ^b	340k
English-Romanian	WPT2005 ^b	203	5033	0	Constitution, Newspaper ^b	50k

^a www-i6.informatik.rwth-aachen.de/goldAlignment/

^b <http://web.eecs.umich.edu/~mihalcea/wpt05/>

Table 1: Details on gold standards and training data. $|S|$ is the number of sure edges in the gold standard and $|P \setminus S|$ the number of additional possible edges.

Φ_{pq} grid). Finally, to confirm an alignment link at word-level, we set a threshold λ ; λ is the minimum ratio of subword segmentation is required to confirm a word alignment link. Note that not necessarily all cells of the grid improve the alignment, we thus need a strategy to pick a subset of cells $\xi^* \subset \Phi_{pq}$ maximizing the ultimate alignment score. Having language pairs with ground-truth alignment, we can solve this problem via hyperparameter optimization using Bayesian optimization. Subsequently, we investigate whether applying the same hyperparameters, on another language pair yields improvements. To solve this the optimization problem for the supervised case, we propose an iterative greedy subword sampling algorithm.

2.4 Iterative subword sampling algorithm

To maximize the alignment score for the known links (the ground-truth) at the word-level, we are seeking for ξ^* a set of cells in the Φ_{pq} grid, and their corresponding thresholds λ^* satisfying the following equation:

$$\xi^*, \lambda^* = \underset{\xi^i, 0 \leq \lambda \leq 1; i \in \{1, 2, \dots, T\}}{\operatorname{argmin}} -f(\Phi_{pq}, S_{pq}, \mathbf{y}_{pq}),$$

where f refers to the alignment F1 score based on ground-truth, which its underlying alignment model does not have any closed form nor gradient. $\mathbf{y}_{pq}$ is the ground-truth we have for the language pair l_p and l_q , and S_{pq} refers to the parallel sentences, which are going to be segmented in T different schemes (T cells from the Φ_{pq} grid, $0 < i < T$). These T cells can be selected in any order. However, to reduce the search space, we propose a sequential greedy selection of the segmentations (ξ^i, λ) , and solve each step in a Bayesian optimization framework. The iterative process is detailed in Algorithm 1. The core computation of this algorithm is $\xi_i, \lambda = \underset{\xi_i, \lambda}{\operatorname{argmin}} -f(\Phi_{pq}, S_{pq}, \mathbf{y}_{pq}, \xi_{0:i-1})$, for which the selected vocabulary sizes up to the current iteration

$(\xi_{0:i-1})$ are used for segmentation and the measurement of the alignment score. We perform Bayesian optimization to find the next optimal values for ξ_i and λ . As discussed in §2.3, in the Bayesian optimization, we explore the cells from the grid of Φ_{pq} using logarithmic priors for each of Φ_p and Φ_q . We continue this process until the the moment where introducing more segmentations does not improve the alignment score, setting an early stopping condition.

Algorithm 1: Iterative subword sampling

Result: graph G of word-aligned sentence pairs

$f1_{prev} = 0; i = 0;$

$\xi = \langle \text{empty} \rangle;$ % history of selected cells

$\lambda = \langle \text{empty} \rangle;$ % history of selected λ 's

$\delta = +\infty; E = \text{early-stopping parameter};$

while $\exists \delta > 0$ in the last E iterations **do**

$\xi_i, \lambda = \underset{\xi_i, \lambda}{\operatorname{argmin}} -f(\Phi_{pq}, S, y, \xi, \lambda);$

$\xi.push(\xi_i);$

$\lambda.push(\lambda);$

$f1^* = f(S, y, \xi, \lambda);$

$\delta = f1^* - f1_{prev};$

$f1_{prev} = f1^*;$

$i = i + 1;$

end

$G = \text{alignment}(\text{segment}(S, \xi, \lambda))$

2.5 Intuition behind the use of logarithmic priors for the vocabulary size

Figure 1 provides an intuition behind the use of logarithmic priors. This diagram shows that by introducing a new merging step (increasing the vocabulary size by one) in the BPE algorithm, which portion of sequences are affected. As proposed for protein sequences (Asgari et al., 2019a), this can be served as an approximation for the relative likelihood of including a merging step (which is analogous to introducing a new subword).

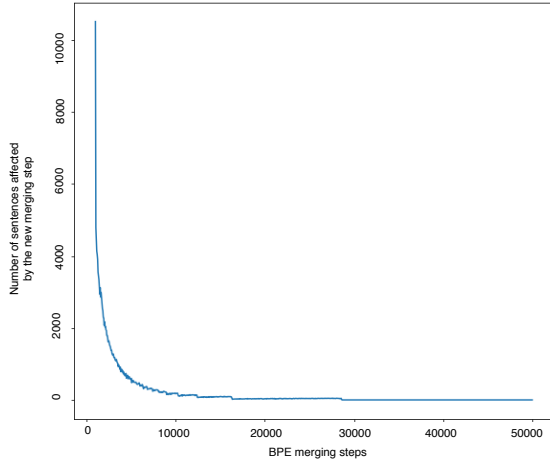


Figure 1: An example of English BPE on a collection of 10000 sentences. This diagram shows that with introducing new merging steps how many sentences are going to be affected .

2.6 Subword sampling in other languages

After training how to choose ξ^* , λ^* for a particular language pair, we apply the same vocabulary settings on new language pairs and evaluate the resulting alignment scores. This would help us in the investigation of the generalizability of a language pair on other language pairs.

2.7 Experimental Setup

Evaluate Low-Resource Alignment

Since the main motivation of subword sampling alignment is for the low-resource scenario¹, we first evaluate the method for an analogous use case, where only a few thousands of parallel sentences are available, similar to the Bible Parallel Corpus of 1000+ languages. To produce a similar scenario for the evaluation, we get samples of 5K aligned sentences from the training datasets of English-German, English-French, English-Romanian, English-Persian, English-Hindi, and English-Inuktitut and concatenate the gold-standard datasets to them. The statistical word aligners generate forward, and backward alignments need a post-processing step of symmetrization (Koehn, 2010). We compared intersection and grow-diag-final-and (GDFA), which produce comparable results in terms of F1 score, and the intersection method having a higher precision. Since the final alignments are produced from the aggregation

¹The language itself is not necessarily a low-resource language, but the number of sentence pairs is relatively low (less than 10K)

of all segmentations’ alignments, the intersection method with higher precision is a proper candidate. Thus, we use the intersection method throughout the experiments.

For each language pair, we evaluate the word-level alignment, as well as the Bayesian optimization subword sampling. In addition, in order to investigate how the vocabulary size of a particular language pair generalizes to the other language pairs, we also evaluate the optimized ξ_{l_1, l_2}^* , λ_{l_1, l_2}^* for each pair on all other language pairs.

Evaluate Mid-Resource Alignment

In addition to the low-resource alignment, we evaluate our approach against the word-level alignment of fast-align and eflomal in the mid-resource scenario (having less than 1M sentence pairs). Therefore, From the six language pairs with gold-standard alignment, we select English-Persian, English-Inuktitut, and English Romanian, containing 600k, 340k, 50k sentence pairs, respectively. For each language pair, we use the vocabulary sizes optimized in the low-resource alignment experiment.

3 Results

3.1 Iterative Subword Sampling

An example space of Φ_{pq} (for English-German) that is explored in the Bayesian optimization to find the ξ^* is shown in Figure 3, a 2D representation of the selected cells and the order of selection by Bayesian optimization on the English-German corpus is provided in Figure 4. We observe that the new segmentation in each iteration consistently improves the alignment scores in the next iteration. Furthermore, as may be expected, the sampled vocabulary sizes are mainly chosen from the lower sizes, i.e., affecting more sentences (Figure 1). All studied language pairs show similar behaviour in selecting subword vocabulary sizes (Figure 2).

3.2 Low-Resource Alignment Results

Table 2 shows F_1 scores of alignment across six language pairs in the low-resource alignment (having a maximum set of 5K aligned sentence pairs). This table compares the word-level and subword-level alignments as well as the generalizability of the ξ_{l_1, l_2}^* , λ_{l_1, l_2}^* on the other language pairs. Interestingly, across all language pairs, we observe improvements of 1.4 to 8.0 percentage points in the alignment F1 score in comparison with the word-

Selected subword vocabulary sizes for each language pair in Bayesian optimization

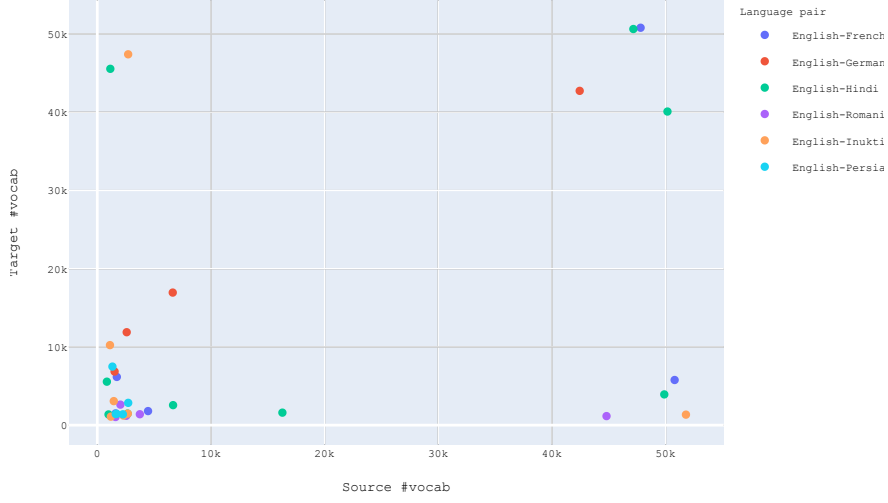


Figure 2: Selected subword vocabulary sizes within Bayesian optimization for each language pairs of English-German, English-French, English-Romanian, English-Persian, English-Hindi, and English-Inuktitut.

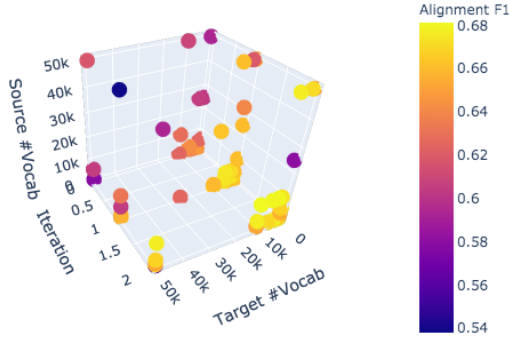


Figure 3: The space of Φ_{pq} that is explored in the Bayesian optimization in the first 3 iterations. The exploring steps are colored with their alignment F1 scores.

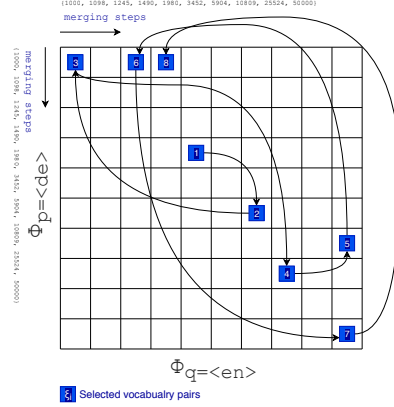


Figure 4: An example of the space Φ_{pq} for English and German and the selected cells by the Bayesian optimization.

level alignment. Subword-sampling optimized on a specific pair consistently improves the word-level alignment also of the other languages. Certain language pairs, like Romanian-English and Hindi-English, proved better generalizability when applied to the other language pairs. This result suggests that although the gold standard is decisive for a significant improvement of the alignment through optimizing the vocabulary sizes, then optimal vocabulary sizes trained on different language pairs (potentially with similar morphological complexity) can be efficiently applied to increase the alignment performance for a new language pair .

3.3 Mid-Resource Alignment Results

F_1 scores of alignment across three language pairs in the mid-resource alignment (having less than 1M aligned sentence pairs) is shown in Table 3. This table compares the word-level and subword-level alignments and the generalizability of the hyperparameter optimized on other language pairs in low-resource for a mid-resource setting. Again, across all language pairs, we observe improvements of 2.7 to 7 percentage points in the alignment F1 score compared to the word-level alignment. Interestingly, the F1 we achieved, using 5K parallel sentences and subword sampling, is similar to the word-level F1 score of English-Inuktitut

	English-German	English-French	English-Romanian	English-Persian	English-Hindi	English-Inuktitut
word-level	0.685	0.897	0.616	0.527	0.508	0.771
Vocab-size Sampling Optimization	0.746	0.913	0.662	0.579	0.548	0.858*
Apply <English-German>		0.899	0.645	0.560	0.532	0.845*
Apply <English-French>	0.743		0.651	0.541	0.524	0.853
Apply <English-Romanian>	0.745	0.905		0.579	0.547	0.821
Apply <English-Persian>	0.743	0.908	0.663		0.521	0.816
Apply <English-Hindi>	0.742	0.904	0.663	0.580		0.804
Apply <English-Inuktitut>	0.744	0.914	0.655	0.530	0.529	

Table 2: The alignment performances (in terms of F1 score) of six language pairs in the low-resource scenario, where the subword sampling and word-level alignments are compared. In addition, the results on applying the hyper-parameters of language pairs on all other pairs are also provided. We experimented systematically on the use of both eflomal and fast-align for every setting. However, for simplicity, in each cell, the best performance of fast-align and eflomal is reported. With the exception of the marked F1 ’s with *, the best results obtained using eflomal method for all the alignments.

using 240K parallel sentences and the word-level F1 score of English-Persian using 600K parallel sentences.

3.4 Qualitative Analysis

We performed a qualitative analysis for English-German and showed six examples in Figure 5. We observed two sources of improvements: i) Compounds, which are frequent in German, obtain better alignments and ii) As we aggregate alignment edges through a λ -weight vote, we observe an “ensembling” effect which mainly affects fertility. Examples 1, 2 and 3 show the compound effect: “Menschenrechte” is correctly aligned to “Human rights” only when using sampling optimization. Similarly, “Mobiltelefonlizenzen” gets successfully aligned to “mobile phone license” whereas pure eflomal only aligns it to “licenses”. In addition, the differently formatted year numbers in Example 2 are easy to align once subword sampling is used. Examples 4 and 5 show the presumed ensembling effect. We hypothesize that “EVP” is aligned to different words in the English sentence across different subword samples. Once aggregated, “EVP-Fraktion” has high fertility, which is useful in this scenario. Similarly, “des” (meaning “of the”) receives a better alignment through subword sampling as some models align “des” to “of” and some others to “the”. Subword sampling cannot resolve all errors of eflomal and can also be harmful in rare cases. Example 6 shows a case where the word “Abmessungen” (“dimensions” or “measurements”) obtains two incorrect alignment edges, presumably because it frequently gets split into subwords like “Ab” or “ungen” which carry only little semantic information.

4 Related Work

Classical models. Statistical word alignment methods (e.g., GIZA++ (Och and Ney, 2000), fast-align (Dyer et al., 2013), eflomal (Östling and Tiedemann, 2016)) are mostly based on *IBM models* (Brown et al., 1993), which are generative models describing how a source language sentence S generates a target language sentence T using alignment latent variables. These models use an expectation maximization (EM) algorithm to train the alignment and only require sentence-aligned parallel corpora.

Neural models. In 2014, seq2seq recurrent neural network (RNN) models introduced for machine translation providing an end-to-end translation framework (Sutskever et al., 2014). Attention was a key component to improve such models (Bahdanau et al., 2014; Luong et al., 2015). Two modifications to attention were proposed to improve the quality of underlying alignment and consequently, the quality of translation. (i) Model guided alignment training is introduced (Chen et al., 2016; Mi et al., 2016; Garg et al., 2019; Stengel-Eskin et al., 2019) where the cross-entropy between attention weights and the alignment coming from an IBM model (GIZA++) or a manual gold standard is used as an additional cost function. Garg et al. (2019) find that operating at the subword-level can be beneficial for alignment models. Note that they only consider a single subword segmentation. (ii) A disadvantage of neural architectures in comparison with IBM models in producing alignments is that in the neural model the attention weights have only observed the previous target words; in contrast, the IBM models benefit from full observation of the target sentence in alignment generation. *Target foresight* (Peter et al., 2017) improves translation by

	Alignment method	English-Romanian (50K)	English-Inuktitut (340K)	English-Persian (600K)
word-level	fast-align	0.643	0.794	0.552
	eflomal	0.692	0.864	0.58
Apply <English-German> parameters	fast-align	0.667	0.915	0.525
	eflomal	0.715	0.849	0.638
Apply <English-French> parameters	fast-align	0.664	0.913	0.534
	eflomal	0.709	0.885	0.647
Apply <English-Romanian> parameters	fast-align	0.663	0.873	0.534
	eflomal	0.712	0.826	0.587
Apply <English-Persian> parameters	fast-align	0.677	0.897	0.562
	eflomal	0.711	0.812	0.587
Apply <English-Hindi> parameters	fast-align	0.659	0.865	0.521
	eflomal	0.719	0.813	0.606
Apply <English-Inuktitut> parameters	fast-align	0.654	0.911	0.519
	eflomal	0.71	0.898	0.65

Table 3: The alignment performances (in terms of F1 score) of three language pairs in mid-resource scenario, where the subword sampling and word-level alignments are compared. In addition, the results on applying the hyper-parameters of language pairs on all other pairs are also provided. For each setting, both eflomal and fast-align results are reported.

considering the target word of the current decoding step as an additional input to the attention calculation. The main purpose of the above-mentioned alignment structures has been to improve translation quality. In contrast, our main motivation is providing a framework to reliably relate linguistic units, words, or subwords in parallel corpora, which can be used in linguistic resource creation (Agić et al., 2016; Asgari et al., 2020) and typological analysis (Östling, 2015; Asgari and Schütze, 2017). The above mentioned methods work well for the large parallel corpora, but they fail when parallel sentences are scarce. Insufficiency of parallel sentences is usually the case for low-resource languages, which are usually the most interesting scenarios for linguistic resource creation and linguistic analysis (Cieri et al., 2016).

Low-resource alignment models. The most popular dataset for low resource alignment is the Bible Parallel Corpus containing a large number (1000+) of languages, but are characteristically low-resource, i.e., have little text per language (Mayer and Cysouw, 2014). Some recent work touched upon this problem using unsupervised cross-lingual embeddings and a monogamy objective (Poerner et al., 2018). However, this method could not improve the fast-align results for the parallel corpora containing more than 250 sentences. We showed that our method improves the fast-align and eflomal on six language pairs consistently on the size of 5000K parallel sentences, in the range of parallel sentences of 1000+ languages in BPC, the most interesting parallel corpora for the low-resource scenario (in terms of the number of covered languages). Our proposed method improved the mid-

resource alignments (50K-600K parallel sentences) as well.

Subword sampling. The use of multiple subword candidates has improved the machine translation performance (Kudo, 2018). BPE-Dropout (Provlkov et al., 2020) followed the same idea, introducing dropout in the merging steps of a fixed BPE to create multiple segmentations. The probabilistic use of multiple subword candidates has been proposed to segmentation protein sequences (Asgari et al., 2019a). We use the inspiration from the latter approach for the word-alignment of parallel sequences of language pairs, using a multitude of possible subword segmentations.

5 Conclusion

Motivated by the important NLP area of annotation projection, used to create linguistic resources/knowledge in the low-resource languages, we proposed subword sampling-based alignment of text units. This method’s hypothesis is that the aggregation of different granularities of text for specific language pairs can help with word-level alignment. For individual languages where a gold-standard alignment corpus exists, we proposed an iterative Bayesian optimization framework to optimize selecting subwords from the space of possible BPE representations of the source and target sentences. We showed that the subword sampling method consistently outperforms the pure word-level alignment on six language pairs of English-German, English-French, English-Romanian, English-Persian, English-Hindi, and English-Inuktitut in a low-resource scenario. Although the subword samples are selected in a super-

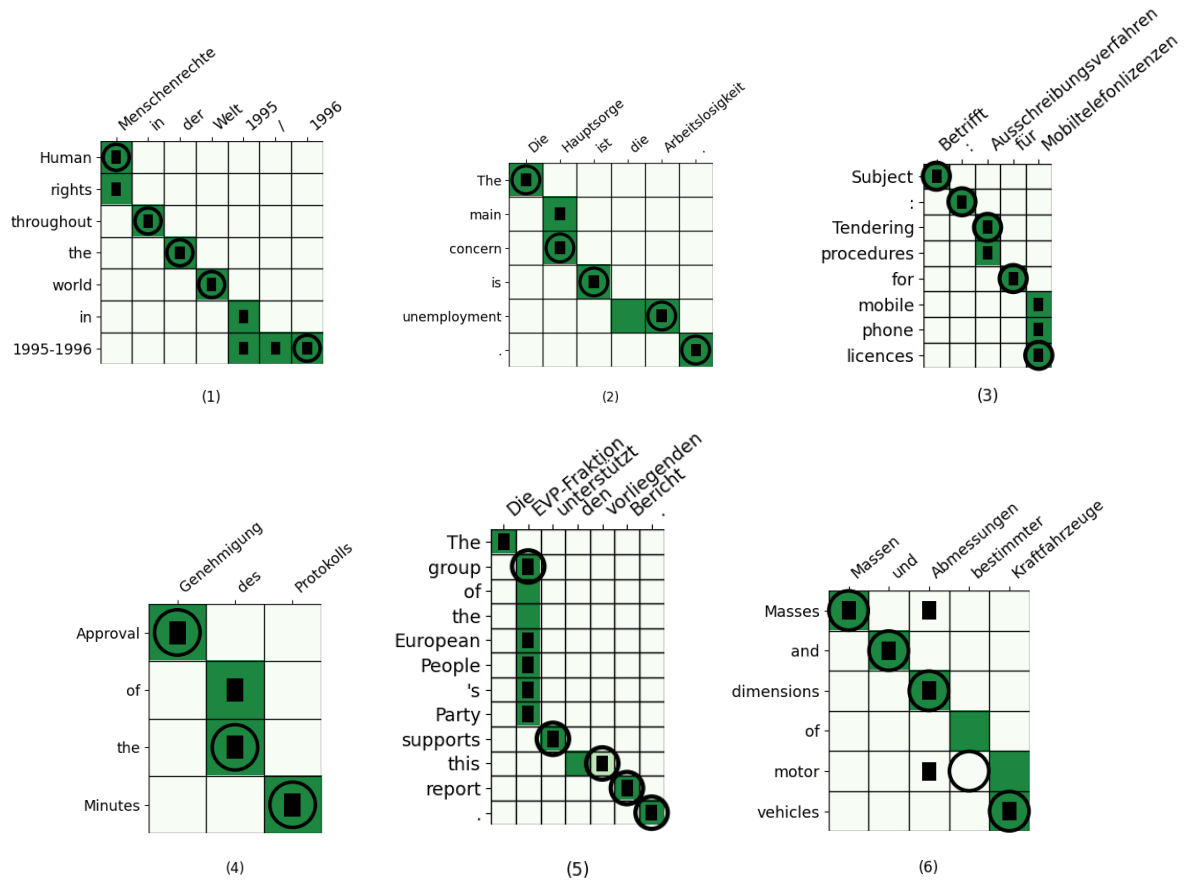


Figure 5: Examples from the English-German gold standard. Dark green represent sure alignment edges. Light green possible edges (only on edge in Example 5). Circles are edges predicted by word-level eflomal, boxes are predicted when applying our proposed subword sampling with eflomal.

vised manner, we show that the hyperparameters can fruitfully be used for other language pairs with no supervision and consistently improve the alignment results. We showed that using 5K parallel sentences together with our proposed subword sampling approach, we obtain similar F1 scores to the use of 340K and 600K parallel sentences and word-level alignment in English-Inuktitut and English-Persian, respectively. The proposed method can efficiently improve the creation of linguistic resources (POS tagging, sentiment lexicon, etc.) for low-resource languages, where only a few thousand parallel sentences are available.

References

- Željko Agić, Anders Johannsen, Barbara Plank, Héctor Alonso Martínez, Natalie Schluter, and Anders Søgaard. 2016. Multilingual projection for parsing truly low-resource languages. *Transactions of the Association for Computational Linguistics*, 4:301–312.
- Ehsaneddin Asgari. 2019. *Life Language Processing: Deep Learning-based Language-agnostic Processing of Proteomics, Genomics/Metagenomics, and Human Languages*. Ph.D. thesis, UC Berkeley.
- Ehsaneddin Asgari, Fabienne Braune, Benjamin Roth, Christoph Ringlstetter, and Mohammad Mofrad. 2020. UniSent: Universal adaptable sentiment lexica for 1000+ languages. In *Proceedings of The 12th Language Resources and Evaluation Conference*, pages 4113–4120, Marseille, France. European Language Resources Association.
- Ehsaneddin Asgari, Alice C McHardy, and Mohammad RK Mofrad. 2019a. Probabilistic variable-length segmentation of protein sequences for discriminative motif discovery (dimotif) and sequence embedding (protvecx). *Scientific reports*, 9(1):1–16.
- Ehsaneddin Asgari, Philipp C Münch, Till R Lesker, Alice C McHardy, and Mohammad RK Mofrad. 2019b. Ditaxa: Nucleotide-pair encoding of 16s rna for host phenotype and biomarker detection. *Bioinformatics*, 35(14):2498–2500.
- Ehsaneddin Asgari and Hinrich Schütze. 2017. Past, present, future: A computational investigation of the typology of tense in 1000 languages. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 113–124, Copenhagen, Denmark. Association for Computational Linguistics.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. 2014. Neural machine translation by jointly

- learning to align and translate. *arXiv preprint arXiv:1409.0473*.
- Peter F Brown, Vincent J Della Pietra, Stephen A Della Pietra, and Robert L Mercer. 1993. The mathematics of statistical machine translation: Parameter estimation. *Computational linguistics*, 19(2):263–311.
- Wenhu Chen, Evgeny Matusov, Shahram Khadivi, and Jan-Thorsten Peter. 2016. Guided alignment training for topic-aware neural machine translation. *arXiv preprint arXiv:1607.01628*.
- Christopher Cieri, Mike Maxwell, Stephanie Strassel, and Jennifer Tracey. 2016. Selection criteria for low resource language programs. In *LREC*.
- Mona Diab and Philip Resnik. 2002. An unsupervised method for word sense tagging using parallel corpora. In *Proceedings of the 40th Annual Meeting on Association for Computational Linguistics*, pages 255–262. Association for Computational Linguistics.
- Chris Dyer, Victor Chahuneau, and Noah A Smith. 2013. A simple, fast, and effective reparameterization of ibm model 2. Association for Computational Linguistics.
- Sarthak Garg, Stephan Peitz, Udhyakumar Nallasamy, and Matthias Paulik. 2019. [Jointly learning to align and translate with transformer models](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 4453–4462, Hong Kong, China. Association for Computational Linguistics.
- Ulrich Germann. 2001. [Aligned Hansards of the 36th parliament of Canada](#).
- Philipp Koehn. 2005. [Europarl: A parallel corpus for statistical machine translation](#). In *Machine Translation Summit*, volume 5.
- Philipp Koehn. 2010. *Statistical Machine Translation*. Cambridge University Press.
- Taku Kudo. 2018. [Subword regularization: Improving neural network translation models with multiple subword candidates](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 66–75, Melbourne, Australia. Association for Computational Linguistics.
- Minh-Thang Luong, Hieu Pham, and Christopher D Manning. 2015. Effective approaches to attention-based neural machine translation. *arXiv preprint arXiv:1508.04025*.
- Thomas Mayer and Michael Cysouw. 2014. Creating a massively parallel bible corpus. *Oceania*, 135(273):40.
- Anthony McEnery, Paul Baker, Rob Gaizauskas, and Hamish Cunningham. 2000. [Emille: Building a corpus of South Asian languages](#). *VIVEK-BOMBAY*, 13(3).
- Haitao Mi, Zhiguo Wang, and Abe Ittycheriah. 2016. Supervised attentions for neural machine translation. *arXiv preprint arXiv:1608.00112*.
- Franz Josef Och and Hermann Ney. 2000. [Improved statistical alignment models](#). In *Proceedings of the 38th Annual Meeting of the Association for Computational Linguistics*, pages 440–447, Hong Kong. Association for Computational Linguistics.
- Robert Östling. 2015. Word order typology through multilingual word alignment. In *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 205–211.
- Robert Östling and Jörg Tiedemann. 2016. Efficient word alignment with markov chain monte carlo. *The Prague Bulletin of Mathematical Linguistics*, 106(1):125–146.
- Jan-Thorsten Peter, Arne Nix, and Hermann Ney. 2017. Generating alignments using target foresight in attention-based neural machine translation. *The Prague Bulletin of Mathematical Linguistics*, 108(1):27–36.
- Mohammad Taher Pilevar, Heshaam Faili, and Abdol Hamid Pilevar. 2011. [TEP: Tehran English-Persian parallel corpus](#). In *International Conference on Intelligent Text Processing and Computational Linguistics*. Springer.
- Nina Poerner, Masoud Jalili Sabet, Benjamin Roth, and Hinrich Schütze. 2018. Aligning very small parallel corpora using cross-lingual word embeddings and a monogamy objective. *arXiv preprint arXiv:1811.00066*.
- Ivan Provilkov, Dmitrii Emelianenko, and Elena Voita. 2020. [BPE-dropout: Simple and effective subword regularization](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 1882–1892, Online. Association for Computational Linguistics.
- Rico Sennrich, Barry Haddow, and Alexandra Birch. 2016. [Neural machine translation of rare words with subword units](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1715–1725, Berlin, Germany. Association for Computational Linguistics.
- Elias Stengel-Eskin, Tzu-ray Su, Matt Post, and Benjamin Van Durme. 2019. [A discriminative neural model for cross-lingual word alignment](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 910–920, Hong Kong, China. Association for Computational Linguistics.
- Ilya Sutskever, Oriol Vinyals, and Quoc V Le. 2014. Sequence to sequence learning with neural networks. In *Advances in neural information processing systems*, pages 3104–3112.
- Leila Tavakoli and Heshaam Faili. 2014. [Phrase alignments in parallel corpus using bootstrapping approach](#). *International Journal of Information & Communication Technology Research*, 6(3).
- David Yarowsky, Grace Ngai, and Richard Wicentowski. 2001. Inducing multilingual text analysis tools via robust projection across aligned corpora. In *Proceedings of the first international conference on Human language technology research*, pages 1–8. Association for Computational Linguistics.