Joint Verification and Reranking for Open Fact Checking Over Tables

Michael Schlichtkrull^{1,2}*, Vladimir Karpukhin³, Barlas Oğuz³,

Mike Lewis³, Wen-tau Yih³, Sebastian Riedel^{3,4}

¹University of Amsterdam, ²University of Edinburgh,

³Facebook AI Research, ⁴University College London

m.s.schlichtkrull@uva.nl,

{vladk, barlaso, mikelewis, scottyih, sriedel}@fb.com


Abstract

Structured information is an important knowledge source for automatic verification of Nevertheless, the majority factual claims. of existing research into this task has focused on textual data, and the few recent inquiries into structured data have been for the closed-domain setting where appropriate evidence for each claim is assumed to have already been retrieved. In this paper, we investigate verification over structured data in the open-domain setting, introducing a joint reranking-and-verification model which fuses evidence documents in the verification component. Our open-domain model achieves performance comparable to the closed-domain stateof-the-art on the TabFact dataset, and demonstrates performance gains from the inclusion of multiple tables as well as a significant improvement over a heuristic retrieval baseline.

1 Introduction

Verifying whether a given fact coheres with a trusted body of knowledge is a fundamental problem in NLP, with important applications to automated fact checking (Vlachos and Riedel, 2014) and other tasks in computational journalism (Cohen et al., 2011; Flew et al., 2012). Despite extensive investigation of the problem under different conditions including entailment and natural language inference (Dagan et al., 2005; Bowman et al., 2015) as well as claim verification (Vlachos and Riedel, 2014; Alhindi et al., 2018; Thorne and Vlachos, 2018), relatively little attention has been devoted to the setting where the trusted body of evidence is structured in nature – that is, where it consists of tabular or graph-structured data.

Recently, two datasets were introduced for claim verification over structured tables (Chen et al., 2020b; Gupta et al., 2020). Common to these



Title	Established	Parent Company
Daily Mail	1896	DMGT
Mail on Sunday	1982	DMGT
Daily Express	1900	Reach
Sunday Mirror	1915	Reach
Sunday People	1881	Reach

Title	2019 Election party support
Daily Mail	Conservative Party
Mail on Sunday	Conservative Party
The Sun	Conservative Party
Daily Mirror	Labour Party
Sunday Mirror	Labour Party

Figure 1: Example query to be evaluated against two retrieved tables. Named entities represent a strong baseline for retrieval, but ultimately a more complex model is required to distinguish highly similar tables.

datasets is a conception of the task wherein each claim can be either verified or refuted given a single associated table. While highly useful for the development of models, this *closed* setting is not reflective of real-world fact checking tasks where it is usually not known which table to consult for evidence. Fact verification systems as such need to operate in an *open* setting, where evidence must first be retrieved from a large data source.

In this paper, we investigate fact verification over tables in the open setting. We take inspiration from similar work on unstructured data (Chen et al., 2017; Nie et al., 2019; Karpukhin et al., 2020; Lewis et al., 2020), proposing a two-step model which combines non-parametric, retrieval-based memory with a neural reader operating on top of retrieved tables. Drawing on preliminary work in

^{*}Work done while interning with Facebook AI Research.

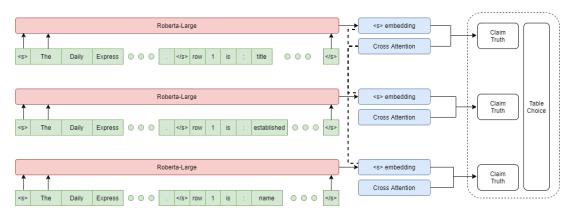


Figure 2: A diagram of our model, using the joint reranking- and verification approach described in Section 4.1.

open question answering over tables (Sun et al., 2016), we perform retrieval based on simple heuristic modeling of individual table cells. We combine this simple heuristic with a RoBERTa-based (Liu et al., 2019) joint reranking-and-verification model, performing fusion of evidence documents in the verification component as suggested for question answering by Izacard and Grave (2020).

We evaluate our models using the recently introduced TabFact dataset (Chen et al., 2020b). While initially developed for the closed domain, the majority of the queries are sufficiently contextindependent that the claims can be understood without knowing which table they were constructed with reference to. As such, the dataset is suitable for the open domain as well. Our models represent a first step into the open domain, achieving performance exceeding the previous closed-domain state of the art (outside of Eisenschlos et al. (2020), which includes pretraining on additional labeled data), with even larger gains when operating in the closed domain. We demonstrate significant improvements from including multiple tables, with verification accuracy increasing as more tables are used. We furthermore present results using a more realistic setting where tables are retrieved not just from the 16,573 tables present in TabFact, but from the full Wikipedia dump. Our contributions can be summarized as follows:

- 1. We introduce the first model for open-domain table fact verification, demonstrating strong performance exceeding the previous closedsetting state of the art.
- 2. We propose two strategies with corresponding loss functions for modeling table fact verification in the open setting, suitable respectively

for high verification accuracy or high performance on identifying if appropriate information has been retrieved for verification.

- 3. In addition to our open-domain performance, our model achieves a new closed-domain stateof-the-art result.
- We report the first results on Wikipedia-scale open-domain table fact verification, using all tables from a Wikipedia dump as the backend.

2 Open Table Fact Verification

Formally, the open table fact verification problem can be described as follows. Given a claim q and a collection of tables T, the task is to determine whether q is true or false. This corresponds to modeling a binary verdict variable v by p(v|q, T). This is in contrast to the closed setting, where a single table $t_q \in T$ is given, and the task is to model $p(v|q, t_q)$. Since there are large available datasets for the closed setting (Chen et al., 2020b; Gupta et al., 2020), it is reasonable to expect to exploit t_q during training; however, at test time, this information may not be available.

We follow a two-step methodology that is often adopted in open-domain setting for unstructured data (Chen et al., 2017; Nie et al., 2019; Karpukhin et al., 2020; Lewis et al., 2020) to our setting. Namely, given a claim query q, we retrieve a set of evidence tables $D_q \subset T$ (Section 3), and subsequently model $p(v|q, D_q)$ in place of p(v|q, T)(Section 4).

3 Entity-based Retrieval

We begin by designing a strategy for retrieving an appropriate table or subset of tables with which to answer a given query. For question answering over tables, Sun et al. (2016) demonstrated strong performance on initial retrieval of tables using entity linking information, following the intuition that many table cells contain entities. We take inspiration from these results. In their setting, claim entities are linked to Freebase entities, and string matching on the alias list is used to match entities to cells. To avoid reliance on a knowledge graph, we instead use only the textual string from the claim to represent entities, and perform approximate matching through dot products of bi- and tri-gram TF-IDF vectors.

We first pre-compute bi- and trigram TF-IDF vectors $z(c_t^1), ..., z(c_t^m)$ for every table $t \in T$ with cells $c_t^1, ..., c_t^m$. Then, we identify the named entities $e_q^1, ..., e_q^n$ within the query q. For our experiments, Chen et al. (2020b) provided named entity spans for TabFact as part of their LPA-model, and we reuse those¹. We compute bi- and trigram TF-IDF vectors $z(e_q^1), ..., z(e_q^n)$ for the surface forms of those entities. To retrieve D_q given q, we then score every $t \in T$. Since we are approximating entity linking between claim entities and cells, we let the score between that entity and a table be the *best* match between that entity and any cell in the table. That is:

$$score(q,t) = \sum_{i=1}^{n} \max_{j=1}^{m} z(e_q^i)^{\mathsf{T}} \cdot z(c_t^j) \quad (1)$$

That is, we compute for every entity the best match in the table, and score the table as the sum over the best matches. To construct the set of evidence tables D_q , we then retrieve the top-k highest scoring tables. Our choice to use bi- and tri-gram TF-IDF as the retrieval strategy was determined empirically – see Section 5.1 as well as Table 1 for experimental comparisons.

4 Neural Verification

To model $p(v|q, D_q)$, we employ a RoBERTabased (Liu et al., 2019) late fusion strategy. Given a query q with a ranked list of k retrieved tabular documents $D_q = (d_q^1, ..., d_q^k)$, we begin by linearising each table. Our linearisation scheme follows Chen et al. (2020b). We first perform sub-table selection by excluding columns not linked to entities in the query. Here, we reuse the entity linking obtained during the retrieval step (see Section 3), and retain only the three columns in which cells received the highest retrieval scores. We linearise each row separately, encoding entries and table headers. Suppose r is a row with cell entries $c_1, c_2, ..., c_m$ in a table, where the corresponding column headers are $h_1, h_2, ..., h_m$. Row number r is mapped to "row r is : h_1 is c_1 ; h_2 is c_2 ; ...; h_m is c_m ."

We construct a final linearisation $L_{q,t}$ for each query-table pair q, t by prepending the query to the filtered table linearisation. We then encode each $L_{q,t}$ with RoBERTa, and obtain a contextualised RoBERTa-embedding $f(d_q^k) \in \mathbb{R}^n$ for every table as the final-layer embedding of the CLStoken. We construct the sequence of embeddings $f(d_q^1), ...f(d_q^k)$ for all k tables.

When the model attempts to judge whether to rely on a given table for verification, other highlyscored tables represent useful contextual information (e.g. in the example in Figure 1, newspapers newspapers with similar political leanings may be more likely to belong to the same owner). Neverthe less, each table embedding $f(d_q^k)$ is functionally independent from the embedding of the other tables. As such, contextual clues from other tables cannot be taken into account. To remedy this, we introduce a cross-attention layer between all tables corresponding to the same query. We collect the embeddings $f(d_a^k)$ for each table into a tensor $F(D_q)$. We then apply a single multi-head selfattention transformation as defined in Vaswani et al. (2017) to this tensor, and concatenate the result. That is, we compute an attention score for head hfrom table *i* to table *j* with query q as:

$$\alpha_{ij}^{h} = \sigma \left(\frac{W_Q^h f(d_q^i) (W_K^h f(d_q^j))^T}{\sqrt{\dim(K)}} \right)$$
(2)

where σ is the softmax function, and W_Q and W_K represent linear transformations to respectively queries and keys. We then compute an attention vector for that head as:

$$a_i^h = \sum_{j \in D_q} \alpha_{ij} W_V^h f(d_q^j) \tag{3}$$

and finally construct contextualized table representations through concatenation as:

$$f^*(d_q^k) = [f(d_q^k), a_k^1, ..., a_k^h]$$
(4)

We subsequently use $F^*(D_q)$, e.g. the tensor containing $f^*(d_q^1), ..., f^*(d_q^k)$, for downstream predictions. We note that our approach can be viewed

¹In the absence of named entity tags, named entity spans would first need to be found though an off-the-shelf named entity recognizer, e.g. SpaCy (Honnibal et al., 2020). A vulnerability of our approach is as such potential propagation of errors from the named entity recognizer.

Dataset	H@1	H@3	H@5	H@10
Query-level word TF-IDF	41.7	54.2	59.0	65.3
Query-level (2,3)-gram TF-IDF	34.7	45.5	50.2	56.8
Entity-level exact match	48.2	57.9	64.2	67.3
Entity-level word TF-IDF	56.0	65.6	74.1	81.2
Entity-level (1,2,3)-gram TF-IDF	62.3	75.2	80.1	86.1
Entity-level (2,3)-gram TF-IDF	69.6	78.8	82.3	86.6

Table 1: Retrieval accuracy for our entity-based TF-IDF retrieval along with several baselines for the TabFact validation set, computed using all 16,573 TabFact tables.

as an extension of the Table-BERT algorithm introduced in Chen et al. (2020b) to the multi-table setting, using an attention function to fuse together the information from different tables.

4.1 Training & Testing

At training time, relying on a closed-setting dataset allows us to identify which tables contain appropriate information for answering each query (e.g., the table against which the claim is to be checked in the closed setting). Although this information is not available at test time, we can construct a training regime that allows us to exploit it to improve model performance, as well as obtain a test-time indicator that an appropriate table has not been retrieved. We identify and experiment with two different approaches to modeling this problem. The first option is to jointly model the choice of table and the truth value of the claim. We refer to this as joint reranking and verification. The second option is to model for each table a choice between indicating that the claim is true, that the claim is false, or that no information about the claim is given. We refer to this as ternary verification. In Sections 5.2 and 5.4, we demonstrate how the former leads to increased performance on verification, while the latter gives access to a strong predictor for the cases where no appropriate table has been retrieved to verify the query.

Joint reranking and verification For the joint reranking and verification approach, we assume that a *best* table for answering each query which can be used to learn a ranking function. We model this as selecting the right table from D_q , e.g. through a categorical variable s. We then learn a joint probability of s and the truth value of the claim v over the tables for a given query. Since there is one correct table and one correct truth value, $p(s, v|q, D_q)$ is also a categorical distribution. As

such we let:

$$p(s, v|q, D_q) = \sigma(W(F^*(D_q)_s)_v)$$
(5)

Where $W : \mathbb{R}^{2n} \to \mathbb{R}^2$ is an MLP and σ is the softmax function. At train time, we correspondingly obtain one cross-entropy term per query. At test time, we marginalize over *s* to obtain a final truth value:

$$p_v(v|q, D_q) = \sum_{t \in D_q} p(v, s = t|q, D_q) \quad (6)$$

This formulation has the additional benefit of also allowing us to make a prediction on which table matches the query. We can do so by marginalizing over v:

$$p_s(s|q, D_q) = \sum_{v_q \in \{true, false\}} p(s, v = v_q | q, D_q)$$
(7)

With this loss, we train the model by substituting for D_q a set D_q^* containing wherein the gold table is guaranteed to appear. We ensure this by replacing the lowest-scored retrieved table in D_q with the gold table whenever it has not been retrieved.

Ternary verification At test time, there may be cases where a table refuting or verifying the fact is not contained in D_q . For some applications, it could be useful to identify these cases. We therefore design an alternative variant of our system better suited for this scenario. Intuitively, each table can represent three outcomes – the query is true, the query is false, or the table is irrelevant. We can model this through a ternary variable i such that for table t:

$$p(i|q,t,D_q) = \sigma(W'(F^*(D_q)_t)_i)$$
(8)

Where $W' : \mathbb{R}^{2n} \to \mathbb{R}^3$ is an MLP and σ is the softmax function. During training, we assign *true*

or *false* to the gold table depending on the truth of the query, and *irrelevant* to every other table. We then use the mean cross-entropy over the tables associated with each query as the loss for each example. At test time, we compute the truth value v of each query as:

$$\sum_{t \in D_q} p(i = true|q, t) > \sum_{t \in D_q} p(i = false|q, t)$$
(9)

5 Experiments

We apply our model to the TabFact dataset (Chen et al., 2020b), which consists of 92,283 training, 12,792 validation and 12,792 test queries to be validated against 16,573 tables. The task is binary classification of claims as true or false, with an even proportion of the two classes in each split. To benchmark our open-domain models and facilitate a fair comparison, we begin by training our RoBERTa-based model for the closed domain. This enables us to construct upper and lower bounds for the performance of our open-domain model. As an upper bound, we can compare against the performance of the closed-domain system scored using a single table retrieved through an oracle. As a lower bound, we can again use the closed-domain system, but using the highest-ranked table according to our TF-IDF retriever. The evaluation metric is simply the prediction accuracy.

5.1 Retrieval

We choose bi- and tri-gram TF-IDF as the retrieval strategy empirically. To address the comparative performance of this choice, we compute and rank in Table 1 the retrieval scores obtained through our strategy on the TabFact test set. We compare against several alternative strategies: bi- and trigram TF-IDF vectors for all words in the query (rather than just the entities), word-level TF-IDF vectors for entities, and entity-level exact matching. Our bi- and tri-gram TF-IDF strategy yields by far the strongest performance. We furthermore demonstrate how the exclusion of unigrams from the TF-IDF vectors slightly increases performance.

5.2 Verification

In Table 2, we compare our best-performing models to the closed-setting system from Chen et al. (2020b), as well as to several recent models from the literature (Zhong et al., 2020; Yang et al., 2020; Eisenschlos et al., 2020). We include results with both losses as discussed in Section 4, using varying numbers of tables. We also include results using RoBERTa-base in Appendix A.

The best-performing open setting system is our attention-based model using the joint rerankingand-verification loss, with an accuracy of 75.1%on the full test set when using five retrieved tables. We see performance improvements when increasing the number of tables, both from 1 to 3 and from 3 to 5; using 10 tables actually decreases performance. In the closed domain, the 77.6% accuracy our model achieves is a significant improvement of the 74.4% the strongest comparable baseline reached. This may be due to our use of RoBERTa, which has previously been found to yield large improvements for modeling linearised tables (Gupta et al., 2020). As we expected, the joint loss which trains the model to focus on one particular table performs better than the ternary loss (see Section 4.1).

Relying purely on TF-IDF for retrieval – that is, using our system with only one retrieved table yields a performance of 73.2%. This represents a surprisingly small decrease of 4.6% accuracy compared to the closed setting, given that an incorrect table is provided in approximately a third of all cases (see Table 1). We suspect that the majority of those claims which the closed-setting model fails to correctly classify are difficult cases for which the retriever also fails. To make sure this is not simply the result of false negatives (e.g. tables which are not the gold table, but which nevertheless have the information to verify the claim), we run the model in a setting where one retrieved table is used, but the gold table is removed from the retrieval results; here, the model achieves an accuracy of only 56.2%. To verify that the model uses information from the retrieved table rather than relying purely on the RoBERTa weights, we furthermore test a system relying on a random table rather than a retrieved table; with a performance drop to 53.1, we find that the information in the retrieved table is indeed what drives the model.

We see performance improvements from using multiple tables both in the case of simple and complex queries. This is somewhat surprising, as retrieval following our results from Table 1 appears much easier for simple than for complex queries; with a Hits@1 of 92.7% for simple queries, we might not have expected as strong benefits from using multiple tables. This suggests that using more tables results in some tangential other benefit for

Model	Dev	Test	Simple Test	Complex Test	Small Test
Table-BERT (Chen et al., 2020b)	66.1	65.1	79.1	58.2	68.1
LogicalFactChecker (Zhong et al., 2020)	71.8	71.7	85.4	65.1	74.3
ProgVGAT (Yang et al., 2020)	74.9	74.4	88.3	67.6	76.2
TAPAS (Eisenschlos et al., 2020)*	81.0	81.0	92.3	75.6	83.9
Ours (Oracle retrieval)	78.2	77.6	88.9	72.1	79.4
Ours (1 retrieved table)	74.1	73.2	86.7	67.8	76.6
Ours (Ternary loss, 3 tables)	73.8	73.5	86.9	68.1	76.9
Ours (Ternary loss, 5 tables)	74.1	73.7	87.1	67.9	76.5
Ours (Ternary loss, 10 tables)	73.9	73.1	86.5	67.9	77.3
Ours (Joint loss, 3 tables)	74.6	73.8	87.0	68.3	78.1
Ours (Joint loss, 5 tables)	75.9	75.1	87.8	69.5	77.8
Ours (Joint loss, 10 tables)	73.9	73.8	86.9	68.1	76.9

Table 2: Prediction accuracy of our RoBERTa-based model on the official splits from the TabFact dataset. We include closed-domain performance of several models from the literature, as well as the performance of our model in both the closed and the open domain, using both proposed loss functions. The first section of the table contains closed-domain results, the second open-domain. * employs pretraining on additional labeled data.

our model, perhaps increased robustness resulting from observing more tables during training.

Model	R@1	R@2-3	R@4-5
Oracle retrieval	80.6	74.1	75.0
1 table	80.6	55.6	53.9
3 tables	78.8	66.7	58.2
5 tables	79.4	73.1	71.7

Table 3: Peformance of our RoBERTa-based model on the parts of the TabFact test set where our TF-IDF retriever assigns the gold table rank respectively 1, 2-3, or 4-5.

To understand how our model derives improvement from the addition of more tables, we compute in Table 3 the performance of our reranking-andverification model when TF-IDF returns the correct table at rank 1, rank 2-3, or rank 4-5. Immediately, we notice a much stronger improvement from using multiple tables when TF-IDF fails to correctly identify the gold table. This is natural, as those are exactly the cases where our model (as opposed to the baseline) has access to the appropriate information to verify or refute the claim.

Interestingly, using three tables improves on using one table even when the gold table is not included among the top three (from 53.9% to 58.2%), and using five tables improves on using three tables also when the gold table *is* included among the top three (from 66.7% to 73.1%). Manual inspection reveals than our model in many cases can rely on correlations between tables, even when the gold table has not been retrieved by TF-IDF – if a sports team loses games in three tables, then that may give a higher probability of that team also losing in an unretrieved, hypothetical fourth table. To test this, we apply the model in a setting where we retrieve the top five tables *excluding* the gold table, and a setting where we use five random tables. Using highly scored (but wrong) tables, we achieve a performance of 59.4%, a significant improvement on the 53.1% we achieve using random tables. This supports our hypothesis that other *good* tables can provide useful background context for verification.

It is worth noting that reliance on such information, while increasing model performance, may also increase the degree to which the model makes inference on the basis of inexactness or bias – depending on the application, correlations between information in various tables may not be a desirable basis for verifying facts. Returning to the example in Figure 1, inferring ownership on the basis of political affiliation when no other information is available may increase accuracy *on average*, but it can also lead to erroneous or biased decisions (indeed, for the claim in the example, the prediction would be wrong).

5.3 Ablation Tests

Our best-performing model from Table 2 relies on two innovations: The cross-attention function which contextualizes each table in relation to the other retrieved table for that claim, and the joint reranking-and-verification loss. In Table 4, we evaluate the model without either of these. Leaving the attention function out is simple – we use the RoBERTa-embeddings $f(d_q^k)$ for each table directly for predictions. We model performance without the reranking component of our loss function by assuming a uniform distribution over the tables; functionally, this is equivalent to a binary version of the ternary loss expressed in Equations 6 and 4.1.

Model	Accuracy
Full model	75.1
- Attention	73.6
- Joint objective	72.9
- Both	71.2

Table 4: Ablation study for our model, performing verification with the five-table version on the TabFact test set. We remove respectively our cross-attention function, the reranking component in the loss, and both.

As can be seen, the combination of both is strictly necessary to obtain strong performance – indeed, without our joint objective, the model performs worse than simply applying the baseline model to the top table returned by TF-IDF as in Table 2. It is informative to compare the performance of our model using the uniform distribution in Table 4 to the performance using the ternary loss as shown in Table 2 – as with the reranking loss, the ability for the model to express the relative relatedness of tables to the query is crucial.

5.4 Predicting Insufficient Information

In realistic settings, many claims will not be directly answerable from any of the top-ranked retrieved tables – partially because of inexactness in the retrieval algorithm, and partially because the trusted corpus of tables may not contain the information which a user is querying for. In such cases, it can be valuable to explicitly inform the user; giving false verifications or refutations when sufficient information is not possible may mislead users, and decrease trust in the verification system.

In TabFact, claims are explicitly either refuted or verified by information contained in the gold table. To model a scenario where information may not always be present, we create a classification task wherein the model must predict for all examples




Figure 3: Precision-recall curve for determining whether a set of five retrieved tables in the TabFact validation set contains the gold table, using respectively entropy of the reranking scores with our joint loss (\longrightarrow) or the maximum probability of some table being the gold table with our ternary loss, (\rightarrow). We also include a most frequent class baseline (.....).

whether the gold table is not among the k documents in D_q .

Using the ternary loss, our model directly gives the probability of each table containing appropriate information to answer the query as $(1 - p(I_t =$ irrelevant|q,t)). We can estimate the suitability of the best retrieved table for verifying the claim as $\max(1 - p(I_t = irrelevant|q, t))$, and apply a threshold τ_1 to classify D_q as suitable or unsuitable. For the joint loss, a more indirect approach is necessary. Intuitively, if our model is too uncertain about which retrieved table contains the information to answer the query, there is a high likelihood that no suitable table has been retrieved. For our joint objective, we can model this directly - this case occurs exactly when the entropy of the reranking component $H_s(s|q, D_q)$ after marginalizing over the truth value of the claim exceeds some threshold au_2 .

We compare these strategies in Figure 3, obtaining Precision-Recall curves by measuring at varying τ_1 and τ_2 . We find that while both approaches outperform the most frequent class baseline by a significant margin, the ternary loss performs better than the joint loss. As such, the choice between the two losses represents a tradeoff between raw performance (see Tables 2 and 5) and ability to identify verifications made on the basis of missing or incomplete information.

5.5 Wikipedia-scale Table Verification

In our experiments so far, we have relied on the 16,573 TabFact tables as a knowledge source. The tables selected for TabFact were taken from WikiTables (Bhagavatula et al., 2013), and filtered so as to exclude "overly complicated and huge tables" (Chen et al., 2020b). Moving beyond the scope of that dataset, a fully open fact verification system should be able to verify claims over even larger collections of tables — for example, the full set of tables available on Wikipedia. To make a preliminary exploration of that larger-scale setting, we include in Table 5 the performance of our approach evaluated using roughly 3 million tables automatically extracted from Wikipedia.

Model	Accuracy
RoBERTa only	52.1
Ours (1 table)	53.6
Ternary loss, 3 tables	55.8
Ternary loss, 5 tables	57.5
Joint loss, 3 tables	56.1
Joint loss, 5 tables	58.1

Table 5: Performance of our RoBERTa-based model on the TabFact test set, using all Wikipedia tables rather than just the TabFact tables as a backend.

As can be seen, our approach improves on the naive strategy of using a single table and a closeddomain verification component also in this more complex setting. To verify that the inference happens on the basis of the retrieved tables and not simply the RoBERTa-weights, we include also the performance of a model which simply uses classification on top of a RoBERTa-encoding of the claim. As previously, our joint-loss model with five retrieved tables performs the strongest. We note that it is unclear whether the performance we observe here originates from correlations obtained through background information (as we see in Section 5.2 when the retriever fails to find the appropriate table), or due to verification against a single entirely appropriate table happening at a lower rate than when using TabFact.

6 Analysis

In Section 4, we introduced our model as a joint system for fact verification and evidence reranking. A benefit of our formulation is the ability to reason about the ability of our model to rerank by marginalizing over the truth value of the claim, following Equation 7. In Table 6, we compare the table retrieval ranking performance of our joint model to a model only trained for reranking, as well as to the TF-IDF baseline.

Model	H@1	H@3	H@5
TF-IDF	69.6	78.8	82.3
Reranking only	69.9	78.9	82.3
Ours (no attention)	67.4	78.3	82.3
Ours (attention)	70.9	79.4	82.3

Table 6: Ranking performance on the TabFact validation set, using either our TF-IDF retriever alone or reranking with our model. We test a version of our model using only a reranking loss, as well as joint-loss model with and without attention.

As can be seen, our joint loss provides a slight performance improvement when the attention component is included. Interestingly, the joint-loss model performs better than a system trained purely for reranking — this highlights the complementary nature of the reranking and verification tasks.

An interesting question is the role attention plays in our model. As can be seen from Tables 2 and 6, our cross-attention module is necessary to achieve high performance – without it, the model struggles to identify which table should be used for verification. To investigate the function of attention, we plot in Figure 4 the strength of the cross-attention between each table for our five-table model. We produce separate plot for the two attention heads, as well as for each of the splits used in Table 3 representing the parts of the dataset where our TF-IDF retriever assigns the gold table rank respectively 1, 2-3, or 4-5.

For both attention heads, the attention function has clearly distinct behaviour when the gold table is retrieved as top 1; the degree to which that table attends to itself is much greater. We suspect that this is because of "easy" cases, where the attention function is used to separate a clearly identifiable "appropriate" table from the other tables. In harder cases, the model uses the attention focus to compare information across tables. To test this, we run the model in a setting where four random tables are used along with the gold table. In that setting, the division is even clearer. For the gold table, respectively 86 and 82 percent of the attention for the two heads is on average focused on itself; for the four random tables, the attention is evenly distributed

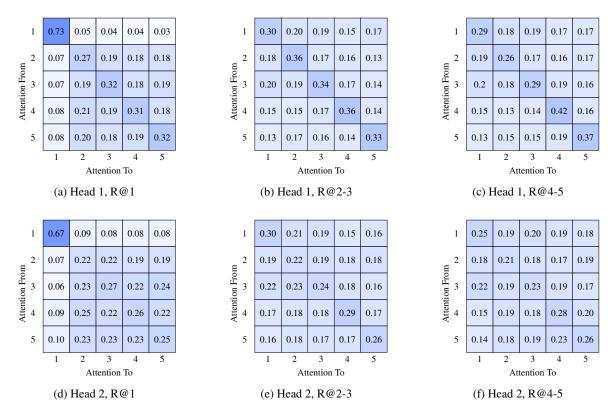


Figure 4: Confusion matrices for the cross-attention between each pair of tables for the five-table version of our model. Each head is represented separately, and individual figures are included for the parts of the dataset where our TF-IDF retriever assigns the gold table rank respectively 1, 2-3, or 4-5.

over all tables except the gold table.

To distinguish the two heads, we in general see the first head exhibit a pattern of behaviour where each table assigns the majority of attention to itself — especially when that table is the gold table. The second head seemingly encodes a more even spread over the retrieved tables, perhaps representing general context more than an attempt to identify the gold table.

7 Related Work

Semantic querying against large collections of tables has been studied in the context of question answering in several papers. In Sun et al. (2016), a framework for searching millions of tables crawled from the Web based on string matching between aliases of linked entities is introduced. Retrieved table cells are then used to provide evidence for the question answering task. Jauhar et al. (2016) demonstrated strong results with a Lucene index and a Markov Logic Network-based model for a small collection of tables answering scientific questions. Recently, Chakrabarti et al. (2020a,b) developed an improved model for table retrieval combining neural representations of the table and the query with a BM25 index.

Keyphrase-based table retrieval was studied in Cafarella et al. (2008, 2009) through a simple approach of reranking a list of tables returning by a search engine. Pimplikar and Sarawagi (2012) demonstrated strong improvement through a graphical model to perform retrieval on the basis of cooccurence statistics, table metadata, and column headers. In Ghasemi-Gol and Szekely (2018), nonparametric clustering was suggested as a simple first step in retrieval, and a fast heuristic with strong performance on table clustering. Zhang and Balog (2018) introduced a method for ad-hoc ranking based on mapping available features into several semantic spaces. Recently, Zhang et al. (2019) introduced a strong neural method for table retrieval and completion using word- and entity-embeddings of table elements.

Neural modeling of tables has been the subject of several recent papers. Aside from the original BERT-based model in Chen et al. (2020b), the closest to our work is Yin et al. (2020). In their paper, a pretrained BERT-based encoder for tables is introduced and demonstrated to yield strong improvements on several semantic parsing tasks. Chen et al. (2019) introduces a model to automatically predict and compare column headers for tables in order to find semantically synonymous schema attributes. Similarly, Zhang and Balog (2019) introduces an autoencoder for predicting table relatedness.

Closed domain semantic parsing over tables has been studied extensively in the context of question answering (e.g. (Pasupat and Liang, 2015; Khashabi et al., 2016; Yu et al., 2018)). In Zhong et al. (2020), a logic-based fact verification system was introduced to improve on the model presented in the initial TabFact paper (Chen et al., 2020b). Yang et al. (2020) builds on the program induction model also introduced in (Chen et al., 2020b), using a graph neural network to verify generated programs. Orthogonally, a similar dataset for tablebased natural language inference was introduced in Gupta et al. (2020) – interestingly, like in our experiments they find RoBERTa-large to work extremely well for tables linearised according to the TabFact scheme. Finally, Herzig et al. (2020); Eisenschlos et al. (2020) introduce a BERT-based model for various table semantic tasks, extending BERT with additional position embeddings denoting columns and rows.

Open-domain fact verification and question answering over unstructured, textual data has been studied in a series of recent papers. Early work resulted in several highly sophisticated full pipeline systems (Brill et al., 2002; Ferrucci et al., 2010; Sun et al., 2015). These provided inspiration for the influential DrQA model (Chen et al., 2017), which like ours relies on a simple heuristic retrieval model, and a complex reading model. Recent work (Karpukhin et al., 2020; Lewis et al., 2020) has built on this approach, developing fast learned retrieval models through dot-product indexing (Johnson et al., 2017), and increasingly advanced pretrained transformer-models for reading. The development of similarly fast, reliable, and learnable indexing techniques for tables as well as text is an important direction for future work.

Concurrently with our work, Chen et al. (2020a) have introduced a BERT-based model to perform question answering over open collections of data including tables. Like ours, their model consists of separate retriever- and reader-steps. Their bestperforming reader employs a long-range sparse attention transformer (Ravula et al., 2020) to jointly summarize all retrieved data. As in our case, their model demonstrates significant improvements from using multiple retrieved tables.

8 Conclusion

We have introduced an attention-based model for fact verification over open collections of tables, along with two separate strategies for handling reranking and verification through the same model. Our approach achieves performance on par with the current state of the art for the closed setting on the TabFact dataset, with larger performance gains the more tables we include. When using an oracle to retrieve a reference table, our RoBERTa-based approach to fact verification also represents a new state of the art for the closed setting. Finally, we have made an initial foray into Wikipedia-scale open domain table fact verification, demonstrating improvements from using multiple tables also when evaluating with a full set of Wikipedia tables as a knowledge source. Our results indicate that the use of multiple tables can provide contextual clues to the model even when those tables do not explicitly verify or refute the claim, because they can provide evidence for the *probability* of the claim. This is a double-edged sword, as reliance on such clues can increase model performance while also induce faulty claims of truthfulness due to inexactness or bias. As such, care will be needed in future work to disentangle the positive and the negative aspects of this phenomenon.

Acknowledgments

We would like to thank Fabio Petroni and Nicola De Cao for helpful discussions and comments.

References

- Tariq Alhindi, Savvas Petridis, and Smaranda Muresan. 2018. Where is your evidence: Improving factchecking by justification modeling. In *Proceedings* of the First Workshop on Fact Extraction and VERification (FEVER), pages 85–90.
- Chandra Sekhar Bhagavatula, Thanapon Noraset, and Doug Downey. 2013. Methods for exploring and mining tables on wikipedia. In *Proceedings of the ACM SIGKDD Workshop on Interactive Data Exploration and Analytics*, pages 18–26.
- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. 2015. A large annotated corpus for learning natural language inference. In Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing, pages 632–642, Lisbon, Portugal. Association for Computational Linguistics.

- Eric Brill, Susan Dumais, and Michele Banko. 2002. An analysis of the askmsr question-answering system. In *Proceedings of the 2002 Conference on Empirical Methods in Natural Language Processing* (*EMNLP 2002*), pages 257–264.
- Michael J Cafarella, Alon Halevy, and Nodira Khoussainova. 2009. Data integration for the relational web. *Proceedings of the VLDB Endowment*, 2(1):1090–1101.
- Michael J Cafarella, Alon Halevy, Daisy Zhe Wang, Eugene Wu, and Yang Zhang. 2008. Webtables: exploring the power of tables on the web. *Proceedings of the VLDB Endowment*, 1(1):538–549.
- Kaushik Chakrabarti, Zhimin Chen, Siamak Shakeri, and Guihong Cao. 2020a. Open domain question answering using web tables. *arXiv preprint arXiv:2001.03272*.
- Kaushik Chakrabarti, Zhimin Chen, Siamak Shakeri, Guihong Cao, and Surajit Chaudhuri. 2020b. Tableqna: Answering list intent queries with web tables. *arXiv preprint arXiv:2001.04828*.
- Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading Wikipedia to answer opendomain questions. In Association for Computational Linguistics (ACL).
- Jiaoyan Chen, Ernesto Jiménez-Ruiz, Ian Horrocks, and Charles Sutton. 2019. Colnet: Embedding the semantics of web tables for column type prediction. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 29–36.
- Wenhu Chen, Ming-Wei Chang, Eva Schlinger, William Wang, and William W. Cohen. 2020a. Open question answering over tables and text.
- Wenhu Chen, Hongmin Wang, Jianshu Chen, Yunkai Zhang, Hong Wang, Shiyang Li, Xiyou Zhou, and William Yang Wang. 2020b. Tabfact : A large-scale dataset for table-based fact verification. In *International Conference on Learning Representations* (*ICLR*), Addis Ababa, Ethiopia.
- Sarah Cohen, Chengkai Li, Jun Yang, and Cong Yu. 2011. Computational journalism: A call to arms to database researchers. CIDR 2011 - 5th Biennial Conference on Innovative Data Systems Research, Conference Proceedings, pages 148–151.
- Ido Dagan, Oren Glickman, and Bernardo Magnini. 2005. The pascal recognising textual entailment challenge. In *Machine Learning Challenges Workshop*, pages 177–190. Springer.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of deep bidirectional transformers for language understanding. In Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers),

pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.

- Julian Eisenschlos, Syrine Krichene, and Thomas Müller. 2020. Understanding tables with intermediate pre-training. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 281–296, Online. Association for Computational Linguistics.
- David Ferrucci, Eric Brown, Jennifer Chu-Carroll, James Fan, David Gondek, Aditya A Kalyanpur, Adam Lally, J William Murdock, Eric Nyberg, John Prager, et al. 2010. Building watson: An overview of the deepqa project. *AI magazine*, 31(3):59–79.
- Terry Flew, Christina Spurgeon, Anna Daniel, and Adam Swift. 2012. The promise of computational journalism. *Journalism Practice*, 6(2):157–171.
- Majid Ghasemi-Gol and Pedro Szekely. 2018. Tabvec: Table vectors for classification of web tables. *arXiv preprint arXiv:1802.06290*.
- Vivek Gupta, Maitrey Mehta, Pegah Nokhiz, and Vivek Srikumar. 2020. INFOTABS: Inference on tables as semi-structured data. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2309–2324, Online. Association for Computational Linguistics.
- Jonathan Herzig, Pawel Krzysztof Nowak, Thomas Müller, Francesco Piccinno, and Julian Eisenschlos. 2020. TaPas: Weakly supervised table parsing via pre-training. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4320–4333, Online. Association for Computational Linguistics.
- Matthew Honnibal, Ines Montani, Sofie Van Landeghem, and Adriane Boyd. 2020. spaCy: Industrial-strength Natural Language Processing in Python.
- Gautier Izacard and Edouard Grave. 2020. Leveraging passage retrieval with generative models for open domain question answering. *arXiv preprint arXiv:2007.01282*.
- Sujay Kumar Jauhar, Peter Turney, and Eduard Hovy. 2016. Tables as semi-structured knowledge for question answering. In Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pages 474–483.
- Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2017. Billion-scale similarity search with gpus. *arXiv* preprint arXiv:1702.08734.
- Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Ledell Wu, Sergey Edunov, Danqi Chen, and Wentau Yih. 2020. Dense passage retrieval for open-domain question answering. *arXiv preprint arXiv:2004.04906*.

- Daniel Khashabi, Tushar Khot, Ashish Sabharwal, Peter Clark, Oren Etzioni, and Dan Roth. 2016. Question answering via integer programming over semistructured knowledge. In *Proceedings of the Twenty-Fifth International Joint Conference on Artificial Intelligence*, pages 1145–1152.
- Diederik P Kingma and Jimmy Ba. 2014. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980.*
- Patrick Lewis, Ethan Perez, Aleksandara Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. 2020. Retrieval-augmented generation for knowledge-intensive nlp tasks. *arXiv preprint arXiv:2005.11401*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. arXiv preprint arXiv:1907.11692.
- Yixin Nie, Haonan Chen, and Mohit Bansal. 2019. Combining fact extraction and verification with neural semantic matching networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 6859–6866.
- Panupong Pasupat and Percy Liang. 2015. Compositional semantic parsing on semi-structured tables. In Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 1470–1480, Beijing, China. Association for Computational Linguistics.
- Rakesh Pimplikar and Sunita Sarawagi. 2012. Answering table queries on the web using column keywords. *Proceedings of the VLDB Endowment*, 5(10):908– 919.
- Anirudh Ravula, Chris Alberti, Joshua Ainslie, Li Yang, Philip Minh Pham, Qifan Wang, Santiago Ontanon, Sumit Kumar Sanghai, Vaclav Cvicek, and Zach Fisher. 2020. Etc: Encoding long and structured inputs in transformers. In 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP 2020).
- Huan Sun, Hao Ma, Xiaodong He, Wen-tau Yih, Yu Su, and Xifeng Yan. 2016. Table cell search for question answering. In *Proceedings of the 25th International Conference on World Wide Web*, WWW '16, page 771–782, Republic and Canton of Geneva, CHE. International World Wide Web Conferences Steering Committee.
- Huan Sun, Hao Ma, Wen-tau Yih, Chen-Tse Tsai, Jingjing Liu, and Ming-Wei Chang. 2015. Open domain question answering via semantic enrichment. In *Proceedings of the 24th International Conference on World Wide Web*, pages 1045–1055.

- James Thorne and Andreas Vlachos. 2018. Automated fact checking: Task formulations, methods and future directions. In *Proceedings of the 27th International Conference on Computational Linguistics*, pages 3346–3359, Santa Fe, New Mexico, USA. Association for Computational Linguistics.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In Advances in Neural Information Processing Systems, pages 5998–6008.
- Andreas Vlachos and Sebastian Riedel. 2014. Fact checking: Task definition and dataset construction. In Proceedings of the ACL 2014 Workshop on Language Technologies and Computational Social Science, pages 18–22, Baltimore, MD, USA. Association for Computational Linguistics.
- Xiaoyu Yang, Feng Nie, Yufei Feng, Quan Liu, Zhigang Chen, and Xiaodan Zhu. 2020. Program enhanced fact verification with verbalization and graph attention network. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7810–7825, Online. Association for Computational Linguistics.
- Pengcheng Yin, Graham Neubig, Wen-tau Yih, and Sebastian Riedel. 2020. Tabert: Pretraining for joint understanding of textual and tabular data. arXiv preprint arXiv:2005.08314.
- Tao Yu, Rui Zhang, Kai Yang, Michihiro Yasunaga, Dongxu Wang, Zifan Li, James Ma, Irene Li, Qingning Yao, Shanelle Roman, Zilin Zhang, and Dragomir Radev. 2018. Spider: A largescale human-labeled dataset for complex and crossdomain semantic parsing and text-to-SQL task. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 3911–3921, Brussels, Belgium. Association for Computational Linguistics.
- Li Zhang, Shuo Zhang, and Krisztian Balog. 2019. Table2vec: neural word and entity embeddings for table population and retrieval. In *Proceedings of the* 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval, pages 1029–1032.
- Shuo Zhang and Krisztian Balog. 2018. Ad hoc table retrieval using semantic similarity. In *Proceedings of the 2018 World Wide Web Conference*, pages 1553–1562.
- Shuo Zhang and Krisztian Balog. 2019. Autocompletion for data cells in relational tables. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, pages 761–770.
- Wanjun Zhong, Duyu Tang, Zhangyin Feng, Nan Duan, Ming Zhou, Ming Gong, Linjun Shou, Daxin Jiang, Jiahai Wang, and Jian Yin. 2020. Logical-FactChecker: Leveraging logical operations for fact

checking with graph module network. In *Proceed*ings of the 58th Annual Meeting of the Association for Computational Linguistics, pages 6053–6065, Online. Association for Computational Linguistics.

A Performance using RoBERTa-base

In our paper, we have reported results using the larger version of RoBERTa with additional hidden layers and greater dimensionality. Liu et al. (2019) also include a smaller version, RoBERTa-base, corresponding to the BERT-base model of Devlin et al. (2019). In Table 8, we report results corresponding to those of Table 2 for our joint model using RoBERTa-base instead of RoBERTa-large.

Interestingly, the performance gain from using multiple tables is even larger for RoBERTa-base (an increase of 4.1 rather than 1.9 point accuracy from using five tables, for example). One explanation could be that some information necessary to verify certain facts may be encoded in the weights of the larger RoBERTa. We attempt to investigate this using random tables; however, with five random tables, RoBERTa-large and RoBERTa-base reach an almost equivalent respective performance of 52.1 and 52.0. As such, we believe that RoBERTa-large exploits the correlations between tables which we discuss in Section 5.2 better than RoBERTa-base.

B Hyperparameters

Our model uses RoBERTa (Liu et al., 2019) to encode each table into vectors. On top of RoBERTa we employ key-value self-attention (Vaswani et al., 2017) with two attention heads. We then use an MLP consisting of a linear transformation to h =3072 hidden units, followed by *tanh*-activation and linear projection to the output space. During training, we employ dropouts with probability 0.1 before each linear transformation in the MLP.

We train the model using Adam (Kingma and Ba, 2014) with a learning rate of 5e - 6. We use a linear learning rate schedule, warming up over the first 30000 batches. We use a batch size of 32. Training was done on 8 NVIDIA Tesla V100 Volta GPUs (with 32GB of memory), and completed in approximately 36 hours.

C Retrieval accuracy for TabFact splits

The TabFact dataset comes with several different data splits. We include here the performance of our retrieval component for each split:

Dataset	H@1	H@3	H@5	H@10
Train	59.5	71.2	74.8	79.2
Dev	69.6	78.8	82.3	86.6
Test	69.7	78.7	81.9	86.3
Simple Test	92.7	97.1	98.1	99.0
Complex Test	64.7	75.2	79.5	84.8
Small Test	82.1	89.6	91.4	94.7

Table 7: Retrieval accuracy with our entity-based TF-IDF heuristic on the different TabFact splits.

Model	Dev	Test	Simple		
Table-BERT (Chen et al., 2020b)	66.1	65.1	79.1	58.2	68.1
LogicalFactChecker (Zhong et al., 2020)	71.8	71.7	85.4	65.1	74.3
ProgVGAT (Yang et al., 2020)	74.9	74.4	88.3	67.6	76.2
TAPAS (Eisenschlos et al., 2020)*	81.0	81.0	92.3	75.6	83.9
Ours (Roberta-base, oracle retrieval)	72.3	69.9	85.7	62.1	71.4
Ours (Roberta-large, oracle retrieval)	78.2	77.6	88.9	72.1	79.4
Ours (Roberta-base, 1 table)	64.7	64.2	78.4	57.8	67.3
Ours (Roberta-base, 3 tables)	67.8	67.0	81.5	60.5	69.4
Ours (Roberta-base, 5 tables)	68.1	68.3	83.4	61.2	70.2
Ours (Roberta-base, 10 tables)	67.5	67.1	82.3	59.9	70.1
Ours (Roberta-large, 1 tables)	74.1	73.2	86.7	67.8	76.6
Ours (Roberta-large, 3 table)	74.6	73.8	87.0	68.3	78.1
Ours (Roberta-large, 5 tables)	75.9	75.1	87.8	69.5	77.8
Ours (Roberta-large, 10 tables)	73.9	73.8	86.9	68.1	76.9

Table 8: Prediction accuracy of our RoBERTa-based model on the official splits from the TabFact dataset, using RoBERTa-base instead of RoBERTa-large. The first section of the table contains closed-domain results, the second and third open-domain. * employs pretraining on additional labeled data obtained through crowdsourcing.