

Exploring the ultimate limits: Super-resolution enhanced by partial coherence

ZDENĚK HRADIL^{1*}, DOMINIK KOUTNÝ¹, AND JAROSLAV ŘEHÁČEK¹

¹Department of Optics, Palacký University, 17. listopadu 12, 771 46 Olomouc, Czech Republic

*Corresponding author: hradil@optics.upol.cz

Compiled March 15, 2021

The resolution of separation of two elementary signals forming a partially coherent superposition, defined by quantum Fisher information and normalised with respect to detection probabilities, is always limited by the resolution of incoherent mixtures. However, when the partially coherent superpositions are prepared in a controlled way the precision can be enhanced by up to several orders of magnitude above this limit. Coherence also allows the sorting of information about various parameters into distinct channels as demonstrated by parameter of separation linked with the anti-phase superposition and the centroid position linked with the in-phase superposition. © 2021 Optical Society of America

OCIS codes: (270.0270) Quantum optics; (270.5585) Quantum information and processing; (120.3940) Metrology.

<http://dx.doi.org/10.1364/ao.XX.XXXXXX>

1. INTRODUCTION

The quest for ultimate limits serves as unfathomable source of inspiration for theoretical as well as experimental research. The "ultimate limits" usually do not represent a final goal but rather show the direction worth pursuing. It is intriguing to note that coherence (and coherent states) provides one of the keystones for quantum optics but the role of (partial) coherence in metrology has not been fully exploited yet.

Recent developments have been inspired by reconsideration of well-known concepts of classical optics such as Rayleigh [1] or Sparrow [2] resolution criterion from the point of view of quantum estimation theory [3] and particularly the concept of Fisher information [4]. The problem of classical resolution can be paraphrased as the question of how well can we distinguish two bright spots, or more generally two elementary signals, in which is coded the information about the parameter of interest. The celebrated classical resolution criteria suggest that this can be done up to the distances when two blurred spots start to overlap. This rule of thumb can be justified by the analysis of the intensity pattern, since the Fisher information vanishes quadratically for separations approaching zero. As shown by Tsang and coworkers [6] and demonstrated experimentally on different platforms [7–11], this behaviour can be avoided if quantum estimation theory is adopted for the estimation of geometrical parameters, namely the transversal separation and the centroid positions of two equally bright spots with

known intensities. In this context, the Fisher information refers to quantum measurements and converts to the Quantum Fisher Information (QFI) upon optimising over all possible measurement schemes [4, 5]. The role of coherence in quantum estimation problems has been discussed in recent publications [2–4] without leading to a consensus. More light was shed on this problem in the paper [1] showing that if the separation between two sources is coded into the coherent superposition state, the QFI may become unlimited. Such an effect, however, is always associated with the measurement on the dark channel with vanishing signal. In this Letter we extend the theory to partially coherent states addressing several issues. At first we show that there are non-equivalent models for the description of partially coherent states built on the mixing of normalised states or alternatively on the mixing of coherent amplitudes, when any fusion of both those generic models is allowed as well. When the strength of the signal is taken into account, none of the models presents a metrological advantage since precision of any of those partial superpositions is limited by the precision of incoherent mixtures though the Quantum Fisher Information itself may become infinite. In this sense our conclusion can be seen as an optical illustration of the profound and more general observation that probabilistic metrology or any post-selection scheme can never improve quantum limits on estimation of a single parameter, though some estimates may appear occasionally excellent [16]. In addition to this we show, how the limiting precision of incoherent mixtures can be overcome by special state preparation. This will be achieved by careful tailoring of the degree of partial coherence depending on the separation. This scenario surely lacks practical relevance for estimating an unknown separation, but this is a common issue for all model-dependent schemes, when the structure cannot be assumed ad hoc as unknown without additional verification steps. The example with enhanced resolution is just stressing the importance of the "classical" part of the signal- namely its strength- which may depend on the estimated parameter. This can be the result of some (presumed) internal process responsible for generation of such a signal, or a part of the controlled experiment: In the first state-preparation step, parameters are coded into the signal and prior information about parameters is used. In the second detection step, where we use only knowledge of the model without using knowledge of the parameters, these parameters are retrieved from data with an increased precision. Such a protocol can be viewed as testbed for experimentalists, and requires the mastering of several advanced steps including state engineering, detection on demand, noise control and data processing. In this perspective, the coherence spreads information into different interfering channels, into the (modulated) strength or probability distribution. As a part of this scenario we will

finally show that coherence may allow efficient sorting of information about parameter of separation into the anti-phase superposition, and centroid position into the in-phase superposition. The analysis will clarify some conceptual misunderstandings related to use of unnormalised states in quantum information processing [2–4]. In the following, the quantum formalism of Dirac notation will be adopted, though the motivation for this research stems from classical optics. The method used here will rely on quantum optimisation and was developed in the context of quantum theory. The conclusions derived here will be still valid in the broader context of quantum metrology. To highlight the optical interpretation, the relevant conclusions will be framed in terms of classical optics.

2. METHOD AND RESULTS

Let us review some basic facts from quantum estimation theory for unbiased estimators of a variable θ . The Fisher Information F quantifies the content of information per detected particle; the Crámer–Rao inequality (CR) [4] (here for a single parameter θ and sequential detection),

$$(\Delta\theta)^2 \geq 1/\mathcal{H} \equiv \frac{1}{n\mathcal{F}}, \quad (1)$$

sets a bound given by the precision \mathcal{H} with which θ can be estimated from the data. Here, $(\Delta\theta)^2$ is the expected value of the variance of the unbiased estimator, and n is the number of repetitions of the detection. The Fisher information \mathcal{F} plays the pivotal role in quantum metrology and can be calculated for the given model by means symmetric logarithmic derivative (for more information see the topical review [5], where the mathematically rigorous formulation is illustrated with numerous examples for applications in quantum science). The Fisher information quantifies well the resources needed for reaching some target precision: small values of \mathcal{F} must be compensated by an increase of the data set. As argued in [1] special attention must be paid to coherent superpositions, where some extra cost are associated with preparation of a particular superposition of displaced states:

$$|\Phi_{1,2}\rangle = \frac{1}{2}(|\Psi_+\rangle \pm e^{i\varphi}|\Psi_-\rangle), |\Psi_{\pm}\rangle = \exp(\pm iPs/2)|\Psi\rangle, \quad (2)$$

where P is the operator of transverse momentum, s parametrises the separation, $\varphi = 0$ and 1D geometry is assumed for the simplicity. The superposition state with \pm sign will be called in-phase and anti-phase $|\Phi_{1,2}\rangle$, respectively. As reviewed in the Supplementary Materials, costs for preparing such states are simply given by the corresponding norms $|\Phi_{1,2}\rangle^2$. The normalisation used here $|\Phi_1|^2 + |\Phi_2|^2 = 1$ guarantees that costs C for preparing the incoherent mixture equal to one. In general, the costs for preparing the partial coherent mixture enter the CR inequality as a multiplicative rescaling n into nC in the inequality Eq. 1 with the obvious meaning: if n pairs of the separated states $|\Psi_{\pm}\rangle$ are at our disposal, the desired superposition is generated nC times. Mathematical models leading to specific choice of C will be specified later.

Partially coherent states and the corresponding rate factors can be generated by many ways, all of them legitimate in the sense of estimation theory but just a few of them useful. The following two basic models (A, B) are useful for understanding of the role of coherence in quantum metrology. In Model A, the states are normalised before they are added, whereas in Model B the unnormalised states ("amplitudes") are added. The way how to sort out those states from a generic scheme

is clarified in Supplementary Materials [17].

$$\rho_A = \frac{p_1}{\|\Phi_1\|^2} |\Phi_1\rangle\langle\Phi_1| + \frac{p_2}{\|\Phi_2\|^2} |\Phi_2\rangle\langle\Phi_2|, \quad (3)$$

$$\rho_B = \frac{1}{C} \left[p_1 |\Phi_1\rangle\langle\Phi_1| + p_2 |\Phi_2\rangle\langle\Phi_2| \right], \quad (4)$$

$$C = p_1 \|\Phi_1\|^2 + p_2 \|\Phi_2\|^2, \quad p_1 + p_2 = 1. \quad (5)$$

The rate C is equal in both the cases. As shown in Supplementary Materials, such states can be generated "blindly," meaning without the knowledge about the true value of the estimated parameter of separation s . The difference between these models was a subject of some misunderstanding. The theory elaborated by Larson and Saleh in Refs. [3, 4] represents a mixture of models A and B, whereas Tsang and Nair [2, 3] have considered just Model B as the only option relevant for optics. We also point the reader to the arguments from the Appendix 3 of the Ref. [3] based on Helstrom book [4] advocating the use of unnormalised function of mutual coherence instead of its normalised form. This may be but need not be always so, depending whether the normalisation factor C is or is not available from the measurement. These issues are detailed in Supplementary Materials [17]. As a brief message for experimentalists, it matters how the partially coherent state is created - either by mixture of coherent superpositions or by an incoherent mixture superimposed with coherent signal, whether or not the intensities are fixed or depend on parameters, and particularly the strength of the detected signal is important. Coherent effects allow to distribute information in different channels (i.e. partially coherent states) and/or modulation of the strength of the signal. "Rayleigh's curse" reappears only if some piece of this information is omitted but coherence cannot be blamed for that.

The central role in quantum metrology is played by QFI matrix associated with the given model. Though this is in general a rather involved problem, the off-the-shelf formulae are at disposal [5]. For the understanding of the role of coherence, the rank-2 density matrix is enough and QFI can be cast in the form

$$\mathcal{F}_{2-rank} = \sum_{i=1,2} \frac{(\partial_s \lambda_i)^2}{\lambda_i} + 4 \sum_{i=1,2} \lambda_i \left[\frac{\|\partial\Phi_i\|^2}{\|\Phi_i\|^2} - \frac{|\langle\Phi_i|\partial\Phi_i\rangle|^2}{\|\Phi_i\|^4} \right]. \quad (6)$$

where $\lambda_{1,2}$ are the eigenvalues of the density matrix and $|\partial\Phi\rangle$ is the derivative of the state with respect to the parameter. As an important distinction the QFI in Model A is given just by adding Fisher informations of individual coherent superpositions, whereas in Model B an extra term appears as a consequence of modulating eigenvalues of those coherent superpositions. This contribution is large for states close to anti-phase superposition, where the signal is vanishing for small separation, see Supplementary Materials [17]. However, if the QFI is accompanied by the rate factor C (5), the overall precision is limited by the resolution of the incoherent mixtures.

This limit can be overcome in some specific scenarios when the parameter is coded into the signal in order to distinguish it more efficiently afterwards. Assume the scheme when the partially coherent state is created in such a way that normalised superposition states $|\Phi_1\rangle, |\Phi_2\rangle$ are normalised and mixed with the parameter -dependent weights $\bar{p}_1(s), \bar{p}_2(s)$. If we choose

$$\bar{p}_1(s) = \frac{p_1 \|\Phi_1\|^2}{C}, \quad \bar{p}_2(s) = \frac{p_2 \|\Phi_2\|^2}{C}, \quad (7)$$

$$\rho_E = \frac{\bar{p}_1}{\|\Phi_1\|^2} |\Phi_1\rangle\langle\Phi_1| + \frac{\bar{p}_2}{\|\Phi_2\|^2} |\Phi_2\rangle\langle\Phi_2| = \rho_B, \quad (8)$$

$$C = p_1 \|\Phi_1\|^2 + p_2 \|\Phi_2\|^2, \quad \bar{p}_1 + \bar{p}_2 = p_1 + p_2 = 1, \quad (9)$$

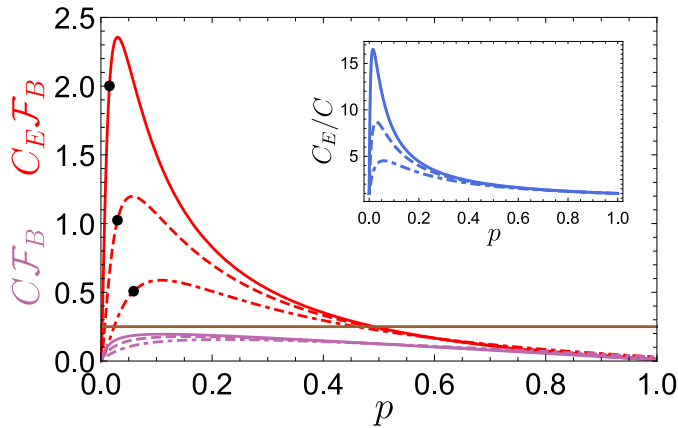


Fig. 1. Dependence of the precision $C_{\mathcal{F}}$ on the weights $p_1 = p, p_2 = 1 - p$ of partially coherent mixtures for values of the separations $s = 0.5, 0.7, 1$ (dashed-dotted, dashed, full) listed from the bottom up. Red curves indicate enhanced resolution (E). The purple curves corresponding to Model B are below the threshold $1/4$ - the limit of incoherent mixtures, and have just indicative meaning. Black points correspond to the "near optimal" p -values, where $C = 1/2$, see the explanation in the text. The displacement is in units of σ , \mathcal{F} is in units of σ^{-2} and numerical calculations are done for Gaussian distribution. The inset shows the ratio of corresponding rate factors C for separations $s = 0.5, 0.7, 1$ listed from the bottom up.

we get the same state as in Model B! What has changed is just the rate factor which will be given as

$$C_E = \frac{1}{C} [p_1 \|\Phi_1\|^4 + p_2 \|\Phi_2\|^4], \quad (10)$$

with all the coefficients having the same meaning in all models. QFI remains large even when multiplied by the rate factor C_E . Here the product $C_E \mathcal{F}$ scales with the small separation like $1/s^2$ and may exceed considerably the precision of an incoherent mixture. This is the essence of models with enhanced resolution (Model E). This behaviour is exemplified in Fig. 1 in comparison to Model B, which has just indicative meaning and demonstrates that such resolution is limited by incoherent superposition.

Though this result might appear paradoxical, there is even some classical rationale behind it as explained by behaviour of "anti-phase" superpositions, which may be considered as always "distinguishable" due to the gap between the peaks [18], but such a signal is vanishing when approaching anti-phase. If we analyse the resolution in Model E in dependence on the weight parameter $p, p_1 = p, p_2 = 1 - p$ (see Supplementary Materials for details) [17], we conclude that maximum is achieved for states close to the mixtures when in-phase component Φ_1 is taken with the weight of anti-phase phase component, i. e. $|\Phi_2|^2$ and the other way around. This defines "nearly optimal" point on the plot in Fig. 1 close to maximum of resolution. For small separations, the anti-phase component is vanishing and in-phase component is dominating, hence the optimal state requires to combine strong signal with vanishing weight and vanishing signal with strong weight factors. This explains the "equal roles" of both the "anti-phase" and "in-phase" components in models yielding enhanced resolution. For such a state $C_E = 1/2$, what means that just half of the signal in comparison to incoherent mixture is used. However, the increase of QFI is enormous and significantly outperforms the precision of QFI for incoherent mixtures.

To exemplify the enhancement in numbers let us consider the parameters at the separation $s = 0.1\sigma$ where super-resolution has been

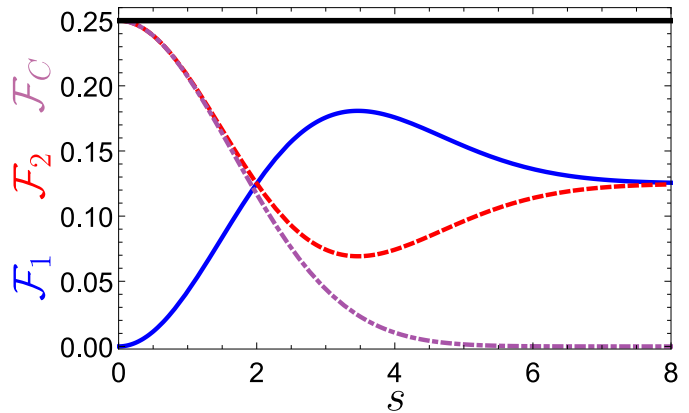


Fig. 2. Fisher information for separation as a function of separation for in-phase superposition \mathcal{F}_1 (full blue) and anti-phase superposition \mathcal{F}_2 (dashed red). Dominant contribution of \mathcal{F}_2 for small separations stems from the modulation of the norm of anti-phase superposition plotted as \mathcal{F}_C (dashed-dotted purple). The sum of individual terms \mathcal{F}_1 and \mathcal{F}_2 is conserved and saturates the limiting resolution for incoherent mixture given as $1/4$. The separation is in units of σ , \mathcal{F} is in units of σ^{-2} and numerical calculations are done for Gaussian distribution.

already demonstrated on different experimental platforms [10, 11] for incoherent mixtures. For optimal enhanced super-resolution one can get the numerical factors $C = 0.02, C_E = 0.67$, whereas $\mathcal{F} = 89$ and the precision scales with the factor $C_E \mathcal{F} \approx 59$. In comparison the precision for the incoherent mixtures of separated sources is constant $(\Delta P)^2 = 0.25$. More detailed calculations are provided in the Supplementary Materials.

The enhanced resolution need not be the only potential benefit of coherence manifested by constructive and destructive interference. Coherent effects may also facilitate new ways for sorting of information. We demonstrate how to exploit the full information content of the signal including the information contained in the modulated rate factor C - the norm of the state, and in the normalised state. As calculated in Supplementary Material [17] the full information carried by unnormalised state $|\Phi\rangle$ consists of QFI for a pure normalised state (e.g. given by Eq. (6) for single eigenvalue $\lambda_1 = 1$), rescaled by the normalisation $C = \|\Phi\|^2$ with an extra added Fisher information term corresponding to the modulation $(\partial C)^2/C$, all together

$$\mathcal{F}_{total} = 4\|\partial\Phi\|^2 + \frac{[\langle\Phi|\partial\Phi\rangle - \langle\partial\Phi|\Phi\rangle]^2}{\|\Phi\|^2}. \quad (11)$$

Applying this result to specific in- and anti-phase superpositions $|\Phi_{1,2}\rangle$ we conclude that for small separations the Fisher information for the separation is carried dominantly by the anti-phase component, and particularly is coded into the norm, whereas the information about centroid position is carried by the in-phase superposition. This simple observation may serve as inspiration for future complex protocols for distributing and sorting of information by means of multi port devices. This effect is graphically illustrated in Fig.2 plotting the Fisher information for separation of Gaussian profiles for in-phase superposition \mathcal{F}_1 and anti-phase superposition \mathcal{F}_2 , and particularly, its dominant part corresponding to the Fisher information attributed to the norm of anti-phase component \mathcal{F}_C .

3. DISCUSSION

The essence of the proposed scheme for enhanced resolution hinges upon the manifestation of genuine partial coherence, when both the

in- and anti-phase coherent channels and their intensities depend on the estimated parameter. The enhancement of the precision stems from the strong modulation of the intensity terms near the point of the almost vanishing signal. The scenario with particular choice of weights considered here serves as an example of how the modulation of coherent signals can be utilised for enhancing the precision above the limit of incoherent mixtures. There is even a certain classical rationale behind this effect. As shown in Refs. [19, 20] points where the intensity of the PSF is vanishing contribute to increased precision even in the case of the intensity detection. The improvement is manifested by the linear scaling of Fisher information. The theoretical analysis presented here is actually the quantum analogue of the same effect: since the signal must vanish for any observation, the signal itself must vanish. Such arguments cannot be used for estimating the separation between unknown sources; however the analysis is relevant for coding the information into the prepared state which will serve for reading out the information afterwards.

Though the effect of enhanced super-resolution is theoretically possible, it will be challenging to observe it experimentally. Several steps must be mastered simultaneously: precise state engineering of phase sensitive states, phase sensitive measurements as projection on the eigenstates of the symmetric logarithmic derivative, and all this must be done with extremely weak fields. These steps have been implemented to a certain extent separately on various experimental setups. In particular, the experiments in Refs. [19, 20] demonstrated that it is possible to detect faithfully the zero intensity signal and based on this to see the region of linear scaling of classical Fisher information. New progress of sophisticated optical methods using quantum pulse gates [21] or mode multiplexing [22] are promising tools for implementation of the phase sensitive detection on demand.

CONCLUSIONS

The analysis of partial coherence identifies metrological advantages of future protocols inspired by quantum information processing. The ultimate precision of incoherent mixtures provides a natural bound which can be overcome in controlled experiments with information additionally coded into the partially coherent signal. Coherence may also provide additional benefits in the form of sorting of information for different parameters into different channels as demonstrated on the separation attributed to the anti-phase component and the centroid position linked with the in-phase component.

Acknowledgments The authors are indebted to Hubert de Guise for valuable comments. We acknowledge financial support from the Grant Agency of the Czech Republic (Grant No. 18-04291S), the Palacký University (Grant No. IGA_PrF_2020_004) the project ApresSF supported by the MEYS, Czech Republic, under the QuantERA programme, which has received funding from the European Union's Horizon 2020 research and innovation programme " and H2020-FETOPEN-2018-2019-2020-01 StormyTune.

Disclosures The authors declare no conflicts of interest. See Supplement for supporting content.

REFERENCES

1. Lord Rayleigh, *Phil. Mag.* **8**, 261–274 (1879)
2. C. M. Sparrow, *Astrophys. J.* **44**, 76–86 (1916).
3. M. Tsang, *Contemporary Physics* **60**, 279–298 (2020).
4. C. W. Helstrom, *Quantum Detection and Estimation Theory* (Academic, New York, 1976)
5. J. Liu, H. Yuan, Xiao-Ming Lu, and X. Wang, *J. Phys. A: Math. Theor.* **53**, 023001 (2020).
6. M. Tsang, R. Nair, and X.-M. Lu, *Phys. Rev. X* **6**, 031033 (2016).
7. Tham W.-K. , Ferretti H, Steinberg A. M., *Phys. Rev. Lett.* **118** : 070801 (2017).
8. Yang F, Tashchilina A, Moiseev ES, Simon C, Lvovsky, A. I. , *Optica* **3** 1148 (2016)
9. Tang Z S, Durak K, Ling A., *Opt Express.* **24** , 22004 (2016).
10. M. Paúr, B. Stoklasa, Z. Hradil, L. L. Sánchez-Soto, and J. Řeháček, *Optica* **3**, 1144–1147 (2016).
11. J. M. Donohue, V. Ansari, J. Rehacek, Z. Hradil, B. Stoklasa, M. Paur, L. L. Sánchez-Soto, and C. Silberhorn, *Phys. Rev. Lett.* **121**, 090501 (2018).
12. W. Larson and B. E. A. Saleh, *Optica* **5**, 1382 (2018).
13. M. Tsang and R. Nair, *Optica* **6**, 400–401 (2019).
14. W. Larson and B. E. A. Saleh, *Optica* **6**, 402 (2019).
15. Z. Hradil, J. Rehacek, L. Sanchez-Soto, B. G. Englert, *Optica* **6**, 1437 (2019).
16. J. Combes, C. Ferrie, Z. Jiang, and C. M. Caves, *Phys. Rev. A* **89**, 052117 (2014).
17. Supplementary Materials
18. G. Cesini, G. Guattari, P. De Santis, and C. Palma, *Journal of Optics* **10**, 79–87 (1979).
19. Paur M., Stoklasa, B; Grover, J., Krzic, A., Sanchez-Soto, LL, Hradil, Z., Rehacek, *Optica* **5** 1177-1180, (2018).
20. M. Paur et. al., *Opt. Lett.* **44**, 3114 - 3117 (2019).
21. A. Eckstein, B. Brecht, C. Silberhorn, *Opt. Express* **19**, 13770 (2011).
22. J.-F.Morizur, et al., *J.Opt.Soc.Am. A* **27**, 2524 (2010)

4. SUPPLEMENTARY MATERIAL

Coherent superpositions [1] play an essential role for understanding of partial coherence. In order to assess the cost needed for preparation of such states assume in the following the state of our system entangled with "spin-like" ancilla states

$$|\varphi\rangle = 2^{-1/2}(|\Psi_+\rangle \otimes |\uparrow_x\rangle + e^{i\varphi}|\Psi_-\rangle \otimes |\downarrow_x\rangle) \quad (12)$$

$$= |\Phi_1\rangle \otimes |\uparrow_z\rangle + |\Phi_2\rangle \otimes |\downarrow_z\rangle, \quad (13)$$

$$|\Phi_{1,2}\rangle = \frac{1}{2}(|\Psi_+\rangle \pm e^{i\varphi}|\Psi_-\rangle), \quad (14)$$

$$|\Psi_{\pm}\rangle = \exp(\pm iP_S/2)|\Psi\rangle. \quad (15)$$

As argued in [1] the state $|\Phi_{1,2}\rangle$ is generated by projecting the ancilla onto the basis $|\uparrow_z\rangle, |\downarrow_z\rangle$. This happens with the probability rate $C = \|\Phi_i\|^2 \equiv \langle\Phi_i|\Phi_i\rangle, i = 1, 2$. Similarly, the marginal distribution over the ancilla selects the state of the system in the incoherent mixture. Due to the normalisation used here this happens with the rate equal to one establishing a reference for later comparison. If the rate is included as the multiplicative factor into the CR inequality, all results are normalised with respect to resources - or equivalently with respect to detection probabilities-rather than conditioned by detected events. The differences may become significant in the cases when e.g. QFI is diverging but the detected channel is actually dark. The special choice of coherent superposition states with $\varphi = 0$ is of particular interest. In both cases, the QFI for the in-phase as well as anti-phase superpositions scales quadratically to zero. In addition to this, the rate for the anti-phase component vanishes as well and it might thought that such a basis is not suitable for super-resolution. As will be seen, the opposite is true.

There are two simple models on how to create partially coherent states that can be constructed directly from coherent superpositions. Model A is defined as incoherent superposition of projectors into the basis of coherent superposition states

$$\rho_A = \frac{p_1}{\|\Phi_1\|^2}|\Phi_1\rangle\langle\Phi_1| + \frac{p_2}{\|\Phi_2\|^2}|\Phi_2\rangle\langle\Phi_2|, \quad (16)$$

$$C = p_1\|\Phi_1\|^2 + p_2\|\Phi_2\|^2. \quad (17)$$

This sorting scheme requires mixing the results of the projections into the ancilla states $|\uparrow_z\rangle, |\downarrow_z\rangle$ with prior probabilities p_1, p_2 . Yet another mixed superposition of signal state can be projected from the entangled state in Model B, if the ancilla is conditioned by the detection

$$\Pi_B = p_1|\uparrow_z\rangle\langle\uparrow_z| + p_2|\downarrow_z\rangle\langle\downarrow_z|, \quad (18)$$

yielding the state

$$\rho_B = \frac{1}{p_1\|\Phi_1\|^2 + p_2\|\Phi_2\|^2}[p_1|\Phi_1\rangle\langle\Phi_1| + p_2|\Phi_2\rangle\langle\Phi_2|], \quad (19)$$

with the same rate factor Eq. (17) as in Model A. The subtle distinction between variants A and B is of fundamental importance. It explains some confusion in the discussions [2, 3] and provides arguments for the enhancement of the super-resolution. Let us note in passing that Model A assumes the summation of the normalised states (as done in quantum optics), whereas in Model B "amplitudes" (like in coherent optics) are added.

Two specific models have been considered recently for construction of partially coherent states. Following the arguments in Larson and Saleh [4], the partially coherent state can be cast as the superposition of fully coherent (here φ dependence can be included) and fully incoherent parts

$$\rho_{LS} = \frac{p}{\|\Phi_1\|^2}|\Phi_1\rangle\langle\Phi_1| + \frac{1-p}{2}\{|\Psi_+\rangle\langle\Psi_+| + |\Psi_-\rangle\langle\Psi_-\rangle\}. \quad (20)$$

Due to the identity

$$|\Phi_1\rangle\langle\Phi_1| + |\Phi_2\rangle\langle\Phi_2| = \frac{1}{2}[|\Psi_+\rangle\langle\Psi_+| + |\Psi_-\rangle\langle\Psi_-\rangle]$$

the state can cast in the form

$$\rho_{LS} = \left[\frac{p}{\|\Phi_1\|^2} + 1 - p\right]|\Phi_1\rangle\langle\Phi_1| + (1-p)|\Phi_2\rangle\langle\Phi_2|. \quad (21)$$

Such a state corresponds to the mixture between the generic Models A and B.

On the other hand, Tsang and Nair [2] were motivated by an optical definition considering the partially mixed state with the degree of coherence γ

$$\rho_{TN} = N_0[|\Psi_+\rangle\langle\Psi_+| + |\Psi_-\rangle\langle\Psi_-\rangle + \gamma|\Psi_+\rangle\langle\Psi_-\rangle + \gamma^*|\Psi_-\rangle\langle\Psi_+\rangle]. \quad (22)$$

Using the polar representation for the degree of coherence $\gamma = |\gamma|e^{-i\varphi}$ and the definition of in- and anti-phase superposition states, the partially mixed state can be simply rewritten to the form of Model B

$$\rho_{TN} = N_0[(2 - |\gamma|)|\Phi_1\rangle\langle\Phi_1| + 2(1 - |\gamma|)|\Phi_2\rangle\langle\Phi_2|], \quad (23)$$

$$N_0^{-1} = 2 - |\gamma| - |\gamma|\|\Phi_2\|^2. \quad (24)$$

All models including their mixtures are legitimate, but as they correspond to different preparations, they cannot be confused.

The normalisation of the states represents another issue in recent discussions. As argued by Tsang in Ref. [2], the unnormalised function of mutual coherence should be used instead of its normalised form. We agree that this argument can be justified in some cases but the correct usage of QFI, however, requires to use normalised states in order to guarantee the consistent normalisation of probability distributions. Particularly in Model B the factor C represents just the trace of unnormalised density matrix in the state Eq. (19). If this factor is known as a function of estimated parameters, it can be exploited for estimation and the total Fisher information carried by such a signal reads

$$\mathcal{F}_{total} = \frac{(\partial_s C)^2}{C} + C\mathcal{F}_n. \quad (25)$$

The first term corresponds to (classical) Fisher information attributed to C and \mathcal{F}_n represents QFI of the (normalised) quantum state. Here and in the following we will use the term Quantum Fisher Information just for normalised states. Before resorting to calculations of QFI for 2-component system let us evaluate the total Fisher information for the pair of in- and anti-phase superpositions $|\Phi\rangle_{1,2}$. As derived in [1], the QFI for the normalised state reads (for $i = 1, 2$)

$$\mathcal{F}_i = \frac{4\|\partial\Phi_i\|^2}{\|\Phi_i\|^2} - \frac{4|\langle\Phi_i|\partial\Phi_i\rangle|^2}{\|\Phi_i\|^4}, \quad C = \langle\Phi_i|\Phi_i\rangle, \quad (26)$$

and therefore the total precision (25) scales with the Fisher information

$$\mathcal{F}_{total} = 4\|\partial\Phi_i\|^2 + \frac{[\langle\Phi_i|\partial\Phi_i\rangle - \langle\partial\Phi_i|\Phi_i\rangle]^2}{\|\Phi_i\|^2}. \quad (27)$$

Adopting usual condition $\langle P \rangle = 0$, the Fisher information for separation associated with the in- and anti-phase superpositions can be easily found as (notice the interchange of indices here)

$$\mathcal{F}_1 = \langle\Phi_2|(\Delta P)^2|\Phi_2\rangle, \quad \mathcal{F}_2 = \langle\Phi_1|(\Delta P)^2|\Phi_1\rangle, \quad (28)$$

$$\mathcal{F}_1 + \mathcal{F}_2 = \langle\Psi|(\Delta P)^2|\Psi\rangle. \quad (29)$$

We note that for small separations the anti-phase component Φ_2 carries the dominant information about separation, whereas information embedded in the in-phase component is negligible. However, sum of both

contributions saturates the limit of incoherent mixtures. In addition to this, the dominant contribution to \mathcal{F}_2 stems from the normalisation term

$$\mathcal{F}_C = \frac{(\partial_s C)^2}{C}. \quad (30)$$

This behaviour is illustrated in Fig. 2 of the main text. Notice that the Fisher information for anti-phase superposition is constant even for vanishing signal if a Poissonian noise model is assumed. Similar argumentation with complementary results can be applied to the estimation of the centroid position c_0 induced by the overall unitary transformation $e^{-ic_0 P}$. The Fisher information terms for individual channels are given as

$$\mathcal{F}_1^{cent} = 4\langle\Phi_1|(\Delta P)^2|\Phi_1\rangle, \quad \mathcal{F}_2^{cent} = 4\langle\Phi_2|(\Delta P)^2|\Phi_2\rangle. \quad (31)$$

Obviously, the dominant contribution is carried by the in-phase superposition Φ_1 . It is intriguing to note that a beam splitter creating both superpositions acts like the device sorting the components with (dominant) information dedicated to different parameters. Such a distribution of information may provide another potential advantage to metrology inspired by the quantum information protocols.

The analysis of partial coherent fields requires to use the concept of quantum Fisher information matrix and symmetric logarithmic derivative \mathcal{L}

$$\partial\rho = \frac{1}{2}[\rho\mathcal{L} + \mathcal{L}\rho]. \quad (32)$$

This is not an easy task in the case of generic multi-parameter estimation. The theoretical background, existing calculation techniques and applications in physics has been addressed in the topical review [5]. The analysis provided here simplifies to the case of rank-two states (see Eq. (14) of Ref. [5]) evaluated in the diagonal basis of two-component mixed state

$$\rho = \lambda_1|u_1\rangle\langle u_1| + \lambda_2|u_2\rangle\langle u_2|. \quad (33)$$

QFI can be written in the form of decomposition into two operator - \mathcal{L} , acting in the 2-dimensional space spanned by the eigenbasis, and its orthogonal part \mathcal{P}

$$\mathcal{L}_\theta = \mathcal{L} + \mathcal{P} \quad (34)$$

$$\mathcal{F} = \text{Tr}(\rho\mathcal{L}_\theta^2) \quad (35)$$

$$\mathcal{L} = \sum_k \frac{\partial_s \lambda_k}{\lambda_k} |u_k\rangle\langle u_k| + 2(\lambda_1 - \lambda_2)[\langle u_2|\partial u_1\rangle|u_2\rangle\langle u_1| + h.c.]$$

$$\mathcal{P} = 2[|u_1^\perp\rangle\langle u_1| + |u_2^\perp\rangle\langle u_2| + h.c.],$$

$$|u_i^\perp\rangle = |\partial u_i\rangle - (|u_1\rangle\langle u_1| + |u_2\rangle\langle u_2|)|\partial u_i\rangle.$$

Here $|\partial u_i^\perp\rangle$ denotes the projection of the derivative of the eigenstate into the subspace orthogonal to the eigenbasis $|u_i\rangle$. The optimal measurement is given by projections into the eigen-basis of logarithmic derivative; this will not be discussed here as we simply address ultimate limits. Finally QFI can be brought to the form

$$\mathcal{F}_{2-rank} = \sum_i \frac{(\partial_s \lambda_i)^2}{\lambda_i} + 4(\lambda_1 - \lambda_2)^2 \times \quad (36)$$

$$\times |\langle \partial u_1 | u_2 \rangle|^2 + 4\lambda_1 \|\partial u_1^\perp\|^2 + 4\lambda_2 \|\partial u_2^\perp\|^2, \quad (37)$$

$$\|u_i^\perp\|^2 = \|\partial u_i\|^2 - |\langle u_i | \partial u_i \rangle|^2 - |\langle u_j | \partial u_i \rangle|^2. \quad (38)$$

In the following we will specialize to the common choice $\varphi = 0$ and such states for which $\langle \psi | e^{isP} | \psi \rangle$ is real (including e.g. Gaussian PSF). This assumption simplifies the analysis considerably since the states are orthogonal $\langle \Phi_2 | \Phi_1 \rangle = \frac{-i}{2} \Im \langle e^{isP} \rangle = 0$ providing the eigenstate basis

$$|u_{1,2}\rangle = \frac{1}{\sqrt{\|\Phi_{1,2}\|^2}} |\Phi_{1,2}\rangle. \quad (39)$$

QFI can be simplified to the final form

$$\mathcal{F}_{2-rank} = \sum_{i=1,2} \frac{(\partial_s \lambda_i)^2}{\lambda_i} + 4 \sum_{i=1,2} \lambda_i \left[\frac{\|\partial \Phi_i\|^2}{\|\Phi_i\|^2} - \frac{|\langle \Phi_i | \partial \Phi_i \rangle|^2}{\|\Phi_i\|^4} \right]. \quad (40)$$

The terms can be easily interpreted. The first term is attributed to the dependance coded in the eigenvalues, whereas the second sum represents the linear combination of the QFI for coherent superpositions $|\Phi_{1,2}\rangle$ given by expression (26).

If the eigenvalues are independent of the estimated parameter as in Model A, the first sum is zero and QFI is just the sum of particular contributions saturating the convexity condition for QFI. Such a partially coherent state does not offer any advantage for enhancing the precision.

An extra term appears in Model B as a consequence of the modulation of eigenvalues $\lambda_{1,2}$, and this term can be large for small separations

$$\mathcal{F}_\lambda = \sum_i (\partial_s \lambda_i)^2 / \lambda_i = \frac{[\Im \langle P e^{isP} \rangle]^2}{1 - c^2} \frac{p(1-p)}{(\|\Phi_2\|^2 + cp)^2}. \quad (41)$$

$$C = \|\Phi_2\|^2 + cp, \quad (42)$$

The parameters here are denoted for brevity as $p_1 = p, p_2 = 1 - p, c = \Re \langle e^{isP} \rangle$, $\|\Phi_2\|^2 = \frac{1}{2}(1 - c) \approx \frac{1}{4}s^2(\Delta P)^2$. However, the term \mathcal{F}_λ is large but when normalised with respect to the rate factor C. This will be limited by the resolution of incoherent mixture $(\Delta P)^2$. This is an expected result since any detection on the entangled state Eq. 12 is limited by its QFI, which equals to $(\Delta P)^2$ [1]. Moreover the complementary measurement to Π_B

$$\Pi_B = p_2 |\uparrow_z\rangle\langle \uparrow_z| + p_1 |\downarrow_z\rangle\langle \downarrow_z|, \quad (43)$$

sorts the complementary state ρ_B and the complementary rate C_B obtained by simple interchange $p_1 \leftrightarrow p_2$. It is intriguing to note that combining those normalised states with their rate factors (what is effectively the combination of un-normalised states) gives again the incoherent mixture of separated states, and henceforth

$$C_B \mathcal{F}_B + C \mathcal{F}_C \leq (\Delta P)^2. \quad (44)$$

These arguments shows that (partial) coherence by itself does not bring any advantage with respect to precision when normalised to detection probabilities. For single channel the optimal regime approaching the resolution of incoherent mixture requires the adjustment of the weight p for the given separation s . As can be shown by simple analysis the maximum of the product $C \mathcal{F}_\lambda$ this is approximately achieved for $p \approx \sqrt{\frac{\|\Phi_2\|^2}{c}}$ with the rate $C = \sqrt{\|\Phi_2\|^2 + cp}$. For instance, for $s = 0.1(0.5)\sigma$ the rate factor C shows that just 2% (12%) of the intensity of incoherent signal is enough for reaching the limiting precision!

This is the clue to enhance the resolution as established in Model E. What is only needed is to increase the rate factor C for the state as in Model B. This can be done if the state of Model B is prepared according to the recipe of Model A! In other words, such a state can be prepared as the mixture with weights dependent on the separation

$$\bar{p}_i = \frac{p_i \|\Phi_i\|^2}{C}. \quad (45)$$

This will give effectively the same state as in Model B but with the enhanced rate

$$C_E = \frac{1}{C} [p_1 \|\Phi_1\|^4 + p_2 \|\Phi_2\|^4]. \quad (46)$$

Straightforward analysis shows the enhancement of precision for $p, s \rightarrow 0$. QFI normalised with respect to the strength of the signal scales as

$$\mathcal{F}_\lambda C_E \propto \frac{1}{s^2}. \quad (47)$$

The procedure of Model E shows how to enhance the information about the estimated parameter high above the level of incoherent mixtures. However such a state preparation is not "blind" in the sense that prior knowledge about the estimated parameter is required and used in the state preparation stage in controlled experiments.

REFERENCES

1. Z. Hradil, J. Rehacek, L. Sanchez-Soto, B. G. Englert, [Optica 6, 1437 \(2019\)](#).
2. M. Tsang and R. Nair, [Optica 6, 400–401 \(2019\)](#).
3. W. Larson and B. E. A. Saleh, [Optica 6, 402 \(2019\)](#).
4. W. Larson and B. E. A. Saleh, [Optica 5, 1382 \(2018\)](#).
5. J. Liu, H. Yuan, Xiao-Ming Lu, and X. Wang, [J. Phys. A: Math. Theor. 53, 023001 \(2020\)](#).