

Detecting of a Patient's Condition From Clinical Narratives Using Natural Language Representation

Thanh-Dung Le, *Member, IEEE*, Rita Noumeir, *Member, IEEE*, Jérôme Rambaud, Guillaume Sans, and Philippe Juvet

Abstract—The rapid progress in clinical data management systems and artificial intelligence approaches enable the era of personalized medicine. Intensive care units (ICUs) are the ideal clinical research environment for such development because they collect many clinical data and are highly computerized environments. We designed a retrospective clinical study on a prospective ICU database using clinical natural language to help in the early diagnosis of heart failure in critically ill children. The methodology consisted of empirical experiments of a learning algorithm to learn the hidden interpretation and presentation of the French clinical note data. This study included 1386 patients' clinical notes with 5444 single lines of notes. There were 1941 positive cases (36% of total) and 3503 negative cases classified by two independent physicians using a standardized approach. The multilayer perceptron neural network outperforms other discriminative and generative classifiers. Consequently, the proposed framework yields an overall classification performance with 89% accuracy, 88% recall, and 89% precision. This study successfully applied learning representation and machine learning algorithms to detect heart failure from clinical natural language in a single French institution. Further work is needed to use the same methodology in other institutions and other languages.

Index Terms—clinical natural language processing, cardiac failure, machine learning, auto-encoder, feature selection.

I. INTRODUCTION

CURRENTLY, clinical narratives are continuously provided and stored in electronic medical records (EMR), but they are underutilized in clinical decision support systems. The limitation comes from their unstructured or semi-structured format. Besides, another problem with clinical narratives is that they are written in incomplete sentences, but in a information-dense way for communication between clinicians [1]. Because of the two reasons, clinical narrative sources impose considerable constraints in real application for clinical outcome prediction.

Since 2013, the Pediatric Critical Care Unit at CHU Sainte-Justine (CHUSJ) has used an EMR. The patients' information,

This work was supported in part by the Natural Sciences and Engineering Research Council (NSERC), in part by the Institut de Valorisation des données de l'Université de Montréal (IVADO), in part by the Fonds de la recherche en santé du Québec (FRQS), and in part by the Fonds de recherche du Québec – Nature et technologies (FRQNT).

Thanh-Dung Le is with the Biomedical Information Processing Lab, École de Technologie Supérieure, University of Québec, Montréal, Québec, Canada, and also with the CHU Sainte-Justine Research Center, CHU Sainte-Justine Hospital, University of Montreal, Montréal, Québec, Canada (Email: thanh-dung.le.1@ens.etsmtl.ca).

Rita Noumeir is with the Biomedical Information Processing Lab, École de Technologie Supérieure, University of Québec, Montréal, Québec, Canada.

Jérôme Rambaud, Guillaume Sans, and Philippe Juvet are with the CHU Sainte-Justine Research Center, CHU Sainte-Justine Hospital, University of Montreal, Montréal, Québec, Canada.

including vital signs, laboratory results, ventilator parameters, is updated every 5 minutes to 1 hour according to the variable sources [2]. Mostly, a significant data source of French clinical notes is currently stored. There are 7 caregiver notes/patient/day from 1386 patients (containing a dataset of more than 2.5×10^7 words). These notes are scribed extensively from admission notes and evaluation notes. Admission notes outline reasons for admission to intensive care units, historical progress of the disease, medication, surgery, and the patient's baseline status. Daily ailments and test results are described in evaluation notes, from which patient condition is evaluated and diagnosed later by doctors. However, these information sources are being used as clinical documentation for reporting and billing instead of clinical knowledge for predicting disease conditions or for decision support.

A. Problem Statement

One of the targets of the clinical decision support system in CHUSJ is to early diagnose acute respiratory distress syndromes (ARDS). Theoretically, it endeavors to improve the respiratory disease diagnosis for children by detecting the absence of “cardiac failure” as suggested by a board of experts in pediatric acute lung injury in [3]. Therefore, in such standard criteria for age, timing, the origin of edema, and chest imaging with an acute deterioration in oxygenation can be well explained by underlying cardiac disease. Then, correctly identifying cardiac failure is vital in the diagnosis and treating ARDS. This linked syndrome is diagnosed using many clinical information and exams, including laboratory tests or echocardiography tests. However, the patients' cardiac condition can be virtually found based on the stored clinical notes that synthesized all this information.

Generally, there is a list of golden indicators to classify the patient with cardiac failure. Those indicators could be either from the medical history, clinical exam, chest X-Ray interpretation, recent cardiovascular performance evaluation, or laboratory test results. Medication, such as Levosimendan, Milrinone, Dobutamine, is a surrogate to the gold standard. Its list can be retrieved from syringe pump data, prescriptions, and notes. If any medication from the three is present, there is certainly a cardiac failure. Besides, cardiovascular performance evaluation also highly contributes to indicate the cardiac failure diagnosis. One of the evaluations is ejection fraction (EF) $< 50\%$. EF refers to the percentage of blood pumped (or ejected) out of the ventricles with each contraction. It is a surrogate for left ventricular global systolic function,

TABLE I: The clinical knowledge representation in detecting cardiac failure

[Label]	Cardiac failure
[Attributes]	<p>1) Admission notes:</p> <p>a) Medical history: Levosimendan, Milrinone or Dobutamine.</p> <p>b) History of diagnosed terms: cardiomyopathie dilatee, choc cardiogenique, defaillance cardiaque gauche aigue, defaillance cardiaque gauche chronique, defaillance cardiaque post-operatorie (LCOS), surcharge liquidienne (hypervolemie), myocardite.</p> <p>2) Evaluation notes:</p> <p>a) Evolution par systeme (Cardiovascular): EF (ejection fraction < 50%) and/or SF (shortening fraction < 25%).</p> <p>b) Laboratory test result: pro-BNP ng/L (> 1000)</p>

defined as the left ventricular stroke volume divided by the end-diastolic volume. The other indicator for cardiovascular performance evaluation is shortening fraction (SF) < 25%. FR is the length of the left ventricle during diastole and systole. It measures diastolic/systolic changes for inter-ventricular septal dimensions and posterior wall dimensions. Finally, brain natriuretic peptide, known as pro-BNP ng/L > 1000, comes from laboratory test results being useful in the acute settings for differentiation of cardiac failure from pulmonary causes of respiratory distress. Pro-BNP is continually produced in small quantities in the heart and released in more substantial quantities when the heart needs to work harder.

Consequently, the clinical knowledge representation summarizes detail attributes, which are the main essential contribution to detect cardiac failure, shown in Table I. All notes are taken into account if they are encompassed by the information of the prescription history of Milrinone (mcg/kg/min), measurement notes of pro-BNP (ng/L), dilated cardiomyopathy, acute left cardiac failure, chronic cardiac failure, postoperative cardiac failure, coronary microvascular disorder history notes, notes of a measurement result of either EF (%) or SF (%). As a result, a patient is considered to have a cardiac failure if he/she has one of the criteria. Unfortunately, as all the mentioned information above that helps diagnose cardiac failure is not readily available electronically, we will develop a machine learning algorithm based on natural language processing (NLP) that automatically detects this desired concept label from clinical notes. Specifically, the algorithm can automatically see whether a patient has a cardiac failure or a healthy condition lacking gold indicators from the notes. Technically, in such a situation, the proposed algorithm can effectively learn a latent representation of clinical notes, which cannot be depicted by traditionally rule-based approaches.

B. Motivation

As proven in the recent study [4], the feasibility of employing machine learning for cardiac failure was extensively analyzed and confirmed. However, in our case, we are dealing with two challenges from clinical notes in French, and a limited amount of dataset size. Fig. 1. shows the main objective consisting of two sub-objectives which aim to overcome the mentioned limitations, as follows:

- Which representation learning approach should be used? The representation learning approach, which can retain

the words' semantic and syntactic analysis in critical care data, enriches the mutual information for the word representation by capturing word to word correlation.

- Which machine learning classifier should be employed? The machine classifier, which can influentially avoid the overfitting associated with machine learning rule by marginalizing over the model parameters instead of making point estimates of its values.

Section II-A and II-B will discuss the data preparation including data collection, data pre-processing from CHUSJ. Then, to solve the first sub-objective, section II-C will explore the possibilities of various clinical note representation learning employing different techniques. From then, we will continue to solve the second sub-objectives, section II-D will summarize different machine learning classifiers for the binary classifier. The results and discussion then will be discussed in section III. Finally, section IV provides concluding remarks.

II. MATERIALS AND METHODS

A. Clinical Narrative Data at CHUSJ

The data integration process has been successfully completed at the Pediatric Intensive Care Unit, CHUSJ, for more than 1300 patients. We only took information from two types of notes, including admission and evaluation notes. Primarily, we focused on medical background, history of the disease to admission, and cardiovascular evaluation. Furthermore, we only used notes for each patient's first stay within the first 24h since the admission. If a patient had more than one ICU stay, we only analyzed the first one. Two doctors from the CHUSJ (Dr. Jérôme Rambaud and Dr. Guillaume Sans) separately reviewed each patient's notes; then, each note was manually labeled "YES" or "NO" for positively cardiac failure or under a healthy condition, respectively. Finally, to avoid data contamination, we checked both the "patientID" and "careproviderID" to ensure that there were not any notes being simultaneously present in the training and the testing cohort.

Totally, we have 5444 single line of notes with 1941 positive cases (36% of total) and 3503 negative cases. Fig. 2 shows an example of clinical notes with labels, which are sorted as the top 10 longest length in total number of characters. Besides, average length of number of characters is 601, and 704 for the positive cases, and negative case, respectively. And, average length of number of digits is 25 and 26 for the positive cases, and negative case, respectively.

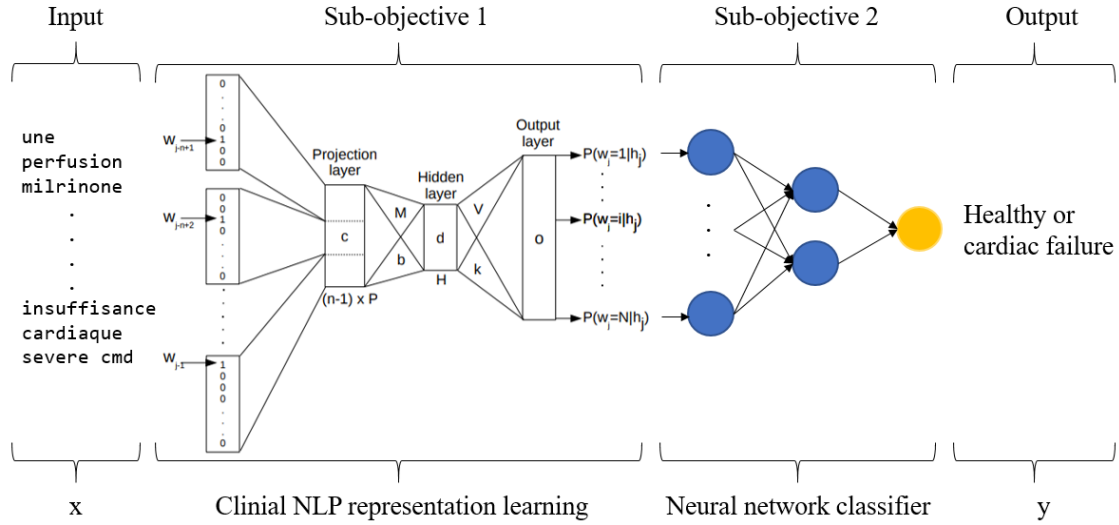


Fig. 1: The two objectives to learn clinical notes for detecting the desirable label.

	notes	label	len_notes
0	CIV par malalignement, CIA type II large, hypo...	no	100
1	Cardiopathie congénitale complexe cyanogène: o...	no	494
2	Née à terme, Grossesse et accouchement sans com...	yes	1056
3	Grossesse normale, aucun Rx Né à terme 38 sem ...	yes	135
4	CARDIOMYOPATHIE 1) S'est présenté le 28.04 à ...	yes	1412
5	Enfant jumeau, né à 35 semaines. Période néona...	no	1312
6	Naissance terme 40+6 semaines Grossesse s/p, A...	no	576
7	Né à 41 semaines, 1ère grossesse, pas complica...	no	779
8	Grossesse : découverte masse intracardiaque VD...	yes	1053
9	Naissance à terme Développement de Sx cardiaqu...	yes	392

Fig. 2: An examples of clinical notes from CHUSJ sorted by the longest length (number of characters).

	Positive freq	Negative freq	pos_precision	pos_freq_pct	pos_hmean
term					
de	11460	13500	0.459135	0.043645	0.079712
et	5180	5519	0.484157	0.019728	0.037911
à	4437	6803	0.394751	0.016898	0.032409
avec	3818	4680	0.449282	0.014541	0.028169
pas	3449	5335	0.392646	0.013135	0.025420
d	3381	4191	0.446513	0.012876	0.025031
en	2957	3250	0.476398	0.011262	0.022003
la	2577	3404	0.430864	0.009814	0.019191
l	2425	3655	0.398849	0.009235	0.018053
o	2343	1055	0.689523	0.008923	0.017618

Fig. 3: Clinical notes analyzing for stop words removing.

B. Data Pre-Processing

Generally, it is proven that if the preprocessing steps are well done, the result for the end-task will be improved [5]. Therefore, there are steps that were used as case lowering, and stop words removing. Fig. 3 shows the statistics for the list of top words removed. From the list, all these words are the definition in French, therefore, they do not contribute to the learning representation. Besides, all the notes are short narratives and the n-gram length distribution is shown in Fig. 4, the longest n-gram is over 400 words, but most of the n-gram length distribution is between 50 and 125 words. Then, the ratio of the number of samples/number of words per sample is much smaller than 1500, as given by a tutorial for small text classification from [6].

In addition, in medical expression, it is very important to pay attention to negation. First, the negation criteria from study [7] was used for detecting the negative meaning from French notes. Then, a negation technique is applied [8]: a term “neg_” is added as a prefix for a term. For example, a original notes as

“Patient explique qu’à ce moment là, il *n’était pas* capable de parler et l’air *ne passait pas* au niveau de sa gorge. Respiration plus rapide, mais état général préservé, parents *n’étaient pas* inquiets.” will be tagged with a negation as: “Patient explique qu’à ce moment là, il **neg_était** capable de parler et l’air **neg_passait** au niveau de sa gorge. Respiration plus rapide, mais état général préservé, parents **neg_étaient** inquiets.”

For the vital numeric values (heart rate, blood pressure, etc...), most of the NLP representation learnings cannot accommodate the numeric values effectively. Actually, most NLP models treat numeric values in text in the same way as other tokens, and it has proven that the pretrained token representations (word2vec) can naturally encode the numeric values [9]. Unfortunately, it required a large amount of data with specific labelling progress for this task, while the state-of-the-art for numerical reasoning results are much less better (47%) compared with the expert human performance (96.4%) in f1-score metric [10]. There is another study which only focus on how to extract the number not dealing with representation learning [11]. Because we have a limited data, we decide to

keep all numeric value for vital sign values (nearly 4% of the notes), and to apply the decoding for those number values. We performed four experiments to see the contribution from the numeric value into the feature space and the classifiers. Table II summarizes the four different approaches to decode the numeric values including (i) keeping all of the original numeric values and their units, (ii) removing all of the numeric values and their units, (iii) encoding the decimal into a string named dot, and (iv) decomposing into digits.

For the note visualization, we apply the ScatterText [12]. Totally, we have more than 580000 (n-grams) word count from the data shown in Fig. 5. The figure shows the most frequent words for the positive case in the upper right corner; the most frequent words for the negative cases in the lower left corner; and, all less frequent words for both cases are in the center. Besides, the top 20 words from the the positive cases and negative cases are presented in the right hand side. Their frequency distribution are also illustrated in Fig. 6 and Fig. 7, respectively. There are abbreviation for medical terms, whose descriptions and characteristics are summerized in Table III. For example, there are CIV (Communication intraventriculaire), CEC (Circulation extra-corporelle), CIA (Communication intra-auriculaire), FC (fréquence cardiaque), and IVRS (Infection des voies respiratoires supérieures). In cases of positive, we easily see that, most these terms following positively related to the cardidac malfuction: milrinone (milri), aorte, aortique, and valve. In contrast, such terms as urgence, ad, respiratorie, vers, toux, and ivrs are relatively contributed to the respiratory syndromes.

C. Clinical Natural Language Representation Learning

There is no doubt about the effectiveness of neural word embedding. In the study [13], the authors confirm that word2vec representation has been successfully used for various disease classification from medical notes. Especially for the French clinical notes, the study [14] show that word2vec and GloVec were effective on embedding the clinical notes. And, the word2vec had the highest score on 3 out of 4 rated tasks (analogy-based operations, odd one similarity, and human validation), particularly regarding the skip-gram architecture. In addition, studies [15]–[18] confirm that conventional approaches bag-of-words (BoW), term frequency-inverse document frequency (TF-IDF) have better performance than other deep learning techniques on smaller corpus with long texts in clinical note corpus. Therefore, we will evaluate the effectiveness of two conventional representation approaches including BoW, TF-IDF and the word2vec neural embedding model.

1) *Bag-of-Words*: A bag-of-words model [19], or BoW for short, is a representation of text that describes the occurrence of words within a document. Technically, if documents have similar content, they will be similar. It extracts features from the text by considering each word count as a feature from a vocabulary of known words. There is a theoretical analysis for understanding the BoW model [20], it proves that the success of BoW representation is not by using a heuristic clustering process but by a statistical process and based on statistical consistency. However, in the BoW representation, any two

different words drawn from the vocabulary are treated equal if they are assigned with the same topic; in reality, it is neglecting much correlation information among words.

2) *TF-IDF*: The TF-IDF, first introduced in [21], stands for term frequency (TF) \times inverse document frequency (IDF). TF-IDF weighting is commonly used in information retrieval for text mining. The intuition is that term importance increases with the term's frequency in the text, but the term's frequency neutralizes it in the domain of interest. Given a collection of terms $t \in T$ that appear in a set of N documents $d \in D$, each of length n_d , tf-idf weighting is computed as follows:

$$tf_{t,d} = \frac{f_{t,d}}{n_d} \quad (1)$$

$$idf_t = \log \frac{N}{df_t} \quad (2)$$

$$W_{t,d} = tf_{t,d} \times idf_t \quad (3)$$

where $f_{t,d}$ is the frequency of term t in document d , and df_t is the document frequency of term t , that is, the number of documents in which term t appears. Several variations and adjustments were offered including normalizing $tf_{t,d}$ and optional weighting schemes.

Actually, TF-IDF and its variations do not only focuses on the basic statistical relation of note representation. But, its strong theoretical arguments are explained for its heuristic [22], and as a probabilistic theoretical explanation [23]. And, it is shown that if TF-IDF is treated carefully with the bias, it will manifest the better performance in representation learning.

3) *Neural Word Embeddings*: The neural word embedding was introduced in [24], and named word2vec model. Each word will be represented by two sets of vectors, u_w and v_w . u_w is used when word w is the context word, and v_w is used when word w is the center word. Using these two vectors, the probability for the central target word w_o and context word w_c for each word w will look like this:

$$p(w_o | w_c) = \frac{\exp(u_o^\top v_c)}{\sum_{i \in V} \exp(u_i^\top v_c)} \quad (4)$$

The key to the success of word2vec is that it can compute the logarithmic conditional probability for the central word vector and the context word vector. Consequently, its computation obtains the conditional likelihood for all the words in the dictionary given the context word w_c , and trained by a neural network.

$$\log p(w_o | w_c) = u_o^\top v_c - \log \left(\sum_{i \in V} \exp(u_i^\top v_c) \right) \quad (5)$$

where $V = \{0, 1, \dots, |V| - 1\}$ is the vocabulary index. After the training, for any word in the dictionary with index w_i , we are going to get its two word vector sets v_i and u_i . In applications of natural language processing, the central target word vector in the skip-gram model is generally used as the representation vector of a word.

In this study, we adapted the instruction of how to generate a good neural word embeddings [25]. Especially, the three

TABLE II: A summary of experiments dealing with vital sign numeric values.

Experiment	Description	Illustration*
Exp_1	Keep all of the numeric values and units	[vg, sévèrement, dilate, 64.8, mm, diastole, 58.3, mm, systole]
Exp_2	Remove all of the numeric values and units	[vg, sévèrement, dilate, diastole, systole]
Exp_3	Encoding the decimal point into string (DOT)	[vg, sévèrement, dilate, 64, dot, 8, mm, diastole, 58, dot, 3, mm, systole]
Exp_4	Decomposing numeric values into digits	[vg, sévèrement, dilate, 6_tens, 4_ones, 8_tenths, mm, diastole, 5_tens, 8_ones, 3_tenths, mm, systole]

*The original notes are “VG sévèrement dilaté (64.8mm en diastole et 58.3mm en systole)”

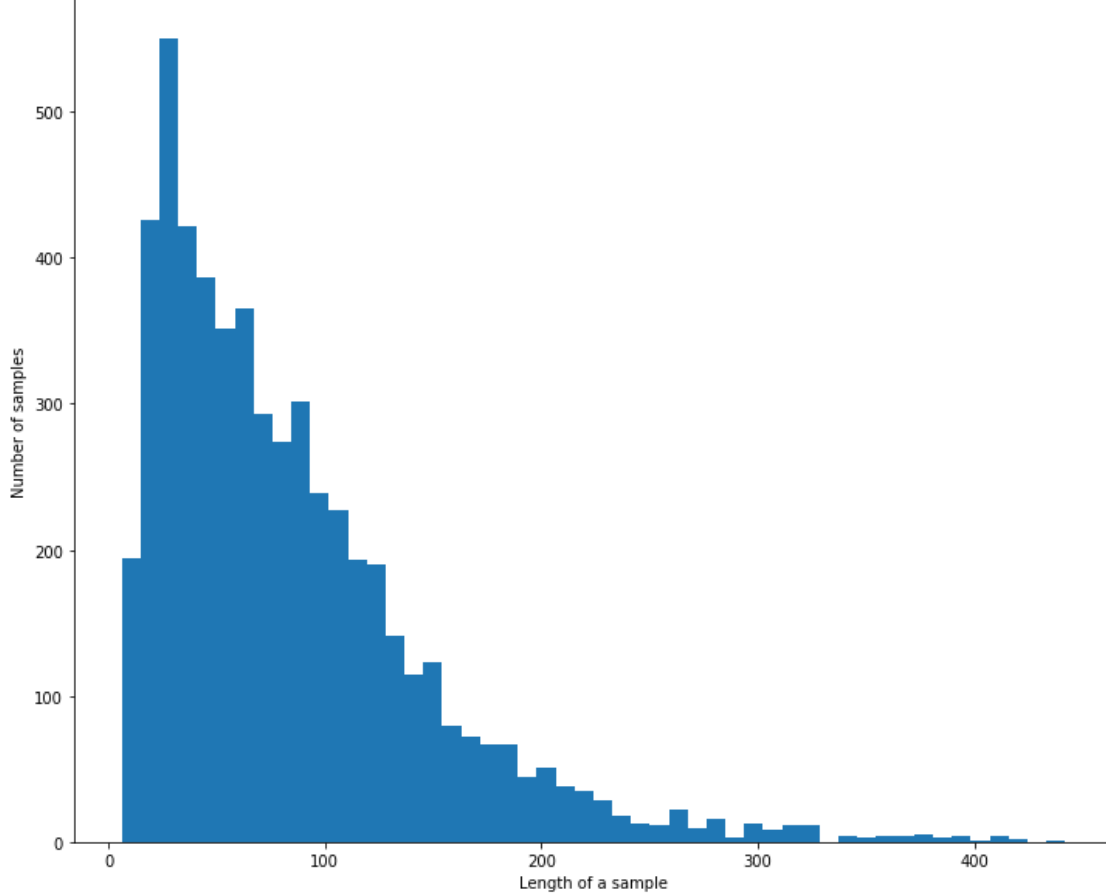


Fig. 4: The distribution of length of notes in CHUSJ dataset.

critical components in training word embeddings including the model, corpus, and training parameters are well customized. In addition, hyper-parameter choices are very important in neural word embedding systems; therefore, we also controlled the effects of data size and frequency range on distributional semantic models based on the recommendations from [26].

D. Machine Learning Classifiers

Deep learning has proven its superiority to representation learning and classification problems from various data structured such as medical imaging, time series data, clinical natural language [27]. Unfortunately, not all cases can apply the deep learning, especially, with the limited amount of data.

When the ratio value for the number of samples/number of words per sample is small (< 1500), a small MLP-NN that takes n-grams as input performs better or at least as well as deep learning-based sequence models [6]. Besides, a MLP-NN

is simple to define and understand, and it takes less computation time than sequence models. A detailed explanation of using a MLP-NN in medical analysis can be seen from [28].

Furthermore, study [29] evaluated different classifiers performance, including discriminative and generative learning approaches, particularly for small datasets. And, it confirms that the discriminative logistic regression algorithm has a lower asymptotic error, while the generative Naive Bayes classifier converges more quickly. Therefore, in this study, we decide to go with three different machine learning classifiers logistic regression, Gaussian Naive Bayes, and MLP-NN.

Here we consider a binary classification problem. Given n training samples $D = (x_1, y_1), \dots, (x_n, y_n)$ where $x_i \in \mathcal{R}^p$ is a p-dimensional column vector and label $y_i \in \{0, 1\}$.

1) *Logistic Regression (LR)*: LR uses a logistic function to model the probability of a binary dependent variable (particular class or event) such as unhealthy/healthy. Therefore, it is widely used in most medical fields [30]. We first write the

TABLE III: Important Abbreviations for Medical Terms

Abbreviations	Descriptions	Characteristics
CIV	Communication intraventriculaire	Cardiac malformation
CEC	Circulation extracorporelle	Treatment for cardiac failure
CIA	Communication intraauriculaire	Cardiac malformation
FC	Fréquence cardiaque	Cardiac frequency
IVRS	Infection des voies respiratoires supérieures	Virus responsible for respiratory distress
SOP	Salle d'opération	Operations
PO	Per os (by mouth)	Feeding

logistic function as follows:

$$p(x; w) = p(y = 1 | x; w) = \frac{1}{1 + \exp(-w^T x)} \quad (6)$$

where w is the weight vector of coefficients, and $p()$ is a sigmoid function. Here, we assume that the n training examples are generated independently. Finally, we thus can obtain the following log-likelihood.

$$\begin{aligned} \ell(w) &= \sum_{i=1}^n \log p(y_i | x_i; w) \\ &= \sum_{i=1}^n \{y_i w^T x_i - \log(1 + \exp(w^T x_i))\} \end{aligned} \quad (7)$$

2) *Gaussian Naive Bayes (GaussianNB)*: GaussianNB algorithm for classification is a set of supervised learning algorithms based on applying Bayes' theorem with the "naive" assumption of conditional independence between every pair of features given the value of the class variable. Bayes' theorem states the following relationship, given class variable Y and dependent feature vector x_1 through x_n :

$$p(y | x_1, \dots, x_n) = \frac{p(y)p(x_1, \dots, x_n | y)}{p(x_1, \dots, x_n)} \quad (8)$$

Using the naive conditional independence assumption that

$$p(x_i | y, x_1, \dots, x_{i-1}, x_{i+1}, \dots, x_n) = p(x_i | y), \quad (9)$$

for all i , this relationship is simplified to

$$p(y | x_1, \dots, x_n) = \frac{p(y) \prod_{i=1}^n p(x_i | y)}{p(x_1, \dots, x_n)} \quad (10)$$

Since $p(x_1, \dots, x_n)$ is constant given the input, we can use the following classification rule: $P(y | x_1, \dots, x_n) \propto p(y) \prod_{i=1}^n p(x_i | y)$. Then

$$\hat{y} = \arg \max_y p(y) \prod_{i=1}^n P(x_i | y) \quad (11)$$

and we can use the maximum a posteriori estimation to estimate $p(y)$ and $p(x_i | y)$; the former is then the relative frequency of class y in the training set. However, the difference between GaussianNB and naive Bayes classifiers is mainly based on the distribution of $p(x_i | y)$. The likelihood of the features is assumed to be Gaussian with mean μ and variance σ^2 for GaussianNB [31]:

$$p(x_i | y) = \frac{1}{\sqrt{2\pi\sigma_y^2}} \exp\left(-\frac{(x_i - \mu_y)^2}{2\sigma_y^2}\right) \quad (12)$$

3) *Multilayer Perceptron Neural Network (MLP-NN)*: The earliest work in the field of "neural network" is attempted to understand, model and emulate neurological function and learning in brains [33]. Since then, a commonly used neural network is the MLP-NN. In an MLP-NN, the neurons are structured into layers, consisting of at least three layers, namely the input layer, hidden layer or layers, and an output layer [34]. Typical MLP-NN networks are feedforward neural networks where the computation is carried out in a single direction from input to output.

As shown in Fig. 8, x_i is the i^{th} input (axon from a neuron) to an input neuron, and a weight w_i is the effect of the i^{th} synapse on neural network. Then, the total effect of the input on the synapse from the cell body is:

$$\sum_i^n w_i x_i + b \quad (13)$$

Following this affine transformation of the weighted sum of its input, a nonlinear activation function $f(\cdot)$ is defined for the cell output. In general, this nonlinear activation function $f(\cdot)$ enables the MLP-NN to learn and solve nonlinear problems. It is proven that ReLU activation in combination with stochastic gradient descent optimization algorithm shows a better convergence and gives a better optimization in small MLP-NN [35]. Therefore, we apply the ReLU activation for the hidden layer as shown below:

$$f(\cdot) = ReLU(\alpha) = \max(\alpha, 0) \quad (14)$$

Besides, based on the analysis for the selection of proper neural network sizes and architectures [36], the structure of an MLP-NN used in this study consists of $L = 3$ layers where layer 1 is the input layer, layer 3 is the output layer, and layer 2 is the hidden layer. The total number of neurons in the hidden layer is $N_t = 100$ neurons. In addition, we also applied dropout [37] ($p=0.25$) and GlorotNormal kernel initializer [38] to prevent the neural network from overfitting.

Recently, there has been a outstanding achievement of machine learning-based NLP for clinical text knowledge extraction [39], [40]. However, significant concerns are remaining in the trajectory of clinical NLP deployment. First, one limitation is how to learn the semantic and syntactic structure of feature extraction for clinical texts. The information combination

(semantic and syntactic structure) will lead to conflation deficiency when a word level is tightened to the semantic and syntactic level. Especially in cases of the clinical notes in language other than English, the challenge is more difficult to mitigate [41]. Hence, the target is cognizance enrichment during the combination process instead of losing crucial information. Second, supervised learning algorithms for classification have reached their highest potentiation because they only learn the discrepancy between instances from actual data distribution and synthesized instances generated by the learning rules. However, the underlying probability distribution of clinical text is not known; thus, the classification is deficient [42].

Currently, all the state-of-the-art for machine learning-based NLP are focusing on deep learning for clinical notes to solve the two limitations above [43], [44]. For example, to predict the cardiac failure, deep learning (Convolution Neural Network-based) shows its exceptional performance, F1 score of 0.756, to the conventional approach (Random Forest) with F1 score of 0.674 [45]. And, study [13] shows the best performance to predict multiple chronic diseases (cerebral infraction, pulmonary infection and coronary atherosclerotic heart disease) by the combination of word2vec and deep learning with the average accuracy and F1 score exceeded 90%. However, deep learning architectures generally work well for large scale data sets with short texts, while do not outperform conventional approaches (BoW) on smaller corpus with long texts in clinical note corpus [16]. In addition, automatic methods to extract New York heart association classification from clinical notes [17] confirm that machine-learning method, support vector machine with n-gram features, achieve the best performance at 93% F-measure. Also, study [15] proved the extraordinary achievement by the combination of BoW and Naive Bayes classifier on clinical notes for accessing hospital readmission offering an area under the curve (AUC) of 0.690. This study again confirms that with the small dataset TF-IDF and BoW have better performance than other techniques on coronary microvascular dysfunction classification [18].

In conclusion, a large enough amount of data is needed to have a good generalization capability of deep learning, while this data availability requirement is not always provided [46]. Even, study [47] proposes an alternative approach to deal with both large and small amount of dataset. However, the authors either remove all of the vital sign numeric values or they did not mention how to deal with numeric values.

III. EXPERIMENTAL RESULTS

Fig. 9 illustrates the conceptual framework for conducting the experiments. To implement our model, we used the scikit-learn library [48] and Keras [49] in Python. The data was divided into 70% training and 30% testing. To make our results more consistent, we used the k -fold cross validation ($k = 5$) [50]; each dataset was divided into k subsets called folds, the model was trained on $k - 1$ of them and tested on left out. This process was repeated k times and the results were averaged to get the final one. Furthermore, we also employed the univariate feature selection with sparse data from the learning representation feature space. This selection process works by

selecting the best features based on univariate statistical tests named SelectKBest algorithms, which removes all but the K highest scoring features.

To deal with the imbalance, we apply the balance technique Bayes Imbalance Impact Index (BI^3) for the classifiers [51]. An extensive evaluation of different sampling techniques and neural network architectures recently confirms that the effect of sampling and the the neural network architecture strongly depends on the dataset, and then the results become less consistent [52]. Consequently, there are two reasons that we considered for not being interested in sampling approaches (i) characteristics of our clinical notes data, namely small training size, large number of features, and correlations between features. Also, it is concluded that there is no clear winner between oversampling and undersampling to compensate for the class imbalance, if we do not carefully take into account factors such as class distribution, class prevalence and features correlations in medical decision making [53]; (ii) sampling methods focused only on the imbalance ratio but ignored the lack of information for the minority class, overlap, and disjuncts, in addition to the lack of representation, which cannot be learned because it is not present in the training set [54]. In summary, the BI^3 for the whole data set \mathcal{D} is calculated by averaging over all Individual Bayes Imbalance Impact Index IBI^3 on the minority class.

$$BI^3(\mathcal{D}) = \frac{1}{N_p} \sum_{(x_i, y_i) \in \mathcal{D}, y_i=+1} IBI^3(x_i) \quad (15)$$

N_p is the numbers of samples in the positive class, and the IBI^3 is the difference between the normalized posterior probabilities of the imbalanced and the balanced case.

$$IBI^3 = \frac{f'_p(x)}{f_n(x) + f'_p(x)} - \frac{f_p(x)}{f_n(x) + f_p(x)} \quad (16)$$

$f_p(x)$ and $f_n(x)$ are the posterior scores for the positive class and the negative one, respectively. $f'_p(x)$ is proportional to the minority class posterior probability under the estimated balanced case. If IBI^3 is small, the influence of the imbalance on x is irrelevant. Therefore, it can measure how much a single minority class sample is influenced by the imbalance.

To effectively assess the performance of our method, metrics including accuracy, precision, recall (or sensitivity), and F1 score were used [55]. These metrics are defined as follows:

$$\begin{aligned} \text{Accuracy (acc)} &= \frac{TP + TN}{TP + TN + FP + FN} \\ \text{Precision (pre)} &= \frac{TP}{TP + FP} \\ \text{Recall/Sensitivity (rec)} &= \frac{TP}{TP + FN} \\ \text{F1-Score (f1)} &= \frac{2 * \text{Precision} * \text{Recall}}{\text{Precision} + \text{Recall}} \end{aligned}$$

where TN and TP stands for true negative and true positive respectively, and they are the number of negative and positive patients that are classified correctly. Whereas FP and FN represents false positive and false negative respectively and

they represent the number of positive and negative patients that was wrongly predicted.

Table IV presents the results of our method. First, among four experiments for dealing with numeric values, the experiment 3 yields the best performance. By encoding the decimal point into a string “DOT”, it has helped the learning representation process retain the information from numeric values from clinical notes. It is also interesting to mention that when we keep all numeric values and do nothing (experiment 1), the results are worse than if we remove all the numbers and their units (experiment 2). Experiment 4 confirms that if the numbers are extensively encoded, it will have the opposite effect on the result, that is lowering the performance.

The combination of TF-IDF and MLP-NN always outperforms other combinations with all overall performance, and are the most stable in all circumstances. Without any feature selection, the proposed framework yielded an overall classification performance with acc, pre, rec, and f1 of 85% and 84%, 85%, and 84%, respectively. Also, the representation matrix from the TF-IDF above is sparse because every word is treated separately. Hence, the semantic relationship between separated entity is ignored, which would cause information loss. Therefore, if the feature selection (SelectKBest) was well applied and tuned, it could accomplish the improvement up to 3-4% for each evaluation in the overall performance. Consequently, it achieves the best performance with 89%, 89%, 88%, 88% for acc, pre, rec, and f1, respectively.

Furthermore, with the limited amount of data, the BoW and TF-IDF have proven their capacity to better retain information from clinical note representation. Especially, the TF-IDF could exhibit a better performance when used on short narratives (approximately 80 words per each example in our case). While the neural word embeddings also showed their potentiality to deal with learning representation for clinical notes. Although the difference between these performances was not significant, it may be more effective when the corpus size is scale-up. When the data is small, neural network-based models can underperform, but they are more reliable when size and frequency are increased [56].

Besides, with the same learning presentation approach (BoW, TF-IDF, or neural word embeddings), the LR classifiers had better performance than GaussianNB classifiers. The results align with the theoretical and experimental analysis from [29], [57]. LR performs better with smaller data size because it effectively approaches its lower asymptotic error from the initial learning steps. However, MLP-NN models always dominated with their best generalization. They have achieved their capacity of generalization because the misclassification probability can be reduced and can be trained closer to optimal points which cannot be achieved with simple algorithms [58].

We also tested with the model CamemBERT, which is specifically a transformer-based language model for the french language [59]. It is motivated by the success of a Bidirectional Encoder Representations from Transformers (BERT) for natural language understanding [60]. Unfortunately, the result was not as good as expected; we could only achieved an accuracy less than 60%, even though, we applied the drop-out technique as recommended from the study [61]. We

continued investigating with the simpler Transformer, which is solely based on attention mechanisms through the connection of the encoder and decoder [62], and it is implemented by Keras [63]. The result has achieved a decent performance in comparison with advanced and complicated BERT-based models. However, it is still far below the performance from the simple MLP-NN, where the highest precision and recall are continually fluctuating at around 80% as shown in Fig. 10, and 11. This again confirms the limitation of transformers for clinical natural language processing classification task. One of the limitations is to correctly identify labels in clinical text depending on keywords or phrases rather than understanding the contextual meaning of sequences of a given text [64].

IV. CONCLUSION

We have employed both learning representation and machine learning algorithms to tackle the French clinical natural language processing for detecting a cardiac failure in children at CHUSJ. We have extensively conducted and analyzed a conceptual framework, from the contextual input to the contextual output, in detecting a patient’s health condition. Our numerical results have confirmed the feasibility of the proposed design by combining TF-IDF and MLP-NN; the proposed mechanism could also be improved with the feature selection from the learning representation vector space. Consequently, the proposed framework yields an overall classification performance with 89% accuracy, 88% recall and 89% precision.

We assumed that the numeric values do not significantly contribute to the classifier. Instead of losing them, we addressed different decoding approaches for numeric values in our future work. By encoding the decimal point into a string “DOT”, it has helped the learning representation process retain the information from the numerical values in clinical notes.

With the MLP-NN learning algorithm, we can train closer to optimal architectures which cannot be trained with simple algorithms (LR, GaussianNB, Random Forest, Multinomial Naive Bayes, and Support Vector Machine). Although BERT-based models are currently known as the state-of-the-art in natural language processing tasks, the final results suggest that these Transformer-based methods perform less effective than existing alternatives.

Future research should consider the potential effects of numerical values alongside with unstructured notes more carefully. Ideally, an algorithm, which can automatically extract and represent the numerical values from the clinical notes, should be investigated for further validation. This may be considered a promising aspect of using a semantic neural network to determine the boundaries and extract the numerical values from the text. For the feasibility, a generative learning approach has a great potential for an evaluation [10], [65].

ACKNOWLEDGMENT

The clinical data was provided by the CHU Sainte-Justine Research Center, University of Montreal. The authors thank Dr. Sally Al Omar, Dr. Michaël Sauthier, Dr. Rambaud Jérôme and Dr. Sans Guillaume for their data support of this research.

TABLE IV: Summarization of experiments performance evaluation


Representation		ML	Exp_1				Exp_2				Exp_3				Exp_4			
			acc	pre	rec	f1	acc	pre	rec	f1	acc	pre	rec	f1	acc	pre	rec	f1
W/o Feature Selection	BoW	LR	0.80	0.77	0.81	0.79	0.81	0.80	0.82	0.81	0.82	0.80	0.83	0.81	0.82	0.80	0.81	0.8
		GaussianNB	0.77	0.72	0.80	0.76	0.78	0.76	0.81	0.78	0.79	0.78	0.81	0.79	0.79	0.76	0.80	0.78
		MLP-NN	0.81	0.78	0.81	0.79	0.81	0.80	0.82	0.81	0.81	0.81	0.84	0.82	0.81	0.81	0.82	0.81
	TF-IDF	LR	0.81	0.79	0.82	0.8	0.78	0.76	0.79	0.77	0.81	0.78	0.81	0.79	0.77	0.75	0.77	0.76
		GaussianNB	0.79	0.75	0.81	0.78	0.77	0.74	0.80	0.77	0.78	0.75	0.81	0.78	0.76	0.74	0.80	0.77
		MLP-NN	0.81	0.80	0.82	0.81	0.84	0.82	0.85	0.83	0.85	0.84	0.85	0.84	0.82	0.81	0.81	0.81
	Embedding	LR	0.74	0.72	0.79	0.75	0.76	0.74	0.79	0.76	0.78	0.75	0.82	0.78	0.76	0.73	0.77	0.75
		GaussianNB	0.72	0.71	0.77	0.74	0.76	0.71	0.79	0.75	0.76	0.73	0.80	0.76	0.75	0.72	0.72	0.72
		MLP-NN	0.74	0.74	0.76	0.75	0.77	0.76	0.78	0.77	0.79	0.77	0.80	0.78	0.77	0.73	0.78	0.75
W/ Feature Selection	BoW	LR	0.80	0.81	0.78	0.79	0.81	0.81	0.79	0.80	0.78	0.78	0.77	0.77	0.80	0.80	0.79	0.79
		GaussianNB	0.80	0.81	0.78	0.79	0.80	0.78	0.79	0.78	0.78	0.79	0.77	0.78	0.80	0.81	0.78	0.79
		MLP-NN	0.80	0.79	0.80	0.79	0.82	0.82	0.81	0.81	0.83	0.82	0.83	0.82	0.84	0.83	0.84	0.83
	TF-IDF	LR	0.76	0.71	0.79	0.75	0.82	0.81	0.83	0.82	0.83	0.82	0.83	0.82	0.78	0.78	0.80	0.79
		GaussianNB	0.80	0.78	0.80	0.79	0.81	0.82	0.79	0.80	0.81	0.81	0.82	0.81	0.79	0.78	0.79	0.78
		MLP-NN	0.84	0.84	0.85	0.84	0.87	0.86	0.88	0.87	0.89	0.89	0.88	0.88	0.85	0.84	0.84	0.84
	Embedding	LR	0.80	0.78	0.80	0.79	0.80	0.79	0.80	0.79	0.82	0.82	0.83	0.82	0.81	0.78	0.79	0.78
		GaussianNB	0.77	0.76	0.78	0.77	0.79	0.79	0.79	0.79	0.81	0.81	0.80	0.8	0.79	0.78	0.78	0.78
		MLP-NN	0.80	0.79	0.80	0.79	0.80	0.80	0.80	0.80	0.82	0.81	0.81	0.81	0.80	0.79	0.80	0.79

This work was supported by a scholarship from Fonds de recherche du Québec – Nature et technologies (FRQNT) to Thanh-Dung Le, and the funds from Natural Sciences and Engineering Research Council (NSERC) and Institut de valorisation des données (IVADO).

REFERENCES

- [1] A. E. Johnson and et. al., "Machine learning and decision support in critical care," *Proceedings of the IEEE. Institute of Electrical and Electronics Engineers*, vol. 104, no. 2, p. 444, 2016.
- [2] M.-P. Matton and et. al., "Databases and computerized systems in picu: Electronic medical record in pediatric intensive care: Implementation process assessment," *Journal of pediatric intensive care*, vol. 5, no. 3, p. 129, 2016.
- [3] P. A. L. I. C. C. Group et al., "Pediatric acute respiratory distress syndrome: consensus recommendations from the pediatric acute lung injury consensus conference," *Pediatric critical care medicine: a journal of the Society of Critical Care Medicine and the World Federation of Pediatric Intensive and Critical Care Societies*, vol. 16, no. 5, p. 428, 2015.
- [4] C. R. Olsen, R. J. Mentz, K. J. Anstrom, D. Page, and P. A. Patel, "Clinical applications of machine learning in the diagnosis, classification, and prediction of heart failure," *American Heart Journal*, 2020.
- [5] S. Kannan and et. al., "Preprocessing techniques for text mining," *International Journal of Computer Science & Communication Networks*, vol. 5, no. 1, pp. 7–16, 2014.
- [6] Google, "Machine learning guides text classification," <https://developers.google.com/machine-learning/guides/text-classification/step-2-5>, 2019-10-21, online; accessed 2020-09-30.
- [7] L. Deléger and et. al., "Detecting negation of medical problems in french clinical notes," in *Proceedings of the 2nd ACM sighth international health informatics symposium*, 2012, pp. 697–702.
- [8] S. Dubois and et. al., "Learning effective representations from clinical notes," *stat*, vol. 1050, p. 15, 2017.
- [9] E. Wallace and et. al., "Do nlp models know numbers? probing numeracy in embeddings," in *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, 2019, pp. 5310–5318.
- [10] D. Dua and et. al., "Drop: A reading comprehension benchmark requiring discrete reasoning over paragraphs," in *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 2019, pp. 2368–2378.
- [11] T. Cai and et. al., "Extraction of emr numerical data: an efficient and generalizable tool to extend clinical research," *BMC medical informatics and decision making*, vol. 19, no. 1, p. 226, 2019.
- [12] J. Kessler, "Scattertext: a browser-based tool for visualizing how corpora differ," in *Proceedings of ACL 2017, System Demonstrations*, 2017, pp. 85–90.
- [13] X. Shi and et. al., "Multiple disease risk assessment with uniform model based on medical clinical notes," *IEEE Access*, vol. 4, pp. 7074–7083, 2016.
- [14] E. Dymant and et. al., "Word embedding for the french natural language in health care: comparative study," *JMIR medical informatics*, vol. 7, no. 3, p. e12310, 2019.
- [15] A. Agarwal and et. al., "A natural language processing framework for assessing hospital readmissions for patients with copd," *IEEE journal of biomedical and health informatics*, vol. 22, no. 2, pp. 588–596, 2017.
- [16] Y. Li and et. al., "Early prediction of acute kidney injury in critical care setting using clinical notes," in *2018 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*. IEEE, 2018, pp. 683–686.
- [17] R. Zhang and et. al., "Automatic methods to extract new york heart association classification from clinical notes," in *2017 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*. IEEE, 2017, pp. 1296–1299.
- [18] S. J. Fodeh and et. al., "Classification of patients with coronary microvascular dysfunction," *IEEE/ACM transactions on computational biology and bioinformatics*, vol. 17, no. 2, pp. 704–711, 2019.
- [19] T. Joachims, "Text categorization with support vector machines: Learning with many relevant features," in *European conference on machine learning*. Springer, 1998, pp. 137–142.
- [20] Y. Zhang and et. al., "Understanding bag-of-words model: a statistical framework," *International Journal of Machine Learning and Cybernetics*, vol. 1, no. 1-4, pp. 43–52, 2010.
- [21] G. Salton and et. al., "On the specification of term values in automatic indexing," Cornell University, Tech. Rep., 1973.
- [22] S. Robertson, "Understanding inverse document frequency: on theoretical arguments for idf," *Journal of documentation*, 2004.
- [23] L. Havrilt and et. al., "A simple probabilistic explanation of term frequency-inverse document frequency (tf-idf) heuristic (and variations motivated by this explanation)," *International Journal of General Systems*, vol. 46, no. 1, pp. 27–36, 2017.
- [24] T. Mikolov and et. al., "Distributed representations of words and phrases and their compositionality," in *Advances in neural information processing systems*, 2013, pp. 3111–3119.
- [25] S. Lai and et. al., "How to generate a good word embedding," *IEEE Intelligent Systems*, no. 6, pp. 5–14, 2016.
- [26] O. Levy and et. al., "Improving distributional similarity with lessons learned from word embeddings," *Transactions of the Association for Computational Linguistics*, vol. 3, pp. 211–225, 2015.
- [27] D. W. Otter and et. al., "A survey of the usages of deep learning for natural language processing," *IEEE Transactions on Neural Networks and Learning Systems*, 2020.
- [28] A. Pasini, "Artificial neural networks for small dataset analysis," *Journal of thoracic disease*, vol. 7, no. 5, p. 953, 2015.
- [29] A. Jordan and et. al., "On discriminative vs. generative classifiers: A comparison of logistic regression and naive bayes," *Advances in neural information processing systems*, vol. 14, no. 2002, p. 841, 2002.
- [30] J. Tolles and et. al., "Logistic regression: relating patient characteristics to outcomes," *Jama*, vol. 316, no. 5, pp. 533–534, 2016.

- [31] T. Hastie and et. al., *The elements of statistical learning: data mining, inference, and prediction*. Springer Science & Business Media, 2009.
- [32] A. Karparthy, "Neural networks 1," <https://cs231n.github.io/neural-networks-1>, 2020-04-01, online; accessed 2020-09-30.
- [33] e. a. McCulloch, "A logical calculus of the ideas immanent in nervous activity," *The bulletin of mathematical biophysics*, vol. 5, no. 4, pp. 115–133, 1943.
- [34] H. B. Demuth and et. al., *Neural network design*. Martin Hagan, 2014.
- [35] Y. Li and et. al., "Convergence analysis of two-layer neural networks with relu activation," *Advances in Neural Information Processing Systems*, vol. 30, pp. 597–607, 2017.
- [36] D. Hunter and et. al., "Selection of proper neural network sizes and architectures—a comparative study," *IEEE Transactions on Industrial Informatics*, vol. 8, no. 2, pp. 228–240, 2012.
- [37] N. Srivastava and et. al., "Dropout: a simple way to prevent neural networks from overfitting," *The journal of machine learning research*, vol. 15, no. 1, pp. 1929–1958, 2014.
- [38] X. Glorot and et. al., "Understanding the difficulty of training deep feed-forward neural networks," in *Proceedings of the thirteenth international conference on artificial intelligence and statistics*. JMLR Workshop and Conference Proceedings, 2010, pp. 249–256.
- [39] T. Young and et. al., "Recent trends in deep learning based natural language processing," *IEEE Computational Intelligence Magazine*, vol. 13, no. 3, pp. 55–75, 2018.
- [40] S. Sheikhalishahi and et. al., "Natural language processing of clinical notes on chronic diseases: systematic review," *JMIR Medical Informatics*, vol. 7, no. 2, p. e12239, 2019.
- [41] A. Névélol and et. al., "Clinical natural language processing in languages other than english: opportunities and challenges," *Journal of biomedical semantics*, vol. 9, no. 1, pp. 1–13, 2018.
- [42] I. Spasic and et. al., "Clinical text data in machine learning: Systematic review," *JMIR Medical Informatics*, vol. 8, no. 3, p. e17984, 2020.
- [43] T. Pham, T. Tran, D. Phung, and S. Venkatesh, "Predicting healthcare trajectories from medical records: A deep learning approach," *Journal of biomedical informatics*, vol. 69, pp. 218–229, 2017.
- [44] A. Rajkomar, E. Oren, K. Chen, A. M. Dai, N. Hajaj, M. Hardt, P. J. Liu, X. Liu, J. Marcus, M. Sun, et al., "Scalable and accurate deep learning with electronic health records," *NPJ Digital Medicine*, vol. 1, no. 1, p. 18, 2018.
- [45] X. Liu and et. al., "Predicting heart failure readmission from clinical notes using deep learning," in *2019 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*. IEEE, 2019, pp. 2642–2648.
- [46] A. Paleyes and et. al., "Challenges in deploying machine learning: a survey of case studies," *arXiv preprint arXiv:2011.09926*, 2020.
- [47] V. Kumar and et. al., "Ensembling classical machine learning and deep learning approaches for morbidity identification from clinical notes," *IEEE Access*, 2020.
- [48] F. Pedregosa and et. al., "Scikit-learn: Machine learning in Python," *Journal of Machine Learning Research*, vol. 12, pp. 2825–2830, 2011.
- [49] F. Chollet and et. al., "keras," 2015.
- [50] R. Kohavi and et. al., "A study of cross-validation and bootstrap for accuracy estimation and model selection," in *Ijcai*, vol. 14, no. 2. Montreal, Canada, 1995, pp. 1137–1145.
- [51] Y. Lu and et. al., "Bayes imbalance impact index: A measure of class imbalanced data set for classification problem," *IEEE transactions on neural networks and learning systems*, vol. 31, no. 9, pp. 3525–3539, 2019.
- [52] C. Steinmeyer and et. al., "Sampling methods and feature selection for mortality prediction with neural networks," *Journal of Biomedical Informatics*, vol. 111, p. 103580, 2020.
- [53] M. A. Mazurowski and et. al., "Training neural network classifiers for medical decision making: The effects of imbalanced datasets on classification performance," *Neural networks*, vol. 21, no. 2-3, pp. 427–436, 2008.
- [54] S. Visa and et. al., "Issues in mining imbalanced data sets-a review paper," in *Proceedings of the sixteen midwest artificial intelligence and cognitive science conference*, vol. 2005. sn, 2005, pp. 67–73.
- [55] C. Goutte and et. al., "A probabilistic interpretation of precision, recall and f-score, with implication for evaluation," in *European conference on information retrieval*. Springer, 2005, pp. 345–359.
- [56] M. Sahlgren and et. al., "The effects of data size and frequency range on distributional semantic models," in *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, 2016, pp. 975–980.
- [57] C. Perlich and et. al., "Tree induction vs. logistic regression: A learning-curve analysis," 2003.
- [58] P. L. Bartlett, "The sample complexity of pattern classification with neural networks: the size of the weights is more important than the size of the network," *IEEE transactions on Information Theory*, vol. 44, no. 2, pp. 525–536, 1998.
- [59] L. Martin and et. al., "Camembert: a tasty french language model," in *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, 2020, pp. 7203–7219.
- [60] J. Devlin and et. al., "Bert: Pre-training of deep bidirectional transformers for language understanding," in *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 2019, pp. 4171–4186.
- [61] K. Pasupa and et. al., "A comparison between shallow and deep architecture classifiers on small dataset," in *2016 8th International Conference on Information Technology and Electrical Engineering (ICITEE)*. IEEE, 2016, pp. 1–6.
- [62] A. Vaswani and et. al., "Attention is all you need," in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, 2017, pp. 6000–6010.
- [63] A. Nandan, "Text classification with transformer," https://keras.io/examples/nlp/text_classification_with_transformer/, 2020-05-10, online; accessed 2020-09-30.
- [64] S. Gao and et. al., "Limitations of transformers on clinical text classification," *IEEE journal of biomedical and health informatics*, 2021.
- [65] T. Berg-Kirkpatrick and et. al., "An empirical investigation of contextualized number prediction," in *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020, pp. 4754–4764.

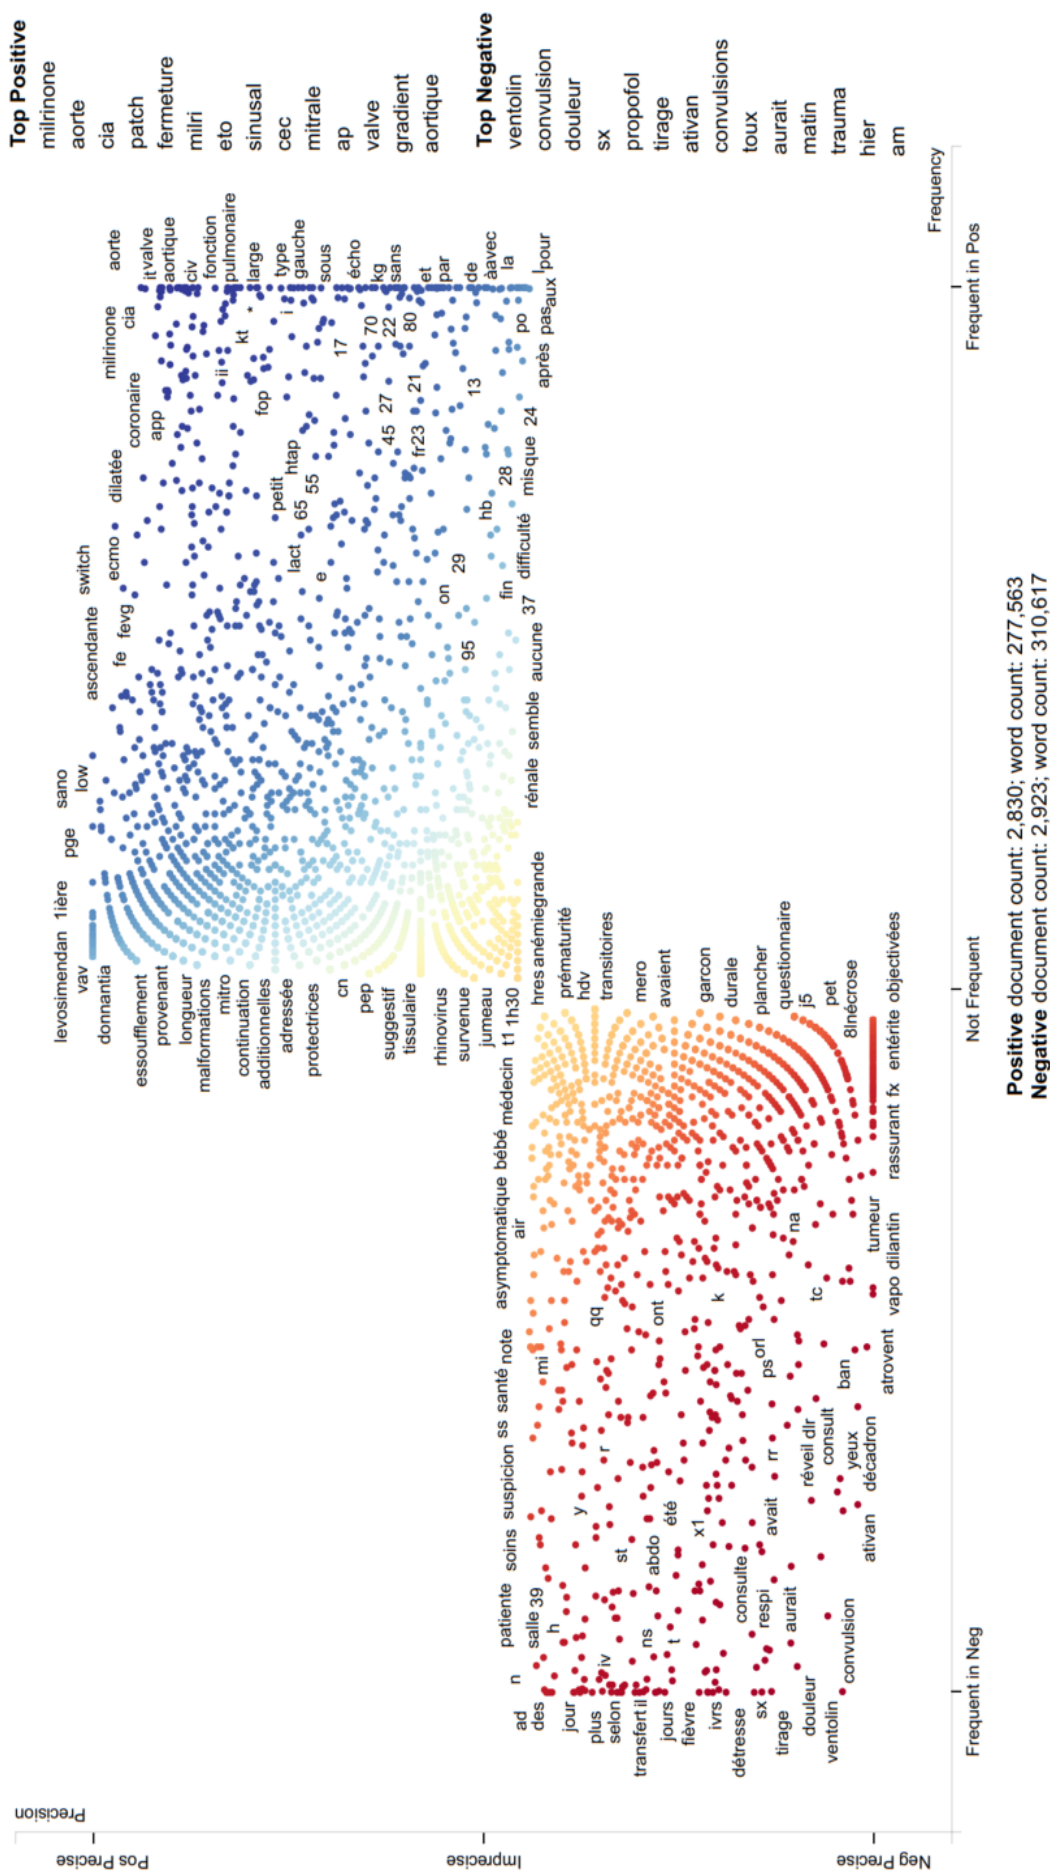

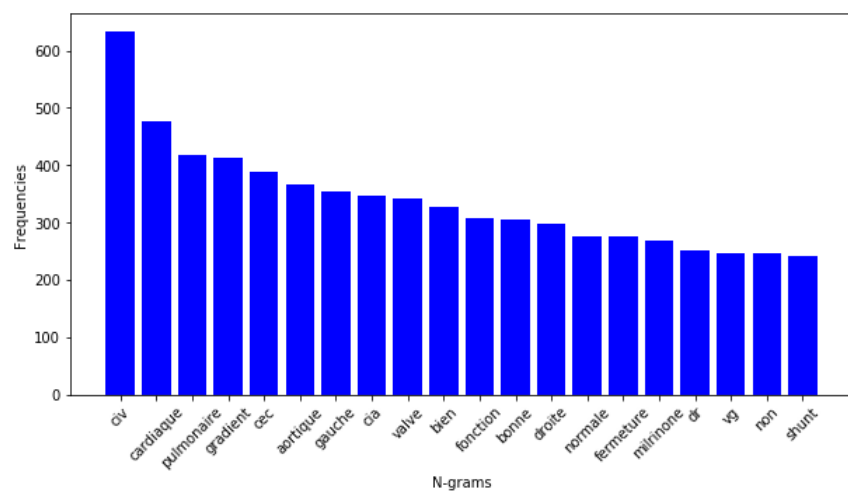


Fig. 6: Frequency distribution of n-grams for positive cases (Top 20 n-grams).

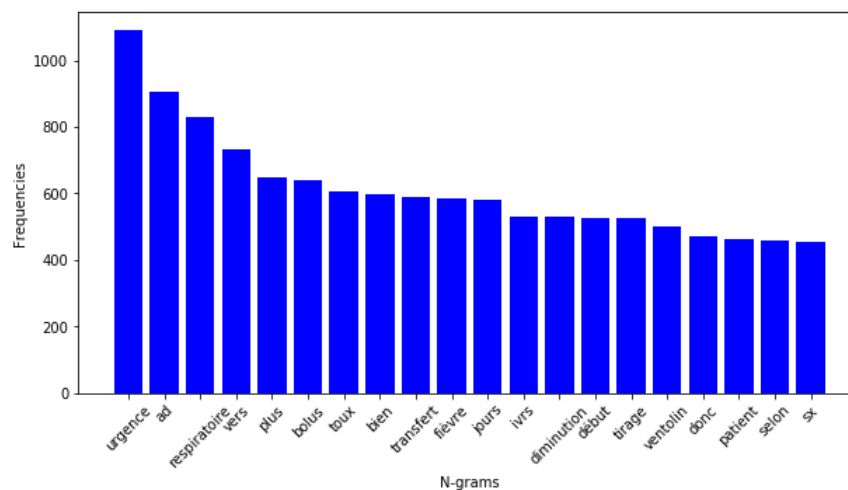


Fig. 7: Frequency distribution of n-grams for negative cases (Top 20 n-grams).

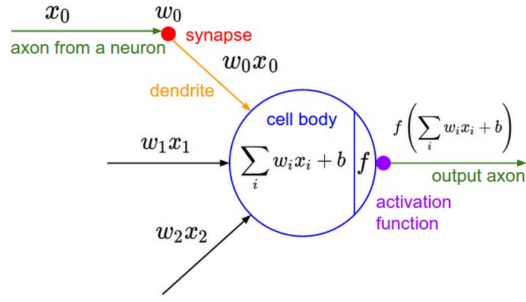


Fig. 8: An mathematical model for a biologically inspired neural network [32].

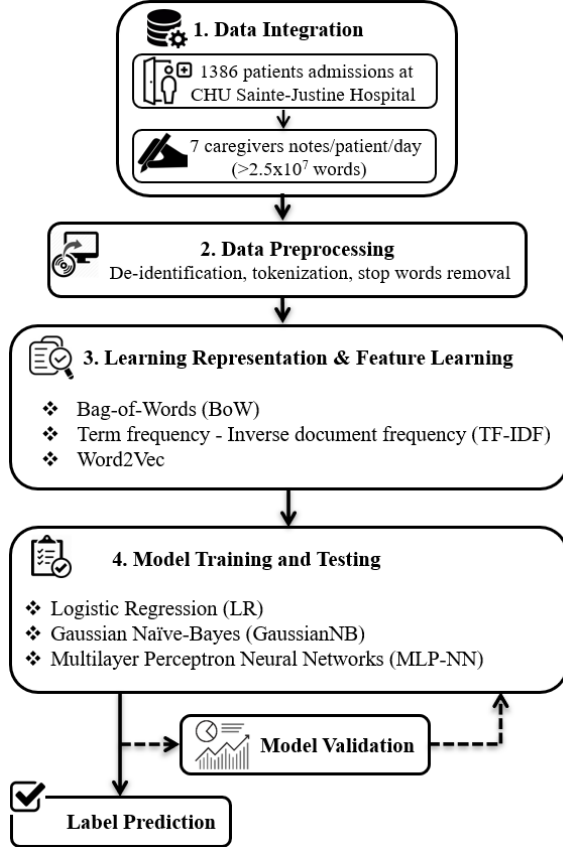


Fig. 9: An overview of the proposed methodology to detect cardiac failure from clinical notes at CHUSJ.

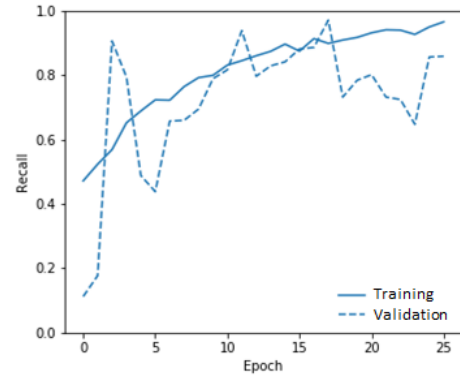


Fig. 11: Recall performance based on the Transformer configuration.

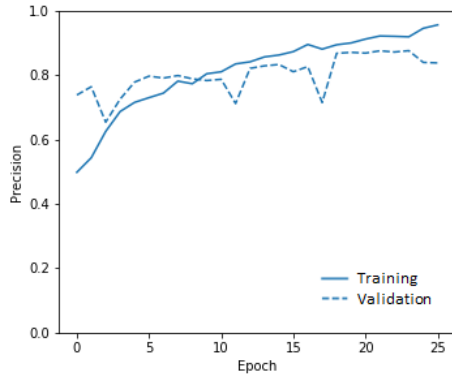


Fig. 10: Precision performance based on the Transformer configuration.