

Nearly-frustration-free ground state preparation

Matthew Thibodeau^{1,2} and Bryan K. Clark^{1,2}

¹Department of Physics, University of Illinois at Urbana-Champaign, IL 61801, USA

²IQUIST and Institute for Condensed Matter Theory and NCSA Center for Artificial Intelligence Innovation, University of Illinois at Urbana-Champaign, IL 61801, USA

Solving for quantum ground states is important for understanding the properties of quantum many-body systems, and quantum computers are potentially well-suited for solving for quantum ground states. Recent work [14] has presented a nearly optimal scheme that prepares ground states on a quantum computer for completely generic Hamiltonians, whose query complexity scales as δ^{-1} , i.e. inversely with their normalized gap. Here we consider instead the ground state preparation problem restricted to a special subset of Hamiltonians, which includes those which we term “nearly-frustration-free”: the class of Hamiltonians for which the ground state energy of their block-encoded and hence normalized Hamiltonian $\alpha^{-1}H$ is within δ^y of -1, where δ is the spectral gap of $\alpha^{-1}H$ and $0 \leq y \leq 1$. For this subclass, we describe an algorithm whose dependence on the gap is asymptotically better, scaling as $\delta^{y/2-1}$, and show that this new dependence is optimal up to factors of $\log \delta$. In addition, we give examples of physically motivated Hamiltonians which live in this subclass. Finally, we describe an extension of this method which allows the preparation of excited states both for generic Hamiltonians as well as, at a similar speedup as the ground state case, for those which are nearly frustration-free.

1 Introduction

Steady progress in the development of quantum computing hardware has spurred interest in possible applications of these machines. One natural candidate is the ground state preparation problem: given a many-body Hamiltonian H , prepare its ground state in a quantum register. Given a quantum many-body system, physicists are often interested in the properties of its ground state because this state predominates at low temperature; preparing ground states using a quantum computer is an important first step to studying them synthetically, with full control over their generating Hamiltonian.

To prepare the ground state of H in a quantum register, one must distinguish it from all other states in the spectrum. Since, by definition, the ground state is separated in energy from the rest of the spectrum by the spectral gap Δ , it should be no great surprise that Δ is a key parameter controlling the complexity of quantum algorithms that prepare ground states. For example, both phase estimation [13] combined with amplitude amplification [2], as well as quantum singular value transformation (QSVT) [9], can find the ground state in time $O(1/\Delta)$. The latter is more efficient with respect to the error ϵ , with a cost which goes as $\log(\epsilon)$ instead of $(1-\epsilon)$ [7]. In fact, the QSVT is known to be optimal with respect to query complexity for preparing the ground state in a quantum register for generic Hamiltonians [14]. The query complexity measures the number of times that H must be accessed and roughly corresponds to the circuit depth. The optimality of this procedure comes from a reduction to Grover’s algorithm [10].

Matthew Thibodeau: mt24@illinois.edu

Bryan K. Clark: bkclark@illinois.edu

For QSVT, beyond Δ and ϵ , there is an additional dependence on the overlap $\gamma = \langle \phi | \mu \rangle$ with the starting ansatz, and an additional term α related to the cost of loading (i.e. block-encoding) H into a quantum computer; roughly, for generic local lattice models, a block-encoding with $\alpha \propto N_{\text{sites}}$ is easily obtained [17]. In fact, both in our algorithms and those previously given, Δ always appears in the complexity normalized to $\Delta/\alpha \sim \Delta/N$; Section 3 covers the details of this normalization.

In many situations, one might know some special properties that H may satisfy which then may evade this general optimality result. Examples of potential properties could include k -locality, frustration-free ground states, or stoquastic Hamiltonians [3, 19]. It is useful, then, to find quantum circuits that prepare the ground state of H after assuming that H is a member of some restricted subclass of all hermitian operators, or to bound the minimum depth of such circuits.

One of the most important of these subclasses is that of frustration-free Hamiltonians, where the ground state of H is simultaneously a ground state of all the operators which sum up to make H . A naive application of the algorithm from ref. [14] still scales as $1/\Delta$ even in the frustration free case. Nonetheless, there is a straightforward way to do better for many frustration free Hamiltonians using spectral gap amplification [19] or uniform spectral amplification [15]. These two approaches take Hamiltonians which are frustration free when decomposed into operator terms which are projectors or linear combination of unitaries respectively and generates a new Hamiltonian with the same ground state which has an $O(1)$ gap. Given a standard (block-encoded) description of our original Hamiltonian, one query of the new Hamiltonian takes $O(1/\sqrt{\Delta})$ queries of the original Hamiltonian. Using the optimal ground-state generation on the new Hamiltonian then takes $O(1)$ time (given that the gap is $O(1)$) leading to a total number of queries (and circuit depth) which scales as $O(1/\sqrt{\Delta})$, significantly improving over the generic result of $1/\Delta$. For the case of a local Hamiltonian, this also gives a speedup from $O(N)$ to $O(\sqrt{N})$ via the α -dependence of the complexity. The apparent violation of the optimality relation is not surprising, as the optimality theorem of [14] relies on a specific Hamiltonian H_G that is extremely frustrated.

The improvement of the frustration free case from $1/\Delta$ to $1/\sqrt{\Delta}$ motivates asking whether there is some intermediate class of H between fully frustration-free and the generic case where a speedup might be achieved, as well as a corresponding proof of optimality. Further, while this all applies to ground state problems, there are analogous questions one can ask about excited states.

2 Summary of Results

In this work, we address the question of finding a method that prepares a ground state of H for a class of Hamiltonians that are near frustration-free, giving a scaling which continuously tunes between the $1/\Delta$ of the generic case to the $1/\sqrt{\Delta}$ for the frustration-free case. While our primary goal will be to show this for ground state problems, we will also extend the work of ref. [14] to preparing low-lying excited states and furthermore show how they can similarly be accelerated in nearly frustration-free situations. To accomplish these goals, the property of nearly frustration-free Hamiltonians that we use is that the ground state energy of the Hamiltonian is close to the frustration-free energy. We then provide a lower-bound on the complexity of preparing ground states of such Hamiltonians, showing that the scaling with Δ of our algorithm is optimal up to logarithmic factors.

To be more precise, we need to use the language of *block encoding* [4, 17]. A block encoding of H is a unitary operator U that has a scaled copy of the Hamiltonian $\alpha^{-1}H$ as its upper-left corner. The existence of a block-encoding U of H is a very powerful tool because it allows the application quantum signal processing [5, 9, 11, 16, 17], which lets us transform H by a suitable polynomial $p(x)$, which acts on the spectrum of H by $p(H) = \sum_{\lambda} p(\lambda) |\lambda\rangle \langle \lambda|$.

Now let us define a parameter y in terms of the other parameters of our problem:

Definition 1. Let H_0 be a Hermitian operator on n qubits with ground state energy μ_0 and gap Δ , and let U be a block-encoding of $\alpha^{-1}H_0$ (with $\alpha \geq \|H_0\|$, the spectral norm of H_0) using m extra qubits. Set $H = \alpha^{-1}H_0$, and let $\delta = \alpha^{-1}\Delta$ and $\mu = \alpha^{-1}\mu_0$; note that $-1 \leq \mu \leq 1$. Given these parameters, there is a y such that $0 \leq y \leq 1$ and $\mu \leq -1 + 2\delta^y$.

The relationship between α , spectral norm $\|H_0\|$, and the ground state energy μ will play an important role in the efficiency of our algorithm. In particular, the actual promise we require of H is that there exists a block-encoding where α is close to the magnitude of the ground state energy $|\mu|$. This closeness is encoded in the value of the parameter y which specifies the distance between μ and its minimum possible value of -1 , and we develop an algorithm for the ground state preparation problem such that the query complexity to U is controlled by y .

Proposition 1. *Let H_0 and U be as specified in Definition 1, and let $|\phi\rangle$ satisfy $|\langle\phi|\mu_0\rangle| = \gamma$. Then the query complexity of preparing the ground state of H_0 to precision ϵ starting with the ansatz $|\phi\rangle$, as measured by queries to U and U^\dagger , is*

$$O\left(\frac{\delta^{y/2-1}}{\gamma} \log^{5/2} \frac{1}{\epsilon} \log \frac{1}{\delta}\right) \quad (1)$$

To accomplish this, as in [14], we will also apply a polynomial of H , $p(H) \approx |\mu\rangle\langle\mu|$, which is approximately the projection onto the ground state $|\mu\rangle$. Note that the polynomial we apply and that of ref [14], though closely related, differs in an important way which is necessary to achieve this improved algorithm. In particular, $p(x)$ is necessarily a quickly-oscillating function of x near the ground state energy so as to filter out the first excited state. The key improvement for our polynomial is to shift the location of this oscillation from $x = 0$ to outer edges of the domain $[-1, 1]$ which allows a reduction in the required degree of p and therefore a reduction in the query complexity.

As an example, in the case that H_0 is frustration-free when decomposed into a linear combination of unitaries, there exists a block-encoding U such that $\alpha = |\mu_0|$, so that $\mu = -1$ and $y = 1$. Then, our complexity results agree with that achieved by combining uniform spectral amplification [15] with the standard approach of ref. [14], giving that the ground state can be prepared with complexity $O(1/\sqrt{\delta})$. In addition, when μ is close enough to -1 and $y > 0$, we find an intermediate scaling between $1/\sqrt{\delta}$ and $1/\delta$.

In addition to providing an improved algorithm, we also show that the asymptotic dependence of the query complexity on δ is optimal, up to a factor of $\log \delta$, for any Hamiltonians which satisfy only the properties of Definition 1.

Proposition 2. *Let H_0 be as specified in Definition 1. If $\gamma = \Omega(1)$ and $\delta \rightarrow 0+$, then the query complexity of preparing its ground state is $\Omega(\delta^{y/2-1})$.*

This is proved through a reduction to Grover's algorithm, using a suitably transformed version of the Hamiltonian $H(1/2)$ in Theorem 10 of [14].

3 Block Encodings, Polynomial Approximation and Degree Reduction

As stated above, to prepare the ground state we will form a quantum circuit that encodes a projector onto $|\mu_0\rangle$, accurate up to some error ϵ . To do so we will perform quantum signal processing on a block-encoding of $\alpha^{-1}H_0$ for some normalization α . We say that U is an (α, m, ϵ) -block-encoding of H_0 if

$$\|(\langle 0^m| \otimes I)U(|0^m\rangle \otimes I) - \alpha^{-1}H_0\|_2 \leq \epsilon \quad (2)$$

i.e. that U is a unitary operator using m extra qubits beyond those used by $H = \alpha^{-1}H_0$, and the restriction of U to the $|0^m\rangle$ -flagged subspace is ϵ -close in operator norm to H . Given a block-encoding, we can form a polynomial transformations of H using the following theorem:

Theorem 1 ([9], Theorem 2). *Let U be an $(\alpha, m, 0)$ -block-encoding of a Hermitian matrix H_0 . Let $p \in \mathbf{R}[x]$ be a degree- l even or odd real polynomial with $l > 0$ so that $|p(x)| \leq 1$ for any $x \in [-1, 1]$. Then there exists a $(1, m+1, 0)$ -block-encoding \tilde{U} of $p(\alpha^{-1}H_0)$ using l queries of U , U^\dagger , and $O((m+1)l)$ other primitive quantum gates.*

The theorem makes clear that the degree l of the polynomial transformation p is the key driver of circuit complexity, and the idea of this work is to show that for some class of H , the required l for projection into the ground state can be systematically reduced.

The basic tools of quantum signal processing are these polynomial transformations of the input H , most often polynomial approximations of analytic functions. That holds true for our application, where the function at hand is a regulated version of the unit step function which we will take to be $\Theta_k(x) = \frac{1}{2}(1 + \operatorname{erf} kx)$ for $k > 0$.

The key to achieving a speedup over the general case is by exploiting a feature of Chebyshev approximations on the interval $x \in [-1, 1]$: quickly-oscillating functions can be approximated (to a given precision) more efficiently when their oscillation occurs near the endpoints $x = \pm 1$. In particular, the Chebyshev approximation of the shifted step function $\Theta_k(x+1)$ can be truncated at a lower degree than that of $\Theta_k(x)$ while maintaining the same desired precision. We will choose k such that, given an error ϵ , the error function is within ϵ of the step function outside of a region of width δ :

$$|\Theta_k(x) - \Theta(x)| \leq \epsilon \quad |x| \geq \delta/2 \quad (3)$$

The details of the approximation are made precise by the following Lemma, which adapts Lemma 16 from [15].

Lemma 1. *Fix $\epsilon, \delta > 0$ and η such that $|\eta| < 1 - \delta$, and let $k = \frac{\sqrt{2}}{\delta} \log^{1/2} \frac{1}{2\pi\epsilon^2}$. Then the shifted error function $f(x) = \operatorname{erf} k(x - \eta)$ can be approximated to error ϵ on the interval $x \in [-1, 1]$ with a polynomial $p(x)$ such that $|p(x)| \leq 1$ for $|x| \leq 1$ and p is of order $n = O(\frac{\sqrt{1-|\eta|}}{\delta} \log \frac{\sqrt{1-|\eta|}}{\delta} \log^{3/2} \frac{1}{\epsilon}) = \tilde{O}(\frac{\sqrt{1-|\eta|}}{\delta})$, where the \tilde{O} notation hides polylogarithmic factors in ϵ, δ and η .*

Proof. Expand $f(x) = \sum_j a_j T_j(x)$ in the Chebyshev basis; we will form $p(x)$ by truncating this series. As stated in [15], the truncation error for $p_n(x) = \sum_{j=0}^n a_j T_j(x)$ is

$$\max_{x \in [-1, 1]} |f(x) - p(x)| \leq \frac{2M\rho^{-n}}{\rho - 1} = O(\epsilon) \quad M = \max_{z \in E_\rho} |f(x)| \quad (4)$$

for any $\rho > 1$, where ρ is the parameter of the Bernstein ellipse $E_\rho = \{z : z = \frac{1}{2}(\rho e^{i\theta} + \rho^{-1} e^{-i\theta})\}$. Using the same error estimates given in [15], we may bound

$$M \leq \max_{z \in E_\rho} \exp \operatorname{Re}(-(k(z - \eta))^2) \quad (5)$$

Over the range $0 \leq \theta < 2\pi$, the exponent $\alpha = \operatorname{Re}(k(z + \eta))^2$ achieves its maximum value of

$$\alpha_0 = \frac{k^2}{4\rho^2(1 + \rho^4)}(\rho^2 - 1)^2(1 - 2\eta^2\rho^2 + \rho^4) \quad (6)$$

If we choose $\rho = 1 + a$ and expand around small a , then we find that $\alpha_0 = 2k^2(1 - \eta^2)a^2 + O(a^3)$. Requiring that $\alpha_0 = O(1)$ fixes the magnitude of a to

$$a = O\left(\frac{1}{\sqrt{k^2(1 - \eta^2)}}\right) = O\left(\frac{\delta}{\sqrt{1 - \eta^2} \log^{1/2} 1/\epsilon}\right) \quad (7)$$

after substituting in $k = O(\delta^{-1} \log^{1/2}(1/\epsilon))$. Note that so long as $|\eta| < 1 - \delta$, which is always true, a is indeed asymptotically small and scales at least as strongly as $O(\sqrt{\delta})$. We are interested in the case where $|\eta|$ is near 1, so we may set $\sqrt{1 - \eta^2} = O(\sqrt{1 + \eta} \sqrt{1 - \eta}) = O(\sqrt{1 - |\eta|})$. Thus, the approximation error from (4) is

$$\epsilon = O(a^{-1} e^{-na}) \implies n = O\left(\frac{\sqrt{1 - |\eta|}}{\delta} \log \frac{\sqrt{1 - |\eta|}}{\delta} \log^{3/2} \frac{1}{\epsilon}\right) \quad (8)$$

$$= \tilde{O}\left(\frac{\sqrt{1 - |\eta|}}{\delta}\right) \quad (9)$$

as desired. \square

To make use of this result, we will always put the location of the shift between the ground state energy μ and the first excited state $\mu + \delta$, so that $\eta = \mu + \delta/2$. In particular, if $\mu = -1 + O(\delta)$, then the degree is $n = \tilde{O}(\frac{1}{\sqrt{\delta}})$. Essentially, if the location μ of the unit step is close to -1 (relative to the width δ) then the dependence of n on δ can be reduced by up to a square-root factor relative to the unshifted case where $n = \tilde{O}(\frac{1}{\delta})$.

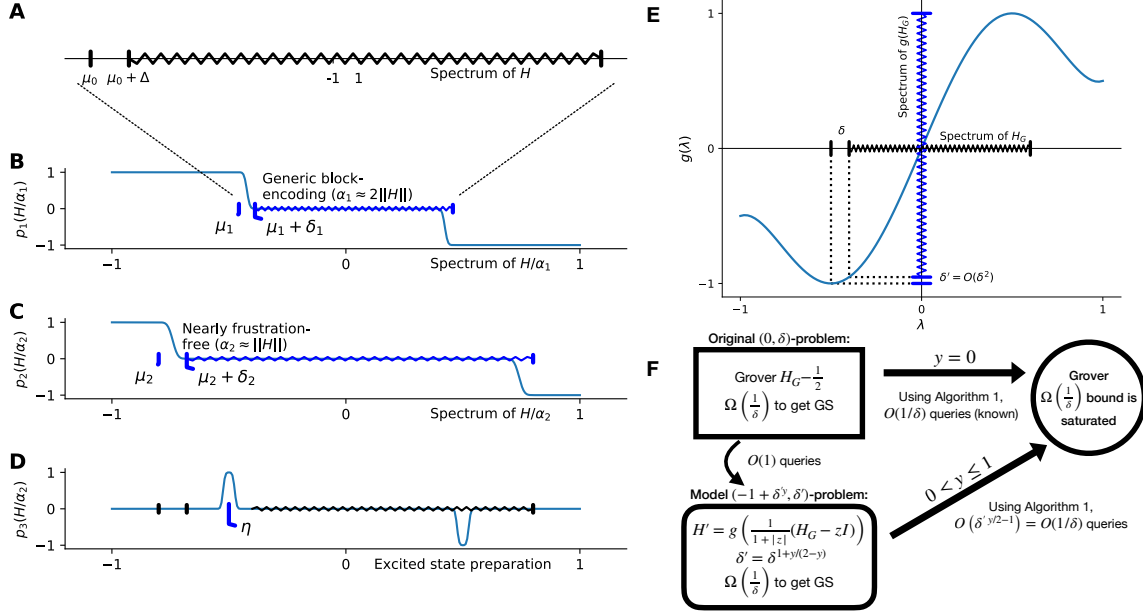


Figure 1: In A, the spectrum of H , the Hamiltonian whose ground state $|\mu_0\rangle$ we would like to prepare. To block-encode, H must be normalized to fit its spectrum in $[-1, 1]$ as shown in B and C, along with the polynomial functions $p_1(H/\alpha_1)$ and $p_2(H/\alpha_2)$ that increase the effective gap to $\Omega(1)$. In B, the normalization α_1 is such that $\mu_1 = \mu_0/\alpha_1$ is far from -1 compared to the normalized gap $\delta_1 = \Delta/\alpha_1$, while in C another normalization α_2 gives us $\mu_2 < -1 + \sqrt{\delta_2}$. Because Chebyshev polynomials oscillate faster near the endpoints of the unit interval, p_2 requires a lower degree than does p_1 . D shows the analogous process for preparing excited states. In E, we show the process of generating $g(\frac{1}{1+|z|})(H_G - zI)$, with z defined below, whose spectrum is shown on the vertical axis. This defines a model (μ, δ) -problem that we use to show optimality. Although its ground state is close to -1 , note that the new gap is asymptotically smaller. Diagram F shows the logical flow of the optimality proof for Proposition 2. The original Grover Hamiltonian with gap $\delta = \frac{2}{\sqrt{N}}$ must take $\Omega(1/\delta)$ time to solve. Using this Hamiltonian we show optimality of our algorithm for all $0 \leq y \leq 1$. Optimality of $y = 0$ follows directly from the top arrow as the algorithm solves the $y = 0$ problem optimally (this optimality was already known from previous works [14]). For all other y , we map H_G to H' , with gap $\delta^{1+y/(2-y)}$, which when solved by our algorithm finds the marked element of Grover's in time $1/\delta$, demonstrating optimality for all y .

4 Projecting to the Ground State

By using the Chebyshev approximation of $f(x)$ from Lemma 1 as our projector, we can apply this speedup to the ground state preparation problem, identifying μ with the (normalized) ground state energy and δ with the spectral gap. Because QSP works best with polynomials of definite parity, we need to do the projection in two steps. First, using the odd component of $p(x)$, we generate a new

“effective gap” in the spectrum of size $\delta' = 1 + O(\epsilon)$; this has query complexity $\tilde{O}(\frac{\sqrt{1+\mu+\delta/2}}{\delta})$. Second, we use the method of [14] to project into the ground state; this has complexity $\tilde{O}(\frac{1}{\delta'}) = O(1)$. We compose these two quantum circuits and thus multiply their complexities, for a final query complexity that has a dependence on μ and δ of $\tilde{O}(\frac{\sqrt{1+\mu+\delta/2}}{\delta})$. This algorithm furnishes a proof of Proposition 1 when we have $\mu = -1 + \delta^y$ for some $0 \leq y \leq 1$.

Proof. Proof of Proposition 1. Fix H_0 and its $(\alpha, m, 0)$ block-encoding U_1 , and denote $p_{\text{odd}} = \frac{1}{2}(p(x) - p(-x))$ for the order- n polynomial p defined in Lemma 1. Given U_1 , there is a $(1, m+1, 0)$ block-encoding U_2 of $p_{\text{odd}}(H)$ that uses n queries to U_1 and U_1^\dagger as well as $O((m+1)n)$ other primitive quantum gates [9]. By construction, $p(\mu) \leq -1 + O(\epsilon)$ and $|p(\lambda)| = O(\epsilon)$ for any eigenvalue with $\lambda > \mu$, so the spectral gap of $p_{\text{odd}}(H)$ is now $\Omega(1)$. Thus, we may use the algorithm of [14] to project into the ground state $|\mu\rangle$ using $O(\frac{1}{\gamma} \log \frac{1}{\epsilon})$ queries to U_2 , or

$$O\left(\frac{n}{\gamma} \log \frac{1}{\epsilon}\right) = O\left(\frac{1}{\gamma} \delta^{y/2-1} \log^{5/2} \frac{1}{\epsilon} \log \frac{1}{\delta}\right) = \tilde{O}\left(\frac{1}{\gamma} \delta^{y/2-1}\right) \quad (10)$$

queries to U_1 and U_1^\dagger , as desired. \square

5 Optimality of the Algorithm

The algorithm of Proposition 1 achieves the optimal dependence of its query complexity on δ and μ , up to a factor of $\log \delta$, in the case where the starting ansatz is good i.e. $\gamma = \Omega(1)$. This lower bound is formalized by Proposition 2, and we prove it by adapting the optimality argument presented in [14] and thus reducing unstructured search to the ground state preparation problem. We will focus on a “Grover Hamiltonian” H_G defined as follows: given a Hilbert space of dimension N , define the usual marker oracle U_t and Grover diffusion operator D as

$$U_t = I - 2|t\rangle\langle t| \quad D = I - 2|u\rangle\langle u| \quad |u\rangle = \frac{1}{\sqrt{N}} \sum_s |s\rangle \quad (11)$$

The Hamiltonian $H_G = \frac{1}{2}D + \frac{1}{2}U_t$ encodes in its ground state $|\mu\rangle \propto |u\rangle + |t\rangle$ the solution $|t\rangle$ of the corresponding unstructured search problem; the spectral gap is $\delta = \frac{2}{\sqrt{N}}$. Thus, for any chosen (small) $\delta > 0$, one can choose a large enough N such that H_G has gap $O(\delta)$; this fixes the ground state energy of H_G as $\mu = -\delta/2$. We take the starting ansatz to be $|u\rangle$, which gives us $\gamma = \langle u|\mu\rangle \approx \frac{1}{\sqrt{2}} + O(1/\sqrt{N}) = \Omega(1)$.

Our algorithm from Proposition 1 works with ground state energies that are near -1 and, hence, a ground state energy very close to 0 doesn’t achieve any speedup relative to the generic case. One first naive attempt to prove this lower bound is to simply shift the Hamiltonian so the ground state is closer to -1. This will improve the bound over the generic case but doesn’t saturate the upper bound of Proposition 1. Instead, we perform another transformation of H_G such that the algorithm of Proposition 1 on this transformed Hamiltonian solves Grover’s in time $O(\sqrt{N})$; any algorithm faster than one in Proposition 1 then would violate the known lower bound of Grover’s. In the rest of this section, we describe in detail how this works.

It is useful to measure the ground state energy relative to the endpoint -1 , so we define the notation $\eta = O_{-1}(\mu)$ to mean that the number η is asymptotically closer to -1 than is μ , or more precisely that $\eta + 1 < c(\mu + 1)$ in the $\delta \rightarrow 0$ limit for constant c . In this section, we refer to preparing the ground state of a (normalized) Hamiltonian H with ground state energy $O_{-1}(\mu)$ and spectral gap $O(\delta)$ (we will ignore small constant factors) as a (μ, δ) -problem.

The lower bound of ref.[14] for generic Hamiltonians can be represented in the following way. For any δ there is a corresponding $(0, \delta)$ -problem that encodes the solution to the unstructured search, which has a query complexity lower bound of $\Omega(1/\delta)$, thus proving that the generic $(0, \delta)$ -problem is

$\Omega(1/\delta)$. We need to formulate a lower bound for the general (μ, δ) -problem when μ is asymptotically close to -1 .

Given a Grover Hamiltonian H_G with gap δ^{1-y} for some chosen $0 \leq y < 1$, we can shift it to $H_{\text{shifted}} = H_G - zI$. This shift affects both μ and δ because it modifies the block-encoding normalization α . Requiring that the H_{shifted} has gap δ fixes x and results in a $(-1 + \delta^y, \delta)$ -problem. Since the ground state of H_{shifted} can't be prepared in time faster than $\Omega(1/\delta^{1-y})$, the generic $(-1 + \delta^y, \delta)$ -problem has a lower bound of $\Omega(\delta^{y-1})$ queries when $y < 1$.

On the other hand, the algorithm of Proposition 1 when $\mu = -1 + \delta^y$ solves any $(-1 + \delta^y, \delta)$ -problem with query complexity $O(\delta^{y/2-1} \text{polylog } \frac{1}{\delta})$, which can be quite a bit larger than δ^{y-1} in the $\delta \rightarrow 0$ limit that we are considering. We will need an additional step to raise the Grover-derived lower bound and prove that the $y/2 - 1$ exponent of our algorithm is indeed optimal.

Proof. Proof of Proposition 2. The extra ingredient required is another polynomial transformation of the input H_G , denoted $g(x)$. We'll use $g(x)$ to map μ to approximately -1 , and we'll see that this mapping can be made to shrink the gap δ less than the simple shift. This polynomial must have two properties: it must have minimum value $\min_x g(x) = -1$ on the interval $x \in [-1, 1]$, and it must be one-to-one in a sufficiently large region around the ground state. Specifically, we will use the explicit polynomial $g(x) = ax + bx^3 + cx^5$ with $a = 19/6, b = -16/3, c = 8/3$, which achieves its minimum of -1 at $x = -\frac{1}{2}$. Now, we create our model (μ', δ') -problem in two steps: first, we introduce the $(-\frac{1}{2} + x_0, \delta)$ -problem H , which has the same spectrum as H_G but is shifted by a constant and scaled such that its ground state is exactly $-\frac{1}{2} + x_0$ for some chosen $x_0 > 0$, with $|x_0| < 1/2$:

$$H = \frac{1}{1 + |z|} (H_G - zI) \quad z = \frac{1 - 2x_0 - \delta}{1 + 2x_0} \quad (12)$$

Using the linear-combination-of-unitaries approach [17], H can be block-encoded with $\alpha = 1$. Then, we map this H through the polynomial g , and $g(H)$ will define a particular $(-1 + \delta^y, \delta')$ -problem with an associated lower bound in terms of δ' .

We choose the offset as $x_0 = \delta^\nu$ for some $0 < \nu \leq 1$; note that x_0 is small in the limit $\delta \rightarrow 0$ that we are concerned with. (This shift does not asymptotically affect the gap size.) Since $g'(-\frac{1}{2}) = 0$ and $g''(-\frac{1}{2}) = O(1)$, we have

$$g(\mu) = g(\frac{1}{2} + x_0) \simeq -1 + x_0^2 \quad (13)$$

$$g(\mu + \delta) \simeq -1 + x_0^2 + 2x_0\delta + \delta^2 \quad (14)$$

Since the new gap of $g(H)$ is $g(\mu + \delta) - g(\mu)$, we have used g to map the $(0, \delta)$ -problem to a $(-1 + x_0^2, 2x_0\delta + \delta^2)$ -problem. Since $x_0 = \delta^\nu$, to leading order in δ , we've reduced the Grover problem to a $(-1 + \delta^{2\nu}, \delta^{\nu+1})$ -problem, or, rescaling δ to $\delta' = \delta^{\nu+1}$, a $(-1 + \delta'^{\frac{2\nu}{\nu+1}}, \delta')$ -problem for any $0 < y \leq 1$.

Because $g(H)$ and H have the same ground state, and because querying $g(H)$ once requires $O(1)$ queries of H , the original $\Omega(1/\delta)$ bound for preparing the ground state of H also applies to $g(H)$. This implies that the solution to the generic $(-1 + \delta^y, \delta')$ -problem for any $y \leq 1$ has query complexity bounded by

$$\Omega(\frac{1}{\delta}) = \Omega\left(\delta'^{\frac{-1}{1+\nu}}\right) = \Omega\left(\delta'^{\frac{y}{2}-1}\right) \quad (15)$$

as desired. □

6 Preparing Excited States with Projectors

A straightforward generalization of the projection polynomial $p(x)$ from Section 3 allows the preparation of excited states. This applies both to any general Hamiltonian, extending the work of ref.[14],

to excited states as well as to nearly frustration free Hamiltonians where we again get an additional speedup even for low-lying excited states. More precisely, given a normalized excited-state energy η (with, as before, $|\eta| \leq 1$), and a radius δ_1 which separates the excitation from both the ground state and other excitations, we can form a new polynomial p_η such that $p_\eta(H)$ selects the subspace of eigenstates with energy $\lambda \in (\eta - \delta_1, \eta + \delta_1)$. Moreover, the degree of p_η scales exactly the same way as that of the ground state projector p , as $n = \tilde{O}\left(\frac{\sqrt{1+\eta}}{\delta_1}\right)$.

Corollary 1. *If a Hamiltonian H , with block-encoding U , has a unique first excited state $|\eta\rangle$ separated by an energy gap of at least δ_1 from the rest of the spectrum, it can be prepared to error ϵ with $\tilde{O}\left(\frac{\sqrt{1+\eta}}{\gamma\delta_1}\right)$ queries to U and U^\dagger , where $\gamma = |\langle\phi_0|\eta\rangle|$ is the overlap with the starting ansatz $|\phi_0\rangle$.*

Proof. As in Lemma 1, we use shifted error functions to accomplish this. Note that the function $f_1(x) = \frac{1}{2}(\text{erf } k(x - \eta - \delta_1/2) - \text{erf } k(x - \eta + \delta_1/2))$, with $k = O(\frac{1}{\delta_1} \log^{1/2} \frac{1}{\epsilon})$, satisfies $f_1(x) \leq -1 + O(\epsilon)$ when $|x - \eta| \leq \delta_1/2$ and $|f_1(x)| \leq O(\epsilon)$ when $|x - \eta| \geq \delta_1$. By the estimates of Lemma 1, $f_1(x)$ can be approximated to error ϵ with a degree- n_1 polynomial p_1 , where

$$n_1 = O\left(\frac{\sqrt{1+\eta}}{\delta_1} \log \frac{\sqrt{1+\eta}}{\delta_1} \log^{3/2} \frac{1}{\epsilon}\right) \quad (16)$$

Again form the antisymmetric $p_{1,\text{odd}} = (p_1(x) - p_1(-x))$; as before, the spectral gap of $p_{1,\text{odd}}(H)$ is now $\Omega(1)$, but the ground state is now $|\eta\rangle$ with eigenvalue $\lambda_\eta = -1 + O(\epsilon)$. We can then use the algorithm of [14] to project to $|\eta\rangle$ with the same query complexity as in Proposition 1, or

$$O\left(\frac{\sqrt{1+\eta}}{\delta_1\gamma} \log^{5/2} \frac{1}{\epsilon} \log \frac{1}{\delta}\right) = \tilde{O}\left(\frac{\sqrt{1+\eta}}{\delta_1\gamma}\right) \quad (17)$$

queries to U and U^\dagger , as desired. \square

Although we can form p_η for any $|\eta| \leq 1$, as with ground state preparation an additional speedup is possible if η is close to the endpoints -1 or 1 . This could be the case for the low-lying excited states of a nearly-frustration-free H_0 , for the following reason: Suppose the Hamiltonian H has a unique first excited state $|\eta\rangle$. Then, if the ground state energy is $\mu = -1 + \delta^y$ and $y \leq 1$, then we have $\eta = -1 + \delta^y + \delta = O_{-1}(\mu)$. This implies that the query complexity of this first-excited-state preparation problem has gap dependence $\tilde{O}(\delta^{y/2}/\delta_1)$, where $\delta_1 = \min(\delta, \delta')$ and δ' separates $|\eta\rangle$ from the next excited state.

7 Example Hamiltonians with Speedup

In this section, we consider a class of Hamiltonians for which our algorithms achieve a speedup over the standard approaches. In particular, we will look at systems for which we have sub-volumetric perturbations to frustration-free Hamiltonians. Note that for frustration free Hamiltonians, our algorithm gives the expected $1/\sqrt{\Delta}$ dependence as one would achieve from uniform or spectral gap amplification.

Sub-volumetric perturbations show up in a number of interesting physical scenarios; we now enumerate some examples. To begin with, many physical systems have defects (i.e. line or point defects) which intercolate amongst the bulk degrees of freedom. For example, a frustration free $N \times N$ system perturbed by a density of N impurities (i.e. approximately one per row), or a constant number of such line-defects, gets an efficiency gain from our algorithm. Note that there is a long history of interesting physics related to impurity problems with relevance to both physics examples, such as disordered solids [6], as well as algorithmic methods such as DMFT [8] and NRG [18].

In addition to defect problems, there is interesting physics that often happens at interfaces [12]. One can consider a system with two frustration-free Hamiltonians which are connected at an interface.

While the 2-d bulk of both of these models will be frustration free, the 1-d interface will have Hamiltonian terms that generically are frustrating. Our algorithm is more efficient at finding ground states in this case. As a final example, quantum computers are designed to “replace” classical simulation techniques for finding ground states. A very common technique in numerical methods such as DMRG is to introduce an additional pinning field [1, 20] to promote certain phases or test robustness of phase diagrams. The introduction of this pinning field on the boundary is sub-volumetric and hence has a scaling with Δ for which our algorithm applies.

Each of these scenarios follow from the decomposition of the full system Hamiltonian into a frustration-free piece H_0 and a perturbation V . Here we explicitly show that such Hamiltonians generically have the key property that $\mu < -1 + \delta^y$ for $y > 0$. Consider a frustration-free H_0 defined on a 2D lattice of size $N \times N$ such as $H_0 = \sum_{j=1}^{N^2} \alpha_j U_j$, where the U_j may for instance be 2-body local interactions, and suppose for simplicity that $|\alpha_j| = 1$ for all j . Without loss of generality, we may assume that -1 is an eigenvalue of each U_j by absorbing any phases into the coefficients α_j , so that the ground state is $\mu = -N^2$. Say that we add a 1-D defect of N perturbations $V = \sum_{k=1}^N V_k = \sum_{k=1}^N v U'_k$, where v is the magnitude of each perturbation. We also assume that the U'_k are unitary and mutually commute with each other but do not commute with, and hence frustrate, H_0 . Deducing the N dependence of this system, we have $\alpha = N^2 + vN = O(N^2)$ when v is held fixed. So long as the system is gapped, so that Δ does not vanish in the large N limit, we have $\mu_0 \leq -N^2 + Nv$ or $\mu \leq -1 + \frac{v}{N}$. Thus, because $\delta = \frac{\Delta}{N^2}$, we have the situation described in Proposition 1 with $y = 1/2$. The algorithm of that Proposition can then prepare the ground state of $H_0 + \sum_{k=1}^N V_k$ with a query complexity dependence on N of

$$O\left(\delta^{y/2-1}\right) = O(\delta^{-3/4}) = O(N^{3/2}) \quad (18)$$

which is better than $O(N^2)$ obtained without considering that $H_0 + \sum_{k=1}^N V_k$ is nearly frustration free. This argument generalizes to d -dimensional systems where perturbations are added sub-volumetrically.

Acknowledgements

We acknowledge support from the Department of Energy grant DOE DESC0020165. M.T. thanks Samuel Goldman for fruitful discussions.

References

- [1] Fakhre F. Assaad and Igor F. Herbut. Pinning the order: The nature of quantum criticality in the hubbard model on honeycomb lattice. *Phys. Rev. X*, 3:031010, Aug 2013. DOI: [10.1103/PhysRevX.3.031010](https://doi.org/10.1103/PhysRevX.3.031010). URL <https://link.aps.org/doi/10.1103/PhysRevX.3.031010>.
- [2] Gilles Brassard, Peter Høyer, Michele Mosca, and Alain Tapp. Quantum amplitude amplification and estimation. *Quantum Computation and Information*, page 53–74, 2002. ISSN 0271-4132. DOI: [10.1090/conm/305/05215](https://doi.org/10.1090/conm/305/05215). URL <http://dx.doi.org/10.1090/conm/305/05215>.
- [3] Sergey Bravyi, David P. Divincenzo, Roberto Oliveira, and Barbara M. Terhal. The complexity of stoquastic local Hamiltonian problems. *Quantum Information and Computation*, 8(5):0361–0385, 2008. ISSN 15337146. DOI: [10.26421/qic8.5-1](https://doi.org/10.26421/qic8.5-1).
- [4] Shantanav Chakraborty, András Gilyén, and Stacey Jeffery. The power of block-encoded matrix powers: Improved regression techniques via faster Hamiltonian simulation. In *Leibniz International Proceedings in Informatics, LIPIcs*, volume 132, pages 1–58, 2019. ISBN 9783959771092. DOI: [10.4230/LIPIcs.ICALP.2019.33](https://doi.org/10.4230/LIPIcs.ICALP.2019.33).
- [5] Yulong Dong, Xiang Meng, K. Birgitta Whaley, and Lin Lin. Efficient phase-factor evaluation in quantum signal processing. *Physical Review A*, 103(4):1–26, 2021. ISSN 24699934. DOI: [10.1103/PhysRevA.103.042419](https://doi.org/10.1103/PhysRevA.103.042419).

- [6] Jeppe C Dyre and Thomas B Schröder. Universality of ac conduction in disordered solids. *Reviews of Modern Physics*, 72(3):873, 2000.
- [7] Yimin Ge, Jordi Tura, and J. Ignacio Cirac. Faster ground state preparation and high-precision ground energy estimation with fewer qubits. *Journal of Mathematical Physics*, 60(2):1–25, 2019. ISSN 00222488. DOI: [10.1063/1.5027484](https://doi.org/10.1063/1.5027484).
- [8] Antoine Georges, Gabriel Kotliar, Werner Krauth, and Marcelo J. Rozenberg. Dynamical mean-field theory of strongly correlated fermion systems and the limit of infinite dimensions. *Rev. Mod. Phys.*, 68:13–125, Jan 1996. DOI: [10.1103/RevModPhys.68.13](https://doi.org/10.1103/RevModPhys.68.13). URL <https://link.aps.org/doi/10.1103/RevModPhys.68.13>.
- [9] András Gilyén, Yuan Su, Guang Hao Low, and Nathan Wiebe. Quantum singular value transformation and beyond: Exponential improvements for quantum matrix arithmetics. *Proceedings of the Annual ACM Symposium on Theory of Computing*, pages 193–204, 2019. ISSN 07378017. DOI: [10.1145/3313276.3316366](https://doi.org/10.1145/3313276.3316366).
- [10] Lov K. Grover. A fast quantum mechanical algorithm for database search. In *Proceedings of the Twenty-Eighth Annual ACM Symposium on Theory of Computing*, STOC ’96, page 212–219, New York, NY, USA, 1996. Association for Computing Machinery. ISBN 0897917855. DOI: [10.1145/237814.237866](https://doi.org/10.1145/237814.237866). URL <https://doi.org/10.1145/237814.237866>.
- [11] Jeongwan Haah. Product decomposition of periodic functions in quantum signal processing. *Quantum*, 3(September):1–22, 2019. ISSN 2521327X. DOI: [10.22331/q-2019-10-07-190](https://doi.org/10.22331/q-2019-10-07-190).
- [12] Frances Hellman, Axel Hoffmann, Yaroslav Tserkovnyak, Geoffrey S. D. Beach, Eric E. Fullerton, Chris Leighton, Allan H. MacDonald, Daniel C. Ralph, Dario A. Arena, Hermann A. Dürr, Peter Fischer, Julie Grollier, Joseph P. Heremans, Tomas Jungwirth, Alexey V. Kimel, Bert Koopmans, Ilya N. Krivorotov, Steven J. May, Amanda K. Petford-Long, James M. Rondinelli, Nitin Samarth, Ivan K. Schuller, Andrei N. Slavin, Mark D. Stiles, Oleg Tchernyshyov, André Thiaville, and Barry L. Zink. Interface-induced phenomena in magnetism. *Rev. Mod. Phys.*, 89:025006, Jun 2017. DOI: [10.1103/RevModPhys.89.025006](https://doi.org/10.1103/RevModPhys.89.025006). URL <https://link.aps.org/doi/10.1103/RevModPhys.89.025006>.
- [13] A. Yu. Kitaev. Quantum measurements and the Abelian Stabilizer Problem. pages 1–22, 1995. URL <http://arxiv.org/abs/quant-ph/9511026>.
- [14] Lin Lin and Yu Tong. Near-optimal ground state preparation. *Quantum*, 4:1–22, 2020. ISSN 2521327X. DOI: [10.22331/Q-2020-12-14-372](https://doi.org/10.22331/Q-2020-12-14-372).
- [15] Guang Hao Low and Isaac L. Chuang. Hamiltonian simulation by uniform spectral amplification. *arXiv*, pages 1–32, 2017. ISSN 23318422.
- [16] Guang Hao Low and Isaac L. Chuang. Optimal Hamiltonian Simulation by Quantum Signal Processing. *Physical Review Letters*, 118(1):1–6, 2017. ISSN 10797114. DOI: [10.1103/PhysRevLett.118.010501](https://doi.org/10.1103/PhysRevLett.118.010501).
- [17] Guang Hao Low and Isaac L. Chuang. Hamiltonian Simulation by Qubitization. *Quantum*, 3:163, 2019. ISSN 2521-327X. DOI: [10.22331/q-2019-07-12-163](https://doi.org/10.22331/q-2019-07-12-163).
- [18] Iztok Pižorn and Frank Verstraete. Variational numerical renormalization group: Bridging the gap between NRG and density matrix renormalization group. *Physical Review Letters*, 108(6):1–8, 2012. ISSN 00319007. DOI: [10.1103/PhysRevLett.108.067202](https://doi.org/10.1103/PhysRevLett.108.067202).
- [19] R. D. Somma and S. Boixo. Spectral gap amplification. *SIAM Journal on Computing*, 42(2):593–610, 2013. ISSN 00975397. DOI: [10.1137/120871997](https://doi.org/10.1137/120871997).
- [20] E. M. Stoudenmire and Steven R. White. Studying two-dimensional systems with the density matrix renormalization group. *Annual Review of Condensed Matter Physics*, 3(1):111–128, 2012. ISSN 19475454. DOI: [10.1146/annurev-conmatphys-020911-125018](https://doi.org/10.1146/annurev-conmatphys-020911-125018).