

# Diagonalization *of* Polynomial-Time Turing Machines Via Nondeterministic Turing Machine

Tianrong Lin\*

December 28, 2021

## Abstract

The diagonalization technique was invented by Cantor to show that there are more real numbers than algebraic numbers, and is very important in computer science. In this work, we enumerate all polynomial-time deterministic Turing machines and diagonalize over all of them by an universal nondeterministic Turing machine. As a result, we obtain that there is a language  $L_d$  not accepted by any polynomial-time deterministic Turing machines but accepted by a nondeterministic Turing machine working within  $O(n^k)$  for any  $k \in \mathbb{N}_1$ , i.e.  $L_d \in \mathcal{NP}$ . That is, we present a proof that  $\mathcal{P}$  and  $\mathcal{NP}$  differ.

*Key words:* Diagonalization, Polynomial-Time deterministic Turing machine, Universal nondeterministic Turing machine

## Contents

<b>1</b>	<b>Introduction</b>	<b>2</b>
1.1	Our Approach . . . . .	4
1.2	Related Work . . . . .	4
1.3	Overview . . . . .	5
<b>2</b>	<b>Preliminaries</b>	<b>5</b>
<b>3</b>	<b>Enumeration <i>of</i> All Polynomial-Time DTMs</b>	<b>7</b>
<b>4</b>	<b>Diagonalization <i>of</i> All Polynomial-Time DTMs</b>	<b>9</b>
<b>5</b>	<b>Don't Suspect That <math>L_d \in \mathcal{NP}</math></b>	<b>13</b>
<b>6</b>	<b>Conclusions</b>	<b>15</b>

---

\**E-mail:* tianrong[dot]lam[at]gmail[dot]com

<b>A</b>	<b>The Two Definitions of <math>\mathcal{P}</math> (Respectively, <math>\mathcal{NP}</math>) Are Equivalent</b>	<b>17</b>
A.1	Proof of Two Definitions of $\mathcal{P}$ Are Equivalent. . . . .	18

# 1 Introduction

In 1936, Turing’s seminal work [Tur37] opened the door of computer science, which today develops to many subfields such as *computability theory, formal language and automata theory, computational complexity theory, algorithm theory*, and so on. On the one hand, Turing’s contributions are so huge that he has been considered as the father of computer. On the other hand, although Turing’s work initiates the study of computer science, he was not concerned with the efficiency of his machines, which is the main topics in computational complexity theory. In fact, Turing’s concern [Tur37] was whether they can simulate arbitrary algorithms given sufficient time.

Mention of computational complexity theory, it is a central subfield of the theoretical foundations of computer science. As mentioned above, the computational complexity theory mainly concerns with the efficiency of Turing machine, or the intrinsic complexity of computational tasks. It specifically deals with fundamental questions such as, what is feasible computation, and what can and can not be computed with a reasonable amount of computational resources in terms of time or space. Additionally, one of the most important classical complexity classes is arguably  $\mathcal{NP}$ , i.e. nondeterministic polynomial-time. This class comprises languages that can be computed in polynomial-time by a nondeterministic Turing machine.

Perhaps, the most basic and fundamental measures of difficulty that appear particularly important are time and space. The fundamental measure of time opened the door to the study of the extremely expressive time complexity class  $\mathcal{NP}$ . The famous Cook-Levin theorem [Coo71, Lev73] shows that this class has complete problems, which states that the *Satisfiability* is  $\mathcal{NP}$ -complete, that is, Satisfiability is in  $\mathcal{NP}$  and any other language in  $\mathcal{NP}$  can be reduced to it in polynomial-time. This result opened the door to the research of the rich theory of  $\mathcal{NP}$ -completeness [Kar72].

In computational complexity theory, the technique of diagonalization led to some of early successes. Historically, it was invented by Cantor [Can91] to show that there are more real numbers than algebraic numbers, then it was used by Turing to show that the halting problem is undecidable [Tur37], and then refined to prove computational complexity lower bounds. A typical theorem in this area is that more time/space buys more computational power [Coo73, FS07, Pap94], e.g. there are functions computable in time  $n^2$ , say, which are not computable in time  $n$ . The heart of such arguments is the existence of a universal Turing machine, which can simulate every other Turing machines with only small loss in efficiency.

The famous  $\mathcal{P}$  versus  $\mathcal{NP}$  question is a major question in computational complexity theory, and it is also considered as the most fundamental question in computer science, which asks whether every problem in  $\mathcal{NP}$  can also be solved in polynomial-time by deterministic Turing machine. It appeared explicitly first in the papers of Cook [Coo71] and Levin [Lev73]. We refer the readers to [Wig07] for more introductions on  $\mathcal{P}$  versus  $\mathcal{NP}$  question. As far as we known, many of the methods that have been used to attack the  $\mathcal{P}$

versus  $\mathcal{NP}$  question (in direction to  $\mathcal{P} \neq \mathcal{NP}$ ) have been combinatorial, or algebraic; this includes, for instance, circuit lower bound, diagonalization, and relativization [BGS75], but all of these attempts reach a failure, see [Coo00, Wig07]. As mentioned above, the diagonalization technique was invented by Cantor [Can91] to show that there are more real numbers than algebraic numbers. There is an important doubt : can diagonalization resolve  $\mathcal{P}$  versus  $\mathcal{NP}$  question? Researchers realized in the 1970s that diagonalization alone may not resolve the  $\mathcal{P}$  versus  $\mathcal{NP}$  question, it needs other new techniques besides diagonalization. To the best of our knowledge, we will say that the above viewpoint is a misunderstanding. In the following, Figure 1 which is from [A1] illustrates the Euler diagram for  $\mathcal{P}$ ,  $\mathcal{NP}$ ,  $\mathcal{NP}$ -complete and  $\mathcal{NP}$ -Hard set of problems in two possibilities:

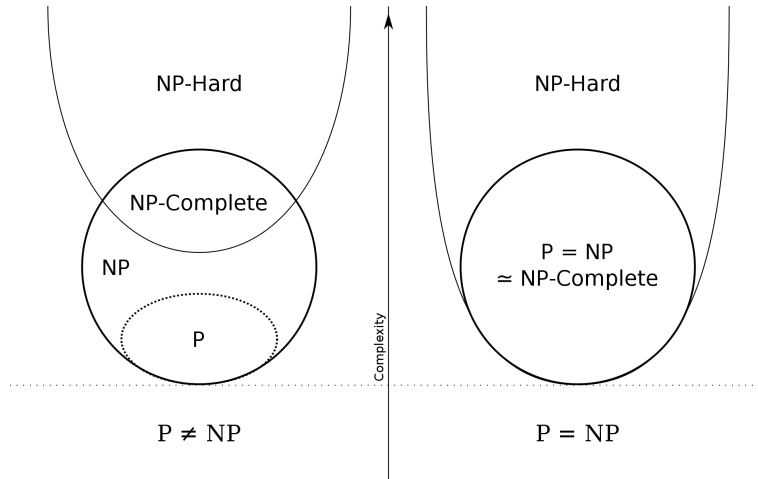


Figure 1: Euler diagram for  $\mathcal{P}$ ,  $\mathcal{NP}$ ,  $\mathcal{NP}$ -complete and  $\mathcal{NP}$ -Hard set of problems

Our motivation here is that in [Lad75], Lander constructed a language which is  $\mathcal{NP}$ -intermediate by the method of *lazy diagonalization* under the assumption that  $\mathcal{P}$  and  $\mathcal{NP}$  differ. The lazy diagonalization put the  $\mathcal{NP}$ -intermediate language accepted by no polynomial-time deterministic Turing machine, see [Pap94, AB09]. Since it is a widespread belief that  $\mathcal{P}$  and  $\mathcal{NP}$  are different, we naturally will consider that can we use an universal nondeterministic Turing machine to diagonalize over all polynomial-time deterministic Turing machines to produce a language accepted by no polynomial-time deterministic Turing machine but accepted by a nondeterministic Turing machine? If so, we can further study whether this language is in  $\mathcal{NP}$ , i.e. whether this nondeterministic Turing machine runs in polynomial-time.

In this work, we put our motivation mentioned above or ideas into practice. We enumerate all polynomial-time deterministic Turing machines and diagonalize over all of them by an universal nondeterministic Turing machine. Generally, people use universal deterministic Turing machine to diagonalize over a list of deterministic Turing machines, for example [Pap94, AB09], or use universal nondeterministic Turing machine to diagonalize over a list of nondeterministic Turing machines, for instance [Coo73]. Using an universal nondeterministic Turing machine to diagonalize an enumeration of deterministic Turing machines appears less often even never except in author's recent work [Lin21], and it is a new attempt that may lead to successes. As an amazing result, we obtain the following

important theorem :

**Theorem 1.** *There exists a language  $L_d$  which is not accepted by all polynomial-time deterministic Turing machines, but accepted by a nondeterministic Turing machine. Furthermore, this nondeterministic Turing machine runs in  $O(n^k)$  for any  $k \in \mathbb{N}_1$ , i.e.  $L_d \in \mathcal{NP}$ .*

From which it immediately follows that

**Corollary 1.**  $\mathcal{P} \neq \mathcal{NP}$ .

and

**Corollary 2.**  $\mathcal{P} \neq \mathcal{PSPACE}$ .

## 1.1 Our Approach

The Cook-Levin Theorem is a well known theorem stating that *Satisfiability* (SAT) is complete for  $\mathcal{NP}$  under polynomial-time many-one reductions. Starting from this, on the one hand, if one wants to prove that  $\mathcal{P}$  and  $\mathcal{NP}$  are identical, then one can try to design polynomial-time algorithms for SAT. On the other hand, if one wants to show that  $\mathcal{P}$  and  $\mathcal{NP}$  differ, then one may try to prove a super-polynomial lower-bound for SAT.

As a novel thought and attempt, we enumerate all polynomial-time deterministic Turing machines and diagonalize over all of them by an universal nondeterministic Turing machine. Generally, a common practice is to use an universal deterministic Turing machine to diagonalize over a list of deterministic Turing machines [Pap94, AB09], or take advantage of an universal nondeterministic Turing machine to diagonalize over a list of nondeterministic Turing machines [Coo73]. Using an universal nondeterministic Turing machine to diagonalize over all of polynomial-time deterministic Turing machines is a new attempt. We would like to stress that the approach had never been tried by anybody before in the literature.

## 1.2 Related Work

As is well known, a central problem in computational complexity theory is the  $\mathcal{P}$  versus  $\mathcal{NP}$  question, which is to determine whether every language accepted by some nondeterministic Turing machine in polynomial-time is also accepted by some deterministic Turing machine in polynomial-time. In this Section, we will review its history and related works. With respect to its importance, we refer the reader to the reference [Coo00, Wig07].

In 1971, Cook [Coo71] introduced a notion of  $\mathcal{NP}$ -completeness as a polynomial-time analog of c.e.-completeness, except that the reduction used was a polynomial-time analog of Turing reducibility rather than of many-one reducibility (see [HR67] Chapter 7). Besides the first well-known  $\mathcal{NP}$ -complete problem of Satisfiability, Cook also showed in [Coo71] that several natural problems, including 3-SAT and subgraph isomorphism are  $\mathcal{NP}$ -complete.

A year later stimulated by the work of Cook [Coo71], Karp [Kar72] used these completeness results to show that 20 other natural problems are  $\mathcal{NP}$ -complete, forcefully demonstrating the importance of the subject. Thus far, there are many problems shown to

be  $\mathcal{NP}$ -complete, see excellent reference [GJ79] to this subject. In his paper [Kar72], Karp also introduced the now standard notation  $\mathcal{P}$  and  $\mathcal{NP}$  and redefined  $\mathcal{NP}$ -completeness by using the polynomial-time analog of many-one reducibility, which has become standard. Meanwhile Levin [Lev73], independently of Cook [Coo71] and Karp [Kar72], defined the notion of “universal search problem”, similar to the  $\mathcal{NP}$ -complete problem, and gave six examples, which includes Satisfiability.

Although the  $\mathcal{P}$  versus  $\mathcal{NP}$  question was formally defined in the 1970s, there were previous inklings of the problems involved. A mention of the underlying problem occurred in a 1956 letter written by K. Gödel to J. von Neumann. Gödel asked whether theorem-proving could be solved in quadratic or linear time (see [Har89]). We also note that, besides the classical version of the question, there is one expressed in terms of the field of complex numbers, which catches interest in the mathematics community [BCSS98].

### 1.3 Overview

The remainder of this work is organized as follows: For convenience of the reader, in the next Section we review some notions closely associated with our discussions and fix some notation we will use in the following context; Also, some useful technical lemmas are presented. In Section 3 we provide a method to encode a polynomial-time deterministic Turing machine, so that we can enumerate all the polynomial-time deterministic Turing machines and we will prove that in terms of our enumeration, all polynomial-time deterministic Turing machines are in the enumeration. The proof of our main result is put into Section 4. Some discussions about our result are placed in Section 5, we recall some background information how our techniques formed. Finally, we draw some conclusions in the last Section.

## 2 Preliminaries

In this Section, we describe the notation and notions needed in the following context. We would like to remark that our style of writing from this Section is heavily influenced by that in Aho, Hopcroft and Ullman’s book [AHU74, HU79].

Let  $\mathbb{N}$  denote the natural numbers  $\{0, 1, 2, 3, \dots\}$  where  $+\infty \notin \mathbb{N}$ . Further,  $\mathbb{N}_1$  denotes the set of  $\mathbb{N} - \{0\}$ . It is clear that there is a bijection between  $\mathbb{N}$  and  $\mathbb{N}_1$ . To see this let the bijection to be  $n \mapsto n + 1$  where  $n \in \mathbb{N}$  and  $n + 1 \in \mathbb{N}_1$ .

The computation model we use is the *Turing machine* as it defined in standard textbooks such as [HU69, HU79, HMU06]. Here, we adopt the definition given in [AHU74]:

**Definition 1.** (*k-tape deterministic Turing machine, [AHU74]*) A *k-tape deterministic Turing machine* (shortly, *DTM*)  $M$  is a seven-tuple  $(Q, T, I, \delta, \mathbb{b}, q_0, q_f)$  where :

1.  $Q$  is the set of states.
2.  $T$  is the set of tape symbols.
3.  $I$  is the set of input symbols;  $I \subseteq T$ .

4.  $\mathbb{b} \in T - I$ , is the blank.
5.  $q_0$  is the initial state.
6.  $q_f$  is the final (or accepting) state.
7.  $\delta$  is the next-move function, maps a subset of  $Q \times T^k$  to  $Q \times (T \times \{L, R, S\})^k$ .  
That is, for some  $(k + 1)$ -tuples consisting of a state and  $k$  tape symbols, it gives a new state and  $k$  pairs, each pair consisting of a new tape symbol and a direction for the tape head. Suppose  $\delta(q, a_1, a_2, \dots, a_k) = (q', (a'_1, d_1), (a'_2, d_2), \dots, (a'_k, d_k))$ , and the deterministic Turing machine is in state  $q$  with the  $i$ th tape head scanning tape symbol  $a_i$  for  $1 \leq i \leq k$ . Then in one move the deterministic Turing machine enters state  $q'$ , changes symbol  $a_i$  to  $a'_i$ , and moves the  $i$ th tape head in the direction  $d_i$  for  $1 \leq i \leq k$ .

The definition of a nondeterministic Turing machine is similar to that of deterministic Turing machine, except that the next-move function  $\delta$  is a mapping from  $Q \times T^k$  to subsets of  $Q \times (T \times \{L, R, S\})^k$ , stated as follows :

**Definition 2.** (*k-tape nondeterministic Turing machine, [AHU74]*) A *k-tape nondeterministic Turing machine (shortly, NTM)*  $M$  is a seven-tuple  $(Q, T, I, \delta, \mathbb{b}, q_0, q_f)$  where all components have the same meaning as for the ordinary deterministic Turing machine, except that here the next-move function  $\delta$  is a mapping from  $Q \times T^k$  to subsets of  $Q \times (T \times \{L, R, S\})^k$ .

In the following, we will refer Turing machine to both the deterministic Turing machine and the nondeterministic Turing machine. And we will often use DTM (respectively, NTM) to denote deterministic (respectively, nondeterministic) Turing machine.

A Turing machine  $M$  works in time  $T(|x|)$  if for every input  $x$  where  $|x|$  is the length of  $x$ , all computations of  $M$  on  $x$  end in less than  $T(|x|)$  steps or moves. Particularly,  $DTIME[T(n)]$  (respectively,  $NTIME[T(n)]$ ) is the class of languages accepted by the deterministic (respectively, nondeterministic) Turing machine working in time  $c \cdot T(n)$  for some constant  $c > 0$ . The notation  $\mathcal{P}$  and  $\mathcal{NP}$  are defined to be the class of languages:

$$\mathcal{P} = \bigcup_{k \in \mathbb{N}_1} DTIME[n^k]$$

and

$$\mathcal{NP} = \bigcup_{k \in \mathbb{N}_1} NTIME[n^k].$$

With respect to the time complexity between  $k$ -tape nondeterministic (respectively, deterministic) Turing machine and single-tape nondeterministic (respectively, deterministic) Turing machine, we have the following useful Lemmas which play important roles in the following context, extracting from [AHU74], see Lemma 10.1 and Corollary 1 to Lemma 10.1 in [AHU74] :

**Lemma 1.** (Lemma 10.1 in [AHU74]) If  $L$  is accepted by a  $k$ -tape nondeterministic Turing machine of time complexity  $T(n)$ , then  $L$  is accepted by a single-tape nondeterministic Turing machine of time complexity  $O(T^2(n))$ .  $\square$

The deterministic version is as follows

**Corollary 3.** (Corollary 1 in [AHU74] to Lemma 1) If  $L$  is accepted by a  $k$ -tape deterministic Turing machine of time complexity  $T(n)$ , then  $L$  is accepted by a single-tape deterministic Turing machine of time complexity  $O(T^2(n))$ .  $\square$

The following theorem about efficient simulation is needed a few times, whose proof is present in [HS66], see also [AB09] :

**Lemma 2.** There exists a Turing machine  $U$  such that for every  $x, \alpha \in \{0, 1\}^*$ ,  $U(x, \alpha) = M_\alpha(x)$ , where  $M_\alpha$  denotes the Turing machine represented by  $\alpha$ . Moreover, if  $M_\alpha$  halts on input  $x$  within  $T(|x|)$  steps then  $U(x, \alpha)$  halts within  $cT(|x|) \log T(|x|)$  moves (steps)<sup>1</sup>, where  $c$  is a constant independent of  $|x|$  and depending only on  $M_\alpha$ 's alphabet size, number of tapes, and number of states.  $\square$

Finally, more information and premise lemmas will be given along the way to prove our main result.

### 3 Enumeration of All Polynomial-Time DTMs

Before coming to the point, we should make a formal definition of a polynomial-time deterministic Turing machine.

**Definition 3.** Formally, a polynomial-time deterministic Turing machine is deterministic Turing machine such that there exists  $k \in \mathbb{N}_1$ , for all input  $x$  of length  $n$  where  $n \in \mathbb{N}$  is arbitrary,  $M(x)$  will halt within  $O(n^k)$  moves. We represent a polynomial-time deterministic Turing machine by a tuple of  $(M, k)$  where  $M$  is the deterministic Turing machine itself, and  $k$  is the unique minimal order of some polynomial  $O(n^k)$  such that for any input  $x$  of length  $n$  where  $n \in \mathbb{N}$  is arbitrary,  $M(x)$  will halt within  $O(n^k)$  moves. We call  $k$  the order of  $(M, k)$ .

**Remark 1.** Obviously, in the above definition, given a polynomial-time deterministic Turing machine  $(M, k)$ , for any input  $x$  of length  $n$  where  $n \in \mathbb{N}$  is arbitrary,  $M(x)$  will halt within  $O(n^{k+i})$  moves, where the integer  $i \geq 0$ . But there exists input  $y$  of length  $n$  where  $n \in \mathbb{N}$  is arbitrary,  $M(y)$  does not halt within  $O(n^{k-1})$  moves.

Next, we present the following important Definition concerning “enumeration”:<sup>2</sup>

**Definition 4** ([Rud76], p. 27, Definition 2.7). By an enumeration of set  $T$ , we mean a function  $e$  defined on the set  $\mathbb{N}_1$  of all positive integers. If  $e(n) = x_n \in T$ , for  $n \in \mathbb{N}_1$ , it is customary to denote the enumeration  $e$  by the symbol  $\{x_n\}$ , or sometimes by  $x_1, x_2, x_3, \dots$ . The values of  $e$ , that is, the elements  $x_n \in T$ , are called the terms of the enumeration.

---

<sup>1</sup>In this work,  $\log n$  means  $\log_2 n$ .

<sup>2</sup>In Georg Cantor's terminology [Can91], enumeration of something is the “sequence” of something.

To obtain our main result we need to *enumerate* the polynomial-time deterministic Turing machines, that is, assign an ordering to polynomial-time deterministic Turing machines so that for each nonnegative integer  $i$  there is a unique  $(M, k)$  associated with  $i$  (I.e. to define a function from  $\mathbb{N}_1$  to the set of all polynomial-time deterministic Turing machines  $\{(M, k)\}$ .)<sup>3</sup>

To achieve our enumeration, we first use the method presented in [AHU74], p. 407, to encode a deterministic Turing machine into an integer.

Without loss of generality, see [AHU74], we can make the following assumptions about the representation of a single-tape deterministic Turing machine :

1. The states are named  $q_1, q_2, \dots, q_s$  for some  $s$ , with  $q_1$  the initial state and  $q_s$  the accepting state.
2. The input alphabet is  $\{0, 1\}$ .
3. The tape alphabet is  $\{X_1, X_2, \dots, X_t\}$  for some  $t$ , where  $X_1 = \mathbb{b}$ ,  $X_2 = 0$ , and  $X_3 = 1$ .
4. The next-move function  $\delta$  is a list of quintuples of the form  $(q_i, X_j, q_k, X_l, D_m)$ , meaning that  $\delta(q_i, X_j) = (q_k, X_l, D_m)$ , and  $D_m$  is the direction,  $L$ ,  $R$ , or  $S$ , if  $m = 0, 1$ , or  $2$ , respectively. We assume this quintuple is encoded by the string  $10^i 10^j 10^k 10^l 10^m 1$ .
5. The Turing machine itself is encoded by concatenating in any order the codes for each of the quintuples in its next-move function. Additional 1's may be prefixed to the string if desired. The result will be some string of 0's and 1's, beginning with 1, which we can interpret as an integer.

Next, we encode the order of  $(M, k)$  to be  $10^k 1$  so that the tuple  $(M, k)$  can be encoded by concatenating the binary string representing  $M$  itself and  $10^k 1$  together. Now the tuple  $(M, k)$  is encoded as a binary string which can be explained as an integer.

By this encoding, any integer which can not be decoded is deemed to represent the trivial Turing machine with an empty next-move function. Every single-tape polynomial-time deterministic Turing machine will appear infinitely often in the enumeration, since given a polynomial-time deterministic Turing machine, we may prefix 1's at will to find larger and larger integers representing the same set of  $(M, k)$ . We denote such a polynomial-time DTM by  $\widehat{M}_j$  where  $j$  is the integer representing  $(M, k)$ . The reader is easy to get that we have defined a function  $e$  from  $\mathbb{N}_1$  to the set  $\{(M, k)\}$  of all polynomial-time deterministic Turing machines which is consistent with Definition 4.

Finally, we remark that the enumeration of all polynomial-time deterministic Turing machines also gives an enumeration of languages in  $\mathcal{P}$  (with languages appearing multiple times). In particular, we have the following Theorem 2 is obvious :

**Theorem 2.** *Any polynomial-time deterministic Turing machines are in the above enumeration.* □

---

<sup>3</sup>There are a variety of ways to enumerate all polynomial-time deterministic Turing machines, for instance, see proof of Theorem 14.1 in [Pap94], p. 330; or see [Lad75].



**Remark 2.** There is another way to *enumerate* all polynomial-time deterministic Turing machines without encoding the order of polynomial. To do this, we need the *Cantor pairing function* :

$$\pi : \mathbb{N} \times \mathbb{N} \rightarrow \mathbb{N}$$

defined by

$$\pi(k_1, k_2) := \frac{1}{2}(k_1 + k_2)(k_1 + k_2 + 1) + k_2$$

where  $k_1, k_2 \in \mathbb{N}$ . Since the Cantor pairing function is invertible (see [A2]), it is a bijection between  $\mathbb{N} \times \mathbb{N}$  and  $\mathbb{N}$ . As we have shown that any deterministic Turing machine is an integer, we can place it and its order of polynomial to a tuple  $(M, k)$  and by Cantor pairing function to map the tuple  $(M, k)$  to an integer in  $\mathbb{N}$ . Recall that there is a bijection between  $\mathbb{N}$  and  $\mathbb{N}_1$ . Obviously, by Definition 4, the inverse of such Cantor pairing function is an enumeration of the set  $\{(M, k)\}$  of all polynomial-time deterministic Turing machines.

## 4 Diagonalization of All Polynomial-Time DTMs

We can now design a four-tape NTM  $M_0$  which treats its input string  $x$  both as an encoding of a tuple  $(M, k)$  and also as the input to  $M$ . One of the capabilities possessed by  $M_0$  is the ability to simulate a Turing machine, given its specification. We shall have  $M_0$  determine whether the polynomial-time deterministic Turing machine  $M$  of time complexity  $O(n^k)$  accepts the input  $x$  without using more than  $O(n^k)$  time. If  $M$  accepts  $x$  within in  $O(n^k)$  time, then  $M_0$  does not. Otherwise,  $M_0$  accepts  $x$ . Thus, for all  $i$ ,  $M_0$  disagrees with the behavior of the polynomial-time DTM in the  $i$ th of enumeration on that input  $x$ . We show the following :

**Theorem 3.** *There exists a language  $L_d$  accepted by an universal nondeterministic Turing machine  $M_0$  but by no polynomial-time deterministic Turing machines.*

*Proof.* Let  $M_0$  be a four-tape NTM which operates as follows on an input string  $x$  of length of  $n$ .

1.  $M_0$  decodes the tuple encoded by  $x$ . If  $x$  is not the encoding of some single-tape polynomial-time DTM  $\widehat{M}_j$  for some  $j$  then GOTO 5, else determines  $t$ , the number of tape symbols used by  $\widehat{M}_j$ ;  $s$ , its number of states; and  $k$ , its order. The third tape of  $M_0$  can be used as “scratch” memory to calculate  $t$ .
2. Then  $M_0$  lays off on its second tape  $|x|$  blocks of  $\lceil \log t \rceil$  cells each, the blocks being separated by single cell holding a marker  $\#$ , i.e. there are  $(1 + \lceil \log t \rceil)n$  cells in all where  $n = |x|$ . Each tape symbol occurring in a cell of  $\widehat{M}_j$ 's tape will be encoded as a binary number in the corresponding block of the second tape of  $M_0$ . Initially,  $M_0$  places  $\widehat{M}_j$ 's input, in binary coded form, in the blocks of tape 2, filling the unused blocks with the code for the blank.

3. On tape 3,  $M_0$  sets up a block of  $\lceil (k+1) \log n \rceil$  cells, initialized to all 0's. Tape 3 is used as a counter to count up to  $n^{k+1}$  <sup>4</sup>.
4. By using nondeterminism <sup>5</sup>,  $M_0$  simulates  $\widehat{M}_j$ , using tape 1, its input tape, to determine the moves of  $\widehat{M}_j$  and using tape 2 to simulate the tape of  $\widehat{M}_j$ . The moves of  $\widehat{M}_j$  are counted in binary in the block of tape 3, and tape 4 is used to hold the state of  $\widehat{M}_j$ . If  $\widehat{M}_j$  accepts, then  $M_0$  halts without accepting.  $M_0$  accepts if  $\widehat{M}_j$  halts without accepting, or if the counter on tape 3 overflows,  $M_0$  halts without accepting.
5. Since  $x$  is not encoding of some single-tape DTM. Then  $M_0$  sets up a block of  $\lceil 2 \times \log n \rceil$  cells on tape 3, initialized to all 0's. Tape 3 is used as a counter to count up to  $n^2$ . By using its nondeterministic choices,  $M_0$  moves as per the path given by  $x$ . The moves of  $M_0$  are counted in binary in the block of tape 3. If the counter on tape 3 overflows, then  $M_0$  halts.  $M_0$  accepts  $x$  if and only if there is a computation path from the start state of  $M_0$  leading to the accept state and the total number of moves can not exceed  $n^2$ , so is within  $O(n)$ . Note that the number of 2 in  $\lceil 2 \times \log n \rceil$  is fixed, i.e. it is default.

The NTM  $M_0$  described above is of time complexity, say  $S$  which is unknown currently. By Lemma 1,  $M$  is equivalent to a single-tape NTM of time complexity  $O(S^2)$ , and it of course accepts some language  $L_d$ .

Suppose now  $L_d$  were accepted by some DTM  $\widehat{M}_i$  in the enumeration which is of time complexity  $T(n) = O(n^k)$ . Then by Corollary 3 we may assume that  $\widehat{M}_i$  is a single-tape DTM. Let  $\widehat{M}_i$  have  $s$  states and  $t$  tape symbols. Since  $\widehat{M}_i$  <sup>6</sup> appears infinitely often in the enumeration, and

$$\begin{aligned}
& \lim_{n \rightarrow \infty} \frac{T(n) \log T(n)}{n^{k+1}} \\
&= \lim_{n \rightarrow \infty} \frac{cn^k (\log c + k \log n)}{n^{k+1}} \quad (\text{for some constant } c > 0) \\
&= \lim_{n \rightarrow \infty} \left( \frac{c \log cn^k}{n^{k+1}} + \frac{ckn^k \log n}{n^{k+1}} \right) \\
&= 0 \\
&< 1,
\end{aligned}$$

so, there exists a  $N_0 > 0$  such that for any  $N \geq N_0$ ,

$$T(N) \log T(N) < N^{k+1}$$

---

<sup>4</sup>Assume that a deterministic Turing machine of time complexity  $T(n)$ , then by Lemma 2, the universal simulation can be done within  $T(n) \log T(n)$  which is less than  $n^{k+1}$  when  $T(n) = O(n^k)$ .

<sup>5</sup>When  $M_0$  simulates a DTM, the behavior of  $M_0$  is somewhat deterministic, since there is no nondeterministic choices in a DTM.

<sup>6</sup> $\widehat{M}_i$  denotes the set of binary strings which encodes  $\widehat{M}_i$ . We know that we may prefix 1's at will to find larger and larger integers representing the same set of quintuples of the same DTM  $M_i$ , thus there are infinitely binary strings of sufficiently long which represents DTM  $M_j$ .

which implies that for a sufficiently long  $w$ , say  $|w| \geq N_0$ , and  $M_w$  denoted by such  $w$  is  $\widehat{M}_i$ , we have that

$$T(|w|) \log T(|w|) < |w|^{k+1}.$$

Thus, on input  $w$ ,  $M_0$  has sufficient time to simulate  $M_w$  and accepts if and only if  $M_w$  rejects (In simulation a polynomial-time DTM,  $M_0$  only turns off mandatorily when the counter on tape 3 overflows, i.e. the counter  $\geq N^{k+1}$ ). But we assumed that  $\widehat{M}_i$  accepted  $L_d$ , i.e.  $\widehat{M}_i$  agreed with  $M_0$  on all inputs. We thus conclude that  $\widehat{M}_i$  does not exist, i.e.  $L_d \notin \mathcal{P}$ .

In the above, we need say more about (4). Since the universal NTM  $M_0$  *diagonalizes* over all polynomial-time deterministic Turing machine, so it can flip the answer, i.e.  $M_0(x) = 1 - \widehat{M}_j(x)$  directly. If  $M_0$  diagonalizes over all NTMs, then other techniques must be presented. □

**Remark 3.** Generally, to *diagonalize* over a list nondeterministic Turing machines of time complexity  $T(n)$  within  $L(n)$  time where  $T(n) = o(L(n))$  is more hard, the diagonalization technique from the proof of Theorem 3 does not directly apply. Since a nondeterministic Turing machine that runs in  $O(T(n))$  may have  $2^{O(T(n))}$  branches in its computation. It is unclear how to determine in  $O(L(n))$  time whether or not it accepts and then flip this answer under the assumption that  $O(L(n)) < 2^{O(T(n))}$ . That is, we do not know whether  $\mathcal{NP} = \text{co}\mathcal{NP}$ , as observed by Cook [Coo73]. Hence, in his work [Coo73], Cook uses *lazy diagonalization* technique to prove nondeterministic time hierarchy theorem, see also [AB09]. Fortunately, in Theorem 3, we diagonalize against deterministic Turing machine (of time complexity  $T(n) = O(n^k)$  for any  $k \in \mathbb{N}_1$ ) rather than nondeterministic Turing machines.

Next, we are going to show that the universal nondeterministic Turing machine  $M_0$  working in  $O(n^k)$  for any  $k \in \mathbb{N}_1$  :

**Theorem 4.** *The universal nondeterministic Turing machine  $M_0$  constructed in proof of Theorem 3 runs in  $O(n^k)$  for any  $k \in \mathbb{N}_1$  <sup>7</sup>. That is,  $L_d \in \mathcal{NP}$ .*

*Proof.* On the one hand, when the input  $x$  encodes a polynomial-time DTM whose time complexity is  $T(n)$ , say  $T(n) = O(n^k)$ , then  $M_0$  turns off mandatorily within  $O(|x|^{k+1})$  by the construction. This holds for any polynomial-time DTM of time complexity of  $O(n^k)$  for any  $k \in \mathbb{N}_1$ . On the other hand, on input  $x$  not encoding for polynomial-time DTM, then the running time of  $M_0$  is within  $O(|x|)$  by the construction, since  $M_0$  turns off mandatorily within  $|x|^2$ . So  $M_0$  is of time complexity of  $S(n) = \max\{n^k, n\}$  for any  $k \in \mathbb{N}_1$ . By Lemma 1, there is a single-tape nondeterministic Turing machine  $M'$  which is equivalent to  $M_0$  and  $M'$  operates in  $O(S(n)^2) = O(n^{2k})$  for any  $k \in \mathbb{N}_1$ . So  $M'$  is a nondeterministic Turing machine running in  $O(n^k)$  for any  $k \in \mathbb{N}_1$ , i.e.  $L_d \in \mathcal{NP}$ . □

---

<sup>7</sup>See Remark 4.

Now we are at the point to present the proof of Theorem 1:

*Proof of Theorem 1.* It is obvious that Theorem 1 is an immediate consequence of Theorem 3 and Theorem 4. So, Theorem 1 follows.  $\square$

**Remark 4.** Originally, we call  $M_0$  a polynomial-time NTM. Some experts [For21] argue that  $M_0$  is not running in polynomial-time, because it runs in  $O(n^k)$  for any  $k \in \mathbb{N}_1$ . He think that the polynomial-time machine is a fixed mathematical definition, i.e. call a machine runs in polynomial-time iff the machine runs in  $O(n^c)$  for some fixed constant  $c > 0$ . Here, we thanks for their valuable criticisms.

But, the author call such  $M_0$  also a “polynomial-time” is because that the language  $L_d$  accepted by  $M_0$  is in  $\mathcal{NP}$ . We show such assertion as in Lemma 3.

In this sense, that we still call  $M_0$  a “polynomial-time” machine is rational. In other words, the result  $L_d \in \mathcal{NP}$  is enough for our discussions. In a nutshell, what we concern about is that to construct a language  $L_d \notin \mathcal{P}$  but  $L_d \in \mathcal{NP}$ . As for the difference between  $M_0$  runs within  $O(n^c)$  for some fixed  $c > 0$  and  $M_0$  runs within  $O(n^k)$  for any  $k \in \mathbb{N}_1$  is not so important to our discussions. In fact, there is no machine can run within  $O(n^c)$  for some fixed  $c > 0$  accepting the  $L_d$  because the mathematicians acknowledge that  $\mathbb{N}_1$  is not bounded from above.

**Lemma 3.** *The language  $L_d$  is in  $\mathcal{NP}$  where  $L_d$  accepted by  $M_0$  runs within  $O(n^k)$  for any  $k \in \mathbb{N}_1$ .*

*Proof.* We first define the family of languages  $\{L_d^i\}_{i \in \mathbb{N}_1}$  as follows :

$L_d^i \triangleq$  language accepted by  $M_0$  runs within  $O(n^i)$  for fixed  $i$  where  $i \in \mathbb{N}_1$ .

That is,  $M_0$  turns off mandatorily when its counter  $\geq n^{i+1}$ .

Then by construction, since  $M_0$  runs within  $O(n^i)$  for any  $i \in \mathbb{N}_1$ , we thus have that

$$L_d = \bigcup_{i \in \mathbb{N}_1} L_d^i. \quad (1)$$

Moreover,

$$L_d^i \subseteq L_d^{i+1} \quad \text{for each fixed } i \in \mathbb{N}_1$$

since for any word  $w \in L_d^i$  accepted by  $M_0$  within  $O(n^i)$  steps, it is surely accepted by  $M_0$  within  $O(n^{i+1})$  steps, i.e.  $w \in L_d^{i+1}$ . This gives that for any  $i \in \mathbb{N}_1$ ,

$$L_d^1 \subseteq L_d^2 \subseteq \cdots \subseteq L_d^i \subseteq L_d^{i+1} \subseteq \cdots \quad (2)$$

Note further that  $L_d^i$  is accepted by a nondeterministic Turing machine  $M_0$  within  $O(n^i)$  steps, we obtain that

$$L_d^i \in NTIME[n^i] \subseteq \mathcal{NP} \quad \text{for any } i \in \mathbb{N}_1. \quad (3)$$

From (1), (2) and (3) we conclude that

$$L_d \in \mathcal{NP},$$

as required.  $\square$

## 5 Don't Suspect That $L_d \in \mathcal{NP}$

Some experts do not acknowledge that  $L_d \in \mathcal{NP}$ , for example [For21]. In [For21], expert Lance Fortnow claims that  $M_0$  to run in polynomial-time it must run in time  $O(n^c)$  for a fixed  $c$ . But to diagonalize all polynomial-time deterministic Turing machines then  $M_0$  needs time  $O(n^k)$  for all  $k \in \mathbb{N}_1$ , including  $k > c$ . He further assert that the author hence made a common mistake and this mistake is not fixable.

We should stress here that although  $M_0$  does not run in  $O(n^c)$  for fixed  $c > 0$ ,  $L_d$  is indeed in  $\mathcal{NP}$ . To further make some experts believe that  $L_d$  is in  $\mathcal{NP}$ , we construct a language  $L_s \in \mathcal{P}$ , but any deterministic Turing machine running within  $O(n^k)$  for fixed  $k \in \mathbb{N}_1$  can not recognize  $L_s$ , because it also needs time  $O(n^k)$  for all  $k \in \mathbb{N}_1$ . To begin, we first cite the following :

**Lemma 4.** (*[HS66]*) *If  $T_1(n)$  and  $T_2(n)$  are time-constructible functions and*

$$\lim_{n \rightarrow +\infty} \frac{T_1(n) \log T_1(n)}{T_2(n)} = 0,$$

*then there is some language accepted in time  $T_2(n)$  but not  $T_1(n)$  by a deterministic Turing machine.*  $\square$

**Theorem 5.** *There exists a language  $L_s$  accepted by an universal deterministic Turing machine  $M'_0$  but by no polynomial-time deterministic Turing machine to run within  $O(n^k)$  for a fixed  $k \in \mathbb{N}_1$ .*

*Proof.* Let  $M'_0$  be a four-tape DTM which operates as follows on an input string  $x$  of length of  $n$ .

1.  $M'_0$  decodes the tuple encoded by  $x$ . If  $x$  is not the encoding of some single-tape polynomial-time DTM  $\widehat{M}_j$  for some  $j$  then rejects, else determines  $t$ , the number of tape symbols used by  $\widehat{M}_j$ ;  $s$ , its number of states; and  $k$ , its order. The third tape of  $M'_0$  can be used as "scratch" memory to calculate  $t$ .
2. Then  $M'_0$  lays off on its second tape  $|x|$  blocks of  $\lceil \log t \rceil$  cells each, the blocks being separated by single cell holding a marker  $\#$ , i.e. there are  $(1 + \lceil \log t \rceil)n$  cells in all where  $n = |x|$ . Each tape symbol occurring in a cell of  $\widehat{M}_j$ 's tape will be encoded as a binary number in the corresponding block of the second tape of  $M'_0$ . Initially,  $M'_0$  places  $\widehat{M}_j$ 's input, in binary coded form, in the blocks of tape 2, filling the unused blocks with the code for the blank.
3. On tape 3,  $M'_0$  sets up a block of  $\lceil (k+1) \log n \rceil$  cells, initialized to all 0's. Tape 3 is used as a counter to count up to  $n^{k+1}$ .
4.  $M'_0$  simulates  $\widehat{M}_j$ , using tape 1, its input tape, to determine the moves of  $\widehat{M}_j$  and using tape 2 to simulate the tape of  $\widehat{M}_j$ . The moves of  $\widehat{M}_j$  are counted in binary in the block of tape 3, and tape 4 is used to hold the state of  $\widehat{M}_j$ . If the counter on tape 3 overflows,  $M'_0$  turns off mandatorily and rejects, else  $M'_0$  accepts if and only if  $\widehat{M}_j$  accepts.

By arguments similar to the proof of Theorem 4, we can prove that the DTM  $M'_0$  described above is of time complexity  $T(n) = O(n^i)$  for any  $i \in \mathbb{N}_1$ , and it of course accepts some language  $L_s$ .

Suppose now  $L_s$  were accepted by some DTM  $\widehat{M}_i$  in the enumeration which is of time complexity  $T(n) = O(n^k)$  for fixed  $k \in \mathbb{N}_1$ . Then by Corollary 3 we may assume that  $\widehat{M}_i$  is a single-tape DTM. Let  $\widehat{M}_i$  have  $s$  states and  $t$  tape symbols. We consider a single-tape deterministic Turing machine  $\widehat{M}_j$  which is of time complexity  $O(n^{k+1})$ . By Lemma 4, there is a language  $\mathcal{L}$  accepted  $\widehat{M}_j$  but not  $\widehat{M}_i$ . Then define the language  $\mathcal{L}'$  as follows

$$\mathcal{L}' \triangleq \{\widehat{M}_j w : w \in \mathcal{L}\},$$

where  $\widehat{M}_j w$  denotes the concatenation of  $\widehat{M}_j$  and  $w$ . It is obvious that  $M'_0$  accepts  $\mathcal{L}'$ . But  $M'_0$  rejects the language  $\{\widehat{M}_i w : w \in \mathcal{L}\}$ . This finishes the proof.  $\square$

Now the language  $L_s$  can be proved in  $\mathcal{P}$  by similar arguments in Lemma 3, which will be shown in the following :

**Lemma 5.**  $L_s \in \mathcal{P}$  where  $L_s$  accepted by  $M'_0$  within  $O(n^i)$  for any  $i \in \mathbb{N}_1$ .

*Proof.* By Corollary 3,  $M'_0$  is equivalent to a single-tape deterministic Turing machine  $\mathcal{M}_0$  of time complexity  $O(n^{2i})$  for any  $i \in \mathbb{N}_1$ .

We first define the family of languages  $\{L_s^i\}_{i \in \mathbb{N}_1}$  as follows :

$$L_s^i \triangleq \text{language accepted by } M'_0 \text{ within } O(n^i), \text{ i.e. } M'_0 \text{ turns off mandatorily when given an input } w, \text{ if the total number of moves made by } M'_0 \text{ exceeds } |w|^{i+1}.$$

Then by construction, since  $M'_0$  runs within  $O(n^i)$  for any  $i \in \mathbb{N}_1$ , we thus have that

$$L_s = \bigcup_{i \in \mathbb{N}_1} L_s^i. \quad (4)$$

Moreover,

$$L_s^i \subseteq L_s^{i+1} \quad \text{for each fixed } i \in \mathbb{N}_1$$

since for any word  $w \in L_s^i$  accepted by  $M'_0$  within  $O(n^i)$  steps, it is surely accepted by  $M'_0$  within  $O(n^{i+1})$  steps, i.e.  $w \in L_s^{i+1}$ . This gives that for any  $i \in \mathbb{N}_1$ ,

$$L_s^1 \subseteq L_s^2 \subseteq \dots \subseteq L_s^i \subseteq L_s^{i+1} \subseteq \dots \quad (5)$$

Note further that  $L_s^i$  is accepted by  $M'_0$  within  $O(n^i)$  steps. In other words,  $L_s^i$  is accepted by a single-tape deterministic Turing machine  $\mathcal{M}_0$  within  $O(n^{2i})$  steps, we thus obtain that

$$L_s^i \in \text{DTIME}[n^{2i}] \subseteq \mathcal{P} \quad \text{for any } i \in \mathbb{N}_1. \quad (6)$$

From (4), (5) and (6) we deduce that

$$L_s \in \mathcal{P},$$

as required.  $\square$

But it can not be accepted by any deterministic Turing machine running in time  $O(n^c)$  for a fixed  $c$ . Such a phenomenon is due to that  $\mathbb{N}_1$  is not bounded from above, in the author’s viewpoint. Of course, by our constructions of machines  $M_0$  in Theorem 3 and  $M'_0$  in Theorem 5,  $L_d \neq L_s$ .<sup>8</sup>

## 6 Conclusions

To summarize, we have shown that there exists a language  $L_d$  accepted by some nondeterministic Turing machine but by no polynomial-time deterministic Turing machines. To achieve this, we first encode any single-tape deterministic Turing machine into an integer by using the method presented in [AHU74]. And then we concatenate the binary string representing the single-tape DTM itself and its order together to represent a polynomial-time DTM. Our encoding of polynomial-time DTM is very convenient for us to map a polynomial-time DTM to integer.

Next, we design a four-tape universal nondeterministic Turing machine diagonalizing over all polynomial-time deterministic Turing machines. Theorem 3 illustrates in detail the operation of the universal nondeterministic Turing machine, showing that there is a language  $L_d$  accepted by this universal nondeterministic Turing machine, but by no polynomial-time deterministic Turing machines. In Theorem 4, we carefully analyze the running time of the universal nondeterministic Turing machine, showing that this universal nondeterministic Turing machine runs in  $O(n^k)$  for any  $k \in \mathbb{N}_1$ . Combining Theorem 3 and Theorem 4, the Theorem 1 follows.

There are many unanswered questions left by this work. For instance, we did not touch the question about the relation between  $\mathcal{NP}$  and  $co\mathcal{NP}$ . Are these two complexity classes the same? There is a subfield of computational complexity theory, namely the proof complexity, which is devoted to the goal of proving  $\mathcal{NP} \neq co\mathcal{NP}$ . See reference [Coo00, Pap94] for the importance of this topic.

## References

- [A1] Anonymous. *P versus NP problem*. October, 2021. Available at: [/wiki/P versus NP problem.](#) 1
- [A2] Anonymous. *Pairing function*. Available at: [/wiki/Pairing function.](#) 2
- [AB09] Sanjeev Arora and Boaz Barak. *Computational Complexity: A Modern Approach*. Cambridge University Press, 2009. 1, 1.1, 2, 3
- [AHU74] Alfred V. Aho, John E. Hopcroft and Jeffrey D. Ullman. *The Design and Analysis of Computer Algorithms*. Addison–Wesley Publishing Company, Reading, California, 1974. 2, 1, 2, 1, 3, 3, 6

---

<sup>8</sup> $L_d$  and  $L_s$  denote diagonalization language and simulation language, respectively.

- [BCSS98] Lenore Blum, Felipe Cucker, Michael Shub and Steve Smale. *Complexity and Real Computation*. Springer-Verlag, New York, 1998. [1.2](#)
- [BGS75] Theodore Baker, John Gill, and Robert Solovay. *Relativizations of The  $P = ?NP$  Question*. SIAM Journal on Computing, Vol. 4, No. 4, December 1975. [1](#)
- [Can91] Georg Cantor. *Ueber eine elementare Frage der Mannigfaltigkeitslehre*. Jahresbericht der Deutschen Mathematiker-Vereinigung. 1 : 75–78 (1891). [1](#), [2](#)
- [Coo73] Stephen A. Cook. *A Hierarchy for Nondeterministic Time Complexity*. Journal of Computer and System Sciences 7, 343–353 (1973). [1](#), [1](#), [1.1](#), [3](#)
- [Coo71] Stephen A. Cook. *The complexity of theorem-proving procedures*. Proceedings of the Third Annual ACM Symposium on Theory of Computing, pages 151–158, ACM, New York, 1971. [1](#), [1.2](#)
- [Coo00] Stephen A. Cook. *The  $P$  versus  $NP$  problem*. April, 2000. Available at [pvsnp.pdf](#). [1](#), [1.2](#), [6](#), [A](#)
- [FS07] Lance Fortnow and Rahul Santhanam. *Time Hierarchies: A Survey*. Electronic Colloquium on Computational Complexity, Report No. 4 (2007). [1](#)
- [For21] Lance Fortnow. *Private communication*. October, 23, 2021. [4](#), [5](#)
- [GJ79] Michael R. Garey and David S. Johnson. *Computers and Intractability, a Guide to the Theory of NP-Completeness*. W. H. Freeman and Company, San Francisco, 1979. [1.2](#)
- [HU69] John E. Hopcroft and Jeffrey D. Ullman. *Formal Languages and Their Relation To Automata*. Reading: Addison-Wesley Publishing Company, California, 1969. [2](#)
- [HU79] John E. Hopcroft and Jeffrey D. Ullman. *Introduction to Automata Theory, Languages, and Computation*. Reading: Addison-Wesley Publishing Company, California, 1979. [2](#)
- [HMU06] John E. Hopcroft, Rajeev Motwani, and Jeffrey D. Ullman. *Introduction to Automata Theory, Languages, and Computation*. 3rd Edition. Addison-Wesley, New York, 2006. [2](#)
- [Har89] Juris Hartmanis. *Gödel, von Neumann, and the  $P=NP$  problem*. Bulletin of the European Association for Theoretical Computer Science. 38 : 101–107, 1989. Available at [1813/6910/89-994.pdf](#). [1.2](#)
- [HR67] H. Rogers, Jr. *Theory of Recursive Functions and Effective Computability*. McGraw-Hill, New York, 1967. [1.2](#)



- [HS66] F. C. Hennie and R. E. Stearns. *Two-Tape Simulation of Multitape Turing Machines*. Journal of the ACM, Vol. 13, No. 4 (October, 1966), pp. 533–546. [2](#), [4](#)
- [Kar72] Richard M. Karp. *Reducibility among combinatorial problems*. In: Miller R. E., Thatcher J. W., Bohlinger J. D. (eds) Complexity of Computer Computations., Plenum Press, New York, 1972, 85–103. [1](#), [1.2](#)
- [Lad75] Richard E. Ladner. *On the Structure of Polynomial Time Reducibility*. Journal of the ACM, Vol. 22, No. 1, January 1975, pp. 155–171. [1](#), [3](#)
- [Lev73] Leonid A. Levin. *Universal search problems* (in Russian). Problemy Peredachi Informatsii 9 (1973), 265–266. English translation in B. A. Trakhtenbrot, *A survey of Russian approaches to Perebor (brute-force search) algorithms*, Annals of the History of Computing 6 (1984), 384–400. [1](#), [1.2](#)
- [Lin21] Tianrong Lin. *Resolution of The Linear-Bounded Automata Question*. CoRR abs/2110.05942 (2021). Available at: [/abs/2110.05942](#) [1](#)
- [Pap94] Christos H. Papadimitriou. *Computational Complexity*. Addison–Wesley, 1994. [1](#), [1](#), [1.1](#), [3](#), [6](#)
- [Tur37] Alan M. Turing. *On computable numbers with an application to the entscheidungsproblem*. Proceedings of the London Mathematical Society, Volume s2-42, Issue 1, 1937, Pages 230–265. [1](#)
- [Rud76] Walter Rudin. *Principles of Mathematical Analysis*. (3rd edition). New York: McGraw–Hill. 1976. [4](#)
- [Wig07] Avi Wigderson. *P, NP and Mathematics—a computational complexity perspective*. Proceedings of the ICM 06, vol. 1, EMS Publishing House, Zurich, pp. 665–712, 2007. [1](#), [1.2](#)

## A The Two Definitions of $\mathcal{P}$ (Respectively, $\mathcal{NP}$ ) Are Equivalent

The official description (definitions) of  $\mathcal{P}$  and  $\mathcal{NP}$  in Cook [[Coo00](#)] are given as :

$$\mathcal{P} \triangleq \{L \mid L = L(M) \text{ for some Turing machine } M \text{ that runs in polynomial time}\}.$$

Here, Turing machine  $M$  is a deterministic Turing machine, and the notion of “running in polynomial time” is that if there exists  $k$  (in  $\mathbb{N}_1$ ) such that,

$$T_M(n) \leq n^k + k \quad \forall n \in \mathbb{N}_1$$

where  $T_M(n)$  defined by

$$T_M(n) = \max\{t_M(w) \mid w \in \Sigma^n\}$$

and  $t_M(w)$  denotes the number of steps (or moves) in the computation of  $M$  on input  $w$ .

$$\mathcal{NP} \triangleq \{L \mid w \in L \Leftrightarrow \exists y (|y| \leq |w|^k \text{ and } R(w, y))\}$$

where the *checking relation*  $R(w, y)$  is polynomial-time, i.e. the language

$$L_R \triangleq \{w \# y \mid R(w, y)\}$$

is in  $\mathcal{P}$ .

These two definitions look a little different with those given in Section 2. But they in fact are equivalent. We will only show the equivalence for definitions of  $\mathcal{P}$  and the case for  $\mathcal{NP}$  can be shown by similar arguments, thus we omit it here.

### A.1 Proof of Two Definitions of $\mathcal{P}$ Are Equivalent.

*Proof.* We show first the “if” part. Suppose that  $L \in \bigcup_{i \in \mathbb{N}_1} \text{DTIME}[n^i]$ . Then there is a  $k \in \mathbb{N}_1$ , such that

$$L \in \text{DTIME}[n^k]$$

which means that for all  $n \in \mathbb{N}_1$ , there is a deterministic Turing machine  $M$ , for any  $w \in \Sigma^n$

$$T_M(|w|) \leq c_0 n^k + c_1 n^{k-1} + \dots + c_k \quad \text{where } c_0 > 0.$$

and  $L = L(M)$ . So,

$$L \in \{L \mid L = L(M) \text{ for some Turing machine } M \text{ that runs in polynomial time}\}.$$

We show next the “only if” part. Assume now that the language

$$L \in \{L \mid L = L(M) \text{ for some Turing machine } M \text{ that runs in polynomial time}\}.$$

Then there exists a  $k \in \mathbb{N}_1$  such that for all  $n \in \mathbb{N}_1$  and for all  $w \in \Sigma^n$ ,

$$T_M(|w|) \leq n^k + k$$

which implies that  $L \in \text{DTIME}[n^k] \subseteq \bigcup_{i \in \mathbb{N}_1} \text{DTIME}[n^i]$ . The conclusion follows.  $\square$