The Cut and Play Algorithm: Computing Nash Equilibria via Outer Approximations

Margarida Carvalho *

Andrea Lodi[‡]

Sriram Sankaranarayanan §

Gabriele Dragotto[†]

November 16, 2021

Abstract

The concept of Nash equilibrium enlightens the structure of rational behavior in multi-agent settings. However, the concept is as helpful as one may compute it efficiently. We introduce the Cut-and-Play, an algorithm to compute Nash equilibria for a class of non-cooperative simultaneous games where each player's objective is linear in their variables and bilinear in the other players' variables. Using the rich theory of integer programming, we alternate between constructing (i.) increasingly tighter outer approximations of the convex hull of each player's feasible set - by using branching and cutting plane methods – and (ii.) increasingly better inner approximations of these hulls - by finding extreme points and rays of the convex hulls. In particular, when these convex hulls are polyhedra, we prove the correctness of our algorithm and leverage the mixed integer programming technology to compute equilibria for a large class of games. Further, we integrate existing cutting plane families inside the algorithm, significantly speeding up equilibria computation. We showcase a set of extensive computational results for Integer Programming Games and simultaneous games among bilevel leaders. In both cases, our framework outperforms the state-of-the-art in computing time and solution quality.

1 Introduction

Game Theory and Mixed Integer Programming (MIP) – and some of their founding ideas – fortuitously share a common root. As noted in [56], two critical contributions in the two fields originated in Princeton and shared John Von Neumann as a common ancestor. On the one hand, linear programming duality provides an elegant and essential component of *MIP* theory and computations.

^{*}CIRRELT & DIRO, Université de Montréal

[†]CERC DS4DM, Polytechnique Montréal gabriele.dragotto@polymtl.ca

 $^{^{\}ddagger}\mathrm{Cornell}$ Tech and ORIE, Cornell University

 $[\]P\&QM,$ Indian Institute of Management, Ahmedabad

On the other hand, the early development of Game Theory by Von Neumann and Morgenstern served as an opener for a rigorous mathematical methodology to model complex interactions among agents. Von Neumann brilliantly hinted at a beautiful connection between the two fields – as George Dantzig explained in [20] – by intertwining linear programming duality and zero-sum games. In a sense, the (ante litteram) game-theoretical interpretation of duality for zerosum games initiated a symbiosis between Mathematical Programming and Game Theory. A few years later, Nash [46, 47] introduced – in two seminal doctoral papers – his solution approach for strategic behavior, namely the concept of *Nash equilibrium*. The Nash's solution concept provides a *stable* solution, in the sense that no "rational" and selfish agent would defer it and get a benefit in doing so. However, the plausibility of the Nash equilibrium concept can only stem from the availability of efficient tools to compute it.

In this paper, we further contribute to bridging the gap between MIP and Game Theory by extending some of the algorithmic rationales of MIP to a family of games. We strongly believe that improving the state-of-the-art techniques for equilibria computation may help extend the broad family of problems involving typical operation research tasks – i.e., logistics, scheduling, tactical decisionmaking – to a multi-agent setting. Recently, the MIP community has been notably active in incorporating game dynamics into optimization frameworks. Games can broaden the modeling capabilities of MIP, and extend classical combinatorial and decision-making problems to multi-agent settings that can account for interactions among multiple decision-makers. For instance, bilevel programming [3, 8, 29, 36, 39, 41]) and Integer Programming Games (IPGs) [9, 11, 19, 24, 33, 40]. This recent research direction suggests that the joint endeavor between game theory and MIP can widen their theoretical understanding and practical impact.

*RBG***s.** As a standard game-theoretic notation, let the operator $(\cdot)^{-i}$ define (\cdot) except *i*; e.g., if $x = (x^1, \ldots, x^n)$, then $x^{-2} = (x^1, x^3, \ldots, x^n)$. In this paper, we study the problem of computing Nash equilibria – arguably the most notorious concept of *stable* solution for strategic behavior – for Reciprocally-Bilinear Games (*RBGs*), a class of *non-cooperative simultaneous* games among *n* players as in Definition 1.

Definition 1 (*RBG*). A Reciprocally-Bilinear Game (RBG) is a game among n players with each player i = 1, 2, ..., n solving the optimization problem

$$\min_{x^{i}} \quad (c^{i})^{\top} x^{i} + (x^{-i})^{\top} C^{i} x^{i}$$
(1a)

s.t.
$$x^i \in \mathcal{X}^i$$
 (1b)

where \mathcal{X}^i is a set (not necessarily closed), C and c are a matrix and a vector with integer entries, respectively. An RBG is polyhedrally-representable if $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ is a polyhedron for each *i*, and one can optimize an arbitrary linear function on \mathcal{X}^i . From the definition, the following properties hold for each player i: (i.) its objective function is *reciprocally-bilinear*, namely, it is linear in its variables x^i , and bilinear in the other players' ones x^{-i} (ii.) its constraint set \mathcal{X}^i contains only the x^i variables, i.e., the interaction takes place at the objective level (i.e., the game is not a generalized Nash equilibrium problem). Besides, we also assume that (i.) all players are rational, namely they want to minimize their objective function, and (ii.) there is *common knowledge of rationality* with complete information, namely each player i knows its optimization problem – as well as the ones of the other players – and knows that every player is rational. We refer to \mathcal{X}^i as the set of (*pure*) strategies of i, namely the set of actions i can adapt in the game. As we will motivate later, the actual strategy set for each player is clconv(\mathcal{X}^i), as it represents the set of all (*mixed*) strategies the player can adopt. Finally, we assume clconv(\mathcal{X}^i) is a polyhedron in order to guarantee finite termination of our algorithms.

In this work, we employ the rich theory of integer program-Contributions. ming - for instance, concepts such as relaxation, valid inequalities, disjunctive programming, branching – and extend them to compute Nash equilibria for *RBGs.* Our approach is *general*, as it does not exploit any game-specific structure besides the polyhedral representability of the (mixed) strategy sets. Further, it stands on the shoulders of many giants: the theoretical and practical apparatus of integer programming. We show the integration of such mathematical programming tools - and specifically integer programming ones - has promising implications in equilibria computation. Specifically, we start from the concept of outer approximation. In *MIP*, often one exploit a series of increasingly tighter outer approximations – or (linear) relaxations [42, 48]. However, a game's approximation (e.g., when at least a player's optimization problem is outer approximated) does not possess the concept of bound when the solution paradigm is the Nash equilibrium. Here we establish an algorithmic rationale to exploit the approximations of RBGs. We briefly summarize our contributions as follows.

- (i.) We introduce *Cut-and-play* (*CnP*), a general algorithm to find mixedstrategy Nash equilibria (*MNEs*) for *RBGs*. The algorithm finds an equilibrium or provides a proof of its non-existence by constructing increasingly tighter outer approximations of $cl conv(\mathcal{X}^i)$ for any player *i*. At every iteration, we attempt to compute an equilibrium for an "easier" approximated game, and eventually refine the approximation by using cutting planes and branching.
- (ii.) As a subroutine to the *CnP*, we introduce an *Enhanced Separation Oracle* (*ESO*) for polyhedrally-representable sets. Given a point $\overline{x} \in \mathbb{R}^n$ and a set $\mathcal{X} \subseteq \mathbb{R}^n$, the *ESO* returns either (i.) no and $(\overline{\pi}, \overline{\pi}_0) \in \mathbb{R}^n \times \mathbb{R}$ such that $\overline{\pi}^\top \overline{x} > \overline{\pi}_0$ with $\overline{\pi}^\top x \leq \overline{\pi}_0$ for all $x \in \mathcal{X}$, or (ii.) yes, and $v^1, \ldots, v^u \in \mathcal{X}$, extreme rays r^1, \ldots, r^p of $\operatorname{cl}\operatorname{conv}(\mathcal{X}), \alpha_1, \ldots, \alpha_u \in [0, 1]$ and $\beta_1, \ldots, \beta_p \in \mathbb{R}_+$ such that $\sum_{k=1}^u \alpha_k = 1$ and $\overline{x} = \sum_{k=1}^u \alpha_k v^k + \sum_{j=1}^p \beta_j r^j$. The idea

grounds in the well-studied concept of separation oracle [6, 13, 28, 31, 37, 48], and the implementation we provide overcomes the computational issues associated with the ellipsoid algorithm. From a game-theory perspective, given a point $\tilde{\sigma}^i \in \operatorname{cl\,conv}(\mathcal{X}^i)$, the *ESO* returns the pure strategies that player *i* plays in $\tilde{\sigma}^i$ with their associated probabilities.

(iii.) We provide extensive computational results on IPGs and Nash games Among Stackelberg Players (NASPs) [10]. In both cases, our work improves the state-of-the-art algorithms in computing time and solution quality (given a quality's measure). Moreover, in IPGs, we show how MIP cutting planes reduce the number of CnP iterations and significantly improve convergence.

Outline. Section 2 provides a literature overview and the necessary background definitions from game theory, optimization, and MIP. Section 3 presents our *Cut-and-Play* algorithm. As a sine qua non component, Section 4 introduces the *ESO*, which separates a given point from the (unknown) set of mixed strategies. Section 4.1 introduces an implementation of the *ESO*, and weighs up some practical aspects concerning the algorithmic implementation. Section 5 presents the two main applications of the algorithm, namely *IPG*s and *NASP*s, and tailors some components of the algorithmic approach to the two families of games. Finally, Section 6 showcases a comprehensive set of computational results.

2 Related literature and background

Nash Equilibrium. We employ the standard concept of Nash Equilibrium [46, 47] as solution concept. For any given RBG instance, we aim to find an equilibrium or show that none exists. When there is only one player – namely n = 1 – the game becomes trivial, and its equilibrium collapses to the solution of a single optimization problem. However, when multiple agents are simultaneously deciding, the notion of Nash equilibrium becomes essential. At any equilibrium point, no player can *unilaterally* deviate from the equilibrium point and improve its payoff. In general, the equilibrium may map a probability distribution over every player's set of pure strategies. The pure strategies contributing to the equilibrium. In general, we will refer to an equilibrium as a mixed-strategy Nash Equilibrium (MNE). However, when the support is a singleton, we refer to it as a pure-strategy Nash Equilibrium (PNE).

Nash [46] proves the existence of MNE for finite games, while the renowned contribution of Daskalakis et al. [21] shows the task of computing an MNE for such games is PPAD-complete. For what concerns continuous games – namely when the set of strategies is infinite – Glicksberg [30] establishes the existence of MNEs whenever the strategy spaces are compact and utilities continuous. Stein et al. [57] prove that for all the MNEs in separable games – namely where players' payoffs take a sum-of-products form – there is a payoff equivalent MNE

of finite support. Carvalho et al. [9, 12] focus on IPGs, where each player strategy set is defined by inequalities and integrality requirements. They point out that the problem of deciding if an IPG has an MNE- or even a PNE- is Σ_2^p -hard. However, whenever the feasible region of each player is nonempty and bounded, the IPG always has an MNE. Similarly, Carvalho et al. [10] proves that deciding if a NASP has a PNE- or analogously an MNE- is Σ_2^p -hard. Further, they prove there is always an MNE if the players' feasible regions are nonempty and bounded. In both IPGs and NASPs, an MNE may not exist if one or more players have an unbounded action space.

Computing equilibria. A significant segment of the algorithmic approaches for Nash equilibria computation focuses on finite games, namely games represented in normal-form (i.e., the input are matrices of payoffs for all possible game's outcomes). The first family of algorithms is the one of complementaritybased methods. Historically, the first contribution to this family – and in general to the task of equilibria computation – is the Lemke-Howson algorithm, a path following algorithm which works for any 2-player finite (i.e., finitely many strategies) game [43]. The algorithm has a strong geometrical interpretation since it represents the game with a polytope for each player and pivots among its vertices until it reaches an equilibrium vertex. Rosenmüller [52], Wilson [59] extended the Lemke-Howson algorithm for *n*-player games. However, such methods require the solution of a series of non-linear equation systems. The second family is the one of homotopy-based algorithms. Scarf [55] proposed a simplicial subdivision algorithm, where the equilibrium is then the fixed point over the product of unit simplices describing the strategy space of each player. Finally, a third family of approaches is the one of support enumeration algorithms. Given a 2-player game, this class of algorithms builds a linear system of equations and inequalities to determine if a given support (a subset of pure strategies) contains an equilibrium for the given game. Following this idea, Sandholm et al. [54] find equilibria by formulating mixed-integer programs, while Porter et al. [51] conceived a simple search algorithm that shows to be very efficient in practice. The latter prioritizes the search towards equilibria of small and balanced supports. A further refinement of their algorithm includes backtracking steps and an effective pruning of strictly dominated pure strategies (i.e., strategies that will never be played from a rational agent).

However, in RBGs, \mathcal{X}^i is large and may be even uncountable, thus the use of the described methodologies for finite games is rather impractical. Indeed, representing a game by enumerating its possible outcomes may be challenging. This applies to any game represented by each player optimization problem, for instance, games with a representation similar to the one of RBGs. When each player optimization problem is convex in their decision variables, a broadly studied family of algorithms is the one of equilibrium programming methods [26]. The equilibrium problem often reformulates as a non-linear complementarity problem or an equivalent variational inequality. Compared to homotopy methods, the latter does not guarantee global convergence [45]. Furthermore, several methodologies address the non-convex cases. Carvalho et al. [12] introduce the Sampled Generation Method (SGM) for IPGs. At each iteration, the algorithm computes an equilibrium in a restricted game (i.e., a game containing a subset of each player's strategies). Then, if at least one player can rationally improve its objective function by adopting a strategy outside the restricted game, the algorithm discards the previously computed equilibrium and adds such strategy to the next iteration's restricted game. Each restricted game is represented in normal-form, enabling the use of many of the methodologies described before. Cronert and Minner [19] extend the SGM algorithm to better select candidate equilibria if more than one exist. Dragotto and Scatamacchia ^[24] provide an algorithm to compute and enumerate PNEs in IPGs through integer programming formulations and valid inequalities. Sagratella [53] introduces a branching method to enumerate all pure equilibria when payoffs are convex and convex constraints along with integrality requirements on variables model the strategy sets. Their approach is general and exploits a branching routine to handle integral non-convexities.

2.1 Background and definitions

We employ some standard definitions from convex [7], polyhedral [17] and complementarity [18] theories. Given any set $K \in \mathbb{R}^k$, we denote as cl(K), int(K), bd(K) the closure, interior, and boundary of K. A face F for K is a non-empty closed convex set so that if $x, y \in K$, and $(\alpha x + (1 - \alpha)y) \in F$ for any $\alpha \in [0, 1]$, then $x, y \in F$. $x \in K$ is an extreme point if it cannot be expressed as a strict convex combination of two points in K, i.e., with $0 < \alpha < 1$. A recession direction for K is a vector $r \in \mathbb{R}^k$ so that, for any $x \in K$, $x + \alpha r \in K$ for any $\alpha \geq 0$. An extreme ray for K, or extreme recession direction, is a recession direction for K that cannot be expressed as a convex combination of two or more other recession directions for K. Given a closed convex set $\overline{K} \in \mathbb{R}^k$, we denote as $rec(\overline{K})$ and $ext(\overline{K})$ the set of recession directions and extreme points of \overline{K} , respectively. Given two closed convex sets $\overline{K}^1 \in \mathbb{R}^k$, and $\overline{K}^2 \in \mathbb{R}^k$, we define as their Minkowski sums $\overline{K}^1 + \overline{K}^2$ as $\{x : x = k^1 + k^2, k^1 \in \overline{K}^1, k^2 \in \overline{K}^2\}$. Depending on its structure, \overline{K} can be: (i.) a polyhedron if finitely many half-spaces generate it, (ii.) a (closed) cone if for any $k \in \overline{K}$ and positive $\alpha \in \mathbb{R}$, then $\alpha k \in \overline{K}$. Furthermore, \overline{K} is convex if any convex combinations of points in \overline{K} still belongs to \overline{K} . A polyhedral cone is a special convex cone given by the conic hull of a finite set of recession directions, i.e., applying the cone operator on a finite set. If \overline{K} is also bounded, Krein and Milman proved that $\overline{K} = \operatorname{conv}(\operatorname{ext}(\overline{K}))$. Should \overline{K} be a polyhedron (therefore possibly unbounded), then the theorem is known as the Weyl theorem, and decomposes \overline{K} into the (Minkowsky) sum of its extreme points $V = \text{ext}(\overline{K})$ and the conic combination of its recession directions $R = \operatorname{rec}(\overline{K})$, namely $\overline{K} = \operatorname{conv}(V) + \operatorname{cone}(R)$. This vertex-ray representation of a polyhedron is also known as the \mathcal{V} -polyhedral representation. A valid inequality for \overline{K} is an inequality of the form $\pi^{\top} x \geq \pi_0$ holding for any $x \in \overline{K}$, and it is supporting if there exists an $x_0 \in \overline{K}$ so that

 $\pi^{\top} x_0 = \pi_0$, i.e., x_0 is a boundary point for \overline{K} , and the inequality is a face for \overline{K} . We define as separation oracle the blackbox solving the *separation problem* of Definition 2.

Definition 2 (Separation Problem). Given a closed convex set \overline{K} , and a point \overline{x} , either: (i.) determine that $\overline{x} \in \overline{K}$ and output **yes**, or (ii.) determine that $\overline{x} \notin \overline{K}$, and output **no** and $(\overline{n}, \overline{n}_0) \in \mathbb{R}^k \times \mathbb{R}$, with $\overline{n}^\top x \leq \overline{n}_0$ being a valid inequality for any $x \in \overline{K}$ while $\overline{n}^\top \overline{x} > \overline{n}_0$ (i.e., a separating hyperplane).

Given \overline{K} , we call a (polyhedral) set O as a (polyhedral) outer approximation of \overline{K} if $\overline{K} \subseteq O$. Conversely, a (polyhedral) set I is a (polyhedral) inner approximation of \overline{K} if $I \subseteq \overline{K}$. Let x be a set of k variables, M a $k \times k$ matrix, and q a k-dimensional vector. We define as (linear) complementarity constraint the expression $0 \le x \perp z = (Mx + q) \ge 0$, where the \perp operator serves the purpose of vector multiplication (e.g., $x \perp z \equiv x^{\top} z = 0$), and M and q are a matrix and a vector of appropriate dimensions. A linear complementarity problem (LCP)is the problem of finding a vector x such that $0 \le x \perp z = (Mx + q) \ge 0$, or show that no such vector exist.

Games. We previously introduced the generic family of RBGs as simultaneous non-cooperative games among n players satisfying Definition 1. In particular, many classes of well-studied optimization problems are polyhedrally-representable: linear complementarity problems (LCPs), MIP, linear bilevel programs and reverse convex programs all satisfy this property [34, 35]. We provide some examples in Remark 1.

Remark 1. If any \mathcal{X}^i is either a polyhedron or a union of polyhedra, then $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ is polyhedral, and the game is polyhedrally-representable. Also, IPGs with reciprocally-bilinear objectives are polyhedrally-representable. There are other polyhedrally-representable games as well: for example, let $\mathcal{X}^i = \{x^i \in \mathbb{R}^3 : ((x_1^i)^2 + (x_2^i)^2 \ge x_3^i, -x_3^i \le x_1^i, x_2^i \le x_1^i, x_3^i \ge 0\}$. This set, despite being non-polyhedral, has a polyhedral convex-hull, $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i) = \{-x_3^i \le x_1^i, x_2^i \le x_3^i, x_3^i \ge 0\}$.

We denote the feasible set of player i as \mathcal{X}^i . We call any point $x^i \in \mathcal{X}^i$ a pure-strategy of player i. When a player i randomizes over its pure-strategies \mathcal{X}^i , we obtain a so-called mixed-strategy. More formally, σ^i is a mixed-strategy – or simply a strategy – for i if it is a probability distribution over the pure strategies \mathcal{X}^i . Let Δ^i denote the set of mixed strategies for i, namely the space of probability distributions over \mathcal{X}^i . Furthermore, $\operatorname{supp}(\sigma^i) = \{x^i \in \mathcal{X}^i : \sigma^i(x^i) > 0\}$ is the support of the mixed-strategy σ^i . We will refer to $\sigma^i(x^i)$ as the probability of playing x^i in $\sigma^i = \sigma^i(x^i)x^i$. Clearly, any mixed-strategy σ^i with a singleton support (e.g., $|\operatorname{supp}(\sigma^i)| = 1$) is a pure strategy. Given a player i, we denote with $\sigma^{-i} \in \prod_{j=1, i\neq j}^n \Delta^j$ the other players' strategies, a probability distribution over the pure-strategies of i's opponents. We will refer to the objective function of i evaluated for $\hat{x} = (\hat{x}^i, \hat{x}^{-i})$ – namely $f^i(\hat{x}^i, \hat{x}^{-i})$ – as the payoff of i for a given pure strategy profile. Note that we slightly

abuse the definition of payoff, since all RBG players are in fact minimizing their objective functions. RBGs fall into the bigger category of *separable games* (e.g., the objective functions are sums of polynomials), since the players' objectives are bilinear expressions. Hence, their MNEs all have finite supports or finite support equivalents [57]. The expected payoff of player *i* for a given mixed-strategy profile $\sigma = (\sigma^1, \ldots, \sigma^n)$ is as in (2).

$$\mathbb{E}(f^{i}(\sigma^{i},\sigma^{-i})) = f^{i}(\sigma^{i},\sigma^{-i}) = (c^{i})^{\top}\sigma^{i} + (\sigma^{-i})^{\top}C^{i}\sigma^{i} = (2)$$
$$\sum_{x^{i}\in\operatorname{supp}(\sigma^{i})} (c^{i})^{\top}x^{i}\cdot\sigma^{i}(x^{i}) + \sum_{x\in\operatorname{supp}(\sigma)} (x^{-i}\cdot\sigma^{-i}(x^{-i}))^{\top}C^{i}x^{i}\cdot\sigma^{i}(x^{i})$$

Equilibria. A strategy $\overline{\sigma}^i$ is a best-response strategy for player *i* given (its opponents' strategies) $\overline{\sigma}^{-i}$ if $f^i(\overline{\sigma}^i, \overline{\sigma}^{-i}) \leq f^i(\widehat{\sigma}^i, \overline{\sigma}^{-i})$ for any other strategy $\widehat{\sigma}^i$. A strategy profile $\overline{\sigma} = (\overline{\sigma}^1, \ldots, \overline{\sigma}^n)$ is an MNE if, for each player *i* and strategy $\widetilde{\sigma}^i \in \Delta^i$, then $f^i(\overline{\sigma}^i, \overline{\sigma}^{-i}) \leq f^i(\widetilde{\sigma}^i, \overline{\sigma}^{-i})$. Any strategy x^i in the support $\operatorname{supp}(\overline{\sigma}^i)$ of the MNE is a best-response strategy for *i*. In other words, given an MNE $\overline{\sigma}$, any *i* is indifferent among the pure-strategies in the support of σ^i . This was formalized by Nash as in Theorem 1.

Theorem 1 (Equality of Payoffs [46, 47]). Assume σ^i is a (mixed) best-response for player i given σ^{-i} . Then, $f^i(\sigma^i, \sigma^{-i}) = f^i(x^i, \sigma^{-i})$ for any $x^i \in \text{supp}(\sigma^i)$.

In Theorem 2, we generalize a theorem from Carvalho et al. [10]. With this result, we ground the algorithmic rationale we present in this paper.

Theorem 2. Consider two RBGs G and \widetilde{G} such that (i.) the objectives of player i in G and \widetilde{G} are the same, and (ii.) the feasible set of player i in G is \mathcal{X}^i and in \widetilde{G} is $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$. For any PNE $\widetilde{\sigma}$ of \widetilde{G} , there exists an MNE $\widehat{\sigma}$ of G such that each player i gets the same payoff in G and \widetilde{G} . Further, if \widetilde{G} has no PNE, then G has no MNE.

In the proof (which is in the appendix Section A), we exploit the linearity of each player's objective (given its opponents' choices) to compute the players' expectation of payoffs. Thus, assuming the game is an RBG is crucial for the result to hold. As of Theorem 2, any *i*-th player's problem in a polyhedrallyrepresentable RBG translates to an equivalent convex game where the feasible set is $cl conv(\mathcal{X}^i)$ instead of \mathcal{X}^i . In such a game, one can directly optimize over the mixed strategies, and each player *i* solves a linear program, where x^i are its variables and x-i are parameters. By pairing all the players' complementarity conditions – namely the primal-dual slackness of each *i*-th linear program – we obtain an LCP where any feasible solution is a PNE for the convex game [18]. However, one may not necessarily have access to $cl conv(\mathcal{X}^i)$ (e.g., an integer programming perfect formulation). In this sense, reformulating the game on the $cl conv(\mathcal{X}^i)$ -sets may be practically unviable.

2.2 Integer Programming Games

IPGs extend the realm of integer programming to a multi-agent setting. Each player i solves the integer program in (3).

$$\min_{x^i} \quad \Pi^i(x^i, x^{-i}) \tag{3a}$$

s.t.
$$A^i x^i \le b^i, x^i \ge 0, x^i_j \in \mathbb{N} \forall j \in \mathcal{I}^i$$
 (3b)

The matrix A^i and the vector b^i have rational entries, and we require some variables – whose indexes are in \mathcal{I}^i – to be integer. To follow the standard notation from Köppe et al. [40], Π^i is a continuous payoff function. Whenever Π^i takes the form of the objective in Definition 1, the *IPG* is also an *RBG*. This latter family of *IPG*s is of particular interest from the *MIP* community since it naturally extends a broad range of tasks from the operations research community to a multi-agent setting. For the scope of this work, we focus on *IPG*s that are also *RBG*s. Hence, for any *i*, the set \mathcal{X}^i is the set of feasible points for (3). The perfect formulation of the feasible region in (3) for any player *i* is cl conv(\mathcal{X}^i). This formulation is notoriously difficult to obtain in practice, and often contains a number of linear inequalities that is exponential in the size of the data needed to describe the problem [16]. Finally, one can visualize the interaction among *i* and its opponents as the change in the direction of the *i*-th objective function due to the opponent's parameters x^{-i} .

$2.3 \quad NASPs$

We recall the definition of NASPs problems from [10]. In this game, each player $i \in \{1, \ldots, n\}$ solves the optimization problem $P^i(x^i, x^{-i})$ in x^i (for brevity, P^i) in the form of (4), where c^i is a real-valued vector of dimension n_i , and Q_o^i is a $n_o \times n_i$ real-valued matrix encapsulating the interactions between any two distinct players i and o. Any leader i has m_i followers, each of which solves a convex continuous optimization problem as in (4c). For a given leader i, and its respective follower $j \in \{1, \ldots, m_i\}$, $f^{i,j}$, $e^{i,j}$ and $D^{i,j}, E^{i,j}, G^{i,j}, H^{i,j}$ are respectively vectors and matrices of conformable dimensions. Each feasible set \mathcal{X}^i is given by the constraints in (4), namely a set of linear constraints (4b) and bilevel ones (4c). Furthermore, the variables x^i are partitioned into the leader's variables w^i , and the followers' ones $y^i = (y^{i,1}, \ldots, y^{i,m_i})$ as of (4d).

$$\min_{x^{i}} (c^{i})^{\top} x^{i} + \sum_{o=1, o \neq i}^{n} (x^{o})^{\top} Q_{o}^{i} x^{i}$$
(4a)

s.t.
$$A^i x^i = b^i$$
 (4b)

$$y^{i,j} \in \arg\min_{y^{i,j}} \{ (\frac{1}{2} (y^{i,j})^\top D^{i,j} y^{i,j} + (f^{i,j} + \sum_{k=1,k\neq j}^{m_i} (y^{i,k})^\top E^{i,j}) y^{i,j} + (Fw^i)^\top y^{i,j} : G^{i,j} w^i + H^{i,j} y^{i,j} \le e^{i,j}, \ y^{i,j} \ge 0 \}$$

$$\forall j \in \{1, \dots, m_i\}$$
(4c)

$$x^i \ge 0, x^i = (w^i, y^i) \tag{4d}$$

Any single problem P^i is a linear Stackelberg Game [58] parametrized in x^{-i} , while a NASP $P = (P^1, \ldots, P^n)$ is a tuple of n Stackelberg Games. Leaders interact through their objectives, while followers can interact only with their respective leader and followers. Thus, leaders are simultaneously deciding their strategies while ensuring optimality conditions for their followers. For any given leader *i*, its feasible region \mathcal{X}^i (4b)-(4d) is a finite union of polyhedra [10], and hence NASPs are polyhedrally-representable RBGs. One can rewrite \mathcal{X}^i as in (5), where \mathcal{C}^i is a set of indexes for the complementarity equations. With such notation, we rewrite the followers' convex quadratic linear problems into identical complementarity conditions derived from the KKT conditions. We point the reader to Colson et al. [15] for a tutorial in the context of bilevel problems, and to Carvalho et al. [10] for a tutorial on NASPs.

$$\mathcal{X}^{i} = \begin{cases}
A^{i}x^{i} \leq b^{i} \\
z^{i} = M^{i}x^{i} + q^{i} \\
0 \leq x^{i}_{j} \perp z^{i}_{j} \geq 0 \\
x^{i} \geq 0
\end{cases} \quad \forall j \in \mathcal{C}^{i}$$
(5)

We can further rewrite (5) as (6). In this last reformulation, we explicitly express \mathcal{X}^i as a finite union of polyhedra. For any leader *i*, we refer to the first polyhedron in (6) as the *polyhedral relaxation* O_0^i . In other words, this is the polyhedron containing the leader constraints, the definitions for z^i , and the non-negativity constraints.

$$\mathcal{X}^{i} = \underbrace{\left\{\begin{array}{cc} A^{i}x^{i} \leq b^{i} \\ z^{i} = M^{i}x^{i} + q^{i} \\ x^{i} \geq 0, z^{i} \geq 0 \end{array}\right\}}_{O_{0}^{i}} \bigcap_{j \in \mathcal{C}^{i}} (\{z_{j}^{i} = 0\} \cup \{x_{j}^{i} = 0\})$$
(6)

For Theorem 2, given a leader i, if $\sigma^i \in \mathcal{X}^i$ then σ^i is a pure-strategy for i, otherwise, i.e., if $\sigma^i \in \operatorname{clconv}(\mathcal{X}^i) \setminus \mathcal{X}^i$, σ^i is a mixed-strategy. Hence, we

optimize the leaders' objective functions over $cl conv(\mathcal{X}^i)$ rather than \mathcal{X}^i (for any *i*). We can then consider $cl conv(\mathcal{X}^i)$ by exploiting the well-known extended formulation of the union of polyhedra from Balas' theorem [1, 2].

3 Algorithmic Scheme

First, we briefly sketch the ideas behind our algorithm. In a nutshell, the CnP computes an MNE for an RBG instance by computing the MNE of a sequence of "easier" convex games, namely what we define as *approximate games*.

Definition 3 (Approximate Game). Given an RBG instance G, \tilde{G} is an approximate game for G if and only if: (i.) G and \tilde{G} have the same number of players, and their payoff functions are equal (ii.) for each i = 1, ..., n, let \mathcal{X}^i and $\tilde{\mathcal{X}}^i$ be the feasible region of player i in G and \tilde{G} , respectively: then, $\tilde{\mathcal{X}}^i \supseteq \mathcal{X}^i$ ($\tilde{\mathcal{X}}^i$ is an outer approximation of \mathcal{X}^i). Further, \tilde{G} is a Polyhedral Approximate Game (PAG) of G if $\tilde{\mathcal{X}}^i$ is a polyhedron for each i = 1, ..., n in \tilde{G} .

In Definition 3 we let $\tilde{\mathcal{X}}^i$ be an outer approximation – possibly polyhedral in PAGs– of $cl \operatorname{conv}(\mathcal{X}^i)$, namely the mixed-strategy space for player *i*. The CnP will compute MNEs for a sequence of PAGs, eventually refining one or more of the $\tilde{\mathcal{X}}^i$ by either adding cutting planes or branching on general disjunctions. This process evokes the same scheme one would use to solve a MIP via Branch and Cut [48], where – instead of a game and an approximate game – one deals with a MIP and its (linear) relaxation. As the $\tilde{\mathcal{X}}^i$ -sets are polyhedral, one can formulate an LCP to determine a PNE in the PAG. Since LCPs are \mathcal{NP} -hard problems, at each iteration of the CnP, we will solve a difficult problem. This is not surprising, given that both deciding on the existence of an MNE for IPGs and NASPs are Σ_2^p -hard problems, for instance. In MIP, a feasible solution to the original problem is always feasible for its linear relaxation, and there is a relationship between the bounds of the two. However, this may not be the case in games.

Optimization, Relaxations and Games. One refines the player's feasible regions as one would refine a series of increasingly accurate relaxations of an integer program. A feasible solution to the original problem is always feasible for its relaxation, and often there is a relationship between the bounds of the two. However, when dealing with games and Nash equilibria, such a strong relationship does not necessarily hold, as we illustrate in Example 1. Carvalho et al. [12] provides a similar example in the context of *IPGs*. A feasible *MNE* for the original problem may not be an *MNE* for the *PAG*, since the latter may introduce (infeasible) profitable deviations for some players, i.e., strategies that are not feasible but prevents the existence of an equilibrium. As a consequence, there is no concept of bound on the players' objective functions. When players have possibly unbounded feasible regions, a *PAG* may not even have an equilibrium, whereas the original game has one (Example 1). In this sense, one loses information by outer approximating one or more of the players' \tilde{X}^i sets.

Example 1. Consider an RBG with n = 2: Player 1 solves $\min_x \{\xi x : x \in \mathbb{R}, x \ge 1\}$ while Player 2 solves $\min_{\xi} \{x\xi : \xi \in \mathbb{R}, \xi \in [1,2]\}$. This game has an MNE: $(x,\xi) = (1,1)$. Consider now the PAG where Player 2's feasible region is $\{\xi \in \mathbb{R} : \xi \in [-1,2]\}$. Then, this PAG has no MNE despite the original game has one. Second, if Player 2 objective becomes $-x\xi$, then the original problem does not have an MNE, while the PAG has the MNE $(x,\xi) = (1,2)$.

Algorithmic outline. Through this section, we provide an abstract rationale for the CnP algorithm. While the scheme works on any RBG and it is general in this sense, we will later contextualize it for IPGs and NASPs in Section 5. We start from a game in the form of (1), assuming to have access to an initial PAG. With NASPs, a natural choice is the polyhedral relaxation \mathcal{O}_0^i for any i, while for IPGs is the linear relaxation of each player's integer program. For any given player i, let $\tilde{\mathcal{X}}_t^i = {\tilde{A}_t^i x^i \leq \tilde{b}_t^i, x^i \geq 0}$ be the increasingly accurate outer approximation of its feasible region \mathcal{X}^i at step t of the cutting plane algorithm. We compute an equilibrium for the PAG by building an LCP where each player i solves an optimization problem over $\tilde{\mathcal{X}}_t^i$ (and the original objective function for the input RBG). Let M_t , and q_t be a vector and a matrix defined as in (7).

$$q_t = \begin{bmatrix} c^1 \\ \tilde{b}_t^1 \\ \vdots \\ c^n \\ \tilde{b}_t^n \end{bmatrix} M_t = \begin{bmatrix} Q^1 x^{-1} & \tilde{A}_t^{1\top} \\ -\tilde{A}_t^1 & 0 \\ \vdots \\ Q^n x^{-n} & \tilde{A}_t^{n\top} \\ -\tilde{A}_t^n & 0 \end{bmatrix}$$
(7)

The objects in (7) model the KKT conditions for each player's convex program associated with the outer approximation of its optimization problems. In other words, they are the optimality conditions associated with the objective function of the original game and the outer approximated feasible regions. The solutions to the LCP defined as $0 \leq \sigma \perp z = (M_t \sigma + q_t) \geq 0$ provide all the *PNE*s $\sigma = (\sigma^1, \ldots, \sigma^n)$ for the *PAG* at step *t*. Similarly to *MIP*'s relaxations, we refine $\widetilde{\mathcal{X}}_t^i$ to $\widetilde{\mathcal{X}}_{t+1}^i$ in two ways: by *cutting* or by a *branching* decision. For *cutting*, we point to the addition of cutting planes that are valid for $cl \operatorname{conv}(\mathcal{X}^i)$. As for *branching*, we borrow the term from *MIP* to refer to the inclusion of a general disjunction over one or more variables.

3.1 The Cut and Play Algorithm

We present the CnP algorithm in Algorithm 1. The input is a polyhedrallyrepresentable RBG instance G (a numerical tolerance ϵ), while the output is either an $MNE \hat{\sigma}$ or a certificate of non-existence. We assume to have access to an initial $PAG \tilde{G}$. For IPGs, the most natural choice is the linear relaxation of each player's integer program. For any given player i, let $\tilde{\mathcal{X}}_0^i$ be the starting

Algorithm 1: Cut and Play for *RBG*s

Data: An instance G of an RBG, a numerical tolerance ϵ **Result:** $\hat{\sigma} = (\hat{\sigma}^1, \dots, \hat{\sigma}^n)$ or \emptyset (no *MNE* exists). 1 Let $\widetilde{\mathcal{X}}_0^i = \{\widetilde{A}^i x^i \leq \widetilde{b}^i, x^i \geq 0\}$ for $i = 1, \dots, n$, and let $t \leftarrow 0$; 2 while true do $\widetilde{G} \leftarrow (\widetilde{P}^1, \dots, \widetilde{P}^n)$, where $\widetilde{P}^i = \min_{x^i} \{ f^i(x^i, x^{-i}) : x^i \in \widetilde{\mathcal{X}}^i_t \}$; 3 $\widetilde{\sigma} \leftarrow EquilibriumLCP(\widetilde{G})$ $\mathbf{4}$ /* Reformulate as an LCP */ if there exists a PNE $\tilde{\sigma}$ for \tilde{G} then 5 for each player $i = 1, 2, \ldots, n$ do 6 $A \leftarrow \mathrm{ESO}(\widetilde{\sigma}^i, \mathcal{X}^i, \epsilon, c^i + (C^i)^\top \widetilde{\sigma}^{-i})$ /* Call the ESO 7 */ if A is no then 8
$$\begin{split} \widetilde{\mathcal{X}}_{t+1}^i \leftarrow \widetilde{\mathcal{X}}_t^i \cap \{ \overline{\pi}^\top x^i \leq \overline{\pi}_0 \} & \textit{/* } \pi, \pi_0 \text{ from ESO's no } * \\ \text{Branch: Find a disjunction in terms of } Y_{t+1}^i, Z_{t+1}^i \text{ for } \mathcal{X}^i \end{split}$$
*/ 9 10 in G, and let $\widetilde{\mathcal{X}}_{t+1}^i \leftarrow \operatorname{cl}\operatorname{conv}(Y_{t+1}^i \cup Z_{t+1}^i)$ if ESO returned n yes then solved=true, return $\tilde{\sigma}$; 11 else if *no* PNE then 12if no Branch-or-Cut candidates for any i then return \emptyset ; 13 else 14 Branch-and-Cut: (i.) find a disjunction in terms of 15 Y_{t+1}^i, Z_{t+1}^i for \mathcal{X}^i in G, and let $\widetilde{\mathcal{X}}_{t+1}^i \leftarrow \operatorname{cl\,conv}(Y_{t+1}^i \cup Z_{t+1}^i)$, and (ii.) add a valid inequality for $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ $\mathbf{16}$ $t \leftarrow t + 1$

outer approximation for the *i*-th feasible region at the starting iteration t =0. In G, the feasible sets are polyhedra, and hence the MNE of G are all PNEs (if any). We determine if G has PNEs by solving the LCP defined as $0 < \sigma \perp z = (M_t \sigma + q_t) > 0$ with M_t and q_t defined as in (7). If G has no PNE, we cannot infer that G has no MNE (Example 1). This non-existence condition triggers when there is at least one i with an unbounded $\widetilde{\mathcal{X}}_{t}^{i}$. The only viable option is to further improve \widetilde{G} by refining at least one $\widetilde{\mathcal{X}}_t^i$ (for some i) with the Branch-and-Cut subroutine, where the algorithm branches and may add a valid inequality for $cl conv(\mathcal{X}^i)$ (Step 15). The inequality here is a discretionary operation, and does not affect finite termination (yet, it may affect performance). In specific, since this step only occurs when there is no *PNE* for \widetilde{G} , there is not even a point to cut off. The only viable option is, in fact, to refine the approximation. Assume $\mathcal{X}^i = Y^i \cup Z^i$ where Y^i, Z^i are two arbitrary sets so that $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i) = \operatorname{cl}\operatorname{conv}(Y^i \cup Z^i)$. If at a step t, there exists a $\tilde{\sigma}^i \in \mathcal{X}_t^i \setminus \operatorname{cl\,conv}(\mathcal{X}^i)$, then the branching operation accounts to finding a Y_{t+1}^i and Z_{t+1}^i so that $\tilde{\sigma}^i \notin \widetilde{\mathcal{X}}_{t+1}^i := \operatorname{clconv}(Y_{t+1}^i \cup Z_{t+1}^i)$, with $\widetilde{\mathcal{X}}_{t+1}^i \subseteq \widetilde{\mathcal{X}}_t^i$. From a different perspective, this operation accounts for finding (one or more) general disjunctions for \mathcal{X}^i . This procedure boils down to the computation of $\widetilde{\mathcal{X}}_{t+1}^i$ through Balas' theorem [1, 2] as the union of a two-sided disjunction. For instance, in a *NASP*, the branching step may find a complementarity $j \in \mathcal{C}^i$ for player *i* at step *t*, so that $\widetilde{\mathcal{X}}_{t+1}^i = \operatorname{cl}\operatorname{conv}((\widetilde{\mathcal{X}}^i \cap x_j^i = 0) \cup (\widetilde{\mathcal{X}}^i \cap z_j^i = 0))$. However, it may happen that no more *branch-or-cut candidates* are available (Step 13), namely when $\widetilde{\mathcal{X}}_t^i = \operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ for any *i*. In this case, if the algorithm found no *PNE* at step *t*, we can conclude no *MNE* for *G* exists (as of Theorem 2). Conversely, if \widetilde{G} has a *PNE* $\widetilde{\sigma} = (\widetilde{\sigma}^1, \ldots, \widetilde{\sigma}^n)$, the question is whether $\widetilde{\sigma}$ is an *MNE* for *G* or not. That is, for every player *i*, is $\widetilde{\sigma}^i$ a feasible mixed-strategy, e.g, $\widetilde{\sigma}^i \in \operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$? Such a question is the *ESO*'s task, which – for any *i* (and a tolerance ϵ) – either returns (i.) a no as the answer and a separating hyperplane $\overline{\pi}^\top x^i \leq \overline{\pi}_0$ for $\widetilde{\sigma}^i$ and $\widetilde{\mathcal{X}}_t^i$, or (ii.) a yes with a constructive proof of inclusion with respect to $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$. If the *ESO* answered with at least one no for a given player *i*, then there exists a *cut* $\overline{\pi}^\top x^i \leq \overline{\pi}_0$ that becomes part of $\widetilde{\mathcal{X}}_{t+i}^i$. If there are *n* yes answers, then $\widetilde{\sigma}$ is an *MNE* for *G*. Figure 1 gives a flow-chart of the whole process.

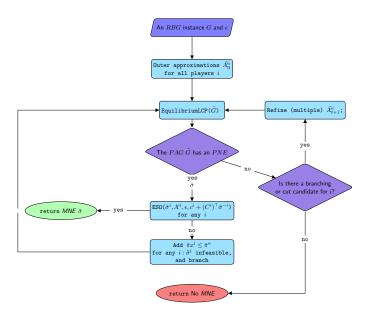


Figure 1: A graphical representation of the CnP algorithm.

MIP and Equilibria Selection. In order to determine if a given $PAG \ G$ has an MNE, we reformulate the game as an LCP as of Step 4. One can either solve directly the LCP via a specialized solver (i.e., PATH by [23, 27]), or via a MIP reformulation. In the latter case, one can get a MIP program from Step 4 by reformulating the complementarity conditions (i.e., with SOS1, bgM, or indicator constraints [38]). Although a MIP reformulation hides the underlying

complementarity structure that a solver such as PATH may exploit, it has two main benefits for our algorithmic machine. The MIP solver can optimize an arbitrary objective function $w: \prod_{i=1}^{n} x^i \to \mathbb{R}$ (up to the given solver's capability) to select an MNE in the $PAG \tilde{G}$ accordingly. While the resulting MNE may not minimize w among all the MNEs of G, it necessarily minimizes w among the MNEs of \tilde{G} for w. In this regard, the algorithmic scheme may incorporate some equilibria selection through MIP, and integrate with existing methodological advancements in the context of MIP and complementarity constraints [60].

Theorem 3. Given a polyhedrally-representable RBG instance G, Algorithm 1 terminates finitely and (i.) if it returns $\hat{\sigma} = (\hat{\sigma}^1, \dots, \hat{\sigma}^n)$ then $\hat{\sigma}$ is an MNE for G, and (ii.) if it returns failure, then G has no MNE.

Proof. First, we prove the algorithm terminates finitely.

Termination. The calls to solve the LCP in Step 4, and to the ESO in Step 7 finitely terminate (see Proposition 2). The only loop that could potentially not terminate is the one starting in Step 2. We restrict to the case where the set \mathcal{X}^i is bounded for any player *i*. Then, any *PAG G* will necessarily have finitely many *PNEs* with finite support in Step 4. Furthermore, since there always exists a *PNE* for \widetilde{G} , the algorithm will never enter in Step 12. Thus, Step 9 and Step 10 are the only two steps refining the sets $\tilde{\mathcal{X}}_t^i$ for some *i*. Then: (i.) the ESO terminates finitely, and (ii.) there are finitely many PNEs in G, and (iii.) the branching step along with the ESO will necessarily find $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ for any i at some point. Thus, the algorithm will terminate finitely whenever \mathcal{X}^i is bounded for any *i*. Whenever at least one set \mathcal{X}^i is unbounded, then a *PNE* for a given PAG G may not exist. Thus, the algorithm may enter Step 12. Then, Step 15 will necessarily find $cl conv(\mathcal{X}^i)$ at some step. Then either (i.) there exists a PNE in G that is also an MNE for G, and the algorithm returns it, or (ii.) there exists no *PNE* in G, and the algorithm returns \emptyset . Thus, the algorithm terminates finitely.

Proof of statements (i) and (ii). We show that $\hat{\sigma}$ is an *MNE* for *G*. If the algorithm returns $\hat{\sigma}$, then there exists an approximate game \tilde{G} in Step 3 that outputed a *PNE* $\tilde{\sigma} = \hat{\sigma}$. Let this last iteration be denoted with $t = \theta$. For each player *i*, its feasible region in the approximate game is $\tilde{\chi}^i_{\theta}$, and the following equilibrium inequalities hold.

$$f^{i}(\widehat{\sigma}^{i},\widehat{\sigma}^{-i}) \leq f^{i}(\overline{\sigma}^{i},\widehat{\sigma}^{-i}) \qquad \forall \ \overline{\sigma}^{i} \in \widetilde{\mathcal{X}}_{\theta}^{i}$$

$$\tag{8}$$

Namely, no player *i* has an incentive to deviate from $\widehat{\sigma}^i$ to any other strategy bar $\sigma^i \in \widetilde{\mathcal{X}}^i_{\theta}$ in the approximate game. Since $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i) \subseteq \widetilde{\mathcal{X}}^i_{\theta}$ for any *i*, the following holds.

$$f^{i}(\widehat{\sigma}^{i},\widehat{\sigma}^{-i}) \leq f^{i}(\overline{\sigma}^{i},\widehat{\sigma}^{-i}) \qquad \forall \ \overline{\sigma}^{i} \in \operatorname{cl}\operatorname{conv}(\mathcal{X}^{i})$$
(9)

Since there cannot exist a strategy $\check{\sigma}^i \in \widetilde{\mathcal{X}}^i_{\theta} \setminus \operatorname{clconv}(\mathcal{X}^i)$ by construction, $\widehat{\sigma}$ is also an *MNE* for *G*.

Remark 2. Algorithm 1 extends to RBGs that are not necessarily polyhedrallyrepresentable, as long as one can optimize a linear function over each player's feasible set, after intersecting them with some polyhedra. Up to modifications in the choices of the convex hull of the players' feasible set, and of the branching and cutting steps (e.g., disjunction on integer variables or bilevel sets), the algorithm generalizes to any RBGs up to an ϵ numerical precision if the associated ESO terminates finitely for every $cl \operatorname{conv}(\mathcal{X}^i)$. Further, one can heuristically (i.) avoid branching in Step 10 and only add a valid cut in the previous step (ii.) skip the cutting in Step 15. Further, a MIP solver can handle the LCPs of Step 4 with a non-void objective function $w : \prod_{i=1}^{n} \mathcal{X}^i \to \mathbb{R}$ in the players variables, and select the PNE of \tilde{G} that minimizes w. Finally, one may add other types of valid inequalities for any $cl \operatorname{conv}(\mathcal{X}^i)$ after Step 10, e.g., families of MIP inequalities in an IPG.

4 Implementing the ESO

Given a set $\mathcal{X} \in \mathbb{R}^d$ and a point $\overline{x} \in \mathbb{R}^d$ as inputs – and assuming to have access to a blackbox to optimize a linear function over \mathcal{X} – the *ESO* will either:

- (i.) outputs yes and (V, α) if $\overline{x} \in \operatorname{cl\,conv}(\mathcal{X})$, with $V \subseteq \mathcal{X}$, and $\alpha \in \mathbb{R}^{|V|}$ being the coefficients of the convex combination of elements in V (i.e., $\overline{x} \in \operatorname{conv}(V) \subseteq \operatorname{cl\,conv}(\mathcal{X})$), or
- (ii.) outputs no and a tuple $(\overline{\pi}, \overline{\pi}_0)$ so that $\overline{\pi}^\top x \leq \overline{\pi}_0$ with $x \in \mathcal{X}$ is a separating hyperplane for \overline{x} and $\operatorname{clconv}(\mathcal{X})$.

Compared to a standard separation oracle [32, 37], here \mathcal{X} is not convex, and we separate from $\operatorname{cl}\operatorname{conv}(\mathcal{X})$. The separation from $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ is crucial for its applicability to RBGs, as of Theorem 2. Since any RBG has an equivalent convex representation (i.e., where each player plays on $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$), one would expect, given a feasible input set \mathcal{X}^i and a point $\tilde{\sigma}^i$, to determine that either: (i.) $\tilde{\sigma}^i$ is a mixed-strategy and $\operatorname{supp}(\tilde{\sigma}^i) = V$ with α being the probabilities of each strategy in V, or (ii.) $\tilde{\sigma}^i \notin \operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$, and $\overline{\pi}^{\top} x^i \leq \overline{\pi}_0$ is a separating hyperplane for the set of mixed strategies $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$.

Practical and game-theoretical considerations. A theoretical version of this *ESO* would include polynomially-many runs of the ellipsoid algorithm, which would make it rather intractable in practice. We provide a \mathcal{V} -polyhedral implementation of it, where we explicitly require $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ to be a polyhedron. This allows us to decompose $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ as conic combination of its rays rec(cl conv(\mathcal{X})) and convex combination of its extreme points $\operatorname{ext}(\operatorname{cl}\operatorname{conv}(\mathcal{X}))$ (the \mathcal{V} -polyhedral representation). The *ESO* will iteratively build an inner approximation of $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ by identifying (and storing) its rays and vertices. If the input point \overline{x} cannot be expressed by the incumbent inner approximation of $\operatorname{cl}\operatorname{conv}(\mathcal{X})$, the oracle either tries to recover new vertices and rays or outputs a separating hyperplane. More importantly, this implementation further exploits two fundamental game-theoretical interpretations of the underlying optimization problems that players solve. First, any strategy supporting an MNE must be a pure best-response, thus any vertex should be a pure-strategy best-response. One can visualize this by taking a player i and its opponents' strategies σ^{-i} , and noticing that the best-response σ^i is then the solution of a parametrized – in σ^{-i} – mathematical program. This implies the actual set of extreme points needed to describe the subset of $cl conv(\mathcal{X}^i)$ needed for an MNE may be smaller – in practice – than $cl conv(\mathcal{X}^i)$ itself. Second, Theorem 1 provides that the utilities of any of the pure strategies in the support of the MNE must be equal to the one of the MNE itself.

The Value Cuts. Starting from these two observations, we develop an optimizationbased test to possibly diagnose the infeasibility of a given strategy profile for an approximated game \tilde{G} with respect to the original $RBG \ G$. We directly exploit Theorem 1, which provides a necessary condition on the players' payoffs in an MNE. Given a set of strategies $\tilde{\sigma} = (\tilde{\sigma}^1, \ldots, \tilde{\sigma}^n)$ for \tilde{G} , we can check if any of the $\tilde{\sigma}^i$ have a payoff that improves (e.g., is less than) the one of a pure best-response to $\tilde{\sigma}^{-i}$ in G. For the *i*-th player, consider the mathematical program $\overline{z}^i = \min_{x^i} \{f^i(x^i, \tilde{\sigma}^{-i}) : x^i \in \mathcal{X}^i\}$, which can be optimized by assumption. If $\overline{z}^i > f^i(\tilde{\sigma}^i, \tilde{\sigma}^{-i})$, then a valid separating hyperplane for $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ is $f^i(x^i, \tilde{\sigma}^{-i}) \geq \overline{z}^i$. We call these simple linear inequalities as value cuts, and formalize them in Proposition 1. Clearly, such inequalities are valid for the $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ -sets of each player.

Proposition 1. Consider an RBG G, and an arbitrary game approximation \widetilde{G} of G. Then, given a strategy profile $\widetilde{\sigma} = (\widetilde{\sigma}^1, \dots, \widetilde{\sigma}^n)$ for \widetilde{G} , for any i,

$$f^{i}(x^{i},\widetilde{\sigma}^{-i}) \geq \inf_{x^{i}} \{ f^{i}(x^{i},\widetilde{\sigma}^{-i}) : x^{i} \in \mathcal{X}^{i} \}$$

is a (supporting) valid inequality for $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ if $\inf_{x^i} \{f^i(x^i, \widetilde{\sigma}^{-i}) : x^i \in \mathcal{X}^i\} = z^i < \infty$. If $z^i > f^i(\widetilde{\sigma}^i, \widetilde{\sigma}^{-i})$, then we call the inequality a value cut for $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ and $\widetilde{\sigma}^i$.

The proof, which follows from the definition of infimum, is in the appendix (Section B).

4.1 The \mathcal{V} -Polyhedral ESO

In this section, we discuss the \mathcal{V} -polyhedral implementation of the *ESO*, including matters concerning cutting planes generation and numerical stability. Algorithm 2 sketches the implementation we will refer through this section. We have two additional inputs: (i.) a numerical tolerance ϵ , and (ii.) an (optional) real-valued vector c having the same length of the input point \overline{x} (to perform the test of Proposition 1). For instance, in Step 7 of Algorithm 1, we call the *ESO* with $c = c^i + (C^i)^{\top} \tilde{\sigma}^{-i}$, the set \mathcal{X}^i of $i, \overline{x} = \tilde{\sigma}^i$, and ϵ . We also expect Algorithm 2: Enhanced Separation Oracle

Data: A point \overline{x} , a set \mathcal{X} , a tolerance ϵ , astorage of V, R, (a vector c). **Result:** Either: (i.) yes and (V, R, α, β) if $\overline{x} \in cl conv(\mathcal{X})$, or (ii.) no and a separating hyperplane $\overline{\pi}^{\top} x \leq \overline{\pi}_0$ for $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ and \overline{x} . 1 $\widetilde{x} \leftarrow \arg\min_{x} \{ c^{\top}x : x \in \mathcal{X} \}, \text{ with } \overline{z} = c^{\top}\widetilde{x}.$ 2 if $c^{\top}\overline{x} < \overline{z}$ then return no and $(-c, -\overline{z})$; **3** if $\overline{x} = \widetilde{x}$ up to ϵ then return yes and $(\{\overline{x}\}, \emptyset, (1), ())$; 4 while true do $\mathcal{W} \leftarrow \operatorname{conv}(V) + \operatorname{cone}(R)$. *PRLP*: $\overline{x} \in \mathcal{W}$? (up to ϵ) $\mathbf{5}$ 6 if $\overline{x} \in \mathcal{W}$ then return yes and (V, R, α, β) ; else 7 Separating hyperplane $\overline{\pi}^{\top} x \leq \overline{\pi}_0$ for \overline{x} and \mathcal{W} ; 8 $\mathcal{G} \leftarrow \max_x \{ \overline{\pi}^\top x : x \in \mathcal{X} \}$ /* Blackbox */ 9 if \mathcal{G} is unbounded then 10 $R \leftarrow R \cup \{r\}$, where r is an extreme ray of \mathcal{G} ; 11 else 12 if $\overline{\pi}^{\top}\nu < \overline{\pi}^{\top}\overline{x}$ then return no and $(\overline{\pi}, \overline{\pi}^{\top}\nu)$; 13 else $\nu \leftarrow \arg \max_x \{ \overline{\pi}^\top x : x \in \mathcal{X} \}$, and $V \leftarrow V \cup \{ \nu \}$; $\mathbf{14}$

one to store and access the elements of V, R across different *ESO*'s calls, and we (initially) assume $V = R = \emptyset$.

As a first (and optional) step, we check if there is any violated value cut by solving the optimization problem $\overline{z} = \min_x \{c^\top x : x \in \mathcal{X}\}$ of Step 1. Specifically, we compare the value of $c^\top \overline{x}$ to the one of \overline{z} in Step 1. Let \widetilde{x} be the minimizer yielding \overline{z} . If (i.) $c^\top \overline{x} < \overline{z}$ (up to ϵ), then the *ESO* returns a (value) cut (Step 2), or (ii.) $\overline{x} = \widetilde{x}$, then the *ESO* returns yes (Step 3). Otherwise, let \mathcal{W} of Step 5 be so that $\mathcal{W} = \operatorname{conv}(V) + \operatorname{cone}(R)$. The task is now to determine if $\overline{x} \in \mathcal{W}$.

The Point-Ray Separator. In order to decide if $\overline{x} \in \mathcal{W}$, we formulate the separation problem through a linear program. The task is to express \overline{x} as the sum of a convex combination of elements in V and a conic combination of elements in R. Let α (β) be the convex (conic) coefficients for any element in V (R). Then, $\overline{x} \in \mathcal{W}$ if and only if there exists a solution (α , β) to (10).

$$\sum_{k=1}^{|V|} v_k^{\top} \alpha_k + \sum_{j=1}^{|R|} r_j^{\top} \beta_j = \overline{x}, \ \sum_{k=1}^{|V|} \alpha_k = 1, \ \alpha \ge 0, \ \beta \ge 0$$
(10)

By linear programming duality, (10) has no solution if there exists a solution $(\overline{\pi}, \overline{\pi}_0)$ to (11) so that $\overline{\pi}^\top \overline{x} - \overline{\pi}_0 > 0$.

$$\pi v_k^\top - \pi_0 \le 0 \qquad \forall v_k \in V$$

$$\pi r_j^\top \le 0 \qquad \forall r_j \in R$$
(11)

Starting from (11), we require our separator to have two additional features: (i.) to maximize the violation $\overline{x}^{\top}\pi - \pi_0$, and (ii.) to normalize the coefficients π so that $||\pi||_1 = 1$. We write the final program as in (12) and define it as the Point Ray Linear Program (*PRLP*).

$$\max_{\pi,\pi_0} \quad \overline{x}^\top \pi - \pi_0 \tag{12a}$$

s.t.
$$\pi v_k^{\top} - \pi_0 \le 0, \quad \forall v_k \in V$$
 (α) (12b)

$$\pi r_j^+ \le 0, \qquad \forall r_j \in R \qquad (\beta) \qquad (12c)$$


$$\pi + u - v = 0 \tag{(\gamma)}$$

$$e^{\top}(u+v) = 1 \tag{5}$$


$$u, v \ge 0 \tag{12f}$$

This PRLP has a similar formulation to the ones of [13, 50]. Each vertex $v_k \in V$ (resp., ray $r_i \in R$) requires constraints such as (12b) (resp., (12c)), while the non-negative variables u, v represent the L_1 -norm of π . The normalization constraints (12d) and (12e) truncate the cone of the PRLP by setting such L_1 norm to 1. Let $\overline{\pi}, \overline{\pi}_0$ be the optimal values of π, π_0 in the *PRLP*. On the one hand, if the PRLP admits an optimal solution with objective of 0, the oracle returns yes (Step 6) since $\overline{x} \in \mathcal{W} \subseteq \operatorname{cl}\operatorname{conv}(\mathcal{X})$. The convex multipliers α (resp., conic multipliers β) are the dual values of (12b) (resp., (12c)). On the other hand, if $\overline{x}^{\top}\overline{\pi} - \overline{\pi}_0 > 0$, then $\overline{\pi}^{\top}x \leq \overline{\pi}_0$ is a separating hyperplane for \overline{x} and \mathcal{W} . In order to determine if $\overline{\pi}^{\top}x \leq \overline{\pi}_0$ is also a separating hyperplane for \overline{x} and $\operatorname{cl}\operatorname{conv}(\mathcal{X})$, in Step 9 we optimize the inequality over \mathcal{X} . If $\mathcal{G} = \max_x \{\overline{\pi}^\top x : x \in \mathcal{I}\}$ \mathcal{X} is unbounded, then its extreme ray r is a new ray for the set R. Conversely, if \mathcal{G} admits an optimal solution ν , the latter is necessarily a new vertex for the set V (Step 14). Furthermore, if $\overline{\pi}^{\top}\nu < \overline{\pi}^{\top}\overline{x}$, then \overline{x} is necessarily infeasible. De facto, this means \overline{x} is separated from $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ by $\overline{\pi}^{\top}x \leq \overline{\pi}^{\top}\nu$, and the ESO returns no. If this is not the case, the ESO necessarily identified a new vertex (or ray), and the process restarts from Step 5.

Similarly to Perregaard and Balas [50], one can modify Step 9 of Algorithm 2 to retrieve multiple vertices and rays violating $\overline{\pi}^{\top}x \leq \overline{\pi}_0$, and subsequently add them in Step 14 and Step 11. In this way, the W inner approximation tends to build faster without significantly impacting the computational overhead.



(a) $\nu \notin \mathcal{W}$. Optimizing $\overline{\pi}^{\top} x$ over \mathcal{X} yields ν . The oracle will return **yes**, since $\overline{\pi}^{\top} \nu > \overline{\pi}^{\top} \overline{x}$ holds.



(b) $\nu \notin \mathcal{W}$. Optimizing $\overline{\pi}^{\top} x$ over \mathcal{X} yields ν . The oracle will return no and $\overline{\pi}^{\top} \nu < \overline{\pi}^{\top} \overline{x}$.

Figure 2: A 2-dimensional example of Algorithm 2 trying to separate \overline{x} from $\operatorname{cl}\operatorname{conv}(\mathcal{X})$. Here, $\mathcal{X} = \{\operatorname{conv}(v^2, \nu)\} \bigcup \{\operatorname{conv}(v^1, v^3) + \operatorname{cone}(r^1)\}$. In light blue, $\operatorname{cl}\operatorname{conv}(\mathcal{X})$, while in dark blue its inner approximation $\mathcal{W} = \operatorname{conv}(v^1, v^2, v^3)$ at a given iteration of the *ESO*.

Normalizations and termination. The normalizations of the *PRLP* in (12) are decisive in practice, since they affect the algorithm's overall stability (and convergence) through the generated cutting planes. Often, normalizations dramatically affect the generators' performance [5, 22, 28, 50]. Hence, normalize (12) with (12d). Also, for any new ray r added in Step 11, we require $||r||_2 = 1$. In practice, we observed that such precautions often produce reasonably sparse and numerically stable cuts. Finally, we show this *ESO* implementation terminates in a finite number of steps with Proposition 2.

Proposition 2. The ESO terminates in a finite number of steps whenever $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ is a polyhedron.

Proof. The ESO inner approximate $cl conv(\mathcal{X})$ with its \mathcal{V} -representation, which is made finitely many rays and vertices for any given polyhedron. Hence, we have to prove that the ESO will never find a vertex v_k (ray r_i) in Step 14 (Step 11) so that v_k was already in V (r_j was already in R) in the previous Step 5. This will necessarily imply that the loop in Step 4 terminates. The inequality in Step 8 is valid for \mathcal{W} if and only if $\overline{\pi}^{\top} v_k \leq \overline{\pi}_0$ for any $v_k \in V$, and $\overline{\pi}^{\top} r_j \leq 0$ for any $r_j \in R$ as of (12b) and (12c). Also, it is a separating hyperplane between \mathcal{W} and \overline{x} , thus $\overline{\pi}^{\top}\overline{x} > \overline{\pi}_0$. Yet, it may not necessarily be a valid inequality for any element in $ext(cl conv(\mathcal{X}))$ and $rec(cl conv(\mathcal{X}))$. Consider now \mathcal{G} in Step 9. On the one hand, if \mathcal{G} is bounded, let ν be its optimal solution. Then, either (i.) $\overline{\pi}^{\top}\nu < \overline{\pi}^{\top}\overline{x}$ with $\overline{\pi}^{\top}x \leq \overline{\pi}^{\top}\nu$ being a separating hyperplane between $\operatorname{cl}\operatorname{conv}(\mathcal{X})$ and \overline{x} . Thus the algorithm terminates and returns no, or (ii.) $\overline{\pi}^{\top}\nu \geq \overline{\pi}^{\top}\overline{x}$, and ν is necessarily a vertex of $ext(cl conv(\mathcal{X})) \setminus V$ violating $\overline{\pi}^{\top} x \leq \overline{\pi}_0$. Then, the algorithm updates $V \leftarrow V \cup \{\nu\}$. On the other hand, if \mathcal{G} is unbounded, then there exists a extreme ray r so that $\overline{\pi}^{\top}r > 0$. Then, ν is necessarily in rec(cl conv(\mathcal{X}))\R, and $\overline{\pi}^{\top}\nu > \overline{\pi}_0$. The algorithm updates $R \leftarrow R \cup \{r\}$ and go back to Step 5. Since there are finitely many rays and vertices, the algorithm will then terminate. Eliminating the conic coefficients. Given a yes and (V, R, α, β) from Algorithm 2, one may need to determine an equivalent proof of inclusion where the set R is void. When using the CnP, this translates to finding an explicit description of a mixed-strategy $\tilde{\sigma}^i$ as a convex combination of pure strategies in \mathcal{X}^i , thus determining $\operatorname{supp}(\tilde{\sigma}^i)$. Proposition 3 proves we can always convert a proof (V, R, α, β) to a proof $(\tilde{V}, \tilde{\alpha})$.

Proposition 3. Let \overline{x} and \mathcal{X} be the inputs of Algorithm 2, and $\operatorname{clconv}(\mathcal{X})$ be a polyhedron. Assuming the algorithm returns **yes** and (V, R, α, β) , one can always convert the proof of inclusion (V, R, α, β) to an equivalent one $(\widetilde{V}, \widetilde{\alpha})$, where – for any element $v \in \widetilde{V} - v \in \mathcal{X}$.

Proof. Let $S_v = \exp(\operatorname{cl}\operatorname{conv}(\mathcal{X}))$ and $S_r = \operatorname{rec}(\operatorname{cl}\operatorname{conv}(\mathcal{X}))$ be the set of extreme points and extreme rays for $\operatorname{cl}\operatorname{conv}(\mathcal{X})$, respectively. Without loss of generality, we restrict to the case where $\overline{x} = v^* + \lambda^* r^*$ and $r^* \in V$ and $r^* \in R$, namely when |V| = |R| = 1. The proof naturally generalizes when |V| > 1 or |R| > 1. We will write \overline{x} as the limit of a set of points resulting from convex combinations of points in \mathcal{X} . Since $r^* \in S_r$, it is also an extreme direction of a given cone of C so that there exists a set $B \subseteq \mathcal{X}$ and $\operatorname{conv}(B) = C$. Let $\overline{v} \in C$ be an arbitrary point in C. We define the new point $\overline{x}_{\epsilon} = \overline{x} - (v^* - \overline{v})\epsilon$. By definition, we have that $\lim_{\epsilon \to 0} \overline{x}_{\epsilon} = \overline{x}$. We can now rewrite \overline{x}_{ϵ} as a convex combination of v^* and a point $\overline{v} + \lambda_{\epsilon} r^*$, where the latter belongs to the cone C for any $\lambda_{\epsilon} \geq 0$.

$$\overline{x}_{\epsilon} = \eta v^* + (1 - \eta)(\overline{v} + \lambda_{\epsilon} r^*) \qquad \eta \in [0, 1]$$
(13)

By substituting the definition of \overline{x}_{ϵ} in (13) we have:

$$\overline{x} - \epsilon v^* + \epsilon \overline{v} = \eta v^* + (1 - \eta)(\overline{v} + \lambda_{\epsilon} r^*)$$
(14)

And by plugging the definition of \overline{x} in (14) we have:

$$v^* + \lambda^* r^* - \epsilon v^* + \epsilon \overline{v} = \eta v^* + (1 - \eta)(\overline{v} + \lambda_\epsilon r^*) \Rightarrow$$
(15)

$$v^*(1-\epsilon) + \epsilon(\overline{v} + \frac{\lambda^*}{\epsilon}r^*) = \eta v^* + (1-\eta)(\overline{v} + \lambda_\epsilon r^*)$$
(16)

The latter equality holds when $\eta = 1 - \epsilon$ and $\lambda_{\epsilon} = \frac{\lambda^*}{\epsilon}$.

5 Tailoring the CnP

Although both Algorithm 1 and Algorithm 2 are correct and generalize for any polyhedrally-representable RBG, one may exploit the special structure of the players' feasible sets to improve the algorithms. We present two applications to NASPs and IPGs.

5.1 CnP for NASPs

In *NASP*s, we reformulate each bilevel program by incorporating the lower-level follower problems as complementarity constraints. Since the followers' problems

are convex-quadratic, this step translates in writing the KKT conditions associated with each followers' convex quadratic program. Such constraints are non-linear and are in the form of complementarity equations. Thus, each of the reformulated problems is a set of the linear leader constraints and the followers' complementarity conditions as in (5). Since the reformulated leaders' problems include the followers' ones, we refer to these reformulated bilevel programs as the players of this game. In Algorithm 1, we start by omitting all the complementarity constraints in the initial relaxation, vastly enlarging the action space for every player. Thus, the relaxation in Step 1 is the polyhedral relaxation $\mathcal{X}_0^i = O_0^i$, for each player *i*. Since the description of (5) only needs a finite number of complementarity conditions in \mathcal{C}^i , the algorithm should track the number of included complementarities at any iteration t via a set J_t^i . Then, Step 15 will include in the next $\widetilde{\mathcal{X}}_{t+1}^{i}$ set one (or more) complementarity j for some player i so that $j \notin J_t^i$ and $j \in \mathcal{C}^i$. Thus, the branching step in Step 15 accounts to finding (one or more) leader i for which $J_t^i \neq \emptyset$, and include a complementarity $j \in J_t^i$ in its refined \mathcal{X}_{t+1}^i set. This boils down to the computation of \mathcal{X}_{t+1}^i as the union of a two-sided disjunction $\{\widetilde{\mathcal{X}}_t^i \cap x_{j^i}^i \leq 0\}$ and $\{\widetilde{\mathcal{X}}_t^i \cap z_{j^i}^i \leq 0\}$, where x_{ji}^{i}, z_{ji}^{i} are the terms involved in the *j*-th complementarity of *i*. If the algorithm ends at step t with $J_t^i = \mathcal{C}^i$ for any i, then we implicitly solved the game via its exact formulation (i.e., we obtained $cl conv(\mathcal{X}^i)$ for any i). In practice, one runs Algorithm 1 with a finite time limit and expects the algorithm to exhibit a reliable converging behavior towards a solution. Two decisive steps of Algorithm 1 are the branching in Step 15, and the procedure LCP_as_MIP in Step 4. Within MIP, the "dark side" heuristic nature of some decisions plays a pivotal role in solvers [44]. With the same spirit, we elaborate an additional ingredient to the algorithm.

Branching step. We focus on the branching task in Step 15. We devised two simple branching rules working whenever there exists an $MNE \tilde{\sigma}$ in Step 4 at iteration t. Given a generic player i, its branching candidates at t are in the set $C^i \setminus J_t^i$, which we assume to contain strictly more than one element.

- (i.) Hybrid branching: for any candidate j in this set, we optimize $\min_{\lambda^i} \{(\lambda^i)^2 : \widetilde{\sigma}^i \in \operatorname{cl\,conv}(\{\widetilde{\mathcal{X}}^i_t \cap x^i_{j^i} \leq 0\} \cup \{\widetilde{\mathcal{X}}^i_t \cap z^i_{j^i} \leq 0\})\}$, where λ are the constraint violations, whose sum of squares we minimize. We select the complementarity with the largest constraint violation among the candidates.
- (ii.) Deviation branching: we compute the best-response for i to $\tilde{\sigma}^{-i}$ by solving the bilevel problem of i. We then select the first (given an arbitrary order) complementarity j necessary to encode part of the polyhedron containing such best-response.

5.2 CnP for IPGs

We tailor Algorithm 1 by exploiting some standard techniques of MIP. We present four ideas regarding tailoring.

- (i.) Since each player's objective direction changes according to the other players' decisions, we speculate the number of cuts the CnP uses may grow faster than it would in a single MIP. Since $cl conv(\mathcal{X}^i)$ is the perfect formulation, any family of valid inequalities for an integer program is also valid here. For instance, in our tests, we use Gomory Mixed-Integer (GMIs), Mixed-Integer Rounding (MIRs), and Knapsack Cover (KPs) Cuts.
- (ii.) At step t = 0 of the CnP- instead of taking the linear relaxation of any \mathcal{X}^i one can already start from a strengthened version of these programs. In our tests, we strengthen the coefficients in each A^i matrix and add some valid inequalities (e.g., root node cuts). Dual presolve routines and fixed-costs fixing are generally discouraged since the objective function is parametrized in x^{-i} .
- (iii.) If the ESO in Step 7 returns no, one can always add additional valid inequalities to strengthen further the next $\tilde{\mathcal{X}}_{t+1}^i$ set. Furthermore, some value cuts may not exhibit a well-behaved numerical behavior (e.g., long fractional coefficients). One can always separate a valid inequality that cuts off the incumbent solution (for the given player i) and avoid using the value cut.
- (iv.) The branching step in Step 15 triggers only when at least one of the players in \widetilde{G} has an unbounded feasible set $\widetilde{\mathcal{X}}^i$. One can always find a disjunction on one or more integer variables for the players and add it to the next $\widetilde{\mathcal{X}}^i_{t+1}$ set.

6 Computational experiments

In this section we present some implementation consideration and the numerical results from our tests. We use an *Intel Xeon Gold 6142*, with 128GB of RAM and *Gurobi* 9.2 as *MIP* (blackbox) solver, and *PATH* [23, 27] as an alternative *LCPs* solver in the *IPGs* tests. The entirety of the time-related results is reported with a shifted geometric mean (shift of 10 seconds) to shield against outlier values. The implementation code is in [25]. Although the *CnP* is quite generic, it manages to outperform game-specific methods on both *IPGs* and *NASPs*.

NASPs tests. We configure the ESO (Algorithm 2) with $\epsilon = 10^{-5}$, a CnP timelimit of 300 seconds, and we use up to 12 cores for the CnP and the baseline. The testbed is the set of instances InstanceSet B [10] (each instance has 7 Stackelberg leaders with up to 3 followers each), and we introduce an even harder InstanceSet H7 (7 leaders up with 7 followers each). As a baseline, we use the inner approximation (Inn), a problem-specific algorithm proposed in [10]. In Table 1 we provide 3 different (geometric) means for the computing times in the GT(s) columns. The first column is the type of algorithm: the baseline (Inn-S) (see [10]), or the CnP (Out), with either the deviation branching (DB) or the hybrid one (HB). The second and third columns are the instance set (Inst)

Algo	\mathbf{Inst}	#	GT (s)	#	GT (s)	#	GT (s)	$\#\mathbf{N}$	#NI	#TL
			NASH_EQ		NO_EQ		ALL			
Inn-S-1	В	50	6.22	49	69.76	1	6.56	50	0	0
Inn-S-3	в	50	4.94	49	23.96	1	5.12	50	0	0
Out-HB	в	50	7.47	46	29.37	1	7.71	47	3	0
Out-DB	в	50	9.45	46	11.81	1	9.50	47	3	0
Inn-S-1	$\mathbf{H7}$	50	-	0	-	0	300.00	46	4	46
Inn-S-3	$\mathbf{H7}$	50	-	0	-	0	-	0	50	0
Out-HB	$\mathbf{H7}$	50	53.79	41	-	0	73.45	50	0	9
Out-DB	$\mathbf{H7}$	50	52.58	35	-	0	88.92	50	0	15

Table 1: NASPs summary results.

and its cardinality (#), respectively. The three subsequent pairs of columns report the computing time and the number of instances for which the algorithm either (i.) found an MNE (EQ), (ii.) concluded no MNE exists (NO_EQ), or (iii.) terminated without numerical issues (ALL). The last two columns report the number of numerical issues (#NI) and time limits hits (#TL). These large NASP instances, in particular the set H7, are generally badly scaled and are thus useful to test the numerical stability of the algorithms. A clear pattern in Table 1 is the systemic failure of Inn-S-1 on the set H7, where the algorithm fails due to the size of the descriptions of $cl conv(\mathcal{X}^i)$. Inn tends to exhibit significant numerical issues. On the contrary, the CnP performs consistently, especially in the hard set H7.

$6.1 \quad IPGs \text{ tests}$

We configure the ESO with $\epsilon = 3 \times 10^{-5}$, and the CnP timelimit being 300 seconds. The baseline is the mSGM algorithm proposed in [12], which provides also the instances of the Random Knapsack Game.

Instances. We use the Random Knapsack Game instances from Carvalho et al. [12], where each player *i* solves a knapsack problem with *m* items as in (17). The objects v^i , w^i are integer vectors corresponding to the profits and weights. Also, W^i is the knapsack capacity, while C^i is a diagonal $m \times (n-1)m$ matrix with integer entries. The elements on the diagonal are the interaction coefficients associated with each of the (n-1) other players in the game and their *m* decision variables (in the lexicographic order given by each player's index). We remark that all such parameters are integer-valued yet are not required to be positive. In this game, each player *i* solves a knapsack problem where its profits v^i may be decreased or increased by the interactions given in C^i . Since this latter is a diagonal matrix, players are mutually interacting only for corresponding items, for instance x_j^i interacts with any x_j^{-i} for $j \in \{1, \ldots, m\}$. A positive interaction coefficient between x_j^i and x_j^p in C^i – where *p* is another player – boils down to a positive incentive for *i* when both x_j^i and x_j^p are equal to 1, namely both players are selecting the item. Analogously, if the interaction coefficient is negative, i may be penalized in picking j if also p picks it. Formally, the model reads as in (17).

$$\max_{x^{i}} \quad (v^{i})^{\top} x^{i} + (x^{-i})^{\top} C^{i} x^{i} \tag{17a}$$

s.t.
$$w^i x^i \le W^i, x^i \in \{0, 1\}^m$$
 (17b)

Since each PAG has an MNE (\mathcal{X}^i is finite for any i), the CnP never branches but adds MIP inequalities. Namely, the CnP purely acts as a cutting plane algorithm without ever branching.

Setup. We possibly strengthen each player's $\tilde{\mathcal{X}}^i$ with multiple rounds of GMIs, MIRs, and KPs cuts (using [14]), and add other valid inequalities whenever the ESO returns no. We aim to show MIP cuts are a pivotal ingredient of the CnP, and their integration improves the algorithm's performance. We test 4 levels of MIP cuts aggressivenes: -1 with no MIP cuts, and 0, 1, 2 for more cutting planes at each iteration. We solve the LCPs with either: (i.) PATH, thus computing a feasible MNE, or (ii.) Gurobi, optimizing the quadratic social welfare (SW), namely the players' payoffs sum.

Results. In Table 3 we present the computational results for our experiments, with Table 4 being a similar table with percent changes concerning the baseline of m-SGM. The first column is the algorithm's type as defined previously. For the CnP, we also report which solver handled the EquilibriumLCP. The second column (O) is the objective type, either F for feasibility (e.g., an MNE) or Q for quadratic objective. In particular, we use a quadratic objective given by the sum of all players' payoff, namely the so-called social-welafre (SW). The third column (C) reports the aggressiveness of the additional MIP cutting planes generated. The column is set to -1 if we add no additional MIP cuts, and 0 if we add such cuts whenever a value cut was numerically unstable (e.g., we could not transform the coefficients to integer, or the coefficients ranged from 10^{-3} to 10^{3}). Otherwise, 1 is the higher increasing levels of aggressiveness, namely where the CnP adds (multiple) MIP cuts even when ESO cuts were added. For each set of instances, we report the number of players n, and the number of items in each knapsack m. The fourth column reports the computing times geometric mean (GeoT) and the fifth column (#F) reports the number of time-limit hits for the associated algorithm. The remaining columns are mean average results for a series of statistics. Specifically, in the sixth and seventh columns, we report the average social welfare (SW^*) and the average number of iterations $(\#IT^*)$, respectively. The last four columns are the average numbers of: (i.) all cuts added $(Cuts^*)$, (ii.) The cuts added by the ESO, namely the \mathcal{V} -polyhedral cuts (VP^*) in Step 13 of Algorithm 2, (iii.) value cuts added by the ESO (VC^*) in Step 2 of Algorithm 2, (iv.) generic MIP cuts added $(MIP^*).$

A first clear pattern is an increase in the SW – in almost Highlights. any instance set – with the CnP algorithm. The m-SGM algorithm does find only an equilibrium, and so does the CnP with PATH. Since the CnP exploits game's relaxations, one can expect it will find a possibly more favorable MNE. Whenever a MIP solver optimizes the welfare function, there are dramatic improvements in the welfare. However, this may come at a cost in terms of computing times, as highlighted in Table 4. In general, MIP solvers do not exploit the underlying structure of *LCP*s, and we speculate this may cause such computing time increases. In general, with PATH there are significant computing time improvements in all of the instance sets except n = 2, m = 20. Furthermore, the more the cuts, the fewer iterations of the CnP are required to converge to a feasible *MNE*. This seems to be the case for all the instance sets. Interestingly, a greater aggressiveness of cuts tends to reduce the number of \mathcal{V} polyhedral and value cuts in favor of more MIP cuts in almost all the instance sets. A plausible explanation is that the MIP cuts are generally generated by routines that are more likely to result in *stronger* cuts for the mixed-integer hull than the ESO cuts. Finally, whenever MIP cuts were completely disabled (C columns set to -1) we generally observe an increase in computation time and average numbers of iterations.

Algo	С	t (s)	MM	Т	SW%	OSW	#It	Cuts	MIP
m-SGM		0.73	21.43	0	0.0%	27.0%	8.43	-	-
CnP-MIP	Q/-1	6.58	287.52	0	13.5%	37.0%	7.80	9.57	0.00
CnP-MIP	Q/0	6.13	287.01	0	12.9%	37.0%	5.73	6.47	2.30
CnP-MIP	Q/1	6.31	287.52	0	13.3%	37.0%	3.50	9.60	7.47
CnP-PATH	F/-1	0.36	10.54	0	1.8%	27.0%	7.60	10.2	0.00
CnP-PATH	F/0	0.05	0.19	0	2.9%	27.0%	5.27	5.90	2.07
CnP-PATH	F/1	0.04	0.19	0	4.9%	27.0%	3.23	8.87	7.10
m-SGM		20.86	300.00	6	0.0%	25.0%	18.58	-	-
CnP-MIP	Q/-1	61.08	294.50	0	22.5%	40.0%	13.70	17.00	0.00
CnP-MIP	Q/0	57.85	299.45	1	19.6%	40.0%	11.62	12.62	3.45
CnP-MIP	Q/1	68.20	299.04	0	22.3%	38.0%	9.48	16.80	10.32
CnP-PATH	F/-1	6.68	80.89	0	15.7%	28.0%	13.55	16.35	0.00
CnP-PATH	F/0	4.48	74.37	0	15.7%	28.0%	9.62	10.25	2.42
CnP-PATH	F/1	4.32	75.88	0	15.9%	28.0%	8.22	14.35	8.43

Table 2: *IPGs* summary results.

Finally, Table 2 provides an overview of the results by splitting the instances: the small instances (with $mn \leq 80$) in rows 2 - 8, and the large ones (with mn > 80) in rows (9 - 15). The first two columns are the algorithm's name, and the objective type, and the *MIP* cut aggressivenes as above. In column order, we report: the geometric mean time (t(s)), the difference among the maximum and the minimum of time (MM), the number of timelimits (T), and the improvement in social welfare with respect to m-SGM (SW%). We provide the percentage of instances (OSW) where the *MNE*'s SW is at least 80% the optimal social outcome (e.g., a solution, possibly not an *MNE*, where a planner independently decides to maximize the SW). In the last three columns, we report the average number of iterations (#IT), the total number of cuts (Cuts),

and the separate number for MIP cuts (MIP).

Algo	0	С	GeoT (s)	#F	\mathbf{SW}^*	$\#It^*$	Cuts*	\mathbf{VP}^*	$\mathbf{V}\mathbf{C}^*$	\mathbf{MIP}^*
n=3 m=10										
m-SGM	-	-	2.11	0	632.99	10.00	-	-	-	-
CnP-MIP	Q	-1	0.47 (0.23)	0	812.48	4.50	5.0	2.0	3.0	0.0
CnP-MIP	Q	0	0.31 (0.14)	0	812.98	4.60	4.8	2.0	1.1	1.7
CnP-MIP	Q	1	0.20 (0.08)	0	820.71	2.60	7.2	0.5	1.1	5.6
CnP-PATH	F	-1	0.02	0	706.66	5.00	5.9	2.0	3.9	0.0
CnP-PATH	F	0	0.02	0	718.13	4.50	4.9	2.0	1.5	1.4
CnP-PATH	F	1	0.03	0	742.87	2.00	5.4	0.3	0.7	4.4
n=2 m=20										
m-SGM	-	-	0.01	0	658.31	5.40	-	-	-	-
CnP-MIP	Q	-1	0.96(0.25)	0	684.19	6.40	6.3	4.4	1.9	0.0
CnP-MIP	Q	0	0.93 (0.29)	0	683.91	6.10	5.9	3.0	1.2	1.7
CnP-MIP	õ	1	0.75 (0.18)	0	682.69	3.70	7.6	1.4	0.9	5.3
CnP-PATH	F	-1	0.05	Ő	645.44	5.30	5.5	3.1	2.4	0.0
CnP-PATH	F	0	0.04	Ő	664.44	4.90	4.7	1.8	1.2	1.7
CnP-PATH	F	1	0.03	Ő	656.44	3.10	6.2	1.2	0.4	4.6
n=3 m=20	-	-	0.00	~		0.20				
m-SGM	-	-	0.20	0	1339.98	9.90	-	-	-	-
CnP-MIP	Q	-1	29.74 (1.49)	Ő	1488.96	12.50	17.4	7.0	10.4	0.0
CnP-MIP	ğ	0	27.22 (0.66)	Ő	1473.46	6.50	8.7	4.0	1.2	3.5
CnP-MIP	Q	1	29.61 (0.61)	Ő	1476.85	4.20	14.0	2.0	0.5	11.5
CnP-PATH	F	-1	1.04	Ő	1327.47	12.50	19.2	6.3	12.9	0.0
CnP-PATH	F	0	0.08	0	1325.23	6.40	8.1	3.4	1.6	3.1
CnP-PATH	F	1	0.03	0	1325.25 1361.74	4.60	15.0	2.2	0.5	12.3
n=2 m=40	-	-	0.01	0	1001111	1.00	10.0	2.2	0.0	12.0
m-SGM	-	-	1.26	0	1348.56	13.70	-	-	-	-
CnP-MIP	Q	-1	27.87 (5.11)	Ő	1433.13	16.70	21.9	11.1	10.8	0.0
CnP-MIP	Q	0	25.58 (3.53)	Ő	1434.09	12.80	13.4	8.2	1.1	4.1
CnP-MIP	Q	1	29.72 (2.16)	Ő	1405.30	10.50	18.7	6.4	0.7	11.6
CnP-PATH	F	-1	0.89	Ő	1355.26	16.80	20.7	9.5	11.2	0.0
CnP-PATH	F	0	0.70	Ő	1355.01	10.00	9.9	7.1	0.8	2.0
CnP-PATH	F	1	0.62	Ő	1355.21	7.80	14.1	5.1	0.3	8.7
n=3 m=40				-				-		
m-SGM	-	-	27.04	2	2339.79	20.10	-	-	-	-
CnP-MIP	Q	-1	140.33 (5.49)	0	2991.76	20.20	28.5	13.2	15.3	0.0
CnP-MIP	õ	0	128.74 (3.06)	Ő	3016.22	11.60	15.6	8.9	1.9	4.8
CnP-MIP	õ	1	162.20 (2.58)	Ő	2980.69	9.30	21.9	6.7	0.9	14.3
CnP-PATH	F	-1	2.35	Ő	2882.45	17.60	24.9	12.6	12.3	0.0
CnP-PATH	F	0	0.87	ŏ	2906.33	10.80	14.0	8.8	1.4	3.8
CnP-PATH	F	1	0.79	Ő	2898.04	9.00	21.1	6.6	0.8	13.7
n=2 m=80				-						
m-SGM	-	-	14.97	1	2676.52	19.40	-	-	-	-
CnP-MIP	Q	-1	29.83 (11.47)	0	3127.96	7.60	6.7	5.4	1.3	0.0
CnP-MIP	õ	0	27.02 (7.27)	Ő	3127.97	7.80	7.0	5.3	0.7	1.0
CnP-MIP	õ	1	36.71 (10.06)	Ő	3124.63	6.10	8.6	3.6	0.5	4.5
CnP-PATH	F	-1	7.71	Ő	2914.36	8.80	8.1	6.7	1.4	0.0
CnP-PATH	F	0	5.45	Ő	2926.82	7.00	6.1	4.5	0.4	1.2
CnP-PATH	F	1	4.93	0	2936.52	5.80	7.4	3.4	0.4	3.6
n=2 m=100										
m-SGM	-	-	77.13	3	2861.20	21.10	-	-	-	-
CnP-MIP	Q	-1	102.57 (36.29)	õ	3750.38	10.30	10.9	7.4	3.5	0.0
CnP-MIP	ğ	0	105.97 (33.07)	1	3454.41	14.30	14.5	9.4	1.2	3.9
CnP-MIP	Q	1	107.04 (30.86)	0	3771.62	12.00	18.0	6.3	0.8	10.9
CnP-PATH	F	-1	23.02	Ő	3496.86	11.22	11.67	8.33	3.33	0.0
CnP-PATH	F	0	14.46	Ő	3488.44	10.70	11.0	7.1	1.2	2.7
CnP-PATH	F	1	14.56	0	3507.71	10.30	14.8	6.4	0.7	7.7
	•	-	1 1.00	5		10.00	1 1.0	0.1	0.1	

Table 3: IPGs results in absolute values.

Algo	0	С	GeoT (s)	#F	SW^*	$\#It^*$	\mathbf{Cuts}^*	\mathbf{VP}^*	$\mathbf{V}\mathbf{C}^*$	MIP*
m=3 n=10			0001 (0)	<i>π</i> -	5.1	<i>\[</i>	cut	• •		
m-SGM	-	-	0.00%	0	0.00%	0.00%	-	-	-	
CnP-MIP	Q	-1	-77.68%	ŏ	28.35%	-55.00%	5.0	2.0	3.0	0.0
CnP-MIP	õ	0	-85.45%	Ő	28.44%	-54.00%	4.8	2.0	1.1	1.7
CnP-MIP	Q	1	-90.77%	0	29.66%	-74.00%	7.2	0.5	1.1	5.6
CnP-PATH	F	-1	-98.89%	0	11.64%	-50.00%	5.9	2.0	3.9	0.0
CnP-PATH	F	0	-99.18%	0	13.45%	-55.00%	4.9	2.0	1.5	1.4
CnP-PATH	F	1	-98.73%	0	17.36%	-80.00%	5.4	0.3	0.7	4.4
m=2 n=20	-	-	50.1070	0	11.0070	00.0070	0.4	0.0	0.1	1.1
m-2 n-20 m-SGM	-	-	0.00%	0	0.00%	0.00%	-	_	_	
CnP-MIP	Q	-1	7247.90%	0	3.93%	18.52%	6.3	4.4	1.9	0.0
CnP-MIP	Q	0	7084.17%	0	3.89%	12.96%	5.9	3.0	1.2	1.7
CnP-MIP	õ	1	5634.50%	Ő	3.70%	-31.48%	7.6	1.4	0.9	5.3
CnP-PATH	F	-1	268.26%	0	-1.95%	-1.85%	5.5	3.1	2.4	0.0
CnP-PATH	F	0	214.60%	0	0.93%	-9.26%	4.7	1.8	1.2	1.7
CnP-PATH	F	1	149.61%	Ő	-0.28%	-42.59%	6.2	1.2	0.4	4.6
m=3 n=20	1	1	110.01/0	0	0.2070	12.0070	0.2	1.2	0.4	4.0
m-SGM	-	-	0.00%	0	0.00%	0.00%	-	-	-	-
CnP-MIP	Q	-1	14958.58%	0	11.12%	26.26%	17.4	7.0	10.4	0.0
CnP-MIP	Q	0	13681.22%	0	9.96%	-34.34%	8.7	4.0	10.4	3.5
CnP-MIP	Q	1	14891.54%	0	10.21%	-57.58%	14.0	2.0	0.5	11.5
CnP-PATH	F	-1	424.87%	0	-0.93%	26.26%	19.2	6.3	12.9	0.0
CnP-PATH	F	0	-57.18%	Ő	-1.10%	-35.35%	8.1	3.4	1.6	3.1
CnP-PATH	F	1	-63.36%	Ő	1.62%	-53.54%	15.0	2.2	0.5	12.3
m=2 n=40	-	-	00.0070	0	1.0270	00.0470	10.0	2.2	0.0	12.0
m-SGM	-	-	0.00%	0	0.00%	0.00%	-	-	-	-
CnP-MIP	Q	-1	2111.71%	Ő	6.27%	21.90%	21.9	11.1	10.8	0.0
CnP-MIP	Q	0	1929.94%	Ő	6.34%	-6.57%	13.4	8.2	1.1	4.1
CnP-MIP	Q	1	2258.44%	Ő	4.21%	-23.36%	18.7	6.4	0.7	11.6
CnP-PATH	F	-1	-29.26%	Ő	0.50%	22.63%	20.7	9.5	11.2	0.0
CnP-PATH	F	0	-44.36%	ŏ	0.48%	-27.01%	9.9	7.1	0.8	2.0
CnP-PATH	F	1	-50.86%	ŏ	0.49%	-43.07%	14.1	5.1	0.3	8.7
m=3 n=40	-	-	00.0070	0	0.1070	1010170		0.1	0.0	0.1
m-SGM	-	-	0.00%	2	0.00%	0.00%		-	-	
CnP-MIP	Q	-1	418.88%	0	27.86%	0.50%	28.5	13.2	15.3	0.0
CnP-MIP	Q	0	376.04%	Ő	28.91%	-42.29%	15.6	8.9	1.9	4.8
CnP-MIP	q	1	499.77%	ŏ	27.39%	-53.73%	21.9	6.7	0.9	14.3
CnP-PATH	F	-1	-91.31%	Ő	23.19%	-12.44%	24.9	12.6	12.3	0.0
CnP-PATH	F	0	-96.78%	Ő	24.21%	-46.27%	14.0	8.8	1.4	3.8
CnP-PATH	F	1	-97.07%	Ő	23.86%	-55.22%	21.1	6.6	0.8	13.7
m=2 n=80	-	-	0.100.70	~		,				
m-SGM	-	-	0.00%	1	0.00%	0.00%	-	-	-	-
CnP-MIP	Q	-1	99.30%	0	16.87%	-60.82%	6.7	5.4	1.3	0.0
CnP-MIP	ð	0	80.53%	Ő	16.87%	-59.79%	7.0	5.3	0.7	1.0
CnP-MIP	ð	1	145.29%	ŏ	16.74%	-68.56%	8.6	3.6	0.5	4.5
CnP-PATH	F	-1	-48.49%	Ő	8.89%	-54.64%	8.1	6.7	1.4	0.0
CnP-PATH	F	0	-63.56%	ŏ	9.35%	-63.92%	6.1	4.5	0.4	1.2
CnP-PATH	F	1	-67.08%	ŏ	9.71%	-70.10%	7.4	3.4	0.4	3.6
m=2 n=100										
m-SGM	-	-	0.00%	3	0.00%	0.00%	-	-	-	-
CnP-MIP	Q	-1	32.99%	0	31.08%	-51.18%	10.9	7.4	3.5	0.0
CnP-MIP	õ	0	37.40%	1	20.73%	-32.23%	14.5	9.4	1.2	3.9
CnP-MIP	ð	1	38.79%	0	31.82%	-43.13%	18.0	6.3	0.8	10.9
CnP-PATH	F	-1	-70.16%	Ő	22.22%	-46.81%	11.67	8.33	3.33	0.0
CnP-PATH	F	0	-81.25%	Ő	21.92%	-49.29%	11.0	7.1	1.2	2.7
CnP-PATH	F	1	-81.12%	0	21.92% 22.60%	-51.18%	14.8	6.4	0.7	7.7
	1	T	01.12/0	0	22.0070	51.1070	14.0	0.4	0.1	1.1

Table 4: IPGs results (in percentage) with respect to the *m-SGM*. For GeoT(s), and #It, the lower the better. As of SW^* , the higher the better.

7 Conclusions

The defining boundaries of this work are game theory and mathematical programming and how they can effectively interact to improve the theory and practice of equilibria computation. We strongly believe the joint endeavor between the disciplines can widen their theoretical understanding and practical impact equilibria computation through a Branch and Cut algorithm. We employ the concept of game's approximation and extend it to a game by building an increasingly tight sequence of approximations that eventually lead to an equilibrium (or a non-existence proof). The amusing element of this approach is its interoperability with standard mathematical programming tools, such as - and not restrictively – valid inequalities, relaxations, disjunctions. Our approach does not necessarily exploit the specific structure of any of the players' problems, nor the game, and is in this sense generic. However, it stands on the shoulder of the many "giants" ideas - theoretical and practical - that mathematical programming offers. The CnP- even when compared to standard sample generation algorithms or problem-specific ones – offers an appealing alternative for the efficient computation of equilibria. We do believe the results reported should not constitute a barrier. On the contrary, we prudently believe improvement opportunities lie ahead. The integration of existing mathematical programming tools may indeed significantly advance this algorithmic rationale. Moreover, and even more importantly, we hopefully foresee an increased interest from this community towards developing new tools to tackle equilibria computation. The open questions and possible extensions of this work are several. Nevertheless, we are quite optimistic about such opportunities. This paper's ultimate goal is to showcase - in the context of MIP- that existing theory is of tremendous relevance for equilibria computation, also from a practical standpoint. Among the many questions that arose through the making of this work, we present four.

The polyhedral assumption. In the implementation of the ESO in Section 4.1, we heavily leveraged what we called the *polyhedral assumption* on each player $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$. In specific, we use this assumption to handle unboundedness through polyhedral cones. However, we believe this should not be – in theory – restrictive. An improved separation oracle could – for instance – leverage on second-order cones and drop the polyhedral assumption. For the scope of this work, we showcased IPGs and NASPs, which are archetypical forms of RBGs. Nevertheless, the polyhedral assumption may be dropped in favor of other well-structured sets as soon as one may guarantee a finite termination of the associated enhanced separation oracle.

Inequalities. Except value-cuts, we mainly employed \mathcal{V} -polyhedral inequalities and generic *MIP* ones. However, we speculate there is room for developing new *game-theoretical* inequalities, i.e., inequalities that account for more than one player's variables. This may well exploit some special or general structure of the game, and they are an auspicious direction of research in the *MIP* context.

A pivotal solution concept in game theory is the one of *rational*-Rationality. izability, introduced independently by Bernheim [4], Pearce [49]. The concept grounds in two main assumptions: (i.) each player views its opponents' choices as uncertain events, and thus probabilistically assesses them (ii.) the players are *individually* rational, or in the context of this paper they seek to optimize their payoff (objective function) as much as they can. Whenever player i has to decide which strategy to pick, it faces uncertainty about other players' choices. Thus, the choices of i must somehow reflect some beliefs the player has concerning the strategies of its opponents. For instance, i may rule out the possibility of playing a strategy that is never the best-response to any opponents' strategy profile. However, i shall play strategies that are best-responses to some opponents' strategies and verify the validity of these latter ones. Namely, i should also assess the strategies played by its opponents are best-responses. In other words, we define a strategy as rationalizable only if it is a best-response to some opponents' beliefs, which in their turn are best-responses to some other opponents' beliefs, and so on.

In practice, a strategy is rationalizable for i if it can be rationalized with a sequence of rationalizable behaviors of the opponents of i. In this sense, iholds a *belief* on the other players' strategies. namely, it associates a subjective probability distribution to its opponents' strategies. MNEs themselves are rationalizable strategies were also the beliefs player i associates to its opponents are rationalizable and exact. We turn our attention to the ESO, and without loss of generality, we consider a generic player i and – for the sake of explanation - we will assume \mathcal{X}^i is bounded (although this assumption is not restrictive). As previously mentioned, the ESO builds an increasingly accurate description \mathcal{W}^i of $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$ by storing the extreme points $\operatorname{ext}(\operatorname{cl}\operatorname{conv}(\mathcal{X}^i))$ in V^i . These points correspond to some best-responses for i given its beliefs about the other players. One may wonder whether the strategies in V^i are rationalizable or not. The answer is generally negative. Consider an MNE $\tilde{\sigma}$ in Algorithm 1, and the related call to the ESO in Step 7 for player i. The best-responses in V^i may not be rationalizable, disregarding the fact that the EO sampled them through the solution of a series of parametrized mathematical programs for i. The issue here concerns the values of the parameters $\tilde{\sigma}^{-i}$ of such programs, which may not be themselves rationalizable. Although the best-response computation for *i* returns a feasible pure-strategy, the $\tilde{\sigma}^{-i}$ beliefs plugged in as parameters may themselves not be feasible mixed-strategies. In turn, at each iteration, tof Algorithm 1, the strategies in support of $\tilde{\sigma}$ are rationalizable for the relaxation G. Can we design specific routines to "select" rationalizable supports in an efficient way? This question is somehow related to the works of Carvalho et al. [12], Porter et al. [51], which in fact propose algorithms to sample rationalizable best-responses. These two approaches seek to achieve *feasibility* (e.g., an MNE) by constructing a smaller approximation of the original games where only a few strategies are present. Dichotomically, the CnP tries to refine a loose approximation of the original game. In this context, better identification of best-responses may lead to faster convergence and the development of new cutting planes based on assumptions of rationality, somehow connecting to the first idea on inequalities. In this sense, another important ground would be to establish what "valid" means in the context of games and inequalities.

Tree and bounds. There is a clear connection between CnP and the Branch and Cut algorithm of Padberg and Rinaldi [48]. Instead of solving a linear program – which is a \mathcal{P} -problem at least in theory –, the CnP leverages a series of LCPs which are well-known \mathcal{NP} -hard problems. This is not surprising for either IPGs or NASPs, which are Σ_2^p -hard in practice. A natural extension of this work would be the creation of a search tree, where leaves spring from the disjunctions in Step 15 of Algorithm 1. This approach hopes to find a feasible MNE by possibly solving more constrained LCPs, and eventually enumerate equilibria. A feasible MNE constitutes a valid upper bound for the problems. Nevertheless, it is not clear how to use this information in the context of game relaxations. An efficient way to identify non-improving – and thus fathomed – nodes would significantly improve the capabilities of the CnP. The algorithm may then select the most favorable equilibrium among the possibly many in a given game. However - in contrast with the Branch and Cut - we believe such bounds relationships may be problem-specific and not general.

Acknowledgement

We would like to thank Federico Bobbio, Didier Chételat, Aleksandr Kazachkov, Rosario Scatamacchia and Mathieu Tanneau for the insightful discussions we had concerning this work.

References

- E. Balas. Disjunctive Programming and a Hierarchy of Relaxations for Discrete Optimization Problems. SIAM Journal on Algebraic Discrete Methods, 6(3):466-486, July 1985. ISSN 0196-5212, 2168-345X. URL https://epubs.siam.org/doi/10.1137/0606047. (Cited on pages 11 and 14.)
- [2] E. Balas. Disjunctive programming: Properties of the convex hull of feasible points. *Discrete Applied Mathematics*, 89(1-3):3-44, Dec. 1998. ISSN 0166218X. URL https://linkinghub.elsevier.com/retrieve/ pii/S0166218X9800136X. (Cited on pages 11 and 14.)
- [3] A. Basu, C. T. Ryan, and S. Sankaranarayanan. Mixed-integer bilevel representability. *Mathematical Programming*, Aug. 2019. ISSN 1436-4646. (Cited on page 2.)
- B. D. Bernheim. Rationalizable Strategic Behavior. *Econometrica*, 52(4): 1007, July 1984. ISSN 00129682. URL https://www.jstor.org/stable/ 1911196?origin=crossref. (Cited on page 30.)

- R. E. Bixby. Solving Real-World Linear Programs: A Decade and More of Progress. Operations Research, 50(1):3-15, Feb. 2002. ISSN 0030-364X, 1526-5463. URL http://pubsonline.informs.org/doi/abs/10.1287/ opre.50.1.3.17780. (Cited on page 20.)
- [6] E. A. Boyd. Fenchel Cutting Planes for Integer Programs. Operations Research, 42(1):53-64, Feb. 1994. ISSN 0030-364X, 1526-5463. URL http: //pubsonline.informs.org/doi/abs/10.1287/opre.42.1.53. (Cited on page 4.)
- S. P. Boyd and L. Vandenberghe. *Convex optimization*. Cambridge University Press, Cambridge, UK; New York, 2004. ISBN 978-0-521-83378-3. (Cited on page 6.)
- [8] A. Caprara, M. Carvalho, A. Lodi, and G. J. Woeginger. Bilevel Knapsack with interdiction constraints. *INFORMS Journal on Computing*, 28(2): 319–333, 2016. ISSN 15265528. doi: 10.1287/ijoc.2015.0676. (Cited on page 2.)
- [9] M. Carvalho, A. Lodi, and J. P. Pedroso. Existence of Nash Equilibria on Integer Programming Games. In A. I. F. Vaz, J. P. Almeida, J. F. Oliveira, and A. A. Pinto, editors, *Operational Research*, volume 223, pages 11–23. Springer International Publishing, Cham, 2018. ISBN 978-3-319-71582-7 978-3-319-71583-4. URL http://link.springer.com/10.1007/ 978-3-319-71583-4%5F2. Series Title: Springer Proceedings in Mathematics & Statistics. (Cited on pages 2 and 5.)
- [10] M. Carvalho, G. Dragotto, F. Feijoo, A. Lodi, and S. Sankaranarayanan. When Nash Meets Stackelberg. arXiv preprint, 2019. URL https: //arxiv.org/abs/1910.06452. (Cited on pages 4, 5, 8, 9, 10, 23, and 38.)
- [11] M. Carvalho, A. Lodi, and J. P. Pedroso. Computing nash equilibria for integer programming games. arXiv preprint arXiv:2012.07082, 2020. URL https://arxiv.org/abs/2012.07082. (Cited on page 2.)
- [12] M. Carvalho, A. Lodi, and J. P. Pedroso. Computing nash equilibria for integer programming games. arXiv preprint arXiv:2012.07082, 2020. (Cited on pages 5, 6, 11, 24, and 30.)
- [13] V. Chvátal, W. Cook, and D. Espinoza. Local cuts for mixed-integer programming. *Mathematical Programming Computation*, 5(2):171-200, June 2013. ISSN 1867-2949, 1867-2957. URL http://link.springer.com/10. 1007/s12532-013-0052-9. (Cited on pages 4 and 19.)
- [14] Coin-OR. The coin-or cut generation library. https://github.com/ coin-or/Cgl, 2021. Accessed: 2021-05-20. (Cited on page 25.)
- [15] B. Colson, P. Marcotte, and G. Savard. An overview of bilevel optimization. Annals of Operations Research, 153(1):235-256, June 2007.

ISSN 0254-5330, 1572-9338. URL http://link.springer.com/10.1007/ s10479-007-0176-2. (Cited on page 10.)

- M. Conforti, G. Cornuéjols, and G. Zambelli. Extended formulations in combinatorial optimization. 4OR, 8(1):1–48, Mar. 2010. ISSN 1619-4500, 1614-2411. URL http://link.springer.com/10.1007/s10288-010-0122-z. (Cited on page 9.)
- M. Conforti, G. Cornuéjols, and G. Zambelli. Integer Programming, volume 271 of Graduate Texts in Mathematics. Springer International Publishing, Cham, 2014. ISBN 978-3-319-11007-3 978-3-319-11008-0. URL http://link.springer.com/10.1007/978-3-319-11008-0. (Cited on page 6.)
- [18] R. Cottle, J.-S. Pang, and R. E. Stone. *The linear complementarity problem*. Number 60 in Classics in applied mathematics. Society for Industrial and Applied Mathematics, Philadelphia, siam ed., [classics ed.] edition, 2009. ISBN 978-0-89871-686-3. OCLC: ocn370388155. (Cited on pages 6 and 8.)
- [19] T. Cronert and S. Minner. Equilibrium identification and selection in integer programming games. SSRN Preprint 3762380, page 38, 2021. (Cited on pages 2 and 6.)
- [20] G. B. Dantzig. Reminiscences about the origins of linear programming. In Mathematical Programming The State of the Art, pages 78–86. Springer, 1983. (Cited on page 2.)
- [21] C. Daskalakis, P. W. Goldberg, and C. H. Papadimitriou. The complexity of computing a Nash equilibrium. *Communications of the ACM*, 52(2):89–97, Feb. 2009. ISSN 0001-0782, 1557-7317. URL https://dl.acm.org/doi/10.1145/1461928.1461951. (Cited on page 4.)
- S. S. Dey, M. Molinaro, and Q. Wang. Approximating polyhedra with sparse inequalities. *Mathematical Programming*, 154(1-2):329-352, Dec. 2015. ISSN 0025-5610, 1436-4646. URL http://link.springer.com/10. 1007/s10107-015-0925-y. (Cited on page 20.)
- [23] S. P. Dirkse and M. C. Ferris. The path solver: a nommonotone stabilization scheme for mixed complementarity problems. *Optimization Methods and Software*, 5(2):123–156, Jan. 1995. ISSN 1055-6788, 1029-4937. URL http://www.tandfonline.com/doi/abs/10.1080/ 10556789508805606. (Cited on pages 14 and 23.)
- [24] G. Dragotto and R. Scatamacchia. ZERO Regrets Algorithm: Optimizing over Pure Nash Equilibria via Integer Programming. arXiv, abs/2111.06382, 2021. URL https://arxiv.org/abs/2111.06382. (Cited on pages 2 and 6.)
- [25] G. Dragotto, S. Sankaranarayanan, M. Carvalho, and A. Lodi. ZERO: Playing Mathematical Programming Games, 2021. URL http://ww.getzero. one. (Cited on page 23.)

- [26] F. Facchinei and J.-S. Pang. Finite-dimensional variational inequalities and complementarity problems. Springer series in operations research. Springer, New York, 2003. ISBN 978-0-387-95580-3 978-0-387-95581-0. (Cited on page 5.)
- M. C. Ferris and T. S. Munson. Interfaces to PATH 3.0: Design, Implementation and Usage. Computational Optimization and Applications, 12 (1/3):207-227, 1999. ISSN 09266003. URL http://link.springer.com/ 10.1023/A:1008636318275. (Cited on pages 14 and 23.)
- M. Fischetti, A. Lodi, and A. Tramontani. On the separation of disjunctive cuts. *Mathematical Programming*, 128(1-2):205-230, June 2011. ISSN 0025-5610, 1436-4646. URL http://link.springer.com/10.1007/ s10107-009-0300-y. (Cited on pages 4 and 20.)
- M. Fischetti, I. Ljubić, M. Monaci, and M. Sinnl. A New General-Purpose Algorithm for Mixed-Integer Bilevel Linear Programs. Operations Research, 65(6):1615-1637, Dec. 2017. ISSN 0030-364X, 1526-5463. doi: 10.1287/opre.2017.1650. URL http://pubsonline.informs.org/doi/10.1287/opre.2017.1650. (Cited on page 2.)
- [30] I. L. Glicksberg. A Further Generalization of the Kakutani Fixed Point Theorem, with Application to Nash Equilibrium Points. *Proceedings of the American Mathematical Society*, 3(1):170, Feb. 1952. ISSN 00029939. URL https://www.jstor.org/stable/2032478?origin=crossref. (Cited on page 4.)
- [31] M. Grötschel, L. Lovász, and A. Schrijver. The ellipsoid method and its consequences in combinatorial optimization. *Combinatorica*, 1(2):169–197, 1981. (Cited on page 4.)
- [32] M. Grötschel, L. Lovász, and A. Schrijver. The ellipsoid method and its consequences in combinatorial optimization. *Combinatorica*, 1(2):169–197, June 1981. ISSN 0209-9683, 1439-6912. URL http://link.springer.com/10.1007/BF02579273. (Cited on page 16.)
- [33] C. Guo, M. Bodur, and J. A. Taylor. Copositive Duality for Discrete Markets and Games. arXiv:2101.05379 [econ, math], Jan. 2021. URL http: //arxiv.org/abs/2101.05379. arXiv: 2101.05379. (Cited on page 2.)
- [34] R. J. Hillestad and S. E. Jacobsen. Linear programs with an additional reverse convex constraint. Applied Mathematics & Optimization, 6(1):257– 269, Mar. 1980. ISSN 0095-4616, 1432-0606. URL http://link.springer. com/10.1007/BF01442898. (Cited on page 7.)
- [35] R. J. Hillestad and S. E. Jacobsen. Reverse convex programming. Applied Mathematics & Optimization, 6(1):63-78, Mar. 1980. ISSN 0095-4616, 1432-0606. URL http://link.springer.com/10.1007/BF01442883. (Cited on page 7.)

- [36] X. Hu and D. Ralph. Using EPECs to Model Bilevel Games in Restructured Electricity Markets with Locational Prices. *Operations Research*, 55(5): 809-827, Oct. 2007. ISSN 0030-364X, 1526-5463. doi: 10.1287/opre.1070. 0431. URL http://pubsonline.informs.org/doi/abs/10.1287/opre. 1070.0431. (Cited on page 2.)
- [37] R. Karp and C. Papadimitriou. On Linear Characterizations of Combinatorial Optimization Problems. SIAM Journal on Computing, 11(4):620–632, 1982. (Cited on pages 4 and 16.)
- [38] T. Kleinert and M. Schmitt. Why there is no need to use a big-M in linear bilevel optimization: A computational study of two ready-touse approaches. Optimization Online Preprint, 2020. URL http:// www.optimization-online.org/DB%5FFILE/2020/10/8065.pdf. (Cited on page 14.)
- [39] T. Kleinert, M. Labbé, I. Ljubić, and M. Schmidt. A Survey on Mixed-Integer Programming Techniques in Bilevel Optimization. EURO Journal on Computational Optimization, 9:100007, 2021. ISSN 21924406. doi: 10.1016/j.ejco.2021.100007. URL https://linkinghub.elsevier.com/ retrieve/pii/S2192440621001349. (Cited on page 2.)
- [40] M. Köppe, C. T. Ryan, and M. Queyranne. Rational Generating Functions and Integer Programming Games. Operations Research, 59(6):1445–1460, Dec. 2011. ISSN 0030-364X, 1526-5463. URL http://pubsonline.informs.org/doi/abs/10.1287/opre.1110.0964. (Cited on pages 2 and 9.)
- [41] M. Labbé and A. Violin. Bilevel programming and price setting problems. 4OR, 11(1):1–30, 2013. (Cited on page 2.)
- [42] A. H. Land and A. G. Doig. An Automatic Method of Solving Discrete Programming Problems. *Econometrica*, 28(3):497, July 1960. ISSN 00129682. URL https://www.jstor.org/stable/1910129?origin=crossref. (Cited on page 3.)
- [43] C. E. Lemke and J. T. Howson, Jr. Equilibrium Points of Bimatrix Games. Journal of the Society for Industrial and Applied Mathematics, 12(2):413–423, June 1964. ISSN 0368-4245, 2168-3484. URL http://epubs.siam.org/doi/10.1137/0112033. (Cited on page 5.)
- [44] A. Lodi. The Heuristic (Dark) Side of MIP Solvers. In E.-G. Talbi, editor, *Hybrid Metaheuristics*, volume 434, pages 273-284. Springer Berlin Heidelberg, Berlin, Heidelberg, 2013. ISBN 978-3-642-30670-9 978-3-642-30671-6. URL http://link.springer.com/10.1007/978-3-642-30671-6% 5F10. (Cited on page 22.)
- [45] R. McKelvey and A. McLennan. Computation of Equilibria in Finite Games. In the Handbook of Computation Economics, Vol. I. Elsevier, Eds. Amman, H., Kendrick, DA, Rust, J, 1996. (Cited on page 5.)

- [46] J. Nash. Non-cooperative games. Annals of mathematics, pages 286–295, 1951. (Cited on pages 2, 4, and 8.)
- [47] J. F. Nash. Equilibrium Points in n-Person Games. Proceedings of the National Academy of Sciences of the United States of America, 36(1):48– 49, 1950. URL http://www.jstor.org/stable/88031. (Cited on pages 2, 4, and 8.)
- [48] M. Padberg and G. Rinaldi. A Branch-and-Cut Algorithm for the Resolution of Large-Scale Symmetric Traveling Salesman Problems. SIAM Review, 33(1):60-100, 1991. URL http://www.jstor.org/stable/2030652. (Cited on pages 3, 4, 11, and 31.)
- [49] D. G. Pearce. Rationalizable Strategic Behavior and the Problem of Perfection. *Econometrica*, 52(4):1029, July 1984. ISSN 00129682. URL https://www.jstor.org/stable/1911197?origin=crossref. (Cited on page 30.)
- [50] M. Perregaard and E. Balas. Generating Cuts from Multiple-Term Disjunctions. In G. Goos, J. Hartmanis, J. van Leeuwen, K. Aardal, and B. Gerards, editors, *Integer Programming and Combinatorial Optimization*, volume 2081, pages 348–360. Springer Berlin Heidelberg, Berlin, Heidelberg, 2001. ISBN 978-3-540-42225-9 978-3-540-45535-6. URL http: //link.springer.com/10.1007/3-540-45535-3%5F27. Series Title: Lecture Notes in Computer Science. (Cited on pages 19 and 20.)
- [51] R. Porter, E. Nudelman, and Y. Shoham. Simple search methods for finding a Nash equilibrium. *Games and Economic Behavior*, 63(2):642-662, July 2008. ISSN 08998256. URL https://linkinghub.elsevier.com/ retrieve/pii/S0899825606000935. (Cited on pages 5 and 30.)
- [52] J. Rosenmüller. On a Generalization of the Lemke-Howson Algorithm to Noncooperative N -Person Games. SIAM Journal on Applied Mathematics, 21(1):73-79, July 1971. ISSN 0036-1399, 1095-712X. URL http://epubs. siam.org/doi/10.1137/0121010. (Cited on page 5.)
- [53] S. Sagratella. Computing All Solutions of Nash Equilibrium Problems with Discrete Strategy Sets. SIAM Journal on Optimization, 26(4):2190-2218, Jan. 2016. ISSN 1052-6234, 1095-7189. URL http://epubs.siam.org/ doi/10.1137/15M1052445. (Cited on page 6.)
- [54] T. Sandholm, A. Gilpin, and V. Conitzer. Mixed-integer programming methods for finding nash equilibria. In AAAI, pages 495–501, 2005. (Cited on page 5.)
- [55] H. Scarf. The Approximation of Fixed Points of a Continuous Mapping. SIAM Journal on Applied Mathematics, 15(5):1328-1343, Sept. 1967. ISSN 0036-1399, 1095-712X. URL http://epubs.siam.org/doi/10.1137/0115116. (Cited on page 5.)

- [56] Y. Shoham. Computer science and game theory. Communications of the ACM, 51(8):74-79, Aug. 2008. ISSN 0001-0782, 1557-7317. URL https://dl.acm.org/doi/10.1145/1378704.1378721. (Cited on page 1.)
- [57] N. D. Stein, A. Ozdaglar, and P. A. Parrilo. Separable and low-rank continuous games. *International Journal of Game Theory*, 37(4):475-504, Dec. 2008. ISSN 0020-7276, 1432-1270. URL http://link.springer.com/10. 1007/s00182-008-0129-2. (Cited on pages 4, 8, and 38.)
- [58] H. von Stackelberg. Market Structure and Equilibrium. Springer-Verlag Berlin Heidelberg, New York, NY, USA, 2011. ISBN 978-3-642-42390-1. English translation of "Marktform und Gleichgewicht", published in 1934. (Cited on page 10.)
- R. Wilson. Computing Equilibria of N -Person Games. SIAM Journal on Applied Mathematics, 21(1):80-87, July 1971. ISSN 0036-1399, 1095-712X. URL http://epubs.siam.org/doi/10.1137/0121011. (Cited on page 5.)
- B. Yu, J. E. Mitchell, and J.-S. Pang. Solving linear programs with complementarity constraints using branch-and-cut. *Mathematical Programming Computation*, 11(2):267-310, June 2019. ISSN 1867-2949, 1867-2957. URL http://link.springer.com/10.1007/s12532-018-0149-2. (Cited on page 15.)

Appendix A Proof of Theorem 2

Proof. We follow the same structure of the proof for Theorem 7 from Carvalho et al. [10]. First, since G and \tilde{G} are separable games, the payoff any given player is as in (2). Also, from the result of Stein et al. [57], both G and \tilde{G} are separable games, all the *MNEs* (thus any *PNE*) have finite supports or finite supports equivalents. For each player i, its payoff in \tilde{G} and G is linear in its variables x^i .

<u>**PNE** in \widetilde{G} is an MNE in G.</u> Given the PNE $\widetilde{\sigma}$ for \widetilde{G} , we first show $\widetilde{\sigma}$ is an MNE for G by contradiction, thus assuming $\widetilde{\sigma}$ is not an MNE in G. Assume *i* has a unilateral profitable deviation from $\widetilde{\sigma}^i$ to $\overline{\sigma}^i$ in G, namely it can increase its payoff by playing the mixed-strategy $\overline{\sigma}^i$. For construction, $\operatorname{supp}(\overline{\sigma}^i)$ should contain only pure strategies that are feasible for G, i.e., for any *i* and $\dot{x}^i \in \operatorname{supp}(\overline{\sigma}^i)$ it follows that $\dot{x}^i \in \mathcal{X}^i$. Furthermore, since $\overline{\sigma}^i$ is a profitable deviation for *i*, then $f^i(\overline{\sigma}^i, \widetilde{\sigma}^{-i}) \leq f^i(\widetilde{\sigma}^i, \widetilde{\sigma}^{-i})$. This clearly contradicts the assumption $\widetilde{\sigma}$ is a PNE for \widetilde{G} . Thus, no deviation exists for either G or \widetilde{G} .

<u>MNE in G is a PNE in \widetilde{G} .</u> Let $\widehat{\sigma}$ be now an MNE for G. We show this is a PNE for \widetilde{G} by explicitly considering the sets $\operatorname{clconv}(\mathcal{X}^i)$. First, $\widehat{\sigma}$ is also a feasible pure strategy profile in \widetilde{G} since $\mathcal{X}^i \subseteq \operatorname{clconv}(\mathcal{X}^i)$ for any *i*. The following equilibrium constraint is valid in G for every player *i*, since we have an MNE $\widehat{\sigma}$:

$$f^{i}(\overline{x}^{i},\widehat{\sigma}^{-i}) \ge f^{i}(\widehat{\sigma}^{i},\widehat{\sigma}^{-i}) \qquad \forall \ \overline{x}^{i} \in \mathcal{X}^{i}$$
 (18)

We show (18) holds for any $\overline{x}^i \in \operatorname{cl\,conv}(\mathcal{X}^i)$. We multiply (18) on both sides by an appropriately sized non-negative vector $\lambda \geq 0$, with $\sum_{j=1}^{|\lambda|} \lambda_j = 1$. Clearly, all the resulting equations hold because the payoff functions are linear in each player's variable, and the multipliers non-negative. Thus, (18) holds for any $\overline{x}^i \in \operatorname{conv}(\mathcal{X}^i)$. In order to prove (18) holds also for the closure, we simply consider a convergent sequence of deviations $\overline{x}_1^i, \overline{x}_2^i, \ldots$ where $\overline{x}_j^i \in \operatorname{cl\,conv}(\mathcal{X}^i)$ for any j, and $\lim_{j\to\infty} \overline{x}_j^i = \overline{x}^i$. Then:

$$f^{i}(\overline{x}^{i}_{j},\widehat{\sigma}^{-i}) \ge f^{i}(\widehat{\sigma}^{i},\widehat{\sigma}^{-i}) \quad \forall j$$

$$\tag{19}$$

We apply a $\lim_{i\to\infty}$ operator to both sides, and obtain:

$$f^{i}(\overline{x}^{i}, \widehat{\sigma}^{-i}) \ge f^{i}(\widehat{\sigma}^{i}, \widehat{\sigma}^{-i}) \qquad \forall j$$
(20)

Hence, we can simply compute a PNE on \tilde{G} and arbitrarily map it to an MNE of G. Furthermore, it follows that if G has no MNE, then \tilde{G} has no PNE.

Appendix B Proof of Proposition 1

Proof. Consider a generic player i. Note that we assume the infimum z^i is finite. From the definition of infimum, it follows that player i cannot achieve a payoff strictly less than z^i given the other players' strategies $\tilde{\sigma}^{-i}$. Consider now the optimization program of i where its feasible set is replaced with $\operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$: player i attains a payoff of z^i at least in one point $v^i \in \operatorname{cl}\operatorname{conv}(\mathcal{X}^i)$. Namely, z^i is a minimum for the ptimization problem in (21).

$$z^{i} = \min_{x^{i}} \{ f^{i}(x^{i}, \tilde{\sigma}^{-i}) : x^{i} \in \operatorname{cl}\operatorname{conv}(\mathcal{X}^{i}) \}$$

$$(21)$$

Let us define $F^i = \{x^i : x^i \in \operatorname{cl\,conv}(\mathcal{X}^i), f^i(x^i, \tilde{\sigma}^{-i}) = z^i\}$, which is also a face of $\operatorname{cl\,conv}(\mathcal{X}^i)$ with $v^i \in F^i$. Assume there exist a best-response $\overline{v}^i \in \operatorname{cl\,conv}(\mathcal{X}^i)$ so that *i* can improve its payoff by deviating to that strategy. Then, v^i would not be a best-response to $\tilde{\sigma}^{-i}$. Since all the solutions of (21) are necessarily infima in \mathcal{X}^i with respect to $f^i(x^i, \tilde{\sigma}^{-i})$, this would mean that the optimal solution of (21) is \overline{v}^i , thus resulting in an absurdity.