

# partycls: A Python package for structural clustering

## Joris Paret<sup>1</sup> and Daniele Coslovich<sup>2</sup>

1 Laboratoire Charles Coulomb (L2C), Université de Montpellier, CNRS, Montpellier, France 2 Dipartimento di Fisica, Università di Trieste, Italy

# **Summary**

partycls is a Python framework for cluster analysis of systems of interacting particles. By grouping particles that share similar structural or dynamical properties, partycls enables rapid and unsupervised exploration of the system's relevant features. It provides descriptors suitable for applications in condensed matter physics and integrates the necessary tools of unsupervised learning, such as dimensionality reduction, into a streamlined workflow. Through a simple and expressive interface, partycls allows one to open a trajectory file, perform a clustering based on the selected structural descriptor, and analyze and save the results with only a few lines of code.

## Statement of need

Analysis of the local arrangements of atoms and molecules in dense liquids and solids is crucial to understand their emergent physical properties. This is particularly important in systems whose local structure is heterogeneous, which include polycrystalline materials and partially ordered systems, like semi-crystalline polymers (Ganda and Stenzel 2020) or metastable liquids during crystal nucleation (Russo and Tanaka 2016). Even more challenging is the case of glass-forming liquids and glasses (Royall and Williams 2015), as these systems may display locally favored structures, whose symmetry and chemical concentration differ in a subtle way from the bulk.

Recently, unsupervised learning has emerged as a novel approach to structural analysis of disordered materials (Reinhart et al. 2017; Boattini, Dijkstra, and Filion 2019). In particular, clustering methods based on simple observables, such as radial distribution functions, bond angle distributions, and bond orientational parameters (BOP), provide useful insight into the structural heterogenity of glassy systems (Boattini et al. 2020; Paret, Jack, and Coslovich 2020). By grouping the particles according to the similarity of their local structure, these methods avoid the profileration of distinct structural signatures that affects conventional methods, like Voronoi-based analysis (Tanemura et al. 1977) or common neighbor analysis (CNA) (Honeycutt and Andersen 1987), as well as topological classification approaches (Malins et al. 2013; Lazar, Han, and Srolovitz 2015).

With the present code, we aim to provide a coherent numerical framework for unsupervised learning of structural and dynamical features of condensed matter systems. To the best of our knowledge, there is currently no publicly available code that provides and integrates all the necessary tools needed for this kind of analysis. Through a variety of structural descriptors, dimensionality reduction methods, clustering algorithms and filtering options, partycls makes it possible to discover the key structural features of a system and to assess the robustness of the results. It can readily analyze trajectories generated by molecular dynamics simulation softwares, both within particle-based and multi-scale approaches (see e.g. Plimpton (1995), Anderson, Glaser, and Glotzer (2020) and Guzman et al. (2019)). The code has already been used in the context of a recent publication (Paret, Jack, and Coslovich 2020) and can be easily extended. In particular, future versions will implement descriptors that depend on both space

### **DOI:** 10.21105/joss.03723

#### **Software**

- Review 🗗
- Repository ௴
- Archive ௴

### Editor: Lucy Whalley ♂

#### Reviewers:

- @govarguz ♂
- @FTurci ♂

**Submitted:** 27 August 2021 **Published:** 08 November 2021

#### License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License (CC BY 4.0).




and time, to learn about the dynamics of the system as well. Spatio-temporal clustering may provide valuable insight into the heterogeneous dynamics of amorphous materials (Berthier et al. 2011) and into particles' trajectories in more extreme states of matter (Markidis et al. 2020).

# Design

partycls is mostly written in Python, with a few parts coded in Fortran 90 for efficiency. It provides a simple and configurable workflow, from reading the input trajectory, through the pre-processing steps, to the final clustering results. It accepts several trajectory file formats, by relying on optional third-party packages such as MDTraj (McGibbon et al. 2015), which supports several well-known trajectory formats, and atooms (Coslovich 2018), which makes it easy to interface custom formats often used by in-house simulation codes. Thanks to a flexible system of filters, it is possible to compute the structural descriptors or perform the clustering on restricted subsets of particles of the system, based on arbitrary particle properties. In addition to its native descriptors, partycls also supports additional structural descriptors via DScribe (Himanen et al. 2020).

Some parts of the code act as a wrapper around functions of the machine learning package scikit-learn (Pedregosa et al. 2011). This allows non-experienced users to rely on the simplicity of partycls's interface without any prior knowledge of this external package, while experienced users can take full advantage of the many options provided by scikit-learn. In addition, the code integrates the relevant tools for distributional clustering, such as a community inference method tailored to amorphous materials (Paret, Jack, and Coslovich 2020), and several helper functions, e.g. for merging mixture models (Baudry et al. 2010) and consistent centroid-based cluster labeling. A simple diagram of the different steps and combinations to create a custom workflow is shown in Figure 1. A collection of notebooks, with various examples and detailed instructions on how to run the code, is available in the partycls's repository.

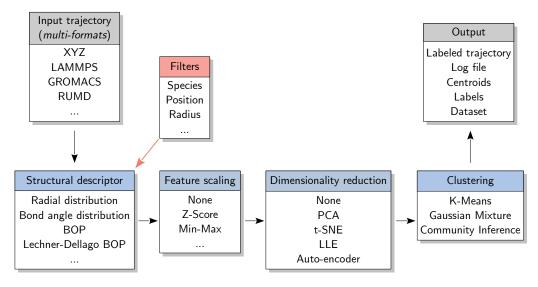

**Figure 1:** The different steps to perform a structural clustering. The input is a file written in any of the trajectory formats supported by partycls. After selecting the structural descriptor and optional filters, two key steps for pre-processing the data are possible: feature scaling and dimensionality reduction. Finally, a clustering is performed using the selected algorithm. Several output files are produced for further analysis.

To maintain a consistent API as the code base evolves, partycls will rigorously follow semantic



versioning as the code is designed for maintainable extension. Future work will focus on the underlooked case of dynamical clustering by implementing time-dependent descriptors for individual particle trajectory.

# **Examples**

As a simple example, we consider the detection of the grain boundaries in a polycrystal formed by differently oriented FCC crystallites (Rosenbrock et al. 2018). This is easily achieved even with a simple radial descriptor, since the average radial distribution of particles at the boundaries is different than the one of the crystal in the bulk. The following short piece of code opens the input trajectory stored in the file grains.xyz, computes the local radial distribution functions of the particles, applies a standard Z-Score normalization on the data, and finally performs a clustering using the Gaussian mixture model (GMM) with K=2 clusters (default):

```
from partycls import Workflow
```

Each of these steps is easily tunable, so as to change the workflow with little effort. The labels are available as a simple attribute of the Workflow instance. Optionally, a set of output files can be produced for further analysis, including a trajectory file with the cluster labels. Quick visualization of the clusters, as in Figure 2, is possible within partycls through optional visualization backends.

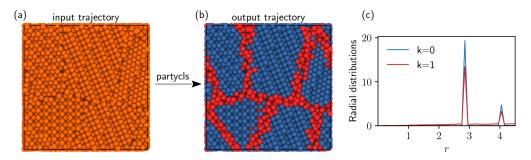


Figure 2: (a) A polycrystalline material with differently oriented FCC crystallites. (b) Using the individual radial distributions of the particles as structural descriptor, the algorithm identifies the crystalline domains (blue, k=0) and the grain boundaries (red, k=1). (c) The radial distribution functions restricted to these two clusters display a marked difference, with higher peaks for the crystals. All 3D visualizations were performed with OVITO (Stukowski 2009).

The local structure of a glass-forming liquid provides a more challenging bench-case, since the system is amorphous overall, but subtle structural features emerge at low temperature. Here, we consider a binary metallic alloy  ${\rm Cu_{64}Zr_{36}}$ , which shows a tendency for local icosahedral arrangements around copper atoms (Soklaski et al. 2016). The fraction of atoms that form such locally favored structures increases markedly when the system is cooled at low temperature. We use LAMMPS (Plimpton 1995) to perform a molecular dynamics simulation using an embedded atom potential. After a rapid quench from high temperature, the supercooled liquid is annealed at  $T=900{\rm K}$ . In the following piece of code, we open a LAMMPS trajectory using atooms as backend, we restrict the analysis to the copper atoms and use bond-angle correlations and the K-Means algorithm to form the clusters:



Here, we directly access classes for the trajectory and the structural descriptor, and then pass them to the Workflow instance. Every step of the workflow can also be performed manually by directly instantiating the desired classes, without creating an instance of Workflow.

In Figure 3, we see that the distribution of the cluster k=1 is similar to what is expected for icosahedral structural environments, whereas that of the cluster k=0 is flatter and thus more disordered. This provides evidence of the local structural heterogeneity of the system. Similar results have been obtained using related clustering algorithms for simpler models of glass-forming liquids based on Lennard-Jones interactions (Boattini et al. 2020; Paret, Jack, and Coslovich 2020).

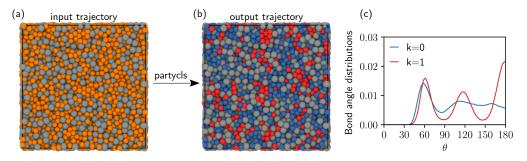


Figure 3: (a) A glassy copper-zirconium alloy at T=900K. Copper and zirconium atoms are colored in orange and grey, respectively. We focus on the bond-angle distribution around the copper atoms only. (b) Copper atoms are now colored blue (k=0) and red (k=1) based on their cluster membership. Zirconium atoms (grey) are discarded from the analysis. (c) Bond-angle distributions of the clusters.

# Acknowledgements

We thank Robert Jack for his contribution to the community inference method, the merging of mixture models, and for his helpful comments.

### References

Anderson, Joshua A., Jens Glaser, and Sharon C. Glotzer. 2020. "HOOMD-Blue: A Python Package for High-Performance Molecular Dynamics and Hard Particle Monte Carlo Simulations." *Computational Materials Science* 173: 109363. https://doi.org/10.1016/j.commatsci.2019. 109363.

Baudry, Jean-Patrick, Adrian E. Raftery, Gilles Celeux, Kenneth Lo, and Raphaël Gottardo. 2010. "Combining Mixture Components for Clustering." *Journal of Computational and Graphical Statistics* 19 (2): 332–53. https://doi.org/10.1198/jcgs.2010.08111.



Berthier, Ludovic, Giulio Biroli, Jean-Philippe Bouchaud, Luca Cipelletti, and Wim van Saarloos, eds. 2011. *Dynamical Heterogeneities in Glasses, Colloids, and Granular Media*. International Series of Monographs on Physics. Oxford University Press. https://doi.org/10.1093/acprof:oso/9780199691470.001.0001.

Boattini, Emanuele, Marjolein Dijkstra, and Laura Filion. 2019. "Unsupervised Learning for Local Structure Detection in Colloidal Systems." *The Journal of Chemical Physics* 151 (15): 154901. https://doi.org/10.1063/1.5118867.

Boattini, Emanuele, Susana Marín-Aguilar, Saheli Mitra, Giuseppe Foffi, Frank Smallenburg, and Laura Filion. 2020. "Autonomously Revealing Hidden Local Structures in Supercooled Liquids." *Nature Communications* 11 (1): 5479. https://doi.org/10.1038/s41467-020-19286-8.

Coslovich, Daniele. 2018. *atooms: A python framework for simulations of interacting particles* (version 1.3.3). Zenodo. https://doi.org/10.5281/zenodo.1183302.

Ganda, Sylvia, and Martina H. Stenzel. 2020. "Concepts, Fabrication Methods and Applications of Living Crystallization-Driven Self-Assembly of Block Copolymers." *Progress in Polymer Science* 101: 101195. https://doi.org/10.1016/j.progpolymsci.2019.101195.

Guzman, Horacio V., Nikita Tretyakov, Hideki Kobayashi, Aoife C. Fogarty, Karsten Kreis, Jakub Krajniak, Christoph Junghans, Kurt Kremer, and Torsten Stuehn. 2019. "ESPResSo++ 2.0: Advanced Methods for Multiscale Molecular Simulation." *Computer Physics Communications* 238 (May): 66–76. https://doi.org/10.1016/j.cpc.2018.12.017.

Himanen, Lauri, Marc O. J. Jäger, Eiaki V. Morooka, Filippo Federici Canova, Yashasvi S. Ranawat, David Z. Gao, Patrick Rinke, and Adam S. Foster. 2020. "DScribe: Library of descriptors for machine learning in materials science." *Computer Physics Communications* 247: 106949. https://doi.org/10.1016/j.cpc.2019.106949.

Honeycutt, J. Dana., and Hans C. Andersen. 1987. "Molecular Dynamics Study of Melting and Freezing of Small Lennard-Jones Clusters." *The Journal of Physical Chemistry* 91 (19): 4950–63. https://doi.org/10.1021/j100303a014.

Lazar, Emanuel A., Jian Han, and David J. Srolovitz. 2015. "A Topological Framework for Local Structure Analysis in Condensed Matter." *Proceedings of the National Academy of Sciences* 112 (43): E5769–E5776. https://doi.org/10.1073/pnas.1505788112.

Malins, Alex, Stephen R. Williams, Jens Eggers, and C. Patrick Royall. 2013. "Identification of Structure in Condensed Matter with the Topological Cluster Classification." *The Journal of Chemical Physics* 139 (23): 234506. https://doi.org/10.1063/1.4832897.

Markidis, Stefano, Ivy Peng, Artur Podobas, Itthinat Jongsuebchoke, Gabriel Bengtsson, and Pawel Herman. 2020. "Automatic Particle Trajectory Classification in Plasma Simulations." In 2020 Ieee/Acm Workshop on Machine Learning in High Performance Computing Environments (Mlhpc) and Workshop on Artificial Intelligence and Machine Learning for Scientific Applications (Ai4s), 64–71. https://doi.org/10.1109/MLHPCAI4S51975.2020.00014.

McGibbon, Robert T., Kyle A. Beauchamp, Matthew P. Harrigan, Christoph Klein, Jason M. Swails, Carlos X. Hernández, Christian R. Schwantes, Lee-Ping Wang, Thomas J. Lane, and Vijay S. Pande. 2015. "MDTraj: A Modern Open Library for the Analysis of Molecular Dynamics Trajectories." *Biophysical Journal* 109 (8): 1528–32. https://doi.org/10.1016/j.bpj. 2015.08.015.

Paret, Joris, Robert L. Jack, and Daniele Coslovich. 2020. "Assessing the Structural Heterogeneity of Supercooled Liquids Through Community Inference." *The Journal of Chemical Physics* 152 (14): 144502. https://doi.org/10.1063/5.0004732.

Pedregosa, F., G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, et al. 2011. "Scikit-Learn: Machine Learning in Python." *Journal of Machine Learning Research* 12: 2825–30.



Plimpton, Steve. 1995. "Fast Parallel Algorithms for Short-Range Molecular Dynamics." *Journal of Computational Physics* 117 (1): 1–19. https://doi.org/10.1006/jcph.1995.1039.

Reinhart, Wesley F., Andrew W. Long, Michael P. Howard, Andrew L. Ferguson, and Athanassios Z. Panagiotopoulos. 2017. "Machine Learning for Autonomous Crystal Structure Identification." *Soft Matter* 13 (27): 4733–45. https://doi.org/10.1039/C7SM00957G.

Rosenbrock, Conrad W., Jonathan L. Priedeman, Gus L. W. Hart, and Eric R. Homer. 2018. "Structural Characterization of Grain Boundaries and Machine Learning of Grain Boundary Energy and Mobility." arXiv:1808.05292 [Cond-Mat, Physics:Physics], August. http://arxiv.org/abs/1808.05292.

Royall, C. Patrick, and Stephen R. Williams. 2015. "The Role of Local Structure in Dynamical Arrest." *Physics Reports* 560 (February): 1–75. https://doi.org/10.1016/j.physrep.2014.11.004.

Russo, John, and Hajime Tanaka. 2016. "Crystal Nucleation as the Ordering of Multiple Order Parameters." *The Journal of Chemical Physics* 145 (21): 211801. https://doi.org/10.1063/1.4962166.

Soklaski, Ryan, Vy Tran, Zohar Nussinov, K. F. Kelton, and Li Yang. 2016. "A Locally Preferred Structure Characterises All Dynamical Regimes of a Supercooled Liquid." *Philosophical Magazine* 96 (12): 1212–27. https://doi.org/10.1080/14786435.2016.1158427.

Stukowski, Alexander. 2009. "Visualization and Analysis of Atomistic Simulation Data with OVITOthe Open Visualization Tool." *Modelling and Simulation in Materials Science and Engineering* 18 (1): 015012. https://doi.org/10.1088/0965-0393/18/1/015012.

Tanemura, Masaharu, Yasuaki Hiwatari, Hirotsugu Matsuda, Tohru Ogawa, Naofumi Ogita, and Akira Ueda. 1977. "Geometrical Analysis of Crystallization of the Soft-Core Model\*)." *Progress of Theoretical Physics* 58 (4): 1079–95. https://doi.org/10.1143/PTP.58.1079.