

Towards Compositional Adversarial Robustness: Generalizing Adversarial Training to Composite Semantic Perturbations

Lei Hsiung^{1,3*} Yun-Yun Tsai² Pin-Yu Chen³ Tsung-Yi Ho^{1,4}

¹National Tsing Hua University, Hsinchu, Taiwan

²Columbia University, New York, United States

³IBM Thomas J. Watson Research Center, New York, United States

⁴The Chinese University of Hong Kong, Hong Kong, China

{lei.hsiung, pin-yu.chen}@ibm.com, yt2781@columbia.edu, tyho@cse.cuhk.edu.hk

Abstract

*Model robustness against adversarial examples of single perturbation type such as the ℓ_p -norm has been widely studied, yet its generalization to more realistic scenarios involving multiple semantic perturbations and their composition remains largely unexplored. In this paper, we first propose a novel method for generating composite adversarial examples. Our method can find the optimal attack composition by utilizing component-wise projected gradient descent and automatic attack-order scheduling. We then propose **generalized adversarial training (GAT)** to extend model robustness from ℓ_p -ball to composite semantic perturbations, such as the combination of Hue, Saturation, Brightness, Contrast, and Rotation. Results obtained using ImageNet and CIFAR-10 datasets indicate that GAT can be robust not only to all the tested types of a single attack, but also to any combination of such attacks. GAT also outperforms baseline ℓ_∞ -norm bounded adversarial training approaches by a significant margin.*

1. Introduction

Deep neural networks have shown remarkable success in a wide variety of machine learning (ML) applications, ranging from biometric authentication (e.g., facial image recognition), medical diagnosis (e.g., CT lung cancer detection) to autonomous driving systems (traffic sign classification), etc. However, while these models can achieve outstanding performance on benign data points, recent research has shown that state-of-the-art models can be easily fooled by malicious data points crafted intentionally with adversarial perturbations [37].

To date, the most effective defense mechanism is to incorporate adversarial examples during model training, known as adversarial training (AT) [21, 47]. Nonetheless, current adversarial training approaches primarily only consider a single perturbation type (or threat model) quantified in a specific distance metric (e.g., ℓ_p -ball). In this regard, lacking exploration on the compositional adversarial robustness against a combination of several threats models could lead to impractical conclusion and undesirable bias in robustness evaluation. For example, a model that is robust to perturbations within ℓ_p -ball does not imply it can simultaneously be robust to other realistic semantic perturbations (e.g., hue, saturation, rotation, brightness, and contrast).

To tackle this issue, in this paper, we propose **generalized adversarial training (GAT)**, which can harden against a wide range of threat models, from single ℓ_∞ -norm or semantic perturbation to a combination of them. Notably, extending standard adversarial training to composite adversarial perturbations is a challenging and non-trivial task, as each perturbation type is sequentially applied, and thus the attack order will affect the effectiveness of the composite adversarial example. To bridge this gap, we propose an efficient attack order scheduling algorithm to learn the optimal ordering of various perturbation types, which will then be incorporated into the GAT framework.

Different from existing works, this paper aims to address the following fundamental questions: (a) How to generalize adversarial training from single threat model to multiple? (b) How to optimize the perturbation order from a set of semantic and ℓ_p -norm perturbations? (c) Can GAT outperform other adversarial training baselines against composite perturbations?

Our main contributions in this paper provide affirmative answers to the questions:

*Part of this work was done during Lei Hsiung’s visit to IBM Thomas J. Watson Research Center.

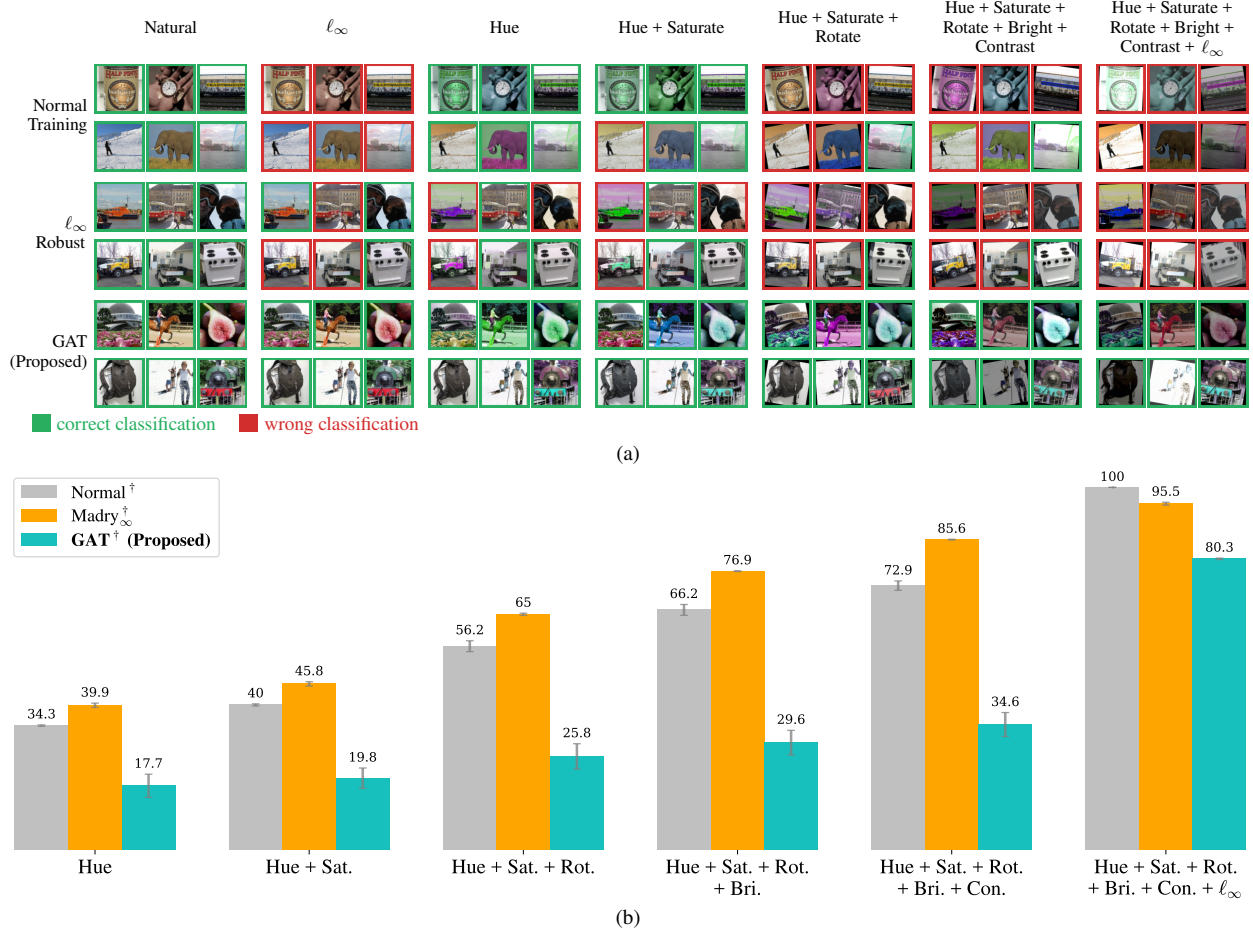


Figure 1. (a) **Qualitative study:** illustration of some perturbed examples generated by different attack combinations and their predictions by different ResNet50 models [10] on ImageNet, including standard training, Madry’s ℓ_∞ robust training [21] and our proposed GAT. The results show that our proposed GAT can maintain robust accuracy under a variety of composite adversarial attacks, even with the increasing number of attacks. (b) **Quantitative study:** the attack success rate (ASR, %) of the above-mentioned models under multiple composite attacks (a higher ASR means less robust) on all correctly classified test samples for each model. The corresponding robust accuracy (RA) is listed in Table 3.

1. We propose composite adversarial attack (CAA), a novel and unified approach to generate adversarial examples across from multiple perturbation types with attack-order-scheduling, including semantic perturbations (*Hue, Saturation, Contrast, Brightness and Contrast*) and ℓ_p -norm space. To the best of our knowledge, this paper is the first work that leverages scheduling algorithm for finding the optimal attack order in composite adversarial attacks.
2. Building upon our composite adversarial attack framework, we propose generalized adversarial training (GAT) toward achieving compositional adversarial robustness, which enables the training of neural networks robust to composite adversarial attacks.
3. For the attack part, our proposed composite adversarial attack exhibits a high attack success rate (ASR) against stan-

dard or ℓ_∞ -norm robust models. Moreover, our method with learned attack order significantly outperforms random attack ordering, giving average 9% and 7% increase in ASR on CIFAR-10 and ImageNet.

4. For the defense part, comparing our GAT to other adversarial training baselines [20, 21, 42, 44, 47, 48], the results show the robust accuracy of GAT outperforms them by average 30% ~ 60% on semantic attacks and 15% ~ 22% on full attacks.

To further motivate the effectiveness of our proposed GAT framework, Fig. 1 compares the performance of different models under selected attacks, ranging from a single threat to composite threats. The models include standard training, ℓ_∞ -robust training, and our proposed GAT. The results show the limitation of ℓ_∞ -robust model [21], which is robust

against the same-type adversarial attack, but becomes fragile against semantic adversarial attacks and their composition. Our proposed GAT addresses this limitation by providing a novel training approach that is robust to any combination of multiple and adversarial threats.

2. Related Work

Adversarial Semantic Perturbations Most studies on adversarial machine learning concentrate on generating examples that can trick a model into making the wrong predictions [2]. Several works have primarily focused on the vulnerability of deep neural networks against ℓ_p -norm adversarial threats [3, 4, 6, 9]. Some works consider the adversarial threats beyond ℓ_p -norm, which generally occur in natural transformations such as geometry, color, and brightness, and are classified as semantic perturbations [1, 11, 13, 14, 29, 32, 40, 41]. In contrast to ℓ_p -norm perturbations, semantic perturbations normally lead to semantically-similar or natural-looking adversarial examples but with large differences, in ℓ_p -norm perspective. For color translation, [11] shows that randomly shifting the Hue and Saturation components in the Hue-Saturation-Value (HSV) color space of images can dramatically decrease the accuracy of a neural network by 88%. A similar idea is proposed by [1], including colorization and texture transfer attack, which can either perturb gray-scale image with natural colorization or infuse the texture of one image into another. For geometric transformation, [8, 45] target rotate transformation. The former uses coordinate-wise optimization in each pixel, which is computationally expensive. The latter proposes a simple way by parametrizing a set of tunable parameters for spatial transformation. [43] utilizes Wasserstein distance for generating adversarial examples beyond ℓ_p -norm. [26] studies certified robustness against semantic perturbations but do not discuss adversarial training. Prior works [7, 29, 49] exploit the context-sensitive changes to features from the input and perturb images with the corresponding feature map interpolation.

Composite Adversarial Perturbations Inspired by the previous literature [1, 12, 19], via combining different adversarial threats, the adversarial examples can be hardened. The experimental results of prior works show how to expand the perturbation space of an image and further increase the misclassification rate of neural networks. Laidlaw and Feizi [19] propose the ReColorAdv attack, which admits multi-functional threats to be used for perturbing every input pixel and also combines with additional ℓ_p -norm threat. Instead of changing input by adding perturbation functionally, Mao et al. utilize genetic algorithms to search for the best combination in multiple attacks that are stronger than a single attack [23]. However, they merely consider searching the order of attack combination in particular norm spaces (i.e.,

ℓ_2 , ℓ_∞ , and corruption semantic space), and could not cope with all attacks simultaneously. In this paper, we consider the scheduling problem for multiple attack types, which can be easily extended to support different attack combinations. In [14], they propose to measure model robustness with an ensemble of unforeseen attacks from broader threat models, including JPEG, Fog, Snow, Gabor, etc. They consider the worst case over all attacks and attempt to improve model performance against these unforeseen adversarial threats.

Adversarial Training Adversarial training (AT) is one of the most efficient ways to derive a robust model, which can defend against the corresponding adversarial attacks [18, 21, 47]. Madry et al. [21] proposed to minimize the worst-case loss in a region around the input. On top of that, Zhang et al. [47] make the robust boundary much smoother by considering both natural input and the perturbed input in computing the loss, along with a parameter β to define the ratio of them. Furthermore, Laidlaw et al. [20] expand the adversarial attack from single to broader threats via neural perceptual distance measurement to generalize the AT with perceptual adversarial examples. Recently, Mao et al. proposed combining robust components as building blocks of vision transformers, which aids in obtaining a state-of-the-art robust vision transformer [24]. AT with adversarial transformations is also done in [8, 36].

However, most of them only target a single adversarial threat model. Specifically, as shown in Fig. 1, a robust classifier that can help defend against ℓ_∞ -norm perturbations still has low robustness to composite semantic attacks or other ℓ_q threats ($p \neq q$) [33]. The adversarial robustness under multiple adversarial threats has been discussed in [22, 38, 39]. They proposed multiple-norm adversarial training, which yields models simultaneously robust against multiple ℓ_p -norm (e.g., ℓ_1 , ℓ_2 , and ℓ_∞) attacks. In particular, although Tramer et al. [38] had considered alternately optimizing perturbation types *given a fixed attack order*, the search for the strongest possible attack order is left out for discussion. Nonetheless, the considered perturbations are simultaneously added to the same data sample rather than sequentially. In contrast to their works, we consider composite adversarial perturbations involving the design of attack order and extend beyond the ℓ_p -norm attacks by considering semantic perturbations.

3. Composite Adversarial Attack and Generalized Adversarial Training

In this section, we first propose the composite adversarial attack (CAA) framework (Fig. 2), and elucidate the details of our attack order scheduling algorithm. We then adopt the CAA into adversarial training, which is called generalized adversarial training (GAT).

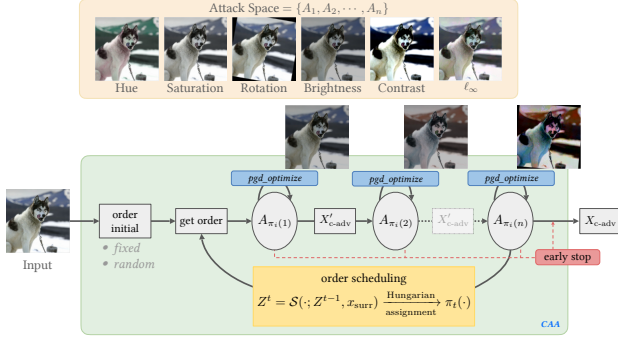


Figure 2. A pipeline of the proposed *composite adversarial attack* method with the ability to dynamically optimize the attack order and harden adversarial examples.

3.1. Composite Attack Formulation

Composite Adversarial Attacks with Order Scheduling.

Let $\mathcal{F} : \mathcal{X} \rightarrow \mathbb{R}^d$ be an image classifier that takes image $x \in \mathcal{X}$ as input and generates a d -dimensional prediction scores (e.g., softmax outputs) for d classes, and let $\Omega = \{A_1, \dots, A_n\}$ denote an attack set that contains n attack types. For each attack A_k , we define a corresponding perturbation interval (boundary) $\epsilon_k = [\alpha_k, \beta_k]$ to govern the attack power of A_k . We then denote the corresponding perturbation intervals of Ω as $E = \{\epsilon_k | k \in \{1, \dots, n\}\}$.

In CAA, we optimize not only the power of each attack component in Ω , but also the attack order applied to the image x . That is, consider $\mathcal{I}_n = \{i\}_{i=1}^n$, we can use an assignment function $\pi_i : \mathcal{I}_n \rightarrow \mathcal{I}_n$ to determine the attack order to be used under the i -th schedule. As shown in Fig. 2, after i -th scheduling, a composite adversarial example $x_{c\text{-adv}}$ can be formulated as:

$$x_{c\text{-adv}} = A_{\pi_i(n)}(A_{\pi_i(n-1)}(\dots A_{\pi_i(1)}(x))).$$

Noted that input x would be perturbed in the order of: $A_{\pi_i(1)} \rightarrow A_{\pi_i(2)} \rightarrow \dots \rightarrow A_{\pi_i(n)}$. For each attack operation $A_k \in \Omega$, an input x would be transformed to a perturbed sample with a specific perturbation level δ_k , where $\delta_k \in \epsilon_k$ would be optimized via projected gradient descent, maximizing the classification error (e.g., cross-entropy loss \mathcal{L}). Therefore, the operation of $A_k(x; \delta_k)$ could be expressed as optimizing δ_k , that is:

$$\arg \max_{\delta_k \in \epsilon_k} \mathcal{L}(\mathcal{F}(A_k(x; \delta_k)), y), \quad (1)$$

where y is the ground-truth label of x . We named it component-wise PGD (Comp-PGD) and will explain more details in Sec. 3.2.

Since the assignment function $\pi_i(\cdot)$ is essentially a permutation matrix (or Birkhoff polytope), we can optimize it by treating it as a (relaxed) *scheduling matrix* Z^i , where

$Z^i = [z_1, \dots, z_n]^\top$ is also a doubly stochastic matrix, i.e. $z_j \in \mathbb{R}^n$, $\sum_i z_{ij} = \sum_j z_{ij} = 1, \forall i, j \in \{1, \dots, n\}$. Furthermore, we can utilize the Hungarian algorithm [16, 27] to obtain an optimal attack order assignment.

In sum, we formalize CAA's attack order auto-scheduling as a constrained optimization problem, where the attack order having maximum classification error can be obtained by solving:

$$\max_{\pi} \mathcal{L}(\mathcal{F}(A_{\pi(n)}(\dots A_{\pi(1)}(x; \delta_{\pi(1)}) \dots ; \delta_{\pi(n)})), y). \quad (2)$$

The Surrogate Image for Scheduling Optimization.

Since $x_{c\text{-adv}}$ contains merely one attack perturbation at each iteration, using it alone is challenging to optimize the likelihood of other attacks in the relaxed scheduling matrix. To manage this issue, we adopt a surrogate composite adversarial image x_{surr} to relax the restriction and compute the loss for updating the scheduling matrix Z , i.e. by weighting each type of attack perturbation with its corresponding probability at each iteration. Therefore, we could optimize the scheduling matrix Z via maximizing the corresponding loss $\mathcal{L}(\mathcal{F}(x_{\text{surr}}), y)$. Given the attack pool Ω of n attacks, the surrogate image would be computed for n iterations. For each iteration i , the surrogate image is defined as:

$$x_{\text{surr}}^i = \sum_{j=1}^n z_{ij} \cdot A_j(x_{\text{surr}}^{i-1}; \delta_j), \forall i \in \{1, \dots, n\},$$

and $x_{\text{surr}}^0 = x$. Let $\mathbf{A}^\top = (A_1, \dots, A_n)$ denotes a vector of all attack types in Ω . Consequently, after n iterations, the resulting surrogate image x_{surr}^n can be formulated into the following compositional form:

$$\begin{aligned} x_{\text{surr}}^n &= \mathbf{z}_n^\top \mathbf{A}(\dots (\mathbf{z}_2^\top \mathbf{A}(\mathbf{z}_1^\top \mathbf{A}(x)))) \\ &= \mathbf{z}_n^\top \mathbf{A}(\dots (\mathbf{z}_2^\top \mathbf{A}(\sum_{j=1}^n z_{1j} \cdot A_j(x; \delta_j)))) \\ &= \mathbf{z}_n^\top \mathbf{A}(\dots (\mathbf{z}_2^\top \mathbf{A}(x_{\text{surr}}^1))) \\ &= \mathbf{z}_n^\top \mathbf{A}(\dots (x_{\text{surr}}^2)). \end{aligned} \quad (3)$$

How to Learn Optimal Attack Order? Learning an optimal attack order expressed by the scheduling matrix Z^* is originally a combinatorial optimization problem to solve the best column and row permutation of a scheduling matrix. Sinkhorn and Knopp proved that any positive square matrix could be turned into a doubly stochastic matrix by alternately normalizing the rows and columns of it [34]. Furthermore, Mena et al. theoretically showed how to extend the Sinkhorn normalization to learn and determine the optimal permutation matrix [25]. Similarly, in our problem, optimizing the attack order over a doubly stochastic matrix Z can be cast as a maximization problem, where the feasible solution set is

convex. With the surrogate composite adversarial example x_{surr} , the updating process of the scheduling matrix Z^t for iteration t can be formulated as:

$$Z^t = \mathcal{S}\left(\exp(Z^{t-1} + \frac{\partial \mathcal{L}(\mathcal{F}(x_{\text{surr}}), y)}{\partial Z^{t-1}})\right), \quad (4)$$

where \mathcal{S} (Sinkhorn normalization) can be done in a limited number of iterations [35]. Here, we fixed the iteration as 20 steps. After deriving an updated scheduling matrix, we utilize the Hungarian assignment algorithm to obtain the updated order assignment function $\pi_t(\cdot)$, as shown in Eq. 5:

$$\pi_t(j) := \arg \max \mathbf{z}_j, \forall j \in \{1, \dots, n\}. \quad (5)$$

3.2. The Component-wise PGD (Comp-PGD)

Upon addressing the attack scheduling issue, we now move forward to elucidate the design of adversarial perturbation in each attack type (component) of our composite adversarial attacks. For most of the semantic perturbations, their parameters are of continuous value. Therefore, we propose to search the parameters of semantic attacks by gradient descent algorithm within each continuous semantic space. In particular, we showed how to optimize the parameters in the following five different semantic perturbations, including (i) hue, (ii) saturation, (iii) brightness, (iv) contrast, and (v) rotation. We extend the iterative gradient sign method [17] to optimize our semantic perturbations for T iterations, which is defined as:

$$\delta_k^{t+1} = \text{clip}_{\epsilon_k}(\delta_k^t + \alpha \cdot \text{sign}(\nabla_{\delta_k^t} \mathcal{L}(\mathcal{F}(A_k(x; \delta_k^t)), y))), \quad (6)$$

where t denotes the iteration index, α is the step size of each iteration, $\nabla_{\delta_k^t} \mathcal{L}(\cdot)$ is the gradient of a loss function \mathcal{L} with respect to the perturbation variable δ_k^t . Let $\epsilon_k = [\alpha_k, \beta_k]$, we denote the element-wise clipping operation $\text{clip}_{\epsilon_k}(z)$ as:

$$\text{clip}_{\epsilon_k}(z) = \text{clip}_{[\alpha_k, \beta_k]}(z) = \begin{cases} \alpha_k & \text{if } z < \alpha_k, \\ z & \text{if } \alpha_k \leq z \leq \beta_k, \\ \beta_k & \text{if } \beta_k < z. \end{cases}$$

Next, we elucidate each semantic attack. The concrete examples of each of them are shown in Appendix H and the loss trace analysis of Comp-PGD are shown in Appendix C.

Hue. The hue value is defined on a color wheel in HSV color space, ranging from 0 to 2π . In hue attack (A_H), we define the perturbation interval of hue as $\epsilon_H = [\alpha_H, \beta_H]$, $-\pi \leq \alpha_H \leq \beta_H \leq \pi$. Let $x_H = \text{Hue}(x)$ denote the hue value of an image x , the variation of hue value at step t is δ_H^t , and the initial variance δ_H^0 is chosen from ϵ_H uniformly. Then δ_H^t can be updated iteratively via Eq. 6, and the hue value of the perturbed image $x_{\text{c-adv}}^t = A_H(X; \delta_H^t)$ is:

$$x_H^t = \text{Hue}(x_{\text{c-adv}}^t) = \text{clip}_{[0, 2\pi]}(x_H + \delta_H^t).$$

Saturation. Similar to hue value, saturation value determines the colorfulness of an image ranging from 0 to 1. Let $x_S = \text{Sat}(x)$ denote the saturation value of an image x . If $x_S \rightarrow 0$, the image becomes more colorless, resulting in a gray-scale image if $x_S = 0$. The perturbation interval of saturation is defined as $\epsilon_S = [\alpha_S, \beta_S]$, $0 \leq \alpha_S \leq \beta_S < \infty$. Let the perturbation factor of saturation value at step t is δ_S^t , and the initial factor δ_S^0 is chosen from ϵ_S uniformly. The saturation attack is to update the perturbation factor δ_S via Eq. 6, and the saturation value of the perturbed image $x_{\text{c-adv}}^t = A_S(X; \delta_S^t)$ is:

$$x_S^t = \text{Sat}(x_{\text{c-adv}}^t) = \text{clip}_{[0, 1]}(x_S \cdot \delta_S^t).$$

Brightness and Contrast. Unlike hue and saturation, these values are defined on RGB color space (pixel space), and they determine the lightness, darkness, and brightness differences of images. In our implementation, we convert the images from $[0, 255]$ scale to $[0, 1]$. The perturbation interval of brightness and contrast is defined as $\epsilon_B = [\alpha_B, \beta_B]$, $-1 \leq \alpha_B \leq \beta_B \leq 1$ and $\epsilon_C = [\alpha_C, \beta_C]$, $0 \leq \alpha_C \leq \beta_C < \infty$, respectively; the same, the initial perturbation δ_B^0 and δ_C^0 are chosen from ϵ_B and ϵ_C uniformly, and can update via Eq. 6. The perturbed image $x_{\text{c-adv}}^t$ under the brightness attack (A_B) and contrast attack (A_C) can be formulated as:

$$x_{\text{c-adv}}^t = \text{clip}_{[0, 1]}(x + \delta_B^t) \text{ and } x_{\text{c-adv}}^t = \text{clip}_{[0, 1]}(x \cdot \delta_C^t).$$

Rotation. This transformation aims to find a rotation angle such that the rotated image has a maximum loss. The rotation implementation is constructed by [30]. Given a square image x , let (i, j) denotes pixel position and (c, c) denotes the center position of x . Then the position (i', j') rotated by θ degree from (i, j) can be formulated as:

$$\begin{bmatrix} i' \\ j' \end{bmatrix} = \begin{bmatrix} \cos \theta \cdot i + \sin \theta \cdot j + (1 - \cos \theta) \cdot c - \sin \theta \cdot c \\ -\sin \theta \cdot i + \cos \theta \cdot j + \sin \theta \cdot c + (1 - \cos \theta) \cdot c \end{bmatrix}.$$

Here, we define the perturbation interval of rotation degree $\epsilon_R = [\alpha_R, \beta_R]$, $\alpha_R \leq \beta_R$, $\alpha_R, \beta_R \in \mathbb{R}$. The perturbation degree at step t is δ_R^t , and the initial degree δ_R^0 is chosen from ϵ_R uniformly. Similarly, like the previous attack, the perturbation δ_R will be updated via Eq. 6.

3.3. Generalized Adversarial Training (GAT)

To harden the classifier against composite perturbations, we generalize the standard adversarial training approach with our proposed composite adversarial attack from Section 3.1. Our goal is to train a robust model $\mathcal{F}(\cdot)$ over a data distribution $(x, y) \sim \mathcal{D}$, and make it robust against composite perturbations in the perturbation boundary E . Existing adversarial training objectives such as the min-max loss [21] or TRADES loss [47] can be utilized in GAT. Here we use

min-max training loss (Madry’s loss) for illustration. The inner maximization in Eq. 7 is to generate $x_{c\text{-adv}}$ optimized using CAA within boundary E , and the outer minimization is for optimizing the model parameters $\theta_{\mathcal{F}}$.

$$\min_{\theta_{\mathcal{F}}} \mathbb{E}_{(x,y) \sim \mathcal{D}} \left[\max_{x_{c\text{-adv}} \in \mathcal{B}(x;\Omega;E)} \mathcal{L}(\mathcal{F}(x_{c\text{-adv}}), y) \right] \quad (7)$$

For completeness, in Appendix B, we summarize the flow of our proposed composite adversarial attacks with order scheduling and attack component optimization. In addition, the ablation study showing order-scheduling and Comp-PGD are essential can be found in Appendix E.

4. Experiments

In this section, we first elucidate the experimental settings and then present the performance evaluation and analysis against multiple composite attacks on two datasets: CIFAR-10 [15] and ImageNet [31]. Additional experimental results and implementation details are shown in Appendix G.

4.1. Experiment Setups

Datasets. We evaluated GAT on two different datasets: CIFAR-10 [15] and ImageNet [31]. CIFAR-10 consists of 60000 32*32 images, with 6000 images per class. There are 50000 training images and 10000 test images. ImageNet is a benchmark in image classification and object detection with 10 million images, including 1000 classes.

Attack Composition. There are many feasible combinations of threats can be utilized in the evaluation; we discuss two attack combinations here, *semantic attacks* and *full attacks*, with two scheduling strategies. Semantic attacks consist of a combination of five semantic perturbations, including *Hue*, *Saturation*, *Rotation*, *Brightness* and *Contrast* attacks. For full attacks, one can generate examples with *all five semantic attacks* and ℓ_{∞} *attack*. We consider different order scheduling strategies: *scheduled* and *random*. That is, we can either schedule the order by the aforementioned scheduling algorithm in Sec. 3.1, or randomly shuffle an attack order when launching attacks for generating the corresponding composite adversarial examples. Furthermore, we also present the results of a variety of attack compositions for analysis (see Appendix F) and discuss the difference between separately/jointly optimizing the attack parameters in Appendix D.

Comparative Training Methods. We compare our GAT with several baseline adversarial training models on both datasets using two different model backbones: ResNet50 [10] and WideResNet34 [46]. The comparative methods are summarized in **Baseline Model Details** below. For GAT, we train our models via finetuning on the ℓ_{∞} -robust pretrained model for both CIFAR-10 and ImageNet

and use the min-max loss in Eq. 7 [21]. Two ordering modes were adopted in GAT: random order (*GAT-f*) and scheduled order (*GAT-fs*). We also found that training from scratch using GAT is unstable due to the consideration of multiple perturbation threats (see Appendix A).

Baseline Model Details. In summary below, we use symbols to mark the model backbones. Here, † denotes models in ResNet50 [10] architecture and * denotes models in WideResNet34 [46]. The baseline models are obtained from top-ranked models of the same architecture in Robust-Bench [5].

- **Normal†/Normal***: Standard training.
- **Madry† $_{\infty}$** : ℓ_{∞} adversarial training in [21].
- **Trades* $_{\infty}$** : ℓ_{∞} adversarial training in [47].
- **FAT* $_{\infty}$** : [48] uses friendly adversarial data that are confidently misclassified for adversarial training.
- **AWP* $_{\infty}$** : [44] injects the worst-case weight perturbation during adversarial training to flatten the weight loss landscape.
- **PAT† $_{self}$, PAT† $_{alex}$** : Two adversarial training models based on the perceptual distance (LPIPS), two models differ: ResNet50 (*self*) and AlexNet (*alex*) [20].
- **Fast-AT†**: Computationally efficient ℓ_{∞} adversarial training in [42].

Training & Evaluation Settings. We adopt the whole training set on both CIFAR-10 and ImageNet for model training. In every training iterative step, the images in each batch share the same attack order. Besides, the Comp-PGD is applied on each image, where we set the iteration-update step T as ten steps of each attack component for evaluation and seven steps for GAT. During the training of GAT, we apply every attack component on the input without the *early-stopped* option to ensure the model could learn all attack components which have been launched. Furthermore, we evaluate two different order scheduling settings: *random/scheduled* during GAT on CIFAR-10. Since both ordering mechanisms provide competitive robust models, therefore, we only use random ranking when training GAT on ImageNet, considering the training efficiency. As mentioned in Sec. 4.1, GAT utilizes a pre-trained model for fine-tuning to make the composite adversarial training more efficient than training from scratch. Different from the training phase of GAT, during the evaluation, we allow CAA to trigger the *early-stop* option when the attack is successful, which can help us improve the attack success rate and reduce the computational cost. Further discussion and comparison between different training settings of GAT, including using TRADES/Madry loss and fine-tuning/training from scratch, are given in Appendix A.

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal [†]	95.2	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	59.7 ± 0.2	44.2 ± 0.5	0.0 ± 0.0	0.0 ± 0.0
Madry [†] _∞	87.0	30.8 ± 0.2	18.8 ± 0.5	19.1 ± 0.3	31.5 ± 0.2	21.3 ± 0.2	10.8 ± 0.2	3.7 ± 0.2
PAT [†] _{self}	82.4	20.9 ± 0.1	11.9 ± 0.5	17.9 ± 0.3	28.9 ± 0.3	17.5 ± 0.3	9.1 ± 0.3	2.5 ± 0.3
PAT [†] _{alex}	71.6	20.7 ± 0.3	12.5 ± 0.2	16.5 ± 0.4	23.4 ± 0.3	12.2 ± 0.4	10.3 ± 0.1	2.5 ± 0.2
GAT-f[†]	82.3	39.9 ± 0.1	33.3 ± 0.1	28.9 ± 0.2	69.9 ± 0.1	66.0 ± 0.1	30.0 ± 0.4	18.8 ± 0.3
GAT-fs[†]	82.1	43.5 ± 0.1	36.6 ± 0.1	32.5 ± 0.1	69.9 ± 0.2	66.6 ± 0.1	32.3 ± 0.8	21.8 ± 0.3
Normal*	94.0	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	46.0 ± 0.4	29.9 ± 0.5	0.0 ± 0.0	0.0 ± 0.0
Trades* _∞	84.9	30.0 ± 0.3	19.8 ± 0.6	10.1 ± 0.5	16.6 ± 0.2	8.1 ± 0.5	5.8 ± 0.3	1.5 ± 0.2
FAT* _∞	88.1	29.8 ± 0.4	17.1 ± 0.4	12.8 ± 0.6	18.7 ± 0.2	9.8 ± 0.5	6.1 ± 0.1	1.5 ± 0.1
AWP* _∞	85.4	34.2 ± 0.2	23.2 ± 0.2	11.1 ± 0.4	15.6 ± 0.2	7.9 ± 0.2	5.9 ± 0.0	1.7 ± 0.2
GAT-f*	83.4	40.2 ± 0.1	34.0 ± 0.1	30.7 ± 0.4	71.6 ± 0.1	67.8 ± 0.2	31.2 ± 0.4	20.1 ± 0.3
GAT-fs*	83.2	43.5 ± 0.1	36.3 ± 0.1	32.9 ± 0.4	70.5 ± 0.1	66.7 ± 0.3	32.2 ± 0.7	21.9 ± 0.7

Table 1. Comparison of accuracy (%) on CIFAR-10. We combine different types of three attacks (CAA_3) with scheduled ordering: CAA_{3a} : (Hue, Saturation, ℓ_∞), CAA_{3b} : (Hue, Rotation, ℓ_∞), CAA_{3c} : (Brightness, Contrast, ℓ_∞), on CIFAR-10

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal [†]	76.1	0.0 ± 0.0	0.0 ± 0.0	0.0 ± 0.0	31.2 ± 0.4	20.6 ± 1.0	0.0 ± 0.0	0.0 ± 0.0
Madry [†] _∞	62.4	13.9 ± 0.4	9.2 ± 0.2	16.2 ± 0.8	14.0 ± 0.1	9.0 ± 0.0	7.1 ± 0.1	2.8 ± 0.2
Fast-AT [†] _∞	53.8	9.5 ± 0.3	5.5 ± 0.1	11.4 ± 0.8	6.3 ± 0.1	3.6 ± 0.1	3.1 ± 0.1	1.0 ± 0.1
GAT-f[†]	60.0	19.2 ± 1.0	18.9 ± 1.4	18.4 ± 0.4	43.5 ± 1.9	38.9 ± 2.0	18.5 ± 0.5	11.8 ± 0.1

Table 2. Comparison of accuracy (%) on ImageNet. ($CAA_{3a,3b,3c}$: same combination as Table 1)

Computing Resources and Code. For CIFAR-10, we train models on ResNet50 and WideResNet34 with SGD for 150 epochs. The training of GAT-f takes about 16 hours (ResNet50) and 28 hours (WideResNet34), and GAT-fs takes about 28 hours (ResNet50) and 55 hours (WideResNet34) on 8 Nvidia Tesla V100 GPUs. For ImageNet, we train ResNet50 with SGD for 100 epochs and about three days on 64 Nvidia Tesla V100 GPUs. The implementation is built with PyTorch [28].

Evaluation Metrics. We report the models’ Clean and Robust Accuracy (RA, %) against multiple composite adversarial attacks. The RA aims to evaluate the model accuracy toward the fraction of perturbed examples retrieved from the test set which is correctly classified. We also provide the attack success rate (ASR, %) in the appendices, in which the higher indicates the stronger attack.

4.2. Performance Evaluation

The experimental results are shown in Table 1 (CIFAR-10) and Table 2 (ImageNet). On CIFAR-10, *GAT-fs* and *GAT-f* show competitive results. Both of them outperform all other baselines by a significant margin. For semantic

attacks, the RA increases by 45% ~ 60% on CIFAR-10, and 28% ~ 37% on ImageNet. For full attacks, the RA increases by 15% ~ 27% on CIFAR-10, and 9% ~ 15% on ImageNet. Nonetheless, the RA against three multiple threats with three different combinations, our proposed GAT keeps outperforming other baselines and shows the highest robustness of others. The comparison between GAT-f and GAT-fs demonstrates that GAT-fs can obtain higher RA against full attacks. However, the result also suggests a trade-off between the robustness of ℓ_∞ and semantic attacks.

Besides adversarial training models, we empirically observe that the RA of models with standard training has a degraded performance of 20% ~ 31% on ImageNet data under semantic attacks (without ℓ_∞ attack). However, while ℓ_∞ attack is involved in the full attacks or other multiple threats (e.g., three attacks in Tables 1 and 2), the models with only standard training are unable to resist these kinds of composite semantic perturbations, and the RA drops dramatically to 0%.

4.3. Analysis, Discussion, and Visualization

Robust Accuracy vs. Number of Attacks and Their combinations. We conduct an ablation study to show that the

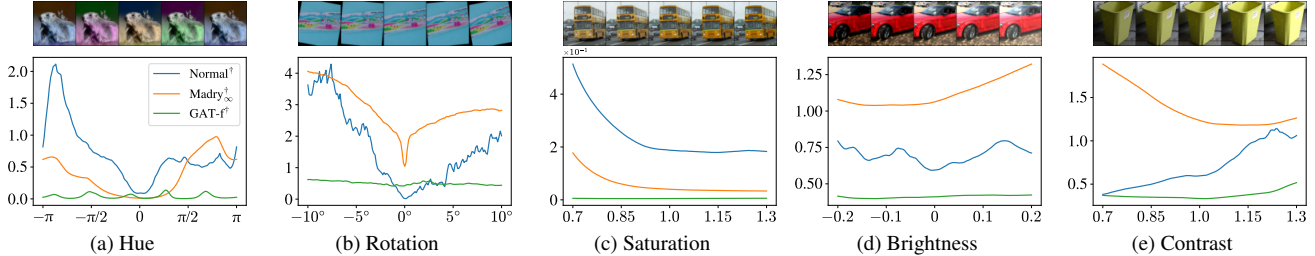


Figure 3. Loss landscape of selected examples when performing five different semantic attacks under models produced by different adversarial training approaches. The blue and orange color curves represent standard and ℓ_∞ robust model respectively; the green color curve represents GAT-f model.

Training	CAA ₁	CAA ₂	CAA ₃	CAA ₄	CAA ₅	CAA ₆
Normal [†]	50.9	45.8	33.4	25.8	21.1	0.0
Madry [†] _∞	38.1	33.9	21.9	14.4	9.0	2.8
Fast-AT [†] _∞	27.8	23.9	12.7	7.0	3.6	1.0
GAT-f[†]	51.0	48.2	44.5	42.2	38.9	11.8

Table 3. Comparison of RA (%) on four adversarial training approaches against six different CAAs on ImageNet. CAA₁: (Hue), CAA₂: (Hue, Saturation), CAA₃: (Hue, Saturation, Rotation), CAA₄: (Hue, Saturation, Rotation, Brightness), CAA₅: (Hue, Saturation, Rotation, Brightness, Contrast), CAA₆: (Hue, Saturation, Rotation, Brightness, Contrast, ℓ_∞)

number of attacks and their combinations can hugely affect robust accuracy, illustrating the importance of attack ordering and the new insights into robustness through our proposed composite adversarial examples. Fig. 1b already demonstrates that our model is the most resilient to composite adversarial examples consisting of different numbers of attacks, in terms of attaining the lowest attack success rate in the test set that each model initially correctly classified. Furthermore, Table 3 shows that as the number of attacks increases (CAA₁ to CAA₆), the RA of our proposed GAT consistently outperforms all other models. Specifically, GAT outperforms other baselines by up to 35%. Although the standard model (Normal[†]) has the advantage of higher cleaning accuracy, it is still not resistant to semantic and various composite adversarial perturbations. Results of *three attacks* in Tables 1 and 2 demonstrate the effect of different combinations when the number of attacks is fixed. Comparing GAT with others on both CIFAR-10 and ImageNet, the result shows that GAT-f is more robust than all baselines under three different attacks by 9% ~ 23%. On ImageNet, GAT-f also outperforms those baselines. For more experimental results, including single attacks, Auto-attack, two-component attacks, and other results on other datasets (e.g., SVHN), please refer to Appendix G.

Effectiveness of Random/Scheduled Ordering. We conducted the pairwise t-test to compare the effectiveness of

random and scheduled ordering. By running ten experiments with different initializations, the experimental results on CIFAR10 / Full-attack show that the robust accuracy of *scheduled* ordering is statistically significantly lower than *random* ordering (p -value < .001 for all models).

Current Adversarial Robustness Assessments May Not Be Comprehensive.

To gain more insights, we compare the rankings of the top ten models on RobustBench (CIFAR-10, ℓ_∞) [5]. We found that rankings between Auto-Attack and CAA have a low correlation, suggesting that only considering perturbations in ℓ_p -ball for robustness evaluation could be biased and incomplete. Furthermore, the Spearman’s rank correlation coefficient between Auto-Attack and CAA (rand. & sched.) are as follows: 0.16 (rand. vs. sched.) for semantic attacks, and 0.36 (rand. vs. Auto) and 0.38 (sched. vs. Auto) for full attacks.

Visualization of Loss Landscape.

To better understand why GAT leads to great improvement, we visualize the loss landscape of a single semantic attack under three different models (see Fig. 3), including standardly trained ResNet50 (Normal[†]), ResNet50 with ℓ_∞ -robust (Madry[†]_∞), and our proposed GAT (GAT-f[†]). We visualize the cross entropy loss of selected samples for each model and sweep over the semantic perturbation space in the designated interval. We empirically observe that across five different single semantic attacks, GAT can result in much smoother, flatter, and lower curves (green) compared to the other models. We believe that this phenomenon sheds light on the effectiveness of our proposed approach, which can indeed train a model robust to the composite adversarial perturbations.

5. Conclusion

In this paper, we proposed GAT, a generic approach to preparing deep learning for the real world by strengthening classifiers to be robust against composite semantic perturbations. The effectiveness of GAT lies in our novel design of attack order scheduling for multiple perturbation types.

Compared to existing adversarial training methods, GAT enhances robustness against a variety of adversarial perturbations, including ℓ_p norms and semantic spaces. Evaluated on CIFAR-10 and ImageNet datasets, our results demonstrate that GAT achieves the highest robust accuracy on most composite attacks by a large margin, providing new insights into achieving compositional adversarial robustness. We believe our work sheds new light on the frontiers of realistic adversarial attacks and defenses.

References

- [1] Anand Bhattad, Min Jin Chong, Kaizhao Liang, Bo Li, and David A Forsyth. Unrestricted adversarial examples via semantic manipulation. *arXiv preprint arXiv:1904.06347*, 2019. [3](#)
- [2] Battista Biggio and Fabio Roli. Wild patterns: Ten years after the rise of adversarial machine learning. *Pattern Recognition*, 84:317–331, 2018. [3](#)
- [3] Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. In *IEEE Symposium on Security and Privacy*, pages 39–57, 2017. [3](#)
- [4] Pin-Yu Chen, Yash Sharma, Huan Zhang, Jinfeng Yi, and Cho-Jui Hsieh. EAD: elastic-net attacks to deep neural networks via adversarial examples. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 10–17, 2018. [3](#)
- [5] Francesco Croce, Maksym Andriushchenko, Vikash Sehwal, Edoardo DeBenedetti, Nicolas Flammarion, Mung Chiang, Prateek Mittal, and Matthias Hein. Robustbench: a standardized adversarial robustness benchmark. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2021. [6](#), [8](#)
- [6] Francesco Croce and Matthias Hein. Reliable evaluation of adversarial robustness with an ensemble of diverse parameter-free attacks. In *International conference on machine learning*, pages 2206–2216. PMLR, 2020. [3](#), [16](#)
- [7] Isaac Dunn, Laura Hanu, Hadrien Pouget, Daniel Kroening, and Tom Melham. Evaluating robustness to context-sensitive feature perturbations of different granularities. *arXiv preprint arXiv:2001.11055*, 2020. [3](#)
- [8] Logan Engstrom, Brandon Tran, Dimitris Tsipras, Ludwig Schmidt, and Aleksander Madry. Exploring the landscape of spatial robustness. In *International Conference on Machine Learning*, pages 1802–1811. PMLR, 2019. [3](#)
- [9] Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. *International Conference on Learning Representations*, 2015. [3](#)
- [10] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, 2016. [2](#), [6](#), [11](#), [12](#)
- [11] Hossein Hosseini and Radha Poovendran. Semantic adversarial examples. In *IEEE Conference on Computer Vision and Pattern Recognition Workshops*, pages 1614–1619, 2018. [3](#)
- [12] Matt Jordan, Naren Manoj, Surbhi Goel, and Alexandros G Dimakis. Quantifying perceptual distortion of adversarial examples. *arXiv preprint arXiv:1902.08265*, 2019. [3](#)
- [13] Ameya Joshi, Amitangshu Mukherjee, Soumik Sarkar, and Chinmay Hegde. Semantic adversarial attacks: Parametric transformations that fool deep classifiers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4773–4783, 2019. [3](#)
- [14] Daniel Kang, Yi Sun, Dan Hendrycks, Tom Brown, and Jacob Steinhardt. Testing robustness against unforeseen adversaries. *arXiv preprint arXiv:1908.08016*, 2019. [3](#)
- [15] Alex Krizhevsky and Geoffrey Hinton. Learning multiple layers of features from tiny images. Technical Report 0, University of Toronto, Toronto, Ontario, 2009. [6](#), [11](#)
- [16] Harold W Kuhn. The hungarian method for the assignment problem. *Naval research logistics quarterly*, 2(1-2):83–97, 1955. [4](#)
- [17] Alexey Kurakin, Ian Goodfellow, and Samy Bengio. Adversarial examples in the physical world. *ICLR Workshop*, 2017. [5](#)
- [18] Alexey Kurakin, Ian Goodfellow, and Samy Bengio. Adversarial machine learning at scale. *International Conference on Learning Representations*, 2017. [3](#)
- [19] Cassidy Laidlaw and Soheil Feizi. Functional adversarial attacks. *arXiv preprint arXiv:1906.00001*, 2019. [3](#)
- [20] Cassidy Laidlaw, Sahil Singla, and Soheil Feizi. Perceptual adversarial robustness: Defense against unseen threat models. In *ICLR*, 2021. [2](#), [3](#), [6](#)
- [21] Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. Towards deep learning models resistant to adversarial attacks. *International Conference on Learning Representations*, 2018. [1](#), [2](#), [3](#), [5](#), [6](#), [11](#), [12](#)
- [22] Pratyush Maini, Eric Wong, and Zico Kolter. Adversarial robustness against the union of multiple perturbation models. In Hal Daumé III and Aarti Singh, editors, *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pages 6640–6650. PMLR, 13–18 Jul 2020. [3](#)
- [23] Xiaofeng Mao, Yuefeng Chen, Shuhui Wang, Hang Su, Yuan He, and Hui Xue. Composite adversarial attacks. *arXiv preprint arXiv:2012.05434*, 2020. [3](#)
- [24] Xiaofeng Mao, Gege Qi, Yuefeng Chen, Xiaodan Li, Ranjie Duan, Shaokai Ye, Yuan He, and Hui Xue. Towards robust vision transformer. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 12032–12041, 2022. [3](#)
- [25] Gonzalo Mena, David Belanger, Scott Linderman, and Jasper Snoek. Learning latent permutations with gumbel-sinkhorn networks. In *International Conference on Learning Representations*, 2018. [4](#)
- [26] Jeet Mohapatra, Tsui-Wei Weng, Pin-Yu Chen, Sijia Liu, and Luca Daniel. Towards verifying robustness of neural networks against a family of semantic perturbations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, June 2020. [3](#)
- [27] James R. Munkres. Algorithms for the assignment and transportation problems. *Journal of The Society for Industrial and Applied Mathematics*, 10:196–210, 1957. [4](#)

- [28] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett, editors, *Advances in Neural Information Processing Systems 32*, pages 8024–8035. Curran Associates, Inc., 2019. 7
- [29] Haonan Qiu, Chaowei Xiao, Lei Yang, Xinchun Yan, Honglak Lee, and Bo Li. Semanticadv: Generating adversarial examples via attribute-conditioned image editing. In *European Conference on Computer Vision*, pages 19–37. Springer, 2020. 3
- [30] Edgar Riba, Dmytro Mishkin, Daniel Ponsa, Ethan Rublee, and Gary Bradski. Kornia: an open source differentiable computer vision library for pytorch. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 3674–3683, 2020. 5
- [31] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet Large Scale Visual Recognition Challenge. *International Journal of Computer Vision (IJCV)*, 115(3):211–252, 2015. 6, 11
- [32] Ali Shahin Shamsabadi, Ricardo Sanchez-Matilla, and Andrea Cavallaro. Colorfool: Semantic adversarial colorization. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1151–1160, 2020. 3
- [33] Yash Sharma and Pin-Yu Chen. Attacking the Madry defense model with L_1 -based adversarial examples. *ICLR Workshop*, 2018. 3
- [34] Richard Sinkhorn. A relationship between arbitrary positive matrices and stochastic matrices. *Canadian Journal of Mathematics*, 18:303–306, 1966. 4
- [35] Richard Sinkhorn and Paul Knopp. Concerning nonnegative matrices and doubly stochastic matrices. *Pacific Journal of Mathematics*, 21(2):343–348, 1967. 5
- [36] David Stutz, Matthias Hein, and Bernt Schiele. Confidence-calibrated adversarial training: Generalizing to unseen attacks. In *International Conference on Machine Learning*, pages 9155–9166. PMLR, 2020. 3
- [37] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. *International Conference on Learning Representations*, 2014. 1
- [38] Florian Tramèr and Dan Boneh. Adversarial training and robustness for multiple perturbations. *arXiv preprint arXiv:1904.13000*, 2019. 3
- [39] Jingkang Wang, Tianyun Zhang, Sijia Liu, Pin-Yu Chen, Jiachen Xu, Makan Fardad, and Bo Li. Towards a unified min-max framework for adversarial exploration and robustness. *arXiv preprint arXiv:1906.03563*, 2019. 3
- [40] Shuo Wang, Shangyu Chen, Tianle Chen, Surya Nepal, Carsten Rudolph, and Marthie Grobler. Generating semantic adversarial examples via feature manipulation. *arXiv preprint arXiv:2001.02297*, 2020. 3
- [41] Yajie Wang, Shangbo Wu, Wenyi Jiang, Shengang Hao, Yuan Tan, and Quanxin Zhang. Demiguise attack: Crafting invisible semantic adversarial perturbations with perceptual similarity. *arXiv preprint arXiv:2107.01396*, 2021. 3
- [42] Eric Wong, Leslie Rice, and J. Zico Kolter. Fast is better than free: Revisiting adversarial training. In *International Conference on Learning Representations*, 2020. 2, 6
- [43] Eric Wong, Frank Schmidt, and Zico Kolter. Wasserstein adversarial examples via projected sinkhorn iterations. In *International Conference on Machine Learning*, pages 6808–6817. PMLR, 2019. 3
- [44] Dongxian Wu, Shu-Tao Xia, and Yisen Wang. Adversarial weight perturbation helps robust generalization. In *NeurIPS*, 2020. 2, 6
- [45] Chaowei Xiao, Jun-Yan Zhu, Bo Li, Warren He, Mingyan Liu, and Dawn Song. Spatially transformed adversarial examples. *arXiv preprint arXiv:1801.02612*, 2018. 3
- [46] Sergey Zagoruyko and Nikos Komodakis. Wide residual networks. In Edwin R. Hancock Richard C. Wilson and William A. P. Smith, editors, *Proceedings of the British Machine Vision Conference (BMVC)*, pages 87.1–87.12. BMVA Press, September 2016. 6, 11, 12
- [47] Hongyang Zhang, Yaodong Yu, Jiantao Jiao, Eric P. Xing, Laurent El Ghaoui, and Michael I. Jordan. Theoretically principled trade-off between robustness and accuracy. In *International Conference on Machine Learning*, 2019. 1, 2, 3, 5, 6, 11, 12, 14
- [48] Jingfeng Zhang, Xilie Xu, Bo Han, Gang Niu, Lizhen Cui, Masashi Sugiyama, and Mohan Kankanhalli. Attacks which do not kill training make adversarial learning stronger. In *ICML*, 2020. 2, 6
- [49] Dawei Zhou, Tongliang Liu, Bo Han, Nannan Wang, Chunlei Peng, and Xinbo Gao. Towards defending against adversarial examples via attack-invariant features. *ArXiv*, abs/2106.05036, 2021. 3

Appendix

A. Implementation Details

Training Phase. In the implementation of generalized adversarial training (GAT), we consider two model architectures, ResNet-50 [10] and WideResNet-34 [46], on CIFAR-10 dataset [15]; and ResNet-50 on ImageNet dataset [31]. For CIFAR-10, we set the maximum training epoch to 150 with batch size 2048 and selected the model with the best evaluation test accuracy. The learning rate is set to 0.1 at the beginning and exponentially decays. We utilize the warming-up learning rate technique for the first ten epochs, which means the learning rate would linearly increase from zero to the preset value (0.1) in the first ten epochs. For ImageNet, we set the maximum training epoch to 100 with the batch size 1536 and selected the model with the best evaluation test accuracy. The learning rate is set to 0.1 at the beginning and exponentially decays by 0.1 every 30 epochs. Similarly, we utilize the warming-up learning rate technique for the first five epochs. We launched all threat models (full attacks) while training; for each batch, we utilized scheduled ordering for *GAT-fs* and random ordering for *GAT-f*. The iteration step T of each attack for Comp-PGD is set to 7, and the step size of attack A_k is set as $2.5 \cdot (\beta_k - \alpha_k)/2T$, where β_k and α_k are the values of perturbation intervals defined in Table A1.

Testing Phase. To compare our GAT approach with other adversarial training baselines, we launch composite adversarial attacks (CAAs) of different numbers of attack types, including single attacks, two attacks, three attacks, all semantic attacks, and full attacks on each robust model. Furthermore, the iteration step T of each attack for Comp-PGD is set as 10, and the step size is the same as the training settings. In addition, the maximum iteration of *order scheduling* is designated as five, and we will launch the early stop option in every update step while the CAA succeeds in attacking.

	CIFAR-10, SVHN	ImageNet
Hue, ϵ_H	$-\pi \sim \pi$	
Saturation, ϵ_S	$0.7 \sim 1.3$	
Rotation, ϵ_R	$-10^\circ \sim 10^\circ$	
Brightness, ϵ_B	$-0.2 \sim 0.2$	
Contrast, ϵ_C	$0.7 \sim 1.3$	
ℓ_∞, ϵ_L	8/255	4/255

Table A1. Perturbation interval of each attack component

Training Strategy. Our training process considers two training strategies: 1) training from scratch and 2) fine-tuning on ℓ_∞ -robust models; two learning objectives: 1) Madry’s loss [21] and 2) TRADES’ loss [47]. Note that $x_{c\text{-adv}} \in \mathcal{B}(x; \Omega; E)$ denotes the composite adversarial example $x_{c\text{-adv}}$ is perturbed by attacks from Ω within the perturbation intervals E . The main difference between these two is shown in Eq. 8 and Eq. 9. That is, Eq. 9 encourages the natural error to be optimized in the first term; meanwhile, the robust error in the second regularization term could help minimize the distance between the prediction of natural samples and adversarial samples. Zhang et al. theoretically proved that this design of loss function could help the outputs of the model to be smooth [47].

$$\min_{\theta_{\mathcal{F}}} \mathbb{E}_{(x,y) \sim \mathcal{D}} \left[\max_{x_{c\text{-adv}} \in \mathcal{B}(x; \Omega; E)} \mathcal{L}_{ce}(\mathcal{F}(x_{c\text{-adv}}), y) \right] \quad (8)$$

$$\min_{\theta_{\mathcal{F}}} \mathbb{E}_{(x,y) \sim \mathcal{D}} \left[\mathcal{L}(\mathcal{F}(x), y) + \beta \cdot \max_{x_{c\text{-adv}} \in \mathcal{B}(x; \Omega; E)} \mathcal{L}(\mathcal{F}(x), \mathcal{F}(x_{c\text{-adv}})) \right] \quad (9)$$

As shown in Fig. A1a, we evaluate the clean test accuracy of GAT models in every epoch with different training settings, including using two architectures (ResNet-50 / WideResNet-34), two learning objectives, and two training strategies mentioned above. We empirically find the models using fine-tuning strategy (solid curves) can achieve higher clean test accuracy than most of models training from scratch (dotted curves). Furthermore, we evaluate the robust test accuracy for these four models (see Fig. A1b). Under the semantic and full attacks, the models GAT- f_M (fine-tuning with Madry’s loss) achieve higher robust accuracy than GAT- f_T (fine-tuning with TRADES loss). Hence, in the section of experimental results, we utilized the GAT models, which are trained with Madry’s loss and fine-tuning on a ℓ_∞ -robust model.

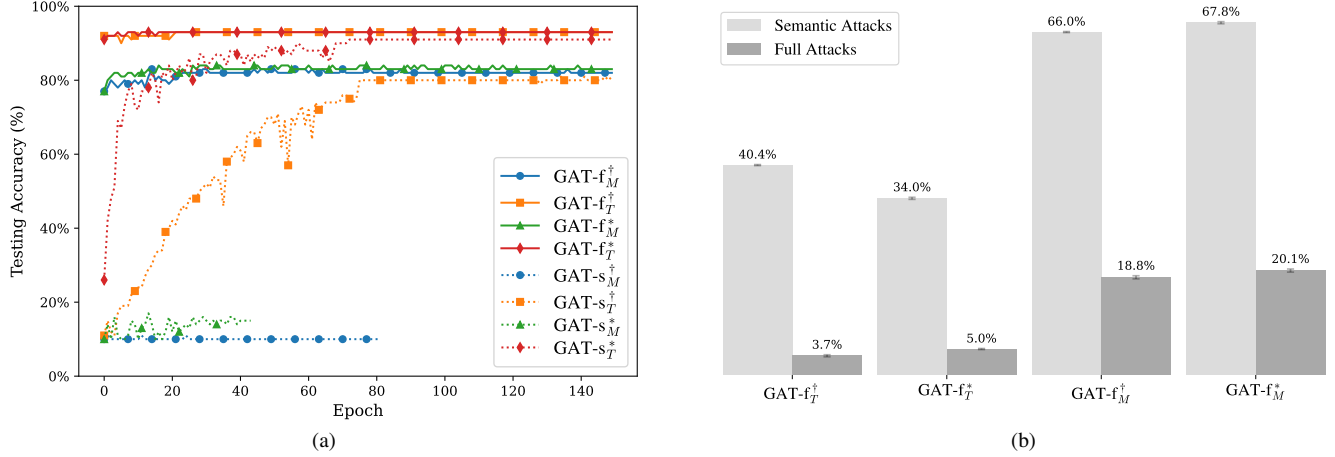


Figure A1. (a) The testing accuracy during generalized adversarial training on CIFAR-10. The models differ in different training scenarios; the lower script T denotes that the model using *TRADES*' loss [47] for training, and M for *Madry*'s loss [21]. The upper script \dagger denotes the model using ResNet50 [10] backbone and $*$ is for WideResNet34 [46]. (b) The robust accuracy (%) of our GAT fine-tuned models under semantic and full attacks.

B. Algorithm of the Composite Adversarial Attack (CAA)

Algorithm 1: Composite Adversarial Attack

Input: classifier $\mathcal{F}(\cdot)$, input x , label y , attack space $\pi = \{A_1, \dots, A_n\}$, attack order *schedule*, scheduling iterations

M , perturbation intervals $\{\epsilon_k\}_{k=1}^n$, Comp-PGD steps T

Output: Composite adversarial examples $x_{c\text{-adv}}$

```

1 # Initialization
2  $\delta_1^0, \dots, \delta_n^0 \leftarrow$  initial perturbation
3 if schedule == scheduled then
4   |  $Z^0, \pi_0 \leftarrow$  scheduling matrix and order assignment initialization
5 else
6   |  $\pi_0 \leftarrow$  initial order assignment (random / fixed)
7 # Iteration of attack order scheduling
8 for  $i \in \{1, \dots, M\}$  do
9   # Applying attacks in order
10  for  $k \in \{1, \dots, n\}$  do
11    |  $A_* = A_{\pi_i(k)}, \delta_*^0 = \delta_{\pi_i(k)}^0, \epsilon_* = \epsilon_{\pi_i(k)}$ 
12    |  $x_{c\text{-adv}}^k \leftarrow A_*(x_{c\text{-adv}}^{k-1}; \delta_*^0)$ 
13    # Iteration of Comp-PGD
14    for  $t \in \{1, \dots, T\}$  do
15      | if  $\mathcal{F}(x_{c\text{-adv}}^k) \neq y$  then
16        | | return  $x_{c\text{-adv}}^k$  # Early stop option
17      | else
18        | |  $\delta_*^t = \text{clip}_{\epsilon_*}(\cdot; x_{c\text{-adv}}^k; \delta_*^{t-1})$  by Eq. 6
19        | |  $x_{c\text{-adv}}^k \leftarrow A_*(x_{c\text{-adv}}^{k-1}; \delta_*^t)$ 
20    # Resetting the attack order
21    if schedule == random then
22      |  $\pi_{i+1} \leftarrow$  Shuffle a new order
23    else if schedule == scheduled then
24      # Optimize scheduling order  $Z$ 
25      |  $x_{\text{surr}} = \mathbf{z}_n^\top \mathbf{A}(\dots(\mathbf{z}_2^\top \mathbf{A}(\mathbf{z}_1^\top \mathbf{A}(x))))$  # Compute the surrogate composite adversarial example by Eq. 3.
26      |  $Z^t = \mathcal{S}(\exp(Z^{t-1} + \partial \mathcal{L}(\mathcal{F}(x_{\text{surr}}), y) / \partial Z^{t-1}))$  # Updating the scheduling matrix by Eq. 4.
27      |  $\pi_{i+1}(j) := \arg \max \mathbf{z}_j, \forall j \in \{1, \dots, n\}$  # Update the attack order assignment by Eq. 5.
28 return  $x_{c\text{-adv}}$ 

```

C. The Loss Trace Analysis of Component-wise PGD (Comp-PGD)

To demonstrate the effectiveness of Comp-PGD, in Fig. A2, we visualize the update process of Comp-PGD when performing a single semantic attack on WideResnet-34 model. We uniformly sample 20 start points for each attack and update δ_k using Comp-PGD by these initial points. The red margins of each sub-figure in Fig. A2 represent the margin of successful attack by our samples. The endpoints of the loss trace show obviously that Comp-PGD indeed can help search for the worst case by maximizing the loss during each attack.

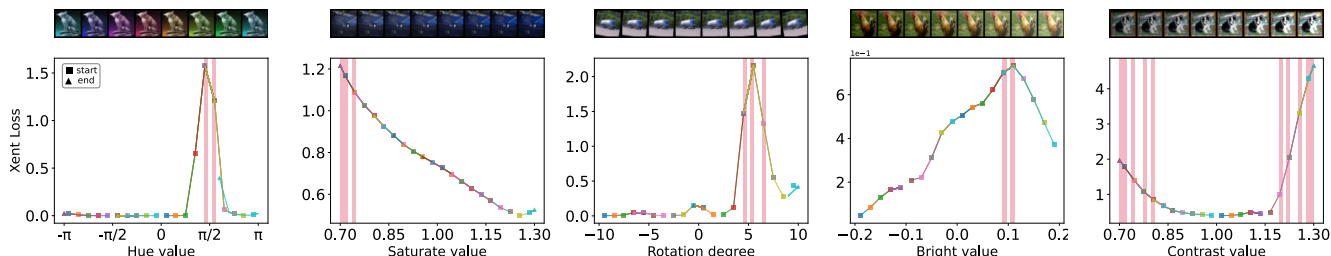


Figure A2. Component-wise PGD process of the single semantic attack.

D. Ablation Study: Attack Components' Optimization

D.1. Why Separately Optimize the Attack Parameters? (Comp-PGD vs. Ensemble-PGD)

In this paper, we used Comp-PGD to optimize the individual attack component. On the other hand, one can also optimize all attack components simultaneously given an attack order, for which we call *Ensemble-PGD*. Specifically, CAA can jointly optimize the attack parameters for an attack chain *at a chosen fixed attack order*. In this regard, we repeated the same experiments on CIFAR-10 but considered optimizing the attack parameters *simultaneously* instead of *sequentially*. The results show that Ensemble-PGD does not provide better attack capacity (see Table A2) than Comp-PGD (see Table A11). We provide the experimental results in Attack Success Rate (ASR), as it represents the strength of the attack (higher means a more vigorous attack). Although GAT approaches still outperform other baselines in defending against all threats, the results showed that Ensemble-PGD generally has *lower* attack performance than Comp-PGD. This is probably due to the fact that the number of the variables for optimizing in Ensemble-PGD is higher than that of Comp-PGD (in each sequential step), making the optimization process harder to achieve similar results.

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA _{3a}	CAA _{3b}	CAA _{3c}	Rand.	Sched.	Rand.	Sched.
Normal [†]	0.0	96.4	91.4	99.4	25.1	30.9	80.7	91.5
Madry [†] _∞	0.0	43.2	54.7	57.9	37.6	46.3	57.7	72.0
PAT [†] _{self}	0.0	50.1	60.3	67.8	42.1	50.9	63.3	74.3
PAT [†] _{alex}	0.0	45.5	56.3	63.7	50.2	57.1	64.1	73.6
GAT-f[†]	0.0	50.9	50.8	63.0	7.4	9.0	39.7	56.2
GAT-fs[†]	0.0	47.3	50.0	52.7	7.7	9.3	40.3	52.5
Normal [*]	0.0	96.8	89.9	99.6	32.3	38.8	83.9	87.6
Trades [*] _∞	0.0	40.7	52.7	66.2	48.5	58.3	64.2	74.3
FAT [*] _∞	0.0	42.1	57.6	64.9	47.9	59.6	65.8	76.6
AWP [*] _∞	0.0	37.2	50.1	62.5	50.0	58.3	64.6	77.1
GAT-f[*]	0.0	47.0	49.0	52.8	6.8	8.8	41.1	54.2
GAT-fs[*]	0.0	46.3	48.8	52.9	6.9	8.7	40.0	53.9

Table A2. Attack success rate (%) of using Ensemble-PGD to perform CAA on CIFAR-10.

D.2. Why Not Optimize Attack Power by Grid Search? (Comp-PGD vs. Grid Search)

It is intuitive to optimize the attack parameters (levels) in a brute-force way, i.e., *grid search*. However, doing so would exponentially increase the computational cost as the number of attacks increases. We conduct an experiment to compare the attack success rate (ASR, %) between the Grid-Search attack and our proposed CAA. We include all types of semantic attacks (Hue, Saturation, Rotation, Brightness, and Contrast) in this experiment. Also, since there are $N!$ kinds of attack orders for N attacks, for simplicity, we chose only one attack order here and utilized the same attack order in CAA (fixed).

As shown in Fig. A3, the results demonstrated that CAA is obviously stronger than grid search, with a significantly lower computational cost. The results also indicate that CAA is more valuable than grid-search-based optimization, as CAA consistently achieves a higher ASR. This is because, in grid search, it could only look into the discrete attack value space; clearly, it would need to increase spatial density (grid numbers) to obtain a higher attack success rate. To be more specific, given the grid numbers K (uniformly sampled points in each attack space), the attack complexity of Grid-Search Attack is $\mathcal{O}(K^N)$; and the attack complexity of CAA (fixed order) is $\mathcal{O}(N \cdot T \cdot R)$, where T is the optimization steps for Comp-PGD, and R is the number of restarts. That is, we allow CAA to optimize each attack with R different starting points. In our experiment, since CAA could search for the optimal attack value by gradient-based search, we need only five restart points (R) and ten steps for Comp-PGD optimization (T) to outperform the grid-search-based strategy. In this scenario, the attack complexity of Grid-Search Attack is higher than CAA (since $\mathcal{O}(K^N) > \mathcal{O}(N \cdot K^2) > \mathcal{O}(N \cdot T \cdot R)$, given $T, R \leq K$).

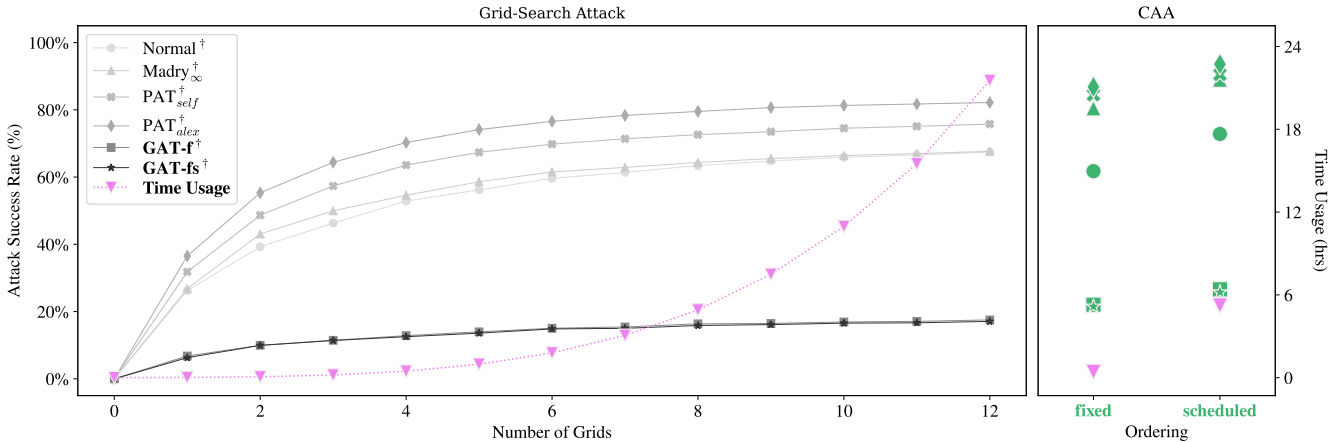


Figure A3. Comparison of attack success rate between Grid-Search Attack and CAA.

E. Ablation Study: Order Scheduling and Comp-PGD Are Essential to Strengthen GAT

To further verify that our scheduling mechanism and Comp-PGD play essential roles in CAA while doing GAT, we remove the order scheduling feature and Comp-PGD but pre-generate training data by adding random semantic perturbations on the CIFAR-10 training set, referring to RSP-10. That is, RSP-10 is generated in random attack ordering and random attack parameters on CIFAR-10. We then performed regular adversarial training on RSP-10 to obtain the robust models [47], including from-scratch and fine-tuning. Table A3 listed the robust accuracy of three such robust models under three attacks, semantic attacks and full attacks. The results show that GAT still outperforms other baselines for up to 27%/54%/25% in three/semantic/full attacks, demonstrating that order scheduling and Comp-PGD are essential to harden GAT to derive a robust model.

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA _{3a}	CAA _{3b}	CAA _{3c}	Rand.	Sched.	Rand.	Sched.
RSP*	84.9	17.9 ± 0.7	11.6 ± 0.9	5.9 ± 0.6	22.8 ± 0.2	12.6 ± 0.0	6.7 ± 0.3	1.6 ± 0.2
RSP-N*	88.1	18.8 ± 0.4	11.9 ± 0.3	8.8 ± 0.5	39.4 ± 0.5	28.5 ± 0.3	10.2 ± 0.2	3.9 ± 0.3
RSP-T*	85.4	38.3 ± 0.2	28.4 ± 0.2	21.2 ± 0.5	54.6 ± 0.3	47.5 ± 0.7	20.4 ± 0.7	9.8 ± 1.0
GAT-f*	83.4	40.2 ± 0.1	34.0 ± 0.1	30.7 ± 0.4	71.6 ± 0.1	67.8 ± 0.2	31.2 ± 0.4	20.1 ± 0.3
GAT-fs*	83.2	43.5 ± 0.1	36.3 ± 0.1	32.9 ± 0.4	70.5 ± 0.1	66.7 ± 0.3	32.2 ± 0.7	21.9 ± 0.7

Note. RSP*: AT from scratch; RSP-N*: AT, fine-tuned on Normal*; RSP-T*: AT, fine-tuned on Trades_∞

Table A3. Robust accuracy (%) of models trained with simulated CAA samples.

F. Sensitive Analysis and Additional Discussions

F.1. The Attack Order Matters! The Two-attack Experiments

We conduct an analysis on different *order* types under two attacks to demonstrate the influence of order on CAA. As shown in Table A4, we list the attack success rate (ASR) of two attacks with different orders ($\ell_\infty \rightarrow \text{semantic}$ attack / semantic attack $\rightarrow \ell_\infty$) on GAT and other baseline models. The results show that most baselines are more fragile to the CAA with a semantic attack launched first than the attack with ℓ_∞ first. Furthermore, *GAT-f* has the smallest ASR change when alternating the order, indicating that GAT helps improve the robustness when the attack order is changed.

Training	2 attacks (Semantic $\rightarrow \ell_\infty$)				
	Hue $\rightarrow \ell_\infty$	Saturation $\rightarrow \ell_\infty$	Rotation $\rightarrow \ell_\infty$	Brightness $\rightarrow \ell_\infty$	Contrast $\rightarrow \ell_\infty$
Normal [†]	100.0 \pm 0.0	100.0 \pm 0.0	100.0 \pm 0.0	100.0 \pm 0.0	100.0 \pm 0.0
Madry [†] _{∞}	72.3 \pm 2.0	52.4 \pm 0.7	60.6 \pm 0.3	56.5 \pm 0.5	58.2 \pm 0.7
Fast-AT [†] _{∞}	76.7 \pm 1.8	56.7 \pm 0.6	66.6 \pm 0.1	62.4 \pm 0.7	63.9 \pm 0.7
GAT-f[†]	60.9 \pm 2.4	59.6 \pm 0.8	60.8 \pm 0.6	59.7 \pm 0.6	64.2 \pm 0.5
Training	2 attacks ($\ell_\infty \rightarrow$ Semantic)				
	$\ell_\infty \rightarrow$ Hue	$\ell_\infty \rightarrow$ Saturation	$\ell_\infty \rightarrow$ Rotation	$\ell_\infty \rightarrow$ Brightness	$\ell_\infty \rightarrow$ Contrast
Normal [†]	100.0 \pm 0.0	100.0 \pm 0.0	99.9 \pm 0.0	100.0 \pm 0.0	100.0 \pm 0.0
Madry [†] _{∞}	64.6 \pm 0.5 (7.7 ↓)	49.1 \pm 0.5 (3.3 ↓)	52.5 \pm 0.1 (8.0 ↓)	50.9 \pm 0.4 (5.7 ↓)	48.8 \pm 0.5 (9.4 ↓)
Fast-AT [†] _{∞}	71.5 \pm 0.6 (5.2 ↓)	54.1 \pm 0.6 (2.6 ↓)	60.0 \pm 0.0 (6.6 ↓)	58.6 \pm 0.5 (3.8 ↓)	56.5 \pm 0.4 (7.4 ↓)
GAT-f[†]	60.8 \pm 0.5 (0.1 ↓)	58.2 \pm 0.8 (1.4 ↓)	56.5 \pm 0.9 (4.2 ↓)	57.2 \pm 0.8 (2.5 ↓)	57.6 \pm 0.8 (6.7 ↓)

Table A4. Attack success rate of two attacks with two order settings on ImageNet. The value in the parenthesis is the reduced value compare with another order settings.

F.2. How Do Composite Perturbations Fool the Model? Visual Examples

In Fig. A4, we present the inference results from an ℓ_∞ -robust model (Madry[†] _{∞}); the confidence bars are marked in green (red) if the prediction is correct (incorrect). The results showed that while a robust model can resist perturbations in ℓ_p ball, this only consideration is not comprehensive. That is, if we consider computing ℓ_∞ perturbations after some semantic attacks, the model may not exhibit the robustness it has around the ℓ_∞ ball.

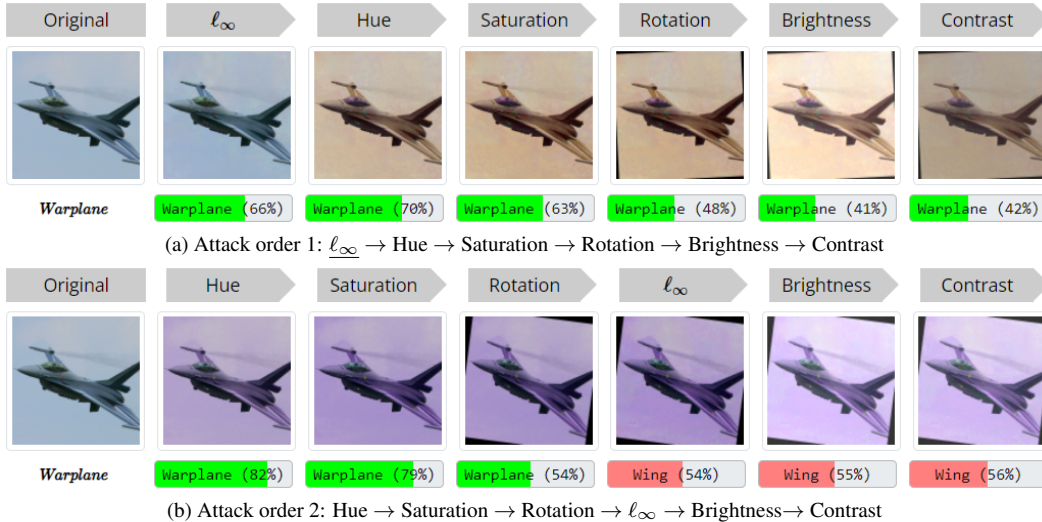


Figure A4. Warplane example. (a) The model can correctly predict objects under a given attack order. (b) The model can easily be fooled when adding ℓ_∞ perturbations after Hue, Saturation, and Rotation attacks. (Note: Attack parameters are optimized by Comp-PGD algorithm.)

G. Additional Experimental Results and Adversarial Examples

We further evaluate multiple CAAs in this section, and the experimental results on SVHN are also provided. In particular, we present the robust accuracy (RA) and their corresponding attack success rate (ASR). Again, the ASR is the percentage of the images that were initially classified correctly but were misclassified after being attacked; therefore, the lower ASR indicates the more robust model. In Sec. G.1, we especially show a single attack, which launches merely one attack from the attack pool. Notably, the ℓ_∞ (20-step) is regular PGD attack, and Auto- ℓ_∞ is an ensemble of four diverse attacks [6]. Multiple attacks (including three, semantic, and full) are listed in Sec. G.2. (For efficiency, we use ℓ_∞ (PGD) in multiple attack evaluation.)

G.1. Single Attack

Results on CIFAR-10

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal [†]	95.2	81.8 ± 0.0	94.0 ± 0.0	88.1 ± 0.1	92.1 ± 0.1	93.7 ± 0.1	0.0 ± 0.0	0.0 ± 0.0	
Madry [†] _{∞}	87.0	70.8 ± 0.0	84.8 ± 0.0	79.5 ± 0.1	77.0 ± 0.1	79.9 ± 0.1	53.5 ± 0.0	49.2 ± 0.0	
PAT [†] _{self}	82.4	64.3 ± 0.2	79.8 ± 0.0	74.1 ± 0.1	72.5 ± 0.1	78.0 ± 0.1	41.2 ± 0.0	30.2 ± 0.0	
PAT [†] _{alex}	71.6	53.2 ± 0.2	68.9 ± 0.0	63.8 ± 0.1	60.6 ± 0.1	65.2 ± 0.0	41.9 ± 0.0	28.8 ± 0.0	
GAT-f[†]	82.3	81.2 ± 0.5	80.8 ± 0.1	78.3 ± 0.5	80.1 ± 0.1	79.7 ± 0.1	42.7 ± 0.0	38.7 ± 0.0	
GAT-fs[†]	82.1	80.6 ± 0.0	80.8 ± 0.0	78.0 ± 0.2	80.4 ± 0.1	79.5 ± 0.1	46.6 ± 0.0	41.9 ± 0.0	
Normal [*]	94.0	75.8 ± 0.2	92.3 ± 0.0	87.4 ± 0.2	89.1 ± 0.0	91.3 ± 0.1	0.0 ± 0.0	0.0 ± 0.0	
Trades [*] _{∞}	84.9	65.7 ± 0.2	82.7 ± 0.0	77.5 ± 0.1	69.7 ± 0.3	70.7 ± 0.1	55.8 ± 0.0	52.5 ± 0.0	
FAT [*] _{∞}	88.1	69.0 ± 0.1	85.4 ± 0.0	77.0 ± 0.1	73.1 ± 0.4	76.5 ± 0.1	54.7 ± 0.0	51.5 ± 0.0	
AWP [*] _{∞}	85.4	67.5 ± 0.1	83.0 ± 0.0	77.0 ± 0.2	68.3 ± 0.1	70.8 ± 0.0	59.4 ± 0.0	56.2 ± 0.0	
GAT-f[*]	83.4	82.3 ± 0.6	81.8 ± 0.0	79.5 ± 0.4	81.7 ± 0.0	81.0 ± 0.1	43.6 ± 0.0	40.0 ± 0.0	
GAT-fs[*]	83.2	81.5 ± 0.1	81.7 ± 0.0	78.8 ± 0.0	81.2 ± 0.0	80.7 ± 0.1	47.2 ± 0.0	42.2 ± 0.0	

Table A5. Robust accuracy of single attack, which is one of semantic attacks, on CIFAR-10

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal [†]	0.0	14.4 ± 0.0	1.4 ± 0.0	8.0 ± 0.2	3.3 ± 0.1	1.6 ± 0.1	100.0 ± 0.0	100.0 ± 0.0	
Madry [†] _{∞}	0.0	19.3 ± 0.0	2.6 ± 0.0	9.3 ± 0.1	11.7 ± 0.2	8.4 ± 0.0	38.6 ± 0.0	43.4 ± 0.0	
PAT [†] _{self}	0.0	23.0 ± 0.2	3.3 ± 0.0	11.8 ± 0.2	12.6 ± 0.1	5.7 ± 0.1	50.0 ± 0.0	63.4 ± 0.0	
PAT [†] _{alex}	0.0	27.7 ± 0.2	4.2 ± 0.1	13.0 ± 0.1	17.2 ± 0.2	10.0 ± 0.0	41.4 ± 0.0	59.8 ± 0.0	
GAT-f[†]	0.0	1.6 ± 0.5	1.9 ± 0.1	5.7 ± 0.5	2.8 ± 0.1	3.3 ± 0.0	48.2 ± 0.0	53.0 ± 0.0	
GAT-fs[†]	0.0	2.0 ± 0.0	1.6 ± 0.0	5.8 ± 0.2	2.2 ± 0.1	3.3 ± 0.1	43.2 ± 0.0	49.0 ± 0.0	
Normal [*]	0.0	19.7 ± 0.2	1.8 ± 0.0	7.6 ± 0.2	5.3 ± 0.1	2.9 ± 0.1	100.0 ± 0.0	100.0 ± 0.0	
Trades [*] _{∞}	0.0	23.0 ± 0.2	2.6 ± 0.0	9.5 ± 0.1	18.2 ± 0.3	16.9 ± 0.1	34.3 ± 0.0	38.2 ± 0.0	
FAT [*] _{∞}	0.0	22.2 ± 0.1	3.1 ± 0.0	13.3 ± 0.1	17.3 ± 0.5	13.4 ± 0.1	37.9 ± 0.0	41.5 ± 0.0	
AWP [*] _{∞}	0.0	21.5 ± 0.2	2.8 ± 0.0	10.5 ± 0.2	20.3 ± 0.1	17.3 ± 0.0	30.4 ± 0.0	34.2 ± 0.0	
GAT-f[*]	0.0	1.7 ± 0.5	2.0 ± 0.0	5.6 ± 0.3	2.3 ± 0.0	3.1 ± 0.0	47.7 ± 0.0	52.0 ± 0.0	
GAT-fs[*]	0.0	2.3 ± 0.1	1.9 ± 0.0	5.9 ± 0.0	2.6 ± 0.0	3.2 ± 0.0	43.3 ± 0.0	49.2 ± 0.0	

Table A6. Attack success rate of single attack on CIFAR-10.

Results on ImageNet

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal [†]	76.1	50.9 ± 0.2	72.5 ± 0.1	68.2 ± 0.6	69.2 ± 0.3	71.8 ± 0.2	0.0 ± 0.0	0.0 ± 0.0	
Madry [†] _∞	62.4	38.1 ± 0.4	58.4 ± 0.0	51.0 ± 0.7	53.6 ± 0.1	55.9 ± 0.0	33.5 ± 0.0	28.9 ± 0.0	
Fast-AT [†] _∞	53.8	27.8 ± 0.2	48.0 ± 0.0	38.6 ± 0.6	42.0 ± 0.1	44.0 ± 0.0	27.5 ± 0.0	24.7 ± 0.0	
GAT-f[†]	60.0	51.0 ± 2.5	58.1 ± 0.0	56.5 ± 0.3	57.7 ± 0.1	58.1 ± 0.1	25.2 ± 0.0	20.9 ± 0.0	

Table A7. Robust accuracy of single attack, which is one of semantic attacks, on ImageNet.

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal [†]	0.0	34.3 ± 0.2	4.9 ± 0.1	12.2 ± 0.6	9.5 ± 0.3	5.9 ± 0.2	100.0 ± 0.0	100.0 ± 0.0	
Madry [†] _∞	0.0	39.9 ± 0.6	6.7 ± 0.0	19.9 ± 0.9	14.6 ± 0.1	10.8 ± 0.1	46.3 ± 0.0	53.6 ± 0.0	
Fast-AT [†] _∞	0.0	49.3 ± 0.3	11.1 ± 0.0	29.8 ± 0.9	22.8 ± 0.1	19.0 ± 0.1	48.9 ± 0.0	54.1 ± 0.0	
GAT-f[†]	0.0	17.7 ± 3.2	3.3 ± 0.0	6.8 ± 0.3	3.9 ± 0.1	3.3 ± 0.1	57.9 ± 0.0	65.1 ± 0.0	

Table A8. Attack success rate of single attack, on ImageNet

Results on SVHN

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal*	95.4	93.3 ± 0.0	94.7 ± 0.0	89.7 ± 0.1	92.2 ± 0.0	93.7 ± 0.0	0.5 ± 0.0	0.0 ± 0.0	
Trades* _∞	90.3	87.3 ± 0.1	89.2 ± 0.0	81.4 ± 0.0	77.2 ± 0.1	83.3 ± 0.1	53.3 ± 0.0	44.2 ± 0.0	
GAT-f*	93.4	92.5 ± 0.0	93.0 ± 0.0	91.2 ± 0.0	92.1 ± 0.1	92.1 ± 0.0	51.2 ± 0.0	36.9 ± 0.0	
GAT-fs*	93.6	92.8 ± 0.0	93.1 ± 0.0	91.7 ± 0.0	92.5 ± 0.0	92.3 ± 0.0	54.1 ± 0.0	38.2 ± 0.0	

Table A9. Robust accuracy of single attack, which is one of semantic attacks, on SVHN.

Training	Clean	Single attack						ℓ_∞ (20-step)	Auto attack Auto- ℓ_∞
		Hue	Saturation	Rotation	Brightness	Contrast			
Normal*	0.0	2.4 ± 0.0	0.7 ± 0.0	6.2 ± 0.1	3.4 ± 0.0	1.8 ± 0.0	99.5 ± 0.0	100.0 ± 0.0	
Trades* _∞	0.0	4.0 ± 0.1	1.3 ± 0.0	10.0 ± 0.0	14.9 ± 0.1	8.0 ± 0.0	41.0 ± 0.0	51.0 ± 0.0	
GAT-f*	0.0	1.1 ± 0.0	0.5 ± 0.0	2.5 ± 0.0	1.5 ± 0.1	1.5 ± 0.0	45.2 ± 0.1	60.5 ± 0.0	
GAT-fs*	0.0	1.0 ± 0.0	0.6 ± 0.0	2.2 ± 0.1	1.2 ± 0.0	1.4 ± 0.0	42.2 ± 0.0	59.1 ± 0.0	

Table A10. Attack success rate of single attack, on SVHN

G.2. Multiple Attacks: Three attacks, Semantic attacks and Full attacks

We only provided the ASR of CIFAR-10 and ImageNet here; the RA can be found in Table 1 and 2 of our paper. Again, the abbreviation used here is the same as in the paper.

Results on CIFAR-10

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal [†]	0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	37.4 ± 0.3	53.6 ± 0.5	100.0 ± 0.0	100.0 ± 0.0
Madry [†] _∞	0.0	64.6 ± 0.2	78.4 ± 0.6	78.0 ± 0.3	63.8 ± 0.2	75.5 ± 0.3	87.6 ± 0.2	95.8 ± 0.2
PAT [†] _{self}	0.0	74.7 ± 0.2	85.6 ± 0.5	78.3 ± 0.4	65.0 ± 0.3	78.8 ± 0.4	88.9 ± 0.4	96.9 ± 0.3
PAT [†] _{alex}	0.0	71.1 ± 0.5	82.5 ± 0.2	77.0 ± 0.6	67.6 ± 0.4	82.9 ± 0.6	85.7 ± 0.1	96.5 ± 0.3
GAT-f [†]	0.0	51.6 ± 0.2	59.6 ± 0.1	64.9 ± 0.3	15.2 ± 0.1	19.8 ± 0.1	63.5 ± 0.5	77.1 ± 0.4
GAT-fs [†]	0.0	47.0 ± 0.1	55.4 ± 0.2	60.5 ± 0.2	15.0 ± 0.2	18.8 ± 0.1	60.7 ± 1.0	73.5 ± 0.4
Normal*	0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	51.1 ± 0.4	68.3 ± 0.6	100.0 ± 0.0	100.0 ± 0.0
Trades* _∞	0.0	64.7 ± 0.4	76.7 ± 0.7	88.1 ± 0.6	80.4 ± 0.3	90.5 ± 0.5	93.2 ± 0.4	98.2 ± 0.2
FAT* _∞	0.0	66.2 ± 0.4	80.6 ± 0.5	85.5 ± 0.7	78.8 ± 0.2	88.9 ± 0.5	93.0 ± 0.2	98.3 ± 0.1
AWP* _∞	0.0	59.9 ± 0.2	72.8 ± 0.3	87.0 ± 0.4	81.8 ± 0.2	90.7 ± 0.2	93.1 ± 0.1	98.0 ± 0.2
GAT-f *	0.0	51.8 ± 0.1	59.2 ± 0.1	63.2 ± 0.5	14.2 ± 0.1	18.7 ± 0.2	62.6 ± 0.4	75.9 ± 0.4
GAT-fs *	0.0	47.8 ± 0.2	56.3 ± 0.1	60.5 ± 0.4	15.4 ± 0.1	19.8 ± 0.4	61.4 ± 0.9	73.7 ± 0.8

Table A11. Attack success rate of composite semantic attacks and composite full attacks on CIFAR-10.

Results on ImageNet

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal [†]	0.0	100.0 ± 0.0	100.0 ± 0.0	100.0 ± 0.0	59.1 ± 0.5	72.9 ± 1.3	100.0 ± 0.0	100.0 ± 0.0
Madry [†] _∞	0.0	77.7 ± 0.6	85.2 ± 0.4	74.0 ± 1.3	77.6 ± 0.1	85.6 ± 0.1	88.7 ± 0.2	95.5 ± 0.4
Fast-AT [†] _∞	0.0	82.3 ± 0.5	89.8 ± 0.2	78.9 ± 1.5	88.3 ± 0.1	93.3 ± 0.1	94.3 ± 0.2	98.1 ± 0.2
GAT-f [†]	0.0	67.9 ± 1.7	68.4 ± 2.3	69.2 ± 0.7	27.8 ± 3.0	34.6 ± 3.3	69.1 ± 0.9	80.3 ± 0.2

Table A12. Attack success rate of composite semantic attacks and composite full attacks on ImageNet.

Results on SVHN

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal*	95.4	0.4 ± 0.0	0.2 ± 0.0	0.4 ± 0.1	78.5 ± 0.2	68.7 ± 0.6	0.5 ± 0.0	0.2 ± 0.1
Trades* _∞	90.3	43.6 ± 0.1	32.1 ± 0.3	21.2 ± 0.7	47.3 ± 0.2	34.7 ± 0.5	22.6 ± 0.5	10.6 ± 0.4
GAT-f *	93.4	47.0 ± 0.1	42.8 ± 0.3	34.4 ± 0.5	85.5 ± 0.1	82.8 ± 0.2	37.1 ± 0.2	26.8 ± 0.6
GAT-fs *	93.6	48.7 ± 0.1	45.2 ± 0.3	35.6 ± 0.5	86.6 ± 0.1	83.7 ± 0.2	39.0 ± 0.4	28.2 ± 0.3

Table A13. Robust accuracy of composite semantic attacks and composite full attacks on SVHN.

Training	Clean	Three attacks			Semantic attacks		Full attacks	
		CAA_{3a}	CAA_{3b}	CAA_{3c}	Rand.	Sched.	Rand.	Sched.
Normal*	0.0	99.5 ± 0.0	99.8 ± 0.0	99.6 ± 0.1	17.8 ± 0.3	28.0 ± 0.6	99.5 ± 0.0	99.8 ± 0.1
Trades $^*_\infty$	0.0	51.7 ± 0.1	64.4 ± 0.3	76.5 ± 0.8	47.6 ± 0.3	61.6 ± 0.6	75.0 ± 0.5	88.2 ± 0.5
GAT-f*	0.0	49.7 ± 0.1	54.2 ± 0.3	63.2 ± 0.5	8.5 ± 0.1	11.4 ± 0.2	60.3 ± 0.2	71.3 ± 0.7
GAT-fs*	0.0	48.0 ± 0.1	51.7 ± 0.3	62.0 ± 0.6	7.5 ± 0.1	10.6 ± 0.2	58.3 ± 0.4	69.8 ± 0.3

Table A14. Attack success rate of composite semantic attacks and composite full attacks on SVHN.

H. Examples of Single Semantic Attacks at Different Levels

Fig. A5 shows five single semantic attacks with corresponding perturbation levels. Each row represents the perturbed image of a corresponding attack A_k with different perturbation values $\delta_k \in \epsilon_k$.

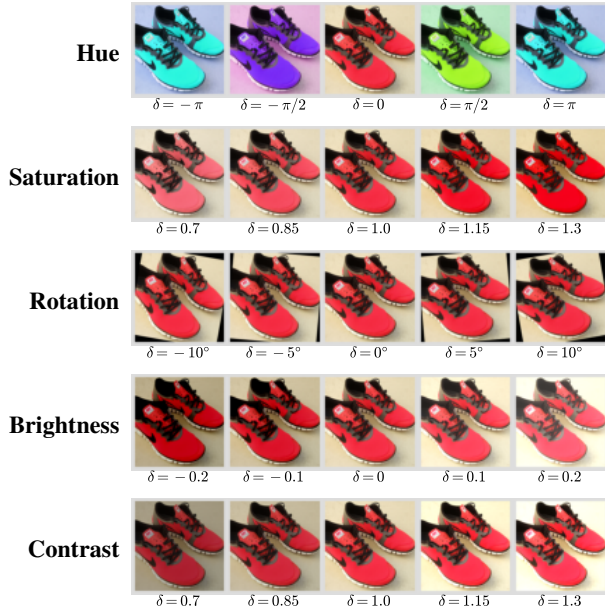


Figure A5. Single Semantic Attack Examples. Clean image was placed at the center of each row.

I. Additional Visualization of Adversarial Examples under Different CAA

We provide some of the adversarial examples from CIFAR-10 in the above CAAs, including single attacks, two attacks, three attacks, semantic attacks, and full attacks. For every attack in the following figures, we arrange the images into several columns; As the Fig. A6, A7, and A8 show, the left-most column represents the original images; every of the following two columns are the adversarial examples generated from one of the CAA attacks and their differences compared with the original images. Note that all of the differences have been multiplied by three for visualization purposes only.

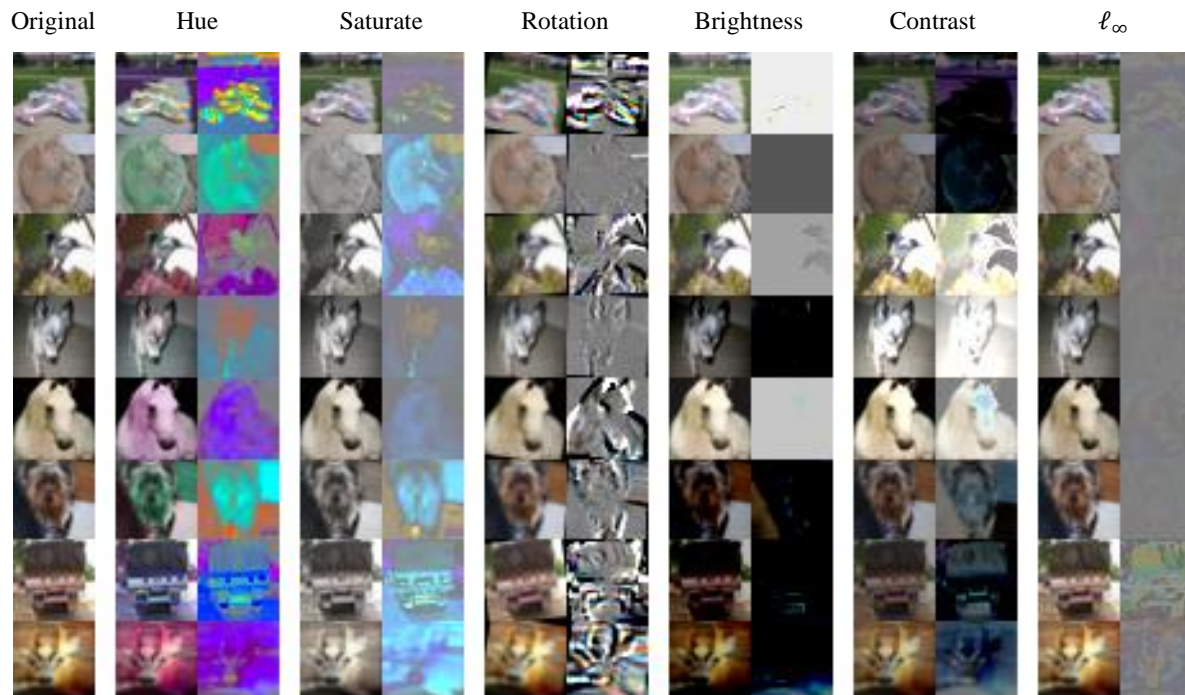


Figure A6. Adversarial examples generated under one of **single semantic** attacks (hue, saturate, rotation, brightness, contrast) or ℓ_∞ attack.

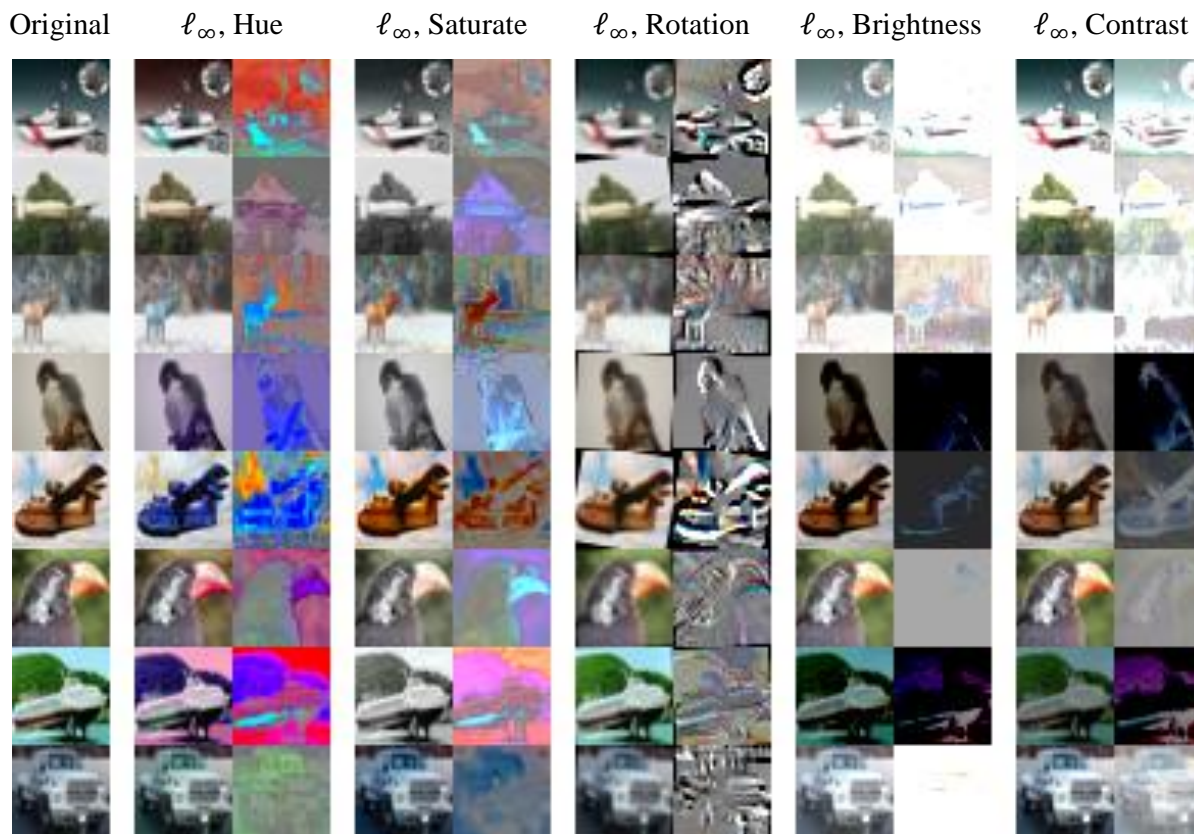


Figure A7. Adversarial examples generated under **two attacks** (composed of one semantic attack and the ℓ_∞ attack).

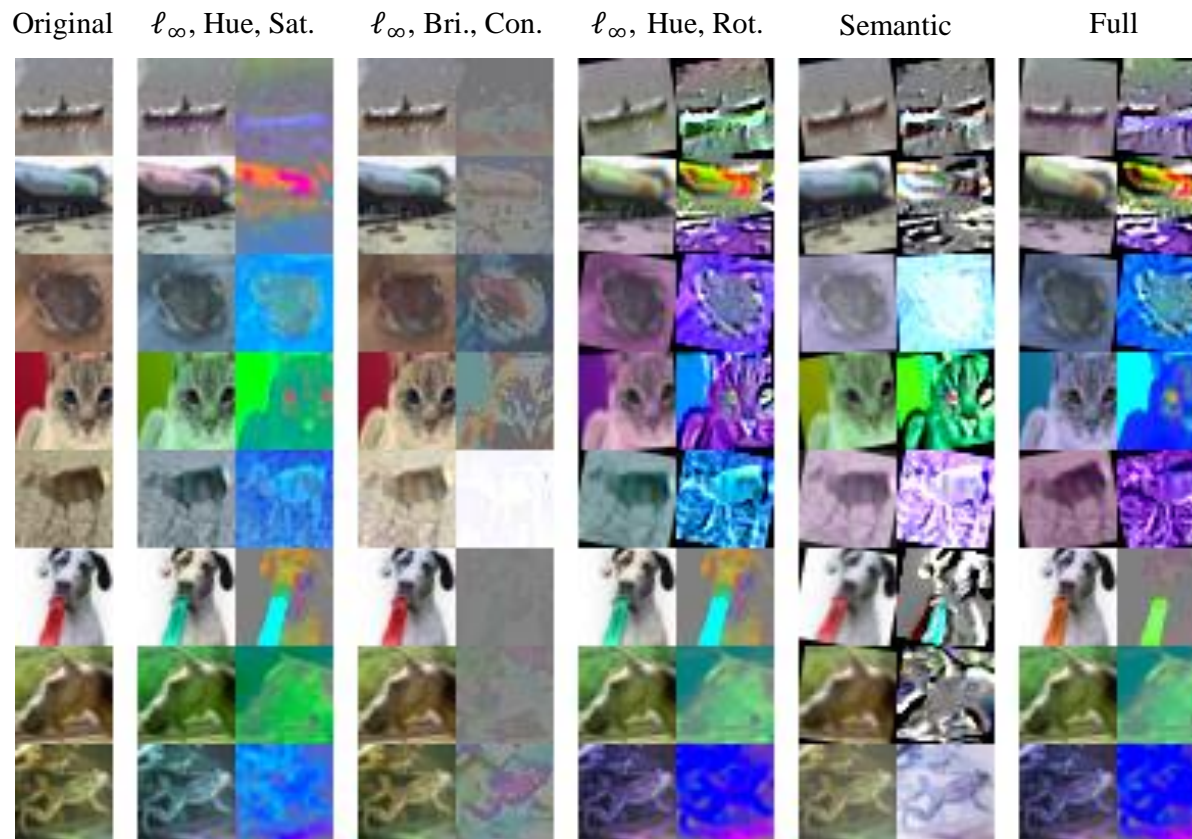


Figure A8. Adversarial examples generated under **three and other multiple attacks**. *Semantic* means we launch all semantic attacks (hue, saturate, rotation, brightness, and contrast). *Full* means we launch ℓ_∞ + *all semantic attacks*.