

# GAN-generated Faces Detection: A Survey and New Perspectives (2022)

Xin Wang<sup>1</sup>, Hui Guo<sup>2</sup>, Shu Hu<sup>1</sup>, Ming-Ching Chang<sup>2</sup>, Siwei Lyu<sup>1</sup>

<sup>1</sup>University at Buffalo, SUNY, USA. <sup>2</sup>University at Albany, SUNY, USA.

xwang264@buffalo.edu, {hguo,mchang}@albany.edu, {shuhu,siweilyu}@buffalo.edu

## Abstract

Generative Adversarial Networks (GAN) have led to the generation of very realistic face images, which have been used in fake social media accounts and other disinformation matters that can generate profound impacts. Therefore, the corresponding GAN-face detection techniques are under active development that can examine and expose such fake faces. In this work, we aim to provide a comprehensive review of recent progress in GAN-face detection. We focus on methods that can detect face images that are generated or synthesized from GAN models. We classify the existing detection works into four categories: (1) deep learning-based, (2) physical-based, (3) physiological-based methods, and (4) evaluation and comparison against human visual performance. For each category, we summarize the key ideas and connect them with method implementations. We also discuss open problems and suggest future research directions.

## 1 Introduction

The development of Generative Adversarial Networks (GANs) [Goodfellow *et al.*, 2014] enables generating high-realistic human faces images that are visually difficult to discern from real ones [Karras *et al.*, 2017; Karras *et al.*, 2019; Karras *et al.*, 2020]. Figure 1 shows some examples from <https://thispersondoesnotexist.com>. GAN-generated faces (GAN-faces) can be easily used in creating fake social media accounts [O’Sullivan, 2020a; O’Sullivan, 2020b; Hartman and Satter, 2020; Vincent, 2020] for malicious purposes that cause significant social concerns. For example, a high school student created a fake candidate by using a GAN-generated face in a voting event that tricked Twitter into obtaining a coveted blue checkmark, thereby verifying the authenticity of the fake candidacy [O’Sullivan, 2020a]. This fake candidate passing verification could set up donation channels to absorb public funds, which not only damages property-related laws but also diminishes election integrity. GAN-faces are used as profile images of fake social media accounts that generate negative social impacts [O’Sullivan, 2020b].

Automatic detection of GAN-faces is of emerging needs, so numerous detection approaches have been developed to



Figure 1: Examples of GAN faces generated by StyleGAN (left), StyleGAN2 (middle), and StyleGAN3 (right).

combat the malicious use of GAN-faces. However, effective GAN-face detection is still a complex and difficult problem, which typically suffers from two major challenges. First, an accurate and flexible GAN-face detection method should be able to expose the large variation of GAN-face images synthesized or generated from numerous GAN models, while remaining robust to adversarial attacks. Secondly, the decision process and the detection result should be **explainable to human users**, especially for non-AI experts, instead of only fitting to specific datasets via complex deep networks.

We start our survey by chronologically summarizing major GAN-face generation milestones (§ 2) as well as GAN-face detection methods with highlights of important breakthroughs along with in Figure 2. Early GAN-face detection methods are mainly Deep Learning (DL)-based methods [Do *et al.*, 2018; Yang *et al.*, 2019a; Marra *et al.*, 2019a], *etc.*; see § 3.1. Although they achieve promising performance in practice, it is difficult to explain the under-taking mechanism or decisions being made.

The above limitations are overcome by approaches reasoning upon physical cues (§ 3.2) or physiological cues (§ 3.3) that are explainable in nature. Recent works in this category distinguish GAN-faces by exploring the inadequacy of the GAN synthesis models in representing human faces and their corresponding relations in the physical world [Yang *et al.*, 2019b; Yang *et al.*, 2019a; Li *et al.*, 2018; Matern *et al.*, 2019]. For example, [Hu *et al.*, 2021] inspect the inconsistency of the corneal specular highlights between the two eyes. However, these methods work under strict as-

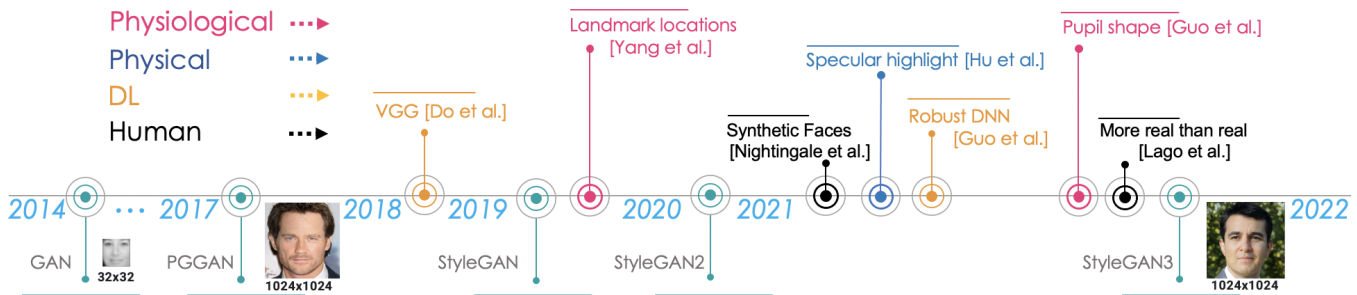


Figure 2: A brief chronology for GAN-faces generation and detection works. **Generation:** The initial GAN model is proposed in 2014 and can only generate  $32 \times 32$  faces. After 2017 the series of StyleGAN models can generate high-realistic faces that are hard to spot from human eyes. **Detection:** The earliest detection techniques are mainly based on DNN in 2018. Due to their limitation of performance and interpretability, methods based on physical and physiological cues are developed in 2019 ~ 2021. Since StyleGAN2 generated faces are very difficult to discern from human eyes, human visual performance on GAN-generated faces is under active investigation since 2021. The listed methods represent milestones and breakthroughs in the chronology. See § 3 for complete survey.

assumptions such as frontal portrait faces or a clearly visible reflector in the eyes. To eliminate these limitations and explore more robust models, [Guo et al., 2022] introduce a physiological-based method by examining pupil shape inconsistencies. As the human eye provides the optics and photoreception for the visual system, the pupil should generally be circular on the eye surface or appear to be elliptical in the image when viewed with an orientation. The key idea is that physiological inconsistency artifacts between the eyes (e.g. difference from comparing the boundary of pupil shapes) can be identified to distinguish GAN-faces from real faces.

An important aspect of the GAN-face detection in contrast to other AI problems (such as image classification) is that *human performance for GAN-face detection is much worse than AI algorithmic methods*. As shown in [Nightingale et al., 2021a], human accuracy for GAN-face detection is around 50%~60%, which shows that topics on improving or accommodating human performance are essential. We provide a comprehensive discussion in § 3.4 on the topic of human visual performance for GAN-face detection.

The datasets are the driving force behind the rapid development of GAN models and GAN-face detection methods. We survey popular datasets and major evaluation metrics in § 4. In the foreseeable future, there are a number of critical problems that are yet to be resolved for existing GAN-face detection methods. With the development of the GAN models, it is thus important to anticipate such new developments and improve the detection methods accordingly. We discuss future research opportunities in § 5.

In this paper, we focus the scope of the survey on the detection of **entire face GAN-based synthesis**. For completeness, we also list other surveys in the related fields. First of all, a related survey in [Liu and Chen, 2020] only discussed DL-based GAN-face detection works and ignored other significant non-DL-based works. Their survey neglects the interpretability issues, which is crucial for applying DL-based methods for detecting GAN-faces in practice. Furthermore, the GAN-face detection task is closely related to other fake face detection tasks including *morphed face* detection and *manipulated face* detection. We also list related survey papers that focus on detecting face manipulation [Tolosana et al., 2020; Juefei-Xu et al., 2021; Nguyen et al., 2019], DeepFake

[Lyu, 2020; Verdoliva, 2020], human visual performance of DeepFake [Khodabakhsh et al., 2019], Face Morphing [Pikoulis et al., 2021], etc.

Contribution of this paper is summarized in the following:

- To the best of our knowledge, this work is the first comprehensive review that discusses different types of GAN-face detection methods. We particularly include the explainable methods that provide interpretability of the decision process and results that ease human understanding.
- We organize and summarize the vast literature on GAN-face detection into four categories: (1) deep learning-based methods, (2) physical-based methods, (3) physiological-based methods, and (4) human visual performance.
- Human visual performance of recognizing GAN-faces is important, especially for people to check for their social networking and possible security or privacy violations. We provide a comprehensive discussion on human visual performance and strategies for checking against fake GAN-generated faces.
- We propose several issues associated with existing state-of-the-art methods and discuss future research directions.

## 2 GAN Generation of Highly Realistic Faces

We next provide a brief summary of mainstream methods for generating high-quality faces that most GAN-face detection works are targeting. Further details on the various kinds of GANs can be found in the surveys of [Jabbar et al., 2020; Xia et al., 2021].

In the past five years, numerous GAN models (e.g., PGGAN [Karras et al., 2017], BigGAN [Brock et al., 2018], StyleGAN [Karras et al., 2019], StyleGAN2 [Karras et al., 2020], etc.) have been developed to synthesis and create realistic-looking face images with diversity from random noise input. These GANs can effectively encode rich semantic information in the intermediate features [Bau et al., 2019] and latent space [Goetschalckx et al., 2019; Jahanian et al., 2019; Shen et al., 2020] for high-quality face image generation. Moreover, these GANs can generate fake face images with various attributes, including various ages, expressions, backgrounds, and viewing angles. However, due to the lack of inference functions or encoders in GANs, such manipula-

Paper	Category	Method	Real Face (#test)	GAN Face (#test)	Performance
[Do et al., 2018]	DL	CNN	CelebA (200)	PGGAN, DCGAN (200)	Acc: 0.80
[Dang et al., 2018]	DL	CNN	CelebA (1250)	PCGAN (1250)	Acc: 0.98
[Mo et al., 2018]	DL	CNN	CelebA-HQ (15K)	PGGAN (15K)	Acc: 0.99
[Nataraj et al., 2019]	DL	CNN	CelebA (500)	StarGAN (4498)	Acc: 0.99
[Fu et al., 2019]	DL	CNN	CelebA-HQ (7K)	PGGAN (7K)	Acc: 0.98
[Marra et al., 2019b]	DL	Incremental Classifier	-	StarGAN (2.4K), etc.	Acc: 0.815~1
[Mansourifar and Shi, 2020]	DL	Out of context object detection	-	StyleGAN (100)	Acc: 0.80
[Wang et al., 2020a]	DL	DNN	FFHQ (1K)	StyleGAN2 (1K), etc.	Acc: 0.88~0.991
[Li et al., 2020]	DL	Disparities in Color Components	CelebA-HQ, FFHQ (50K)	StyGAN, ProGAN (50K)	Acc: 0.997
[Wang et al., 2020b]	DL	CNN	FFHQ (1K)	StyleGAN (1K)	Acc: 0.84
[Hulzebosch et al., 2020]	DL	ForensicTransfer	FFHQ (3K), etc.	StyleGAN (3K), ProGAN (3K), etc.	Acc: 0.01~1
[Goebel et al., 2020]	DL	CNN	CelebA (164), CelebA-HQ (1.5K)	StarGAN (1476), ProGAN (3.7K)	Acc: 0.6768~0.849
[Liu et al., 2020]	DL	CNN	FFHQ (10K), CelebA-HQ (10K)	StyleGAN (10K), PGGAN (10K), etc.	Acc: 0.9854~0.991
[Chen et al., 2021b]	DL	Xception	FFHQ (7K)	LGGF (14K)	Acc: 0.99
[Chen et al., 2021c]	DL	Improved Xception	CelebA (202.60)	PGGAN (202.60)	Acc: 0.713~0.977
[Gragnaniello et al., 2021]	DL	CNN	RAISE ( $\leq 7.8K$ )	StyleGAN2 (3K), ProGAN (3K), etc.	Acc: 0.928~0.999
[Chen et al., 2022]	DL	CNN	FFHQ (20K)	StyleGAN (20K), etc.	Acc: 0.9895~1
[Guo et al., 2021]	DL	Residual Attention	FFHQ (748)	StyleGAN2 (750)	AUC: 1
[Hu et al., 2021]	Physic	Corneal specular highlight	FFHQ (500)	StyleGAN2 (500)	AUC: 0.94
[Matern et al., 2019]	Physiology	Eye color	CelebA (1K)	ProGAN (1K), Glow (1K)	AUC: 0.70~0.85
[Guo et al., 2022]	Physiology	Irregular pupil shape	FFHQ (1.6K)	StyleGAN2 (1.6K)	AUC: 0.91
[Yang et al., 2019b]	Physiology	Landmark locations	CelebA ( $\geq 50K$ )	PGGAN (25K)	AUC: 0.9121~0.9413
[Nightingale et al., 2021a]	Human	Visual	FFHQ (400)	StyleGAN2 (400)	Acc: 0.5~0.6
[Lago et al., 2021]	Human	Visual	FFHQ (150)	StyleGAN2, etc. (150)	Acc: 0.26~0.8

Table 1: Summary of GAN-face detection methods with the corresponding datasets, statistics and performance scores. The green rows highlight those where individual predicted results of the method are explainable to humans. Note that datasets used in the works are self-collected and can contain different subsets across papers. So the performance scores do not represent fair comparisons.

tions in latent space are only applicable to images generated from GANs, not to any given real images.

To address the above issue, GAN inversion methods can invert a given image back into its latent space of a pre-trained GAN model [Xia et al., 2021]. The GAN generator can then reconstruct the image accurately from the inverted code in approximation. This inversion method plays a key role in bridging real and fake face image domains. Therefore, it can significantly improve the quality of the generated face images and be applied widely in state-of-the-art GAN models including StyleGAN2 [Karras et al., 2020], StyleGAN3 [Karras et al., 2021], InterFaceGAN [Shen et al., 2020], and Image2StyleGAN++ [Abdal et al., 2020].

### 3 GAN-face Detection Methods

We organize existing GAN-face detection literature into four categories in the subsections. Although there exist similarities of various methods e.g. across categories, we organize them primarily by their motivations and key ideas. Table 1 summarizes mainstream GAN-face detection methods with the datasets used and performance comparison.

#### 3.1 Deep Learning-based Methods

Deep learning-based GAN-face detection methods extract signal-level features to train Deep Neural Network (DNN) classifiers to distinguish fake faces from real ones in an end-to-end learning framework. The earliest work of [Do et al., 2018] employed VGG-Net [Simonyan and Zisserman, 2014] for GAN-face detection. To train the network, real faces are collected from the CelebA face dataset [Liu et al., 2015], and fake faces are generated using DC-GANs [Radford et al., 2015] and PG-GAN [Karras et al., 2017], where the VGG-16 architecture is used with pre-train weights of VGG-Face [Cao et al., 2018]. [Mo et al., 2018] found that signals in the residual field can serve as effective features to distinguish real and GAN-faces. They first processed the input faces with high-pass filters, and the resulting residuals were fed into deep

networks for GAN-face detection. [Li et al., 2020] identified GAN-faces by analyzing the chrominance color components. They first extracted a feature set to capture color image statistics, then use the concatenated features to train a GAN-face classifier. Similarly, [Chen et al., 2021c] found that both the luminance and chrominance cues are useful for improving GAN-face detection. More recently, [Fu et al., 2019] used a dual-channel CNN to reduce the impact of many widely-used image post-processing operations. The deep CNN of their network extracts features of the pre-processed images, and the shallow CNN extracts features from the high-frequency components of the original image.

**GAN-face detection in real-world scenarios.** [Hulzebosch et al., 2020] developed a framework for evaluating detection methods under cross-model, cross-data, and post-processing evaluations, to examine features produced from commonly-used image pre-processing methods. More recently, many variants of feature-based models have been studied [Wang et al., 2020b; Goebel et al., 2020; Liu et al., 2020; Chen et al., 2022]. However, the detection results from all these feature-based methods are not explainable, so it is unclear why the decision was given to any input face.

**One-shot, incremental and advanced learning.** A one-shot GAN-face detection method was studied recently in [Mansourifar and Shi, 2020]. Scene understanding is applied to determine out-of-context objects that appeared in the GAN-faces to distinguish GAN-faces from the real ones. [Marra et al., 2019b] applied incremental learning for GAN-faces image detection, where the key idea is to detect and classify new GAN-generated faces without decreasing the performance on existing ones.

**Difficulty Analysis.** More difficulty analysis and systemic evaluations using state-of-the-art DNNs for GAN-face detection are investigated in [Gragnaniello et al., 2021; Wang et al., 2020a; Wang et al., 2020b; Jeon et al., 2020]. For example, [Wang et al., 2020b] find that the CNN-generated images share some common systematic flaws, resulting in them being



surprisingly easy to spot for now. To investigate *Are GAN-generated images easy to detect?* [Gragnaniello *et al.*, 2021] conducted the study to analyze the performance of the existing GAN-faces detection methods on different datasets and using different metrics. On the country, they concluded that we are still very far from having reliable tools for GAN image detection.

Unfortunately, all aforementioned methods in this subsection can not provide explainable results. To overcome this shortcoming, an attention-based method was proposed in [Guo *et al.*, 2021] to spot GAN-generated faces by analyzing eye inconsistencies. Specifically, this model learned to identify inconsistent eye components by localizing and comparing the iris artifacts. Visual results from [Guo *et al.*, 2021] showed a clear difference between the attention maps of the irises from the GAN-faces and real ones. For GAN-faces the attention map highlighted the artifact regions on the irises, and for real faces, there is no significant concentration of the attention map. However, the attention map still cannot provide enough explainability to understand the behavior of the learned model.

In summary, Deep Learning-based methods achieved impressive performance on GAN-face detection. However, it is difficult to explain or interpret the decision process of the learned model as a black box. Nonetheless, fake face detection in the real-world favors explainability, alongside from the overall accuracy. Particularly, people do care more for use cases such as *“This picture looks like someone I know, and if the AI algorithm tells it is fake or real, then what is the reasoning and should I trust?”*

### 3.2 Physical-based Methods

Physical-based methods identify GAN-faces by looking for artifacts or inconsistencies among the face and the physical world, such as the illumination and reflections in perspective.

The early work of [Johnson and Farid, 2008] analyzed the internal camera parameters and light source directions from the perspective distortion of the specular highlights of the eyes to reveal traces of image tampering. Recently, [Matern *et al.*, 2019] identified early versions of GAN-faces [Karras *et al.*, 2017] based on an observation that the specular reflection in the eyes of GAN-faces is either missing or appearing as a simple white blob. However, such artifacts have been largely corrected in recent GAN-faces such as StyleGAN2.

The method of [Hu *et al.*, 2021] looked for inconsistency between the two eyes to identify GAN-generated faces. Specifically, the corneal specular highlights of the eyes are detected and aligned for pixel-wise Intersection of Union (IoU) comparison. The assumption is that real human eyes captured by a camera under a portrait setting should exhibit a strong resemblance between the corneal specular highlights between the two eyes. In contrast, this assumption is not true for GAN synthesized eyes, where inconsistencies include different numbers, different geometric shapes, or different relative locations of the specular highlights. However, this method operates on strong assumptions of the frontal portrait pose, far away lighting source(s), and the existence of the eye specular highlights. When these assumptions are violated, false positives may increase significantly.

In summary, the physical-based detection methods are more robust to adversarial attacks, and the predicted results afford intuitive interpretations to human users [Hu *et al.*, 2021].

### 3.3 Physiological-based Methods

Physiologically-based methods investigate the semantic aspect of the human faces, including cues such as symmetry, iris color, pupil shapes, *etc.*, where the identified artifacts are used for exposing GAN-faces.

Early works of [Marra *et al.*, 2019a; Yu *et al.*, 2019; McCloskey and Albright, 2018] indicated that StyleGAN [Karras *et al.*, 2017] generated faces contain obvious artifacts including asymmetric faces [Yang *et al.*, 2019b] and inconsistent iris colors [Matern *et al.*, 2019]. [Yang *et al.*, 2019b] found that GAN can generate facial parts (*e.g.*, eyes, nose, skin, mouth) with a great level of realistic details, yet there is no explicit constraint over the locations of these parts on the face. In other words, the facial parts of GAN-faces may not appear to be coherent or natural-looking, when compared to real faces. They indicated that these abnormalities in the configuration of facial parts in GAN-faces could be revealed using the locations of the facial landmark points (*e.g.*, tips of the eyes, nose, and mouth), which can be effectively detected using automatic algorithms. The normalized locations of these facial landmarks can be used features to train a classifier to identify GAN-faces. However, GAN-face generation has also improved on the other hand. Face images generated by StyleGAN2 have improved greatly in quality and are free of obvious physiological artifacts [Karras *et al.*, 2017; Karras *et al.*, 2019; Karras *et al.*, 2020]. And the synthesis process of GAN-faces is further optimized in StyleGAN3. It exhibits a more natural transformation hierarchy of different scales of features. They are fully equivariant to translation and rotation, which further improved the physiological consistency of the generated faces.

A relatively new physiological-based GAN-face detection method is proposed in [Guo *et al.*, 2022], motivated by a simple observation that GAN-faces exhibit a common artifact of irregular pupil shapes. Specifically, pupils from real human faces should appear to be a smooth circle or ellipse; in contrast, pupils from GAN-faces can appear with irregular shapes or boundaries. This artifact is universal for all known GAN models up to date (including PG-GAN [Karras *et al.*, 2017], StyleGAN3 [Karras *et al.*, 2021], and SofGAN [Chen *et al.*, 2021a]), and this artifact occurs in eyes from the synthesized humans and animals. One fundamental reason for the existence of such artifacts in GAN-generated faces is due to their lack of understanding of human eye anatomy, particularly the geometry and shape of the pupils. The method of [Guo *et al.*, 2022] first detect and localize the eyes and segment out the pupil region. Next, an ellipse model is parametrically fit to the pupil boundary. Boundary intersection-over-union (IoU) [Cheng *et al.*, 2021] is then calculated between the extracted pupil mask and the fitted ellipse to estimate the “circularness” of the pupils. While this method can achieve ROC-AUC of 0.91 on an evaluation set consisting of FFHQ and StyleGAN2 faces, this method still has two limitations. Occlusions or pupil segmentation failure may lead to wrong predictions.

False positive can arise in rare cases of non-elliptical pupils in real faces due to diseased or infected eyes.

In summary, physiological-based method comes with stronger interpretability. However, like other forensic approaches, environmental constraints such as occlusion and visibility of the eye from the face image is still a major limitation. It is still an open question if the power of end-to-end learning is leveraged to improve model training.

### 3.4 Human Visual Performance

Although many automatic GAN-face detection algorithms have been developed, human visual performance in identifying and exposing GAN-faces has not been investigated sufficiently. Compared with other AI problems such as image recognition, GAN-face detection is a much more challenging problem for human eyes. Thus, it is important to study how well human eyes can identify GAN-faces and the related social impacts and ethical issues.

Standard metrics for evaluating the effectiveness of automatic algorithms in detecting GAN-faces include ROC analysis and Precision-Recall. While these metrics can be applied to study human perceptual performance, they are not directly suitable in reflecting the true deceptiveness of the highly realistic GAN-faces for the general public. Human visual performance is largely biased, and with weak but proper hints (such as looking for the correct physiological cues), human performance in identifying fake faces can boost greatly.

[Lago *et al.*, 2021] conducted a study to measure the human ability to recognize fake faces. Their dataset consists of 150 real faces and 150 GAN faces. Real faces are selected from the Flickr-Faces-HQ (FFHQ) dataset, and GAN-Faces are generated from state-of-the-art GANs, including PG-GAN, StyleGAN, and StyleGAN2. The 630 participants sequentially completed 34 tasks to distinguish 30 faces each time. Those faces were randomly selected in equal portions from each category. Results showed that participants had lost the ability to judge newer GAN-faces. Accuracy is not impacted when the test speeds up or the participants have seen similar synthetic faces produced by the generators before.

A more recent work [Nightingale *et al.*, 2021a] examined people’s ability to discriminate GAN-faces from real faces. Specifically, 400 StyleGAN2 faces and 400 real faces from the FFHQ dataset are selected with large diversity across the genders, ages, races, *etc.*, and two sets of experiments are conducted. In the first set of experiments, 315 participants were shown a few examples of GAN-faces and real faces, and around 50% of accuracy is obtained. In the second set of experiments, 170 new participants were given a tutorial consisting of examples of specific artifacts in the GAN-faces. Participants were also given feedback afterward. However, it was found that such training and feedback only improve a little bit of average accuracy. Therefore, this work concluded that the StyleGAN2 faces are realistic enough to fool both naive and trained human observers. However, no information on what synthesis artifacts are provided for participant training in this study. We believe there is still space to improve human capability in discerning GAN-faces if sufficient hints are provided, including philosophical cues (*e.g.* pupil shapes [Guo *et al.*, 2022]) and dataset statistics (*e.g.* GAN-faces are

usually trained with FFHQ samples that are biased toward portrait faces and celebrity styles).

GAN models are under active development, so it is expected that the difficulty of discerning GAN-faces will continue to increase. It is important to find generic and consistent cues for human eyes to effectively distinguish GAN-faces. Typically, useful cues are generally universal for exposing other types of AI tampered faces, including morphed faces, swapped faces, painting faces. The discovery of such cues can also be leveraged for improving the GAN face synthesis algorithm to produce faces that are even harder to distinguish for human eyes.

## 4 Datasets and Performance Evaluation

With the rapid development of AI discriminative and generative models, many human facial datasets have been constructed. Among these datasets, real face images are mainly collected from the FFHQ dataset [Karras *et al.*, 2019], CelebA [Liu *et al.*, 2015], CelebA-HQ [Karras *et al.*, 2018], RAISE [Dang-Nguyen *et al.*, 2015] *etc.*. Synthesized face images are collected using state-of-the-art GAN models and LGGF [Chen *et al.*, 2021b]. Early GAN-faces datasets are mainly comprised of PGGAN, and recent datasets are typically based on StyleGAN2. NVIDIA has recently curated a StyleGAN3 generated set at <https://github.com/NVlabs/stylegan3-detector> that can be used to evaluate GAN-face detection performance.

Table 1 list mainstream datasets for GAN-face detection. Note that datasets used for each work are self-collected and can contain different subsets across papers. This is due to that only specific subsets are relevant to individual methods. For example, in [Guo *et al.*, 2022], only face images with visible eye pupils are used for training and evaluation.

As GAN-face detection is a binary classification problem, **evaluation metrics** are typically based on Accuracy, Precision-Recall, ROC analysis, and AUC. To the best of our knowledge, a sufficiently large-scale benchmark dataset for empirical evaluation of GAN-face detection is still lacking.

## 5 Future Directions

After reviewing existing methods on GAN-face detection with identified advantages and limitations, we next discuss future research directions that are promising for developing forensic algorithms that will be more effective, interpretable, robust, and extensible.

### 5.1 Against the Evolution of GAN models

Although the existing GAN models can not generate perfect fake faces due to known vulnerabilities, more powerful GAN models are under active development and certainly will come out in the near future. We anticipate that the known artifacts of GAN-faces (*e.g.* inconsistent corneal specular highlights [Hu *et al.*, 2021], irregular pupil shapes [Guo *et al.*, 2022], symmetry inconsistencies such as different earrings, *etc.*) can be fixed by incorporating relevant constraints to existing GAN models; however how best to effectively enforce such constraints are still open questions. More powerful deep

neural network architectures, training tricks, and larger training data will continue to push the state-of-the-art GAN models. For example, StyleGAN3 [Karras *et al.*, 2021] presents a comprehensive overhaul of all signal processing aspects of the StyleGAN2 to improve the texture and 3D modeling of the GAN-generated faces. The demands for searching for effective cues for exposing new GAN-faces and developing more powerful GAN-face detection methods continue to rise.

**Low-power demands.** In addition, computationally effective GAN-face detectors that can run on edge devices are of practical importance. Since GAN-faces can directly cause concerns and impacts regarding identities and social networks, forensic analytics should ideally be able to run on smartphones. Research on how best to migrate high FLOPS GPU models toward mobile applications has practical needs.

## 5.2 How to Develop Good Interpretation Methods

One critical disadvantage of many GAN-face detection methods is that they do not afford interpretability for the predicted results. Methods based on the widely-used attention mechanism [Guo *et al.*, 2021] can not provide an interpretable explanation of the prediction results. Although the attention heat map highlights pixels that the network predicts, the mechanism can not tell *why* these pixels are selected that improves performance. Furthermore, although the current physical [Hu *et al.*, 2021] and physiological-based methods [Guo *et al.*, 2022] can provide interpretability of their predicted results, their assumptions are *per-cue* based (such as the iris or pupil inconsistencies) that might not be extensible to future GAN models that are specifically designed. How best to develop an end-to-end mechanism that can effectively leverage physical and physiological cues for GAN-face detection is still an open research question.

**Learning multiple cues.** From the numerous GAN-detection methods being surveyed, we observe that methods depending on a single cue or a few cues cannot retain performance, extensibility, and explainability at a time when dealing with complex real-world challenges such as occlusions and noisy data. It is difficult for features drawn from a single cue to cover multiple characteristics or artifacts. So how best to improve the generalization of the learning system, and how best to integrate or fuse the learning of multiple cues into a unified framework will be the key. Ensemble learning [Sagi and Rokach, 2018], multi-model/task learning [Xu *et al.*, 2013], and knowledge distillation [Gou *et al.*, 2021] are directions that future GAN-face detection models can benefit.

## 5.3 Robust to Adversarial Attack

As DNNs are widely used in GAN-face detection (either as a component or as the main model), DNNs are known to be vulnerable against *adversarial attacks*, which are based on intentionally designed perturbations or noises that are particularly effective and harmful to the DNNs.

With the increasing effectiveness of adversary attack technologies [Carlini and Wagner, 2017; Moosavi-Dezfooli *et al.*, 2016], research efforts start to focus on attacking fake face detectors particularly instead of focusing on general classifiers. Anti-forensics methods for evading fake detection via

adversarial perturbations have been studied including [Carlini and Farid, 2020; Gandhi and Jain, 2020]. These methods of attacking fake image detectors usually generate adversarial perturbations to perturb almost the entire image, which is redundant and can increase the perceptibility of perturbations. [Liao *et al.*, 2021] introduced a sparse attacking method called Key Region Attack to disrupt the fake image detection by determining key pixels to make the fake image detector only focus on these pixels. Their adversarial perturbation appears only on key regions and is hard for humans to distinguish. In general, future GAN-face detection methods need to be cautious in dealing with adversary attacks.

## 5.4 Imbalanced Distribution of Data

In the real world, real faces usually significantly outnumber GAN-generated faces in online applications. The data distribution for GAN-face detection is very imbalanced. Thus, the performance of GAN-face detection methods trained on balanced datasets may degrade when used for real-world applications, *e.g.* high accuracy but low sensitivity for spotting GAN-faces in practice. As an initial effort, the method of [Guo *et al.*, 2021] addresses the imbalance learning issues by maximizing the ROC-AUC via an approximation and relaxation of the AUC using Wilcoxon-Mann-Whitney (WMW) statistics [Yan *et al.*, 2003; Lyu and Ying, 2018]. Experimental results showed the robustness of the model learned from imbalanced data. Looking forward, how best to deal with learning from extremely imbalanced data in real-world settings is an open question.

## 5.5 Handling Mixtures with Other Fake Faces

As face image tampering technologies continue to develop, including Deep Fake [Lyu, 2020; Verdoliva, 2020], Face Morphing [Nightingale *et al.*, 2021b], Face swapping [Perov *et al.*, 2020], *etc.*, GAN-face detection forensics should be robust enough to deal with the mixture of face faking or synthesis methods. In addition to the *detection* of GAN-faces, the *attribution* (find out what tools were used in the generation and the source where the faces come from) and *characterization* (find out the purpose of the generation and if the intention is malicious) are with growing importance. The DARPA Semantic Forensic (SemaFor) program <https://www.darpa.mil/program/semantic-forensics> of the U.S. is an ongoing effort that addresses these issues.

## 6 Conclusion

This paper presents a comprehensive, up-to-date review of GAN-face detection methods. We have reviewed the state-of-the-art models from multiple perspectives as well as provided details of major approaches. Although GAN-face detection has made notable progress recently, there is still significant room for improvement. Detecting GAN-faces in real-world settings remains challenging and with high demand, and we have discussed future research directions. We believe the surveyed techniques and cues can also benefit the detection of other fake face generation tools such as DeepFake, face morphing, and swapping.



## References

- [Abdal *et al.*, 2020] Rameen Abdal, Yipeng Qin, and Peter Wonka. Image2StyleGAN++: How to edit the embedded images? In *CVPR*, 2020.
- [Bau *et al.*, 2019] David Bau, Hendrik Strobelt, William Peebles, et al. Semantic photo manipulation with a generative image prior. *ACM TOG*, 2019.
- [Brock *et al.*, 2018] Andrew Brock, Jeff Donahue, and Karen Simonyan. Large scale GAN training for high fidelity natural image synthesis. *arXiv:1809.11096*, 2018.
- [Cao *et al.*, 2018] Qiong Cao, Li Shen, Weidi Xie, Omkar M Parkhi, and Andrew Zisserman. VGGFace2: A dataset for recognising faces across pose and age. In *FG*. IEEE, 2018.
- [Carlini and Farid, 2020] Nicholas Carlini and Hany Farid. Evading deepfake-image detectors with white-and black-box attacks. In *CVPRW*, 2020.
- [Carlini and Wagner, 2017] Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. In *sp*, 2017.
- [Chen *et al.*, 2021a] Anpei Chen, Ruiyang Liu, Ling Xie, Zhang Chen, Hao Su, and Jingyi Yu. SofGAN: A portrait image generator with dynamic styling. *ACM transactions on graphics*, 2021.
- [Chen *et al.*, 2021b] Beijing Chen, Xingwang Ju, et al. Locally GAN-generated face detection based on an improved Xception. *Information Sciences*, 572, 2021.
- [Chen *et al.*, 2021c] Beijing Chen, Xin Liu, Yuhui Zheng, et al. A robust GAN-generated face detection method based on dual-color spaces and an improved Xception. *TCSVT*, 2021.
- [Chen *et al.*, 2022] Beijing Chen, Weijin TAN, Yiting WANG, and Guoying ZHAO. Distinguishing between natural and GAN-generated face images by combining global and local features. *Chinese Journal of Electronics*, 2022.
- [Cheng *et al.*, 2021] Bowen Cheng, Ross Girshick, Piotr Dollár, et al. Boundary IoU: Improving object-centric image segmentation evaluation. In *CVPR*, 2021.
- [Dang *et al.*, 2018] L Minh Dang, Syed Ibrahim Hassan, et al. Deep learning based computer generated face identification using convolutional neural network. *Applied Sciences*, 2018.
- [Dang-Nguyen *et al.*, 2015] Duc-Tien Dang-Nguyen, Cecilia Pasquini, Valentina Conotter, and Giulia Boato. Raise: A raw images dataset for digital image forensics. In *Proceedings of the 6th ACM multimedia systems conference*, pages 219–224, 2015.
- [Do *et al.*, 2018] Nhu-Tai Do, In-Seop Na, and Soo-Hyung Kim. Forensics face detection from GANs using convolutional neural network. In *ISITC*, 2018.
- [Fu *et al.*, 2019] Yong Fu, Tanfeng Sun, Xinghao Jiang, Ke Xu, and Peisong He. Robust GANs-face detection based on dual-channel CNN network. In *CISP-BMEI*. IEEE, 2019.
- [Gandhi and Jain, 2020] Apurva Gandhi and Shomik Jain. Adversarial perturbations fool deepfake detectors. In *IJCNN*, 2020.
- [Goebel *et al.*, 2020] Michael Goebel, Lakshmanan Nataraj, Tejaswi Nanjundaswamy, et al. Detection, attribution and localization of GAN generated images. *arXiv:2007.10466*, 2020.
- [Goetschalckx *et al.*, 2019] Lore Goetschalckx, Alex Andonian, Aude Oliva, and Phillip Isola. GANalyze: Toward visual definitions of cognitive image properties. In *ICCV*, 2019.
- [Goodfellow *et al.*, 2014] Ian Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial nets. In *NeurIPS*, 2014.
- [Gou *et al.*, 2021] Jianping Gou, Baosheng Yu, et al. Knowledge distillation: A survey. *IJCV*, 2021.
- [Gragnaniello *et al.*, 2021] Diego Gragnaniello, Davide Cozzolino, et al. Are GAN-generated images easy to detect? a critical analysis of the state-of-the-art. In *ICME*, 2021.
- [Guo *et al.*, 2021] Hui Guo, Shu Hu, Xin Wang, Ming-Ching Chang, and Siwei Lyu. Robust attentive deep neural network for exposing GAN-generated faces. *arXiv:2109.02167*, 2021.
- [Guo *et al.*, 2022] Hui Guo, Shu Hu, Xin Wang, Ming-Ching Chang, and Siwei Lyu. Eyes tell all: Irregular pupil shapes reveal GAN-generated faces. *ICASSP*, 2022.
- [Hartman and Satter, 2020] Travis Hartman and Raphael Satter. These faces are not real. In <https://tmsnrt.rs/3rsneCO>, 2020.
- [Hu *et al.*, 2021] Shu Hu, Yuezun Li, and Siwei Lyu. Exposing GAN-generated faces using inconsistent corneal specular highlights. In *ICASSP*. IEEE, 2021.
- [Hulzebosch *et al.*, 2020] Nils Hulzebosch, Sarah Ibrahimi, and Marcel Worring. Detecting CNN-generated facial images in real-world scenarios. In *CVPR Workshops*, 2020.
- [Jabbar *et al.*, 2020] Abdul Jabbar, Xi Li, and Bourahla Omar. A survey on generative adversarial networks: Variants, applications, and training. *arXiv:2006.05132*, 2020.
- [Jahanian *et al.*, 2019] Ali Jahanian, Lucy Chai, and Phillip Isola. On the “steerability” of generative adversarial networks. In *ICLR*, 2019.
- [Jeon *et al.*, 2020] Hyeonseong Jeon, Youngoh Bang, Junyaup Kim, and Simon S Woo. T-GD: Transferable GAN-generated images detection framework. *ICML*, 2020.
- [Johnson and Farid, 2008] Micah K. Johnson and Hany Farid. Exposing digital forgeries through specular highlights on the eye. In *Information Hiding*, volume 4567 of *LNCIS*, 2008.
- [Juefei-Xu *et al.*, 2021] Felix Juefei-Xu, Run Wang, Yihao Huang, et al. Countering malicious deepfakes: Survey, battleground, and horizon. *arXiv:2103.00218*, 2021.
- [Karras *et al.*, 2017] Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of GANs for improved quality, stability, and variation. *arXiv:1710.10196*, 2017.
- [Karras *et al.*, 2018] Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of GANs for improved quality, stability, and variation. In *ICLR*, 2018.
- [Karras *et al.*, 2019] Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *CVPR*, 2019.
- [Karras *et al.*, 2020] Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of StyleGAN. In *CVPR*, 2020.
- [Karras *et al.*, 2021] Tero Karras, Miika Aittala, Samuli Laine, Erik Härkönen, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Alias-free generative adversarial networks. *NeurIPS*, 34, 2021.
- [Khodabakhsh *et al.*, 2019] Ali Khodabakhsh, Raghavendra Ramachandra, et al. Subjective evaluation of media consumer vulnerability to fake audiovisual content. In *QoMEX*, 2019.

- [Lago *et al.*, 2021] Federica Lago, Cecilia Pasquini, Rainer Böhme, et al. More real than real: A study on human visual perception of synthetic faces. *arXiv:2106.07226*, 2021.
- [Li *et al.*, 2018] Haodong Li, Bin Li, Shunquan Tan, and Jiwu Huang. Detection of deep network generated images using disparities in color components. *arXiv:1808.07276*, 2018.
- [Li *et al.*, 2020] Haodong Li, Bin Li, Shunquan Tan, and Jiwu Huang. Identification of deep network generated images using disparities in color components. *Signal Processing*, 174, 2020.
- [Liao *et al.*, 2021] Quanyu Liao, Yuezun Li, Xin Wang, Bin Kong, Bin Zhu, Siwei Lyu, et al. Imperceptible adversarial examples for fake image detection. *ICIP*, 2021.
- [Liu and Chen, 2020] Xin Liu and Xiao Chen. A survey of GAN-generated fake faces detection method based on deep learning. *JIHPP*, 2(2), 2020.
- [Liu *et al.*, 2015] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In *ICCV*, December 2015.
- [Liu *et al.*, 2020] Zhengzhe Liu, Xiaojuan Qi, and Philip HS Torr. Global texture enhancement for fake face detection in the wild. In *CVPR*, 2020.
- [Lyu and Ying, 2018] Siwei Lyu and Yiming Ying. A univariate bound of area under ROC. In *UAI*, 2018.
- [Lyu, 2020] Siwei Lyu. Deepfake detection: Current challenges and next steps. In *ICME Workshop*. IEEE, 2020.
- [Mansourifar and Shi, 2020] Hadi Mansourifar and Weidong Shi. One-shot GAN generated fake face detection. *arXiv:2003.12244*, 2020.
- [Marra *et al.*, 2019a] Francesco Marra, Diego Gragnaniello, Luisa Verdoliva, and Giovanni Poggi. Do GANs leave artificial fingerprints? In *MIPR*. IEEE, 2019.
- [Marra *et al.*, 2019b] Francesco Marra, Cristiano Saltori, et al. Incremental learning for the detection and classification of GAN-generated images. In *WIFS*. IEEE, 2019.
- [Matern *et al.*, 2019] Falko Matern, Christian Riess, and Marc Stamminger. Exploiting visual artifacts to expose deepfakes and face manipulations. In *WACVW*. IEEE, 2019.
- [McCloskey and Albright, 2018] Scott McCloskey and Michael Albright. Detecting GAN-generated imagery using color cues. *arXiv:1812.08247*, 2018.
- [Mo *et al.*, 2018] Huaxiao Mo, Bolin Chen, and Weiqi Luo. Fake faces identification via convolutional neural network. In *ACM IH&MMSEC*, 2018.
- [Moosavi-Dezfooli *et al.*, 2016] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: a simple and accurate method to fool deep neural networks. In *ICCV*, 2016.
- [Nataraj *et al.*, 2019] Lakshmanan Nataraj, Tajuddin M. Mohammed, et al. Detecting GAN generated fake images using co-occurrence matrices. *Electronic Imaging*, 2019.
- [Nguyen *et al.*, 2019] Thanh Thi Nguyen, Cuong M Nguyen, et al. Deep learning for deepfakes creation and detection: A survey. *arXiv:1909.11573*, 2019.
- [Nightingale *et al.*, 2021a] Sophie Nightingale, Shruti Agarwal, Erik Härkönen, Jaakko Lehtinen, and Hany Farid. Synthetic faces: how perceptually convincing are they? *Journal of Vision*, 21(9), 2021.
- [Nightingale *et al.*, 2021b] Sophie J Nightingale, Shruti Agarwal, and Hany Farid. Perceptual and computational detection of face morphing. *Journal of Vision*, 21(3), 2021.
- [O’Sullivan, 2020a] Donie O’Sullivan. A high school student created a fake 2020 US candidate. Twitter verified it. In *CNN Business*, <https://cnn.it/3HpHfzz>, 2020.
- [O’Sullivan, 2020b] Donie O’Sullivan. How fake faces are being weaponized online. In *CNN Business*, <https://cnn.it/3oO6bJZ>, 2020.
- [Perov *et al.*, 2020] Ivan Perov, Daiheng Gao, et al. Deepface-lab: A simple, flexible and extensible face swapping framework. *arXiv:2005.05535*, 2020.
- [Pikoulis *et al.*, 2021] Erion-Vasilis Pikoulis, Zafeiria-Marina Ioannou, et al. Face morphing, a modern threat to border security: Recent advances and open challenges. *Applied Sciences*, 2021.
- [Radford *et al.*, 2015] Alec Radford, Luke Metz, et al. Unsupervised representation learning with deep convolutional generative adversarial networks. *arXiv:1511.06434*, 2015.
- [Sagi and Rokach, 2018] Omer Sagi and Lior Rokach. Ensemble learning: A survey. *Wiley Interdisciplinary Reviews: Data Mining and Knowledge Discovery*, 8(4), 2018.
- [Shen *et al.*, 2020] Yujun Shen, Jinjin Gu, Xiaoou Tang, and Bolei Zhou. Interpreting the latent space of GANs for semantic face editing. In *CVPR*, 2020.
- [Simonyan and Zisserman, 2014] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv:1409.1556*, 2014.
- [Tolosana *et al.*, 2020] Ruben Tolosana, Ruben Vera-Rodriguez, et al. Deepfakes and beyond: A survey of face manipulation and fake detection. *Information Fusion*, 64, 2020.
- [Verdoliva, 2020] Luisa Verdoliva. Media forensics and deepfakes: an overview. *arXiv:2001.06564*, 2020.
- [Vincent, 2020] James Vincent. A spy reportedly used an AI-generated profile picture to connect with sources on LinkedIn. In <https://bit.ly/35BU215>, 2020.
- [Wang *et al.*, 2020a] Run Wang, Felix Juefei-Xu, Lei Ma, Xiaofei Xie, et al. Fakespotter: A simple yet robust baseline for spotting AI-synthesized fake faces. *IJCAI*, 2020.
- [Wang *et al.*, 2020b] Sheng-Yu Wang, Oliver Wang, Richard Zhang, Andrew Owens, and Alexei A Efros. CNN-generated images are surprisingly easy to spot... for now. In *CVPR*, 2020.
- [Xia *et al.*, 2021] Weihao Xia, Yulun Zhang, Yujiu Yang, Jing-Hao Xue, Bolei Zhou, and Ming-Hsuan Yang. GAN inversion: A survey. *arXiv:2101.05278*, 2021.
- [Xu *et al.*, 2013] Chang Xu, Dacheng Tao, and Chao Xu. A survey on multi-view learning. *arXiv:1304.5634*, 2013.
- [Yan *et al.*, 2003] Lian Yan, Robert H Dodier, and et al. Optimizing classifier performance via an approximation to the Wilcoxon-Mann-Whitney statistic. In *ICML*, 2003.
- [Yang *et al.*, 2019a] Xin Yang, Yuezun Li, and Siwei Lyu. Exposing deep fakes using inconsistent head poses. In *ICASSP*, 2019.
- [Yang *et al.*, 2019b] Xin Yang, Yuezun Li, Honggang Qi, and Siwei Lyu. Exposing GAN-synthesized faces using landmark locations. In *ACM Workshop on IHMMSec*, 2019.
- [Yu *et al.*, 2019] Ning Yu, Larry S Davis, and Mario Fritz. Attributing fake images to GANs: Learning and analyzing GAN fingerprints. In *ICCV*, 2019.