

audb - Sharing and Versioning of Audio and Annotation Data in Python

Hagen Wierstorf¹, Johannes Wagner¹, Florian Eyben¹, Felix Burkhardt¹, Björn W. Schuller^{1,2,3}

¹ audeERING GmbH, Gilching, Germany

² Chair of Embedded Intelligence for Health Care and Wellbeing, University of Augsburg, Germany

³ GLAM – Group on Language, Audio, & Music, Imperial College, UK

hwierstorf@audeerling.com

Abstract

Driven by the need for larger and more diverse datasets to pre-train and fine-tune increasingly complex machine learning models, the number of datasets is rapidly growing. *audb* is an open-source Python library that supports versioning and documentation of audio datasets. It aims to provide a standardized and simple user-interface to publish, maintain, and access the annotations and audio files of a dataset. To efficiently store the data on a server, *audb* automatically resolves dependencies between versions of a dataset and only uploads newly added or altered files when a new version is published. The library supports partial loading of a dataset and local caching for fast access to already downloaded data. *audb* is a lightweight library and can be interfaced with any machine learning library. It supports the management of datasets on a single PC, within a university or company, or within a whole research community.

1. Introduction

To foster progress in automatic speech emotion recognition and related learning tasks it is crucial to have a quick and easy way of accessing an ensemble of datasets for training and evaluation [1]. This requires that the datasets have a unique identifier, are versioned, can be shared and combined, are documented in a standardized way [2], and be accessed with a common user interface.

This paper presents *audb*, a Python library to publish, maintain and interface labeled or unlabeled audio data in machine learning pipelines. It also supports audio tracks embedded in video files. It can load a dataset by name and version from different repositories. The dataset is then provided in a well defined specification (*audformat*¹, and its audio data can be re-sampled, remixed, or converted to a different format. A caching mechanism guarantees quick access. A dataset consists of a root folder with a header file and multiple table files holding meta-data and annotations, and the referenced audio files, usually organized into sub-directories. The Python library *audinterface*² provides an interface to read and process the audio data of one or more datasets.

audb is under continuous development and has been used to publish and maintain 840 datasets and versions since 4 years inside audeERING. It is released open-source since 2021 under a MIT license, available via PyPI³ and Github,⁴ and the documentation is hosted on the project website.⁵

¹<https://audeerling.github.io/audformat/>

²<https://audeerling.github.io/audinterface/>

³<https://pypi.org/project/audb/>

⁴<https://github.com/audeerling/audb/>

⁵<https://audeerling.github.io/audb/>

2. Related Work

With the introduction of Git in 2005 and platforms like Github in 2008 for development and sharing of code it became obvious that no convenient solution for audio data management and sharing existed within the research community. In 2014 Git Large File Storage⁶ was released and established as the standard way of including binary files in git repositories based on similar ideas like *git-media*⁷ which existed already since 2009. With this approach it became possible to have git repositories that provide versioning of data and track authorship of certain changes to the data. As Git Large File Storage did not focus on a particular kind of binary data to be versioned Data Version Control⁸ evolved since 2017 with a focus on versioning data, machine learning models, and experiments to foster reproducibility [3].

In parallel the problem of sharing large amount of research data was tackled by approaches like Zenodo established in 2013 [4]. Zenodo allows researchers to upload datasets and provides a digital object identifier [5] to make datasets easier to cite and provide long-term access to them [6]. Access to shared data can be improved if the data and its corresponding metadata or annotations are also provided in a standardized way. One successful example from the audio community is the SOFA format for impulse responses [7].

Recently, the Hugging Face *Datasets* [8] library provides access to datasets with a focus on natural language processing, but also computer vision, and audio tasks. *Datasets* has the advantage that it can efficiently handle very huge datasets by providing the possibility to stream the data and load it only partially into memory. On the Hugging Face Hub⁹ it provides repositories for datasets in which the versioning is handled by Git and Git Large File Storage. As *Datasets* addresses data versioning and management in a similar way to *audb*, Section 4 will compare them in more depth.

3. Library Overview and Design

The most important functionality of the library is to load a dataset and access corresponding annotations and file locations. The following example loads version 1.3.0 of the *emodb* dataset [9] and returns the file names and corresponding annotations stored in a table with the name 'emotion' as a pandas dataframe:

```
db = audb.load("emodb", version="1.3.0")
df = db["emotion"].get()
```

⁶<https://git-lfs.com>

⁷<https://github.com/alebedev/git-media>

⁸<https://dvc.org>

⁹<https://huggingface.co/datasets>

Table 1: Metadata entries in the header of a database. Besides the listed ones, an unlimited number of additional entries can be added.

Field	Mandatory	Description
name	yes	name of dataset
source	yes	original source, e.g. URL
usage	yes	data usage, e.g. research
author		author(s)
description		long description
expires		expiration date if applicable
languages		included languages
license		license
organization		organization

A complete list of all available functions and classes with examples is provided with the *audb* API documentation.¹⁰

3.1. Annotations, Metadata and Header

Annotations are stored as columns in tables, which are represented by CSV files named ‘db.<table id>.csv’, and cached as pickle files for faster access. Each table and column is identified by a unique ID. The rows in the tables are associated with audio files or segments of audio files, which define the index of the table. A *filewise* index is used to reference files as a whole:

```
file,emotion
a.wav,happy
b.wav,angry
```

Or if segments should be referenced, a *segmented* index with additional start and end times is used:

```
file,start,endemotion
c.wav,0 days 00:00:01.0,0 days 00:00:03.3,happy
c.wav,0 days 00:00:03.5,0 days 00:00:07.8,angry
```

Annotations that are not attached to a file or segment are organized in *misc tables* associated with custom indices, e.g. to store age and gender of the speakers:

```
speaker,age,gender
spk0,29,female
spk1,93,male
```

The tables that belong to a dataset are listed in its header together with their type and columns. The annotations stored in a column can be described by schemes, which are also defined in the header. A scheme defines the type of the annotations (bool, date, float, integer, object, string, time) and can restrict the annotations to contain only certain labels. For example, a column with annotations of emotion can be restricted to specific values like ‘happy’, ‘angry’, ‘neutral’.

Metadata not associated with annotations of a dataset are stored in its header as single fields listed in Table 1. In addition, the header stores information about attachments of the dataset and all information associated with annotations of a dataset, namely its tables, columns, schemes, raters, and splits. The header is stored in a YAML file in the root folder of the dataset.

3.2. Repositories and Backends

audb stores and loads all datasets from one or several repositories. A repository is stored on a backend, which can be located on a server or a local machine. *audb* is abstracted from

¹⁰<https://audeering.github.io/audb/api/audb.html>

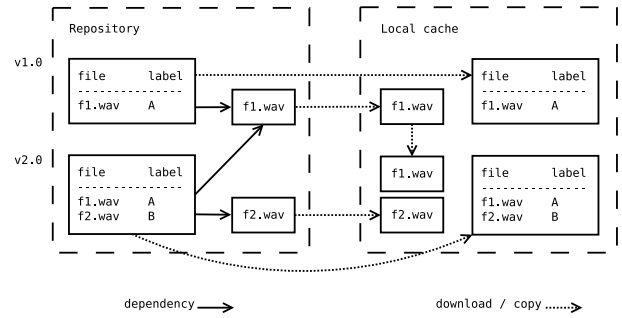


Figure 1: A dependency system ensures that only new or altered files are uploaded to the server for new dataset versions. For instance, in v2.0 a dependency to ‘f1.wav’ from v1.0 is set (left part). When the database is loaded, references are resolved and a self-contained copy of the dataset is created in the cache. If possible files are retrieved from other versions of the dataset that exist in the cache. For instance, when loading v2.0 the file ‘f1.wav’ is copied from v1.0 (right part).

the backend and supports currently a file system, an Artifactory instance, or Google Cloud Storage as backend.

Information on the repository name, host, and backend a dataset is stored in can be obtained via:

```
repo = audb.repository("emodb", version="1.3.0")
repo.name
repo.host
repo.backend
```

3.3. Publication and Versioning

To publish a first version of a dataset, all the audio files that should be included need to be located inside the root or subfolders of the dataset together with its tables and header files. Let’s consider the following small dataset with two audio files and a single table with the ID emotion, stored in the folder dataset:

```
dataset
  audio
    a.wav
    b.wav
  db.emotion.yaml
  db.yaml
```

The name of the dataset root folder doesn’t matter, the name of the dataset is defined inside its header file. The dataset can then be published as version 1.0.0 to an existing repository with:

```
audb.publish("./dataset", "1.0.0", repository)
```

The dataset header, table, and audio files are then uploaded as single ZIP files to the repository together with a dependency table storing audio metadata like sampling rate and possible dependencies to already published files, which will be important when publishing additional versions of the same database. All entries in the dependency table are also available to the user, e.g. compare the sampling rate entry in the model card in Figure 2.

When a dataset should be updated, the header, tables and optionally the audio files of the version on which the update should be based on need to be loaded. Then any file can be deleted, modified, or added to the dataset and during publication *audb* automatically identifies which files were deleted, modified, or added and only those files will be uploaded when publishing the next version of the dataset (see Figure 1). For all

other files a dependency on the version in which it was added or last modified is set instead.

For well established datasets or datasets that grow slowly over time we recommend to create a dataset repository that holds the code for publishing the different versions of a dataset and host it on services like Github where users can open issues or create pull requests to fix errors in the dataset. An example of such a dataset project for the emodb dataset [9] can be found at <https://github.com/audeerling/emodb>.

If a dataset grows constantly, or is generated by an annotation tool the publishing and updating of it can be easily automated by code as *audb* handles the versioning and only needs to upload the newly added data.

3.4. Flavors

A dataset can be loaded with its original audio files, but it can also be requested to change the bit depth, format, or sampling rate of the audio during, or request certain channels, and/or a mono mix down of the signal. Each possible combination of those requests represents a flavor of the dataset and is cached in a different folder. The usage of flavors makes it easy to ensure that all datasets used in a machine learning pipeline behave similarly, e.g. request a sampling rate of 8000 Hz:

```
db = audb.load("emodb", sampling_rate=8000)
```

3.5. Partial Loading

One can speed up loading a dataset by requesting only parts that are needed. For example, *audb* can be restricted to load only the header and tables of the dataset:

```
db = audb.load("emodb", only_metadata=True)
```

Or to load only selected tables together with the audio files listed in those tables:

```
db = audb.load("emodb", tables="emotion")
```

Or to load only selected audio files and remove all other files from the tables:

```
db = audb.load("emodb", media="wav/03a01Fa.wav")
```

3.6. Caching

When a dataset is loaded, *audb* figures out missing tables and audio files, and either copies them from other cached versions of the dataset or if that is not possible downloads them from the server (see Figure 1). If the dataset is completely cached, loading works without an internet connection. Inside the cache a single folder is created per dataset version and flavor. Other than on the server the dataset in the folder will always contain all files, including the ones which are only stored as a dependency on the server. This will consume more space, but has the advantage that the dataset is self-contained and can be shipped as or loaded with the *audformat* Python library as it represents a valid *audformat* dataset. Tables are cached as CSV files, and in addition pickled for faster reading.

3.7. Removing Audio Files From All Versions

An important requirement when storing audio recordings is the possibility to delete certain files on request from participants that created the recordings. Section 3.3 discussed how a file can be removed in an updated version of a database, but this cannot fulfill the requirement as it would leave the file in all previously

published version of the database. Deleting all older versions of the dataset in addition would fulfill the requirement, but has the disadvantage that it would break code that depends on older versions. *audb* solves this problem by providing a function that removes a list of selected audio files from all previously published datasets. This will result in the non-reproducibility of some results, but data-privacy is the more important concern in this case.

4. Comparison with Hugging Face Datasets

For versioning and publishing a dataset Hugging Face *Datasets* recommends data repositories on its Hugging Face Hub. A data repository contains documentation of the dataset and a Git repository with Git Large File Storage support to version the data. As *Datasets* provides the possibility to store so called dataset loading scripts it is possible that the actual audio files are not stored in the dataset repository, but downloaded from another place. This allows to easily include public datasets that are already stored at places like Zenodo. As a consequence of the loading script approach *Datasets* cannot know how the relationship between an audio file with the same name between two versions of the dataset might be, and will always need to download all the data of a new version for caching it. *audb* requires that audio files are published as part of the dataset and it always knows the relationship between files in different version of the dataset, which means it only needs to download new or changed files when loading a new version of a dataset into cache. Another disadvantage of the dataset loading script is that it might take a very long time to generate the dataset when loading it the first time as millions of annotation lines might be needed to be parsed and converted between row and column representations.

audb provides the possibility to download single audio files from a dataset, whereas with *Datasets* this is only possible if the creator of the dataset ensures it by packaging each audio file in a single archive and use the same name for the archive as for the audio file in order to be able to address it during download. The usual approach for audio datasets with *Datasets* is to provide its splits as the smallest dataset unit, e.g. as it is the case for *librispeech_asr*¹¹.

Datasets has an emphasis on samples, which means all audio data and annotations related to a specific sample are bond to it and need to be stored with it. Whereas with *audb* the connection between audio files and annotations is not strictly bond. With the help of the segmented index type *audb* can refer to a part of an audio file without the need to store the actual segment as a different file. This is more efficient if a dataset contains overlapping segments, or its segmentation is updated, e.g. by using a different voice activity detector. It further allows an easy mapping between annotations stored in different tables. For example, consider the following three tables:

```
# ID: speaker
speaker, age
spk01, 19
spk02, 21
```

```
# ID: files
file, speaker
a.wav, spk01
b.wav, spk02
```

```
# ID: emotion
file, start, end, emotion
```

¹¹https://huggingface.co/datasets/librispeech_asr

```
a.wav,0,0 days 00:00:01,happy
a.wav,0,0 days 00:00:02,ca lm
```

If the 'speaker' table is used as labels in the scheme corresponding to the 'speaker' column in the 'files' table, one can request to get samples corresponding to the segmentation provided by the 'emotion' table, but containing age as annotation:

```
db["files"]["speaker"].get(
    index=db["emotion"].index,
    map="age",
)
```

The result would be a pandas Series representing the age column of the following table:

```
file,start,end,age
a.wav,0,0 days 00:00:01,19
a.wav,0,0 days 00:00:02,19
```

5. Use Cases

5.1. Browsing and Searching Datasets

audb provides the possibility to list all available datasets allowing us to loop through them and parse information in a standardized way.

```
datasets = audb.available(only_latest)
```

The extracted information can then be used to fill up a database to query all datasets that contain a certain scheme as shown in this very basic example:

```
# Fill scheme search database
schemes = {}
for name, version in datasets.version.items():
    schemes = list(
        audb.info.schemes(name, version=version)
    )
# Search for datasets with emotion scheme
emotional_datasets = [
    name for name in schemes
    if "emotion" in schemes[name]
]
```

The parsed information can also be used to create documentation in the form of data cards or datasheets [2] as the metadata and the annotations are provided in a well defined interface. Figure 2 shows an example data card for the *emodb* dataset [9]. It summarizes short facts in a tabular form, provides a long description of the database together with an audio example and then lists all available tables, columns, and schemes of the dataset. Data cards for all datasets available with the default public repositories of *audb* are available at <https://audeerling.github.io/datasets/>.

5.2. Fine-tuning a Model for Emotion Recognition

With the success of foundation models [10] also in the paralinguistic community it is a common task to fine-tune an existing model on data related to the task it should learn. The following example highlights how easy the fine-tuning can be adjusted to different tasks and datasets due to the standardized interface *audb* and *audinterface* provide.

Let's assume we have a model callable in Python that takes signal and sampling rate as two arguments and returns a 1024 dimensional embedding as output. *audinterface* provides an interface for the model to work on whole datasets by:

The screenshot shows the 'emodb' data card. It includes a metadata table with fields like version (1.3.0), license (CC-BY 4.0), source (http://emodb.bilderbar.info/download/download.zip), and format (wav). Below the metadata is a 'Description' section explaining that it is a German database of emotional utterances. An 'Example' section shows a small audio waveform and its corresponding file path.

Tables

ID	Type	Columns
emotion	float	emotion, emotion_confidence
emotion.categories.trans.gdnl_standard	float	emotion, emotion_confidence
emotion.categories.trans.gdnl_standard	float	emotion, emotion_confidence
files	float	duration, speaker, transcription
speaker	misc	age, gender, language

Schemes

ID	Dtype	Min	Max	Labels	Mappings
age	int	0			
confidence	float	0	1		
duration	time				
emotion	str			anger, boredom, disgust, fear, happiness, neutral, sadness	
gender	str			female, male	
language	str				
speaker	int	1, 8, 9, 10, 11, 12, 13, 14, 15, 16			age, gender, language
transcription	str	401, 402, 404, 405, 407, 408, 409, 410, 411			/

Figure 2: Data card for *emodb* [9] showing a description of the dataset, metadata on author, license, duration, presenting an audio example, and listing all available tables, columns, and schemes of the dataset.

```
feature_extractor = audinterface.Process(
    process_func=model,
    num_workers=4,
)
```

We can then load a dataset and extract the embeddings to train a linear model on it to predict the emotion label.

```
db = audb.load("emodb", version="1.3.0")
labels = db["emotion"]["emotion"].get()
features = feature_extractor.process_index(
    labels.index
)
```

For a full example see <https://github.com/audeerling/w2v2-how-to/blob/main/notebook.ipynb>.

6. Conclusion

The recent success of foundation models [10] in the paralinguistic and audio community has highlighted the need for a large number of different datasets to benchmark and evaluate the behavior when fine-tuning them on specific tasks [11]. The Python library *audb* can help by providing a common interface to load, combine, and access any number of audio task related datasets. It further allows to version datasets, to automatically publish and update datasets to local or remote servers, and to share data easily with selected individuals or whole communities. We published a selection of publicly available datasets with a focus on the speech emotion recognition community in a public repository. The repository is pre-configured in *audb* and the datasets can directly be accessed. For a list of available datasets take a look at <https://audeerling.github.io/datasets/>.

7. Acknowledgements

The authors would like to thank Baha Eddine Abrougui, Christian Geng, Stephan Huber, Andreas Triantafyllopoulos, Damiano Zanardo for their contributions, and the pandas community for providing the basis for *audb*.

8. References

[1] N. Scheidwasser-Clow, M. Kegler, P. Beckmann, and M. Cernak, "Serab: A multi-lingual benchmark for speech emotion

- recognition,” in *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022, pp. 7697–7701. DOI: 10.1109/ICASSP43922.2022.9747348.
- [2] T. Gebru, J. Morgenstern, B. Vecchione, J. W. Vaughan, H. Wallach, H. D. Iii, and K. Crawford, “Datasheets for datasets,” *Communications of the ACM*, vol. 64, no. 12, pp. 86–92, 2021.
- [3] V. C. Stodden and Yale Roundtable Participants, “Reproducible research: Addressing the need for data and code sharing in computational science,” *IEEE Computing in Science and Engineering*, vol. 12, no. 5, pp. 8–13, 2010. DOI: 10.1109/MCSE.2010.113.
- [4] A. Purcell, *CERN and OpenAIREplus launch new european research repository*, <https://sciencenode.org/feature/cern-and-openaireplus-launch-new-european-research-repository.php>, Accessed: 2023-02-21, 2013.
- [5] *ISO 26324:2022(en), information and documentation – digital object identifier system*, <https://www.iso.org/obp/ui/#iso:std:iso:26324:ed-2:v1:en>, Accessed: 2023-02-21, International Organization for Standardization, 2022.
- [6] P. Herterich and S. Dallmeier-Tiessen, “Data citation services in the high-energy physics community,” *D-Lib Magazine*, vol. 22, no. 1/2, 2016.
- [7] P. Majdak, Y. Iwaya, T. Carpentier, R. Nicol, M. Parmentier, A. Roginska, Y. Suzuki, K. Watanabe, H. Wierstorf, H. Ziegelwanger, and M. Noisternig, “Spatially oriented format for acoustics: A data exchange format representing head-related transfer functions,” in *134th Convention of the Audio Engineering Society*, Roma, Italy, 2013.
- [8] Q. Lhoest, A. Villanova del Moral, Y. Jernite, A. Thakur, P. von Platen, S. Patil, J. Chaumond, M. Drame, J. Plu, L. Tunstall, J. Davison, M. Šaško, G. Chhablani, B. Malik, S. Brandeis, T. Le Scao, V. Sanh, C. Xu, N. Patry, A. McMillan-Major, P. Schmid, S. Gugger, C. Delangue, T. Matussière, L. Debut, S. Bekman, P. Cistac, T. Goehringer, V. Mustar, F. Lagunas, A. Rush, and T. Wolf, “Datasets: A community library for natural language processing,” in *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, Online and Punta Cana, Dominican Republic: Association for Computational Linguistics, 2021, pp. 175–184. DOI: 10.18653/v1/2021.emnlp-demo.21.
- [9] F. Burkhardt, A. Paeschke, M. Rolfes, W. F. Sendlmeier, B. Weiss, *et al.*, “A database of German emotional speech,” in *Proceedings of the Annual Conference of the International Speech Communication Association (INTERSPEECH)*, vol. 5, Lisbon, Portugal: ISCA, 2005, pp. 1517–1520.
- [10] R. Bommasani, D. A. Hudson, E. Adeli, R. Altman, S. Arora, S. von Arx, M. S. Bernstein, J. Bohg, A. Bosselut, E. Brunskill, *et al.*, “On the opportunities and risks of foundation models,” *arXiv preprint arXiv:2108.07258*, 2021.
- [11] J. Turian, J. Shier, H. R. Khan, B. Raj, B. W. Schuller, C. J. Steinmetz, C. Malloy, G. Tzanetakis, G. Velarde, K. McNally, M. Henry, N. Pinto, C. Noufi, C. Clough, D. Herremans, E. Fonseca, J. Engel, J. Salamon, P. Esling, P. Manocha, S. Watanabe, Z. Jin, and Y. Bisk, “HEAR: Holistic Evaluation of Audio Representations,” in *Proceedings of the NeurIPS 2021 Competitions and Demonstrations Track*, D. Kiela, M. Ciccone, and B. Caputo, Eds., vol. 176, PMLR, 2022, pp. 125–145.