

End-to-End Speech Recognition: A Survey

Rohit Prabhavalkar, *Member, IEEE*, Takaaki Hori, *Senior Member, IEEE*, Tara N. Sainath, *Fellow, IEEE*, Ralf Schlüter, *Senior Member, IEEE*, and Shinji Watanabe, *Fellow, IEEE*

Abstract—In the last decade of automatic speech recognition (ASR) research, the introduction of deep learning brought considerable reductions in word error rate of more than 50% relative, compared to modeling without deep learning. In the wake of this transition, a number of all-neural ASR architectures were introduced. These so-called *end-to-end* (E2E) models provide highly integrated, completely neural ASR models, which rely strongly on general machine learning knowledge, learn more consistently from data, while depending less on ASR domain-specific experience. The success and enthusiastic adoption of deep learning accompanied by more generic model architectures lead to E2E models now becoming the prominent ASR approach. The goal of this survey is to provide a taxonomy of E2E ASR models and corresponding improvements, and to discuss their properties and their relation to the classical hidden Markov model (HMM) based ASR architecture. All relevant aspects of E2E ASR are covered in this work: modeling, training, decoding, and external language model integration, accompanied by discussions of performance and deployment opportunities, as well as an outlook into potential future developments.

Index Terms—end-to-end, automatic speech recognition.

I. INTRODUCTION

The classical¹ statistical architecture decomposes an ASR system into four main components: acoustic feature extraction from speech audio signals, acoustic modeling, language modeling and search based on Bayes decision rule [1], [2]. Classical acoustic modeling is based on hidden Markov models (HMM) to account for speaking rate variation. Within the classical approach, deep learning has been introduced to acoustic and language modeling. In acoustic modeling, deep learning replaced Gaussian mixture distributions (hybrid HMM [3], [4]) or augmented the acoustic feature set (nonlinear discriminant/tandem approach [5], [6]). In language modeling, deep learning replaced count-based approaches [7], [8], [9]. However, when introducing deep learning, the classical ASR architecture was not yet touched. Classical state-of-the-art ASR systems today are composed of many separate components and knowledge sources, especially speech signal preprocessing, methods for robustness w.r.t. recording conditions, phoneme inventories and pronunciation lexica, phonetic clustering, handling of out-of-vocabulary words, various methods for adaptation/normalization, elaborate training schedules with different objectives and incl. sequence discriminative training, etc. The potential of deep learning on the other hand initiated successful approaches to integrate formerly separate modeling steps, e.g. integrating speech signal preprocessing and feature extraction into acoustic modeling [10], [11].

¹ The term “classical” here refers to the former long-term state-of-the-art ASR architecture based on the decomposition into acoustic and language model and with acoustic modeling based on hidden Markov models.

More consequently, the introduction of deep learning to ASR also initiated research to replace classical ASR architectures based on hidden Markov models (HMM) with more integrated joint neural network model structures [12], [13], [14], [15]. These ventures might be seen as trading specific speech processing models for more generic machine learning approaches to sequence-to-sequence processing, maybe in a similar way as statistical approaches to natural language processing used to replace more linguistically oriented models. For these all-neural approaches recently the term *end-to-end* (E2E) [16], [17], [13], [18] has been established. However, it lacks distinction in many ways. Therefore, first of all an attempt to defining the term *end-to-end* in the context of ASR is due in this survey.

According to the Cambridge Dictionary, the adjective “end-to-end” is defined by: “including all the stages of a process” [19]. This can be regarded from a number of perspectives:

a) *Joint Modeling*: In terms of ASR, the E2E property might be understood as considering all components of an ASR system jointly as a single computational graph. Even more so, the common understanding of E2E in ASR is that of a single joint modeling approach that does not necessarily distinguish separate components, which also may mean dropping the classical separation of ASR into an acoustic model and a language model.

b) *Single-Pass Search*: In terms of the recognition/search problem, the E2E property can be interpreted as integrating all components (models, knowledge sources) of an ASR system before coming to a decision. This is in line with Bayes’ decision rule, which exactly requires a single global decision integrating all available knowledge sources.

c) *Joint Training*: In terms of model training, E2E suggests estimating all parameters of all components of a model jointly using a single objective function that is consistent with the task at hand, which in case of ASR means minimizing the expected word error rate.

d) *Training Data*: Joint training of an integrated model implies using a single kind of training data, which in case of ASR would be transcribed speech audio data. However, in ASR often even larger amounts of text-only data, as well as optional untranscribed speech audio are available. One of the challenges of E2E modeling therefore is how to take advantage of text-only and audio-only data [20], [21].

e) *Training from Scratch*: The E2E property can also be interpreted for the training process itself, by requiring training *from scratch* avoiding external knowledge like prior alignments or initial models pre-trained using different criteria and/or knowledge sources. Note that pre-training and fine-tuning strategies are also important in some scenarios, if the model has explicit modularity, including self-supervised learn-

ing [22] or joint training of front-end and speech recognition models [23].

f) Secondary Knowledge Sources: For ASR, standard secondary knowledge sources are pronunciation lexica and phoneme sets, as well as phonetic clustering, which in classical state-of-the-art ASR systems usually is based on classification and regression trees (CART) [24]. Secondary knowledge sources and separately trained components may introduce errors, might be inconsistent with the overall training objective and/or may generate additional cost. Therefore, in an E2E approach, these would be avoided.

g) Vocabulary Modeling: Avoiding pronunciation lexica and corresponding subword units would limit E2E recognition vocabularies to be based on whole word or character models. Whole word models [25], according to Zipf’s law [26], would require unrealistically high amounts of transcribed training data for large vocabularies, which might not be attainable for many tasks. On the other hand, methods to generate subword vocabularies based on characters, like the currently popular byte pair encoding (BPE) approach [27], might be seen as secondary approaches outside the E2E objective.

h) Generic vs. Informed Modeling: Finally, E2E may also be seen in terms of the genericity of the underlying modeling: are task-specific constraints learned from data completely, or does task-specific knowledge enter modeling the system architecture in the first place? For example, the monotonicity constraint in ASR may be learned completely from data like in attention-based E2E approaches [15], or it may directly be implemented, as in classical HMM structures.

Overall, end-to-end ASR therefore can be defined as an *integrated ASR model that enables joint training and recognition consistently minimizing expected word error rate, avoiding separately obtained knowledge sources.*

However, what are potential benefits of E2E approaches to ASR? The primary objective when developing ASR systems is to minimize the expected word error rate. However, secondary objectives are to reduce time and memory complexity of the resulting decoder, and - assuming a constrained development budget - genericity and ease of modeling.

First of all, defining an ASR system E2E in terms of a single neural network structure supports modeling genericity and may allow for faster development cycles when building ASR systems for new languages/domains. ASR models defined by a single neural network structure may become more lean compared to classical modeling, and the decoding process becomes simpler as it does not need to integrate separate models. The resulting reduction in memory footprint and power consumption supports embedded ASR applications [28].

Furthermore, joint training E2E may help to avoid spurious optima from intermediate training stages. Avoiding secondary knowledge sources like pronunciation lexica may be helpful for languages/domains where such resources are not easily available. Also, secondary knowledge sources may itself be erroneous. Avoiding these supports improved models trained directly from data, provided that sufficient amounts of task-specific training data are available.

With the current surge of interest in E2E ASR models and an increasing diversity of corresponding work, the authors of this review think it is time to provide an overview of this rapidly evolving domain of research. The goal of this survey is to provide an in-depth overview of the current state of research w.r.t. E2E ASR systems, covering all relevant aspects of E2E ASR and including a contrastive discussion of the different E2E and classical ASR architectures.

This survey of E2E speech recognition is structured as follows. Sec. II describes the historical evolution of E2E speech recognition, with specific focus on the input/output alignment and an overview of currently prominent basic E2E ASR models. Sec. III discusses improvements of the basic E2E models, incl. E2E model combination, training loss functions, context, encoder/decoder structures and endpointing. Sec. IV provides an overview of E2E ASR model training. Decoding algorithms for the different E2E approaches are discussed in Sec. V. Sec. VI discusses the role and integration of (separate) language models in E2E ASR. In Sec. VII, the relationship between novel E2E models and classical, HMM-based ASR approaches are discussed. Sec. VIII reviews experimental comparisons of the different E2E as well as classical ASR approaches. Sec. IX gives an overview of applications of E2E ASR approaches. Sec. X investigates future directions of E2E research in ASR, followed by final conclusions in Sec. XI.

II. A TAXONOMY OF E2E MODELS IN ASR

Before we discuss the details of various E2E modeling approaches, we first introduce our notation. We denote the input speech utterance as X , which we assume has been parameterized into D -dimensional acoustic frames (e.g., log-mel features) of length T' : $X = (\mathbf{x}_1, \dots, \mathbf{x}_{T'})$, where $\mathbf{x}_t \in \mathbb{R}^D$. We denote the corresponding word sequences as C , which can be decomposed into a suitable sequence of labels of length L : $C = (c_1, \dots, c_L)$, where each label $c_j \in \mathcal{C}$. Our description is agnostic to the specific representation used for decomposing the word sequence into labels; popular choices include characters, words, or sub-word sequences (e.g., BPE [27], word-pieces [29]). All E2E models consist of an *encoder* module, denoted by $H(X)$, which maps the input acoustic frame sequence of length T' into a higher-level representation, $H(X) = (\mathbf{h}_1, \dots, \mathbf{h}_T)$ of length T (typically $T \leq T'$). Once again, our discussion is agnostic to the specific modeling choices that are involved in the design of the neural network used to implement the function $H(X)$ – e.g., this might involve recurrent neural networks (either uni-directional or bi-directional) [30], convolutional networks, or transformers [31]. Given a set of training examples, \mathcal{T} , consisting of N pairs of utterances and corresponding transcripts: $\mathcal{T} = \{(X_i, C_i)\}_{i=1}^N$, our goal is to train a model to estimate the conditional distribution over all possible transcripts, given the input acoustics: $P(C|X) = P(C|H(X))$.

Broadly speaking, one of the challenges in estimating $P(C|X)$ with E2E models is the need to account for the unknown alignments between the acoustic frame sequences and the corresponding label sequences of length T and L , respectively. In classical ASR models, these frame-level alignments

can be modeled with hidden Markov models (HMMs), while using generative Gaussian mixture models (GMMs) or neural networks to model the output distribution of acoustic frames; frame-level alignments to train neural network acoustic models may be obtained by force-alignment from a base GMM-HMM systems, but direct sequence training not requiring initial alignments also is possible [32]. While alignment for phonetic label sequences, as usually done in classical ASR systems, seems natural; E2E-based systems usually employ (sub-)word units based on characters. However, a notion of character-level alignments seems less clear². Therefore, in this work, we categorize various E2E modeling approaches based on how the system models this alignment – whether this is done explicitly or implicitly.

Early E2E modeling approaches *modeled alignments explicitly* through a latent variable, which is marginalized out (possibly, approximately) during training and inference. Examples of this family of approaches include connectionist temporal classification (CTC) [12], the recurrent neural network transducer (RNN-T) [13], the recurrent neural aligner (RNA) [33], and the hybrid auto-regressive transducer [34] (HAT). As will be discussed in subsequent sections, the latter modeling approaches in this family represent increasingly sophisticated modeling of alignments, with fewer independence assumptions and are thus increasingly powerful. At the other end of the spectrum, we find attention-based encoder-decoder models which were first popularized in the context of machine translation [35]. Unlike explicit alignment models such as CTC, attention-based encoder-decoder models use an attention mechanism [36] to learn a correspondence between the entire acoustic sequence and the individual labels. Finally, there is a body of work that lies in between these two extremes: models such as the neural transducer [37], or those based on monotonic alignments [38] and its variants (e.g., monotonic chunkwise alignments (MoChA) [39], monotonic infinite look-back (MILK) [40] etc.) use an explicit alignment model, while also utilizing an attention mechanism that allows the model to *examine local acoustics* in order to refine predictions. We describe each of these models in order in the remainder of this section.

A. Explicit Alignment E2E Approaches

Explicit alignment approaches such as CTC, RNN-T, or RNA, define an explicit latent variable corresponding to the alignments between the T -length encoder output, $H(X)$, and the L -length output sequence; each approach differs in how it defines the alignment which in turn determines the underlying probabilistic conditional independence assumptions and the process of training and decoding in the respective models. A common feature of all explicit alignment models is that they introduce an additional *blank* symbol, denoted $\langle b \rangle$, and define an output probability distribution over symbols in the

² For example, in languages such as English the correspondence between orthography and pronunciation is not straightforward: a word such as *knife* can be decomposed into its constituent phonemes *n a y f* which can be associated to individual acoustic frames, but it is less clear what frames should correspond to the silent character *k* in the word when considering its representation as a character sequence.

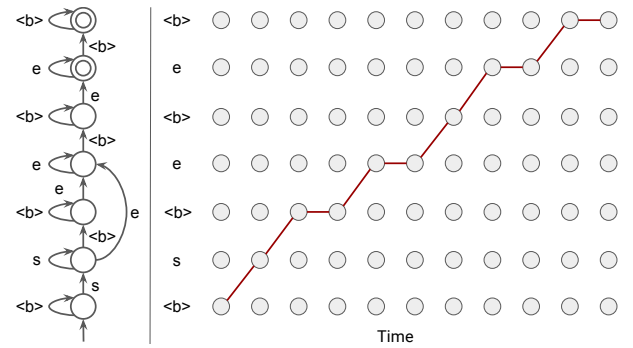


Fig. 1. Example alignment sequence for a CTC model with the target sequence $C = (s, e, e)$ (right), alongside a (non-deterministic) finite state automaton (FSA) [41] (left) representing the set of all valid alignment paths.

set $\mathcal{C}_b = \mathcal{C} \cup \{\langle b \rangle\}$. The interpretation of the $\langle b \rangle$ symbol varies slightly between each of these models, as we discuss in greater details below. For now, it suffices to say that given a specific training example, (X, C) , each of these models defines a set of *valid alignments*, denoted by $\mathcal{A}_{(T,C)}$, and defines the conditional distribution $P(C|X)$ by marginalizing over all valid alignment sequences:

$$\begin{aligned} P(C|X) &= P(C|H(X)) = \sum_A P(C|A, H(X))P(A|H(X)) \\ &= \sum_{A \in \mathcal{A}_{(T,C)}} P(A|H(X)) \end{aligned} \quad (1)$$

where, by definition $P(C|A, H(X)) = 1$ if and only if $A \in \mathcal{A}_{(T,C)}$ and 0 otherwise, which also means that the mapping from an alignment A to a label sequence C is defined to be unique. We discuss the specific formulations of each of these models in the subsequent sections.

1) Connectionist Temporal Classification (CTC): Connectionist Temporal Classification (CTC) was proposed by Graves et al. [12] as a technique for mapping a sequence of input tokens to a corresponding sequence of output tokens. CTC explicitly models alignments between the encoder output, $H(X)$, and the label sequence, C , by introducing a special “blank” label, denoted by $\langle b \rangle$: $\mathcal{C}_b = \mathcal{C} \cup \{\langle b \rangle\}$. An alignment, $A \in \mathcal{C}_b^*$, is thus a sequence of labels in \mathcal{C} or $\langle b \rangle$. Given a specific training example, (X, C) , we denote the set of all valid alignments, $\mathcal{A}_{(X,C)}^{\text{CTC}} = \{A = (a_1, a_2, \dots, a_T)\}$, such that each $a_t \in \mathcal{C}_b$ with the additional constraint that A is identical to C after first collapsing consecutive identical labels, and then removing all blank symbols. For example, if $T = 10$, and $C = (s, e, e)$, then $A = (s, \langle b \rangle, \langle b \rangle, e, e, \langle b \rangle, e, e, \langle b \rangle, \langle b \rangle) \in \mathcal{A}_{(X,C)}^{\text{CTC}}$, as illustrated in Figure 1. As can be seen in this example, repeated labels in the output can be represented by intervening blanks.

Following Eq. (1), CTC defines the posterior probability of the label sequence C conditioned on the input, X , by




Fig. 2. A representation of the CTC model consisting of an encoder which maps the input speech into a higher-level representation, and a softmax layer which predicts frame-level probabilities over the set of output labels and blank.

marginalizing over all possible CTC alignments as:

$$\begin{aligned}
 P_{\text{CTC}}(C|X) &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{CTC}}} P(A|H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{CTC}}} \prod_{t=1}^T P(a_t|a_{t-1}, \dots, a_1, H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{CTC}}} \prod_{t=1}^T P(a_t|h_t) \quad (2)
 \end{aligned}$$

Critically, as can be seen in Eq. (2), CTC makes a strong independence assumption that the model’s output at time t is conditionally independent of the outputs at other timesteps, given the local encoder output at time t .

Thus, a CTC model consists of a neural network that models the distribution $P(a_t|X)$, at each step as shown in Figure 2. For example, this can be accomplished using a neural network, which we refer to as the encoder; popular choices include deep convolutional networks, or deep recurrent neural network (RNN) such as a network with long short-term memory (LSTM) cells [30]. The encoder (which may be uni- or bi-directional) converts the input acoustic frames, X , into an encoded representation, $H = (\mathbf{h}_1, \dots, \mathbf{h}_T)$, where $\mathbf{h}_t \in \mathbb{R}^k$. The encoder is connected to a softmax layer with $|\mathcal{C}_b|$ targets representing the individual probabilities in Eq. (2): $P(a_t = c|X) = P(a_t = c|H(X))$. Thus, at each step, t , the model consumes a single encoded frame h_t and outputs a distribution over the labels; in other words, the model “outputs” a single label either blank, $\langle b \rangle$, or one of the targets in \mathcal{C} .

2) *Recurrent Neural Network Transducer (RNN-T)*: The Recurrent Neural Network Transducer (RNN-T) [13], [42] was proposed by Graves as an improvement over the basic CTC model [12], by removing some of the conditional independence assumptions that we discussed previously. The RNN-T model, which is depicted in Figure 3, is best understood by contrasting it against the CTC model. As with CTC, the RNN-T model augments the output symbols with the blank symbol, and thus defines a distribution over label sequences in \mathcal{C}_b . Similarly, as with CTC, the model consists of an encoder which processes the input acoustic frames X to generate the encoded representation $H(X) = (\mathbf{h}_1, \dots, \mathbf{h}_T)$.

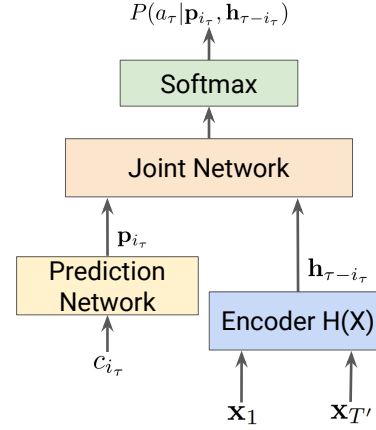


Fig. 3. An RNN-T Model [13], [42] consists of an encoder which transforms the input speech frames into a high-level representation, and a prediction-network which models the sequence of non-blank labels that have been output previously. The prediction network output, $p_{i_{\tau}}$, represents the output after producing the previous non-blank label sequence $c_1, \dots, c_{i_{\tau}}$. The joint network produces a probability distribution over the output symbols (augmented with blank) given the prediction network state and a specific encoded frame.

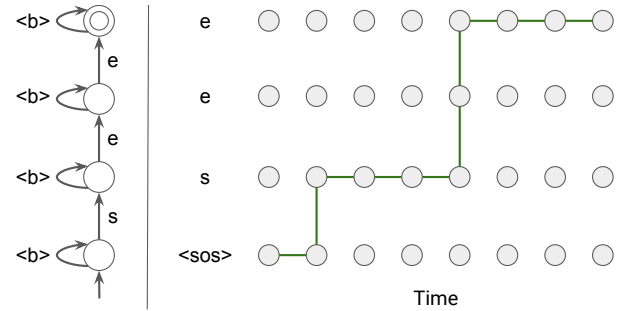


Fig. 4. Example alignment sequence (right) for an RNN-T model with the target sequence $C = (s, e, e)$. Horizontal transitions in the image correspond to blank outputs. The FSA (left) represents the set of all valid RNN-T alignment paths.

Unlike CTC, however, the blank symbol in RNN-T has a slightly different interpretation; for each input encoder frame, \mathbf{h}_t , the RNN-T model outputs a sequence of zero or more symbols in \mathcal{C} which are terminated by a single blank symbol. Thus, we may define the set of all valid alignment sequences in RNN-T as: $\mathcal{A}^{\text{RNN-T}}(X, C) = \{A = (a_1, a_2, \dots, a_{T+L})\}$, the set of all sequences of $T + L$ symbols in \mathcal{C}_b^* , which are identical to C after removing all blanks. Finally, for a given output position τ , let i_{τ} denote the number of non-blank labels in the partial sequence $(a_1, \dots, a_{\tau-1})$. Thus, the number of blanks in the partial sequence $(a_1, \dots, a_{\tau-1})$ is $\tau - i_{\tau} - 1$. For example, if $T = 7$, and $C = (s, e, e)$, then $A = (\langle b \rangle, s, \langle b \rangle, \langle b \rangle, \langle b \rangle, e, e, \langle b \rangle, \langle b \rangle, \langle b \rangle) \in \mathcal{A}_{(X,C)}^{\text{RNN-T}}$. Note that, unlike the CTC model, repeated labels in the output require no special treatment as illustrated in Figure 4; $i_1 = i_2 = 0; i_3 = i_4 = 1; i_{10} = 3$; etc.

We may then define the posterior probability $P(C|X)$ as

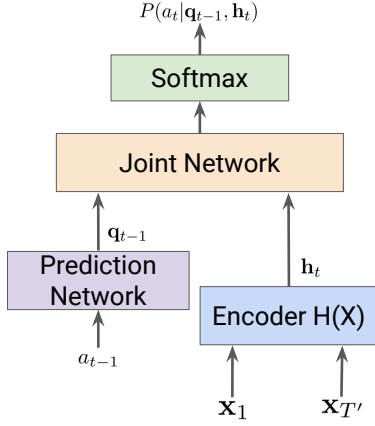


Fig. 5. An RNA Model [33] resembles the RNN-T model [13], [42] in terms of the model structure. However, this model is only permitted to output a single label – either blank, or non-blank – in a single frame. Unlike RNN-T, the prediction network state in the RNA model, \mathbf{q}_{t-1} , depends on the entire alignment sequence a_{t-1}, \dots, a_1 . The joint network produces a probability distribution over the output symbols (augmented with blank) given the prediction network state and a specific encoded frame.

before:

$$\begin{aligned}
 P_{\text{RNNT}}(C|X) &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNNT}}} P(A|H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNNT}}} \prod_{\tau=1}^{T+L} P(a_{\tau}|a_{\tau-1}, \dots, a_1, H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNNT}}} \prod_{\tau=1}^{T+L} P(a_{\tau}|c_{i_{\tau}}, c_{i_{\tau}-1}, \dots, c_0, \mathbf{h}_{\tau-i_{\tau}}) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNNT}}} \prod_{\tau=1}^{T+L} P(a_{\tau}|\mathbf{p}_{i_{\tau}}, \mathbf{h}_{\tau-i_{\tau}})
 \end{aligned} \tag{3}$$

where, $P = (\mathbf{p}_1, \dots, \mathbf{p}_L)$ represents the output of the *prediction network* depicted in Figure 3 which summarizes the sequence of previously predicted non-blank labels, implemented as another neural network: $\mathbf{p}_j = \text{NN}(\cdot|c_0, \dots, c_{j-1})$, where c_0 is a special start-of-sentence label, $\langle \text{sos} \rangle$. Thus, as can be seen in Eq. (2), RNN-T reduces some of the independence assumptions in CTC since we model the output at time t is conditionally dependent on the sequence of previous non-blank predictions, but is independent of the specific choice of alignment (i.e., the choice of the frames at which the non-blank tokens were emitted).

Finally, we note that the work in [43] generalizes the basic RNN-T model by allowing the set of valid frame-level alignments to be represented as an arbitrary graph; the forward-backward algorithm required to compute the conditional probability distributions can be generalized suitably over the graph. This formulation, for example, allows for the use of “ctc-like” alignments in the RNN-T model (i.e., outputting a single label – blank, or non-blank – at each frame) while conditioning on the set of previous non-blank symbols as in the RNN-T model.

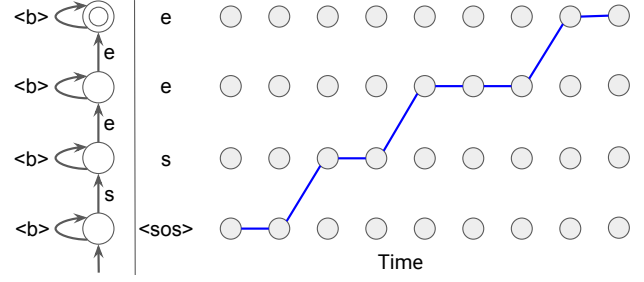


Fig. 6. Example alignment sequence (right) for an RNA model with the target sequence $C = (s, e, e)$. Horizontal transitions in the image correspond to blank outputs; diagonal transitions correspond to outputting a non-blank symbol. The FSA (left) represents the set of valid alignments for the RNA model. Although the FSA is identical to the corresponding FSA for RNN-T in Figure 4, the semantics of the $\langle b \rangle$ label are different in the two cases.

3) *Recurrent Neural Aligner (RNA)*: The recurrent neural aligner (RNA) was proposed by Sak et al. [33]. The RNA model generalizes the RNN-T model by removing one of its conditional independence assumptions. The model, depicted in Figure 5, is best understood by considering how it differs from the RNN-T model. As with CTC and RNN-T, the RNA model defines a probability distribution over blank augmented labels in the set \mathcal{C}_b , where $\langle b \rangle$ has the same semantics as in the CTC model: at each frame the model can only output a single label – either blank, or non-blank – before advancing to the next frame; unlike CTC (but as in RNN-T) the model only outputs a single instance of each non-blank label. More specifically, the set of valid alignments, $\mathcal{A}_{(X,C)}^{\text{RNA}} = (a_1, \dots, a_T)$, in the RNA model consist of length T sequences in \mathcal{C}_b^* with exactly $T - L$ blank symbols, and which are identical to C after removing all blanks. Thus, the blank symbol has a different interpretation in RNA and the RNN-T models: in RNN-T, outputting a blank symbol advances the model to the next frame; in RNA, however, the model advances to the next frame after outputting a single blank or non-blank label. Restricting the model to output a single non-blank label at each frame improves computational efficiency and simplifies the decoding process, by limiting the number of model expansions at each frame (cf. RNN-T decoding). For example, if $T = 8$, and $C = (s, e, e)$, then $A = (\langle b \rangle, s, \langle b \rangle, e, \langle b \rangle, \langle b \rangle, e, \langle b \rangle) \in \mathcal{A}_{(X,C)}^{\text{RNA}}$ as illustrated in Figure 6.

The RNA posterior probability, $P(C|X)$, is defined as:

$$\begin{aligned}
 P_{\text{RNA}}(C|X) &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNA}}} P(A|H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNA}}} \prod_{t=1}^T P(a_t|a_{t-1}, \dots, a_1, H(X)) \\
 &= \sum_{A \in \mathcal{A}_{(X,C)}^{\text{RNA}}} \prod_{t=1}^T P(a_t|\mathbf{q}_{t-1}, \mathbf{h}_t)
 \end{aligned} \tag{4}$$

where, as before i_t denotes the number of non-blank symbols in the partial alignment sequence (a_1, \dots, a_{t-1}) , and $\mathbf{q}_{t-1} = \text{NN}(\cdot|a_{t-1}, \dots, a_1)$ represents the output of a neural network which summarizes the entire partial alignment

sequence, where $\text{NN}(\cdot)$ represents a suitable neural network (an LSTM in [33]). Thus, RNA removes the one remaining conditional independence assumption of the RNN-T model, by conditioning on the sequence of previous non-blank labels *as well as the alignment that generated them*.

Since the RNA model conditions on both the sequence of non-blank labels (as in RNN-T), as well as the specific frames at which these are emitted, the exact computation of the log-likelihood in Eq. (3) (and corresponding gradients) is intractable. Instead, RNA makes a simplifying assumption by utilizing the RNN-T states in the decoder RNN $\text{NN}(\cdot)$ corresponding to the most likely alignment path, while exploiting the constraint that the model can only output a single label (blank or non-blank) at each frame. The latter constraint – allowing only a single label (blank or non-blank) at each frame – has also been explored in the context of the monotonic RNN-T model [44]. Finally, we note that the work in [45] further generalizes the RNA model by employing two RNNs when defining the state: a slow RNN (which corresponds to the sequence of previously predicted non-blank labels), and a fast RNN (which also conditions on the frames at which the non-blank labels were output).

B. Implicit Alignment E2E Approaches

One of the main benefits of the explicit alignment approaches such as CTC, RNN-T, or RNA is that they result in ASR models that are easily amenable to *streaming* – i.e., assuming that the neural network used to generate encoder features $H(X)$ can produce encoded frames based on only the sequence of previous acoustic features with limited look-ahead, then the models can output hypotheses as speech is input to the system. However, there are a number of applications where *offline speech processing* may be appropriate: i.e., where all of the input speech is fed into the system before any outputs are produced. In this section, we discuss the attention-based encoder-decoder (AED) models (also known as, listen-attend-and-spell (LAS)) [14], [15], [46], which employs the *attention mechanism* [36] to implicitly identify and model the portions of the input acoustics which are relevant to each output unit. The attention mechanism thus avoids the need for explicit modeling of alignments in the basic AED model.

In the streaming explicit alignment approaches presented in Section II-A, during inference, the model continues to output symbols until it has processed the final frame at which point the decoding process is complete; similarly, during training, the forward-backward algorithm aligns over all possible alignment sequences. Since an AED model processes the entire acoustic sequence at once, the model needs a mechanism by which it can indicate that it is done emitting all output symbols. This is achieved by augmenting the set of outputs with an end-of-sentence symbol, $\langle \text{eos} \rangle$, so that the output vocabulary consists of the set $\mathcal{C}_{\text{eos}} = \mathcal{C} \cup \{\langle \text{eos} \rangle\}$. Thus, the AED model, depicted in Figure 7, consists of an encoder network – which encodes the input acoustic frame sequence, $X = (\mathbf{x}_1, \dots, \mathbf{x}_{T'})$, into a higher-level representation $H(X) = (\mathbf{h}_1, \dots, \mathbf{h}_T)$ – and an attention-based decoder which defines the probability distribution over the set of output symbols, \mathcal{C}_{eos} . Thus, given a paired training example, (X, C) ,

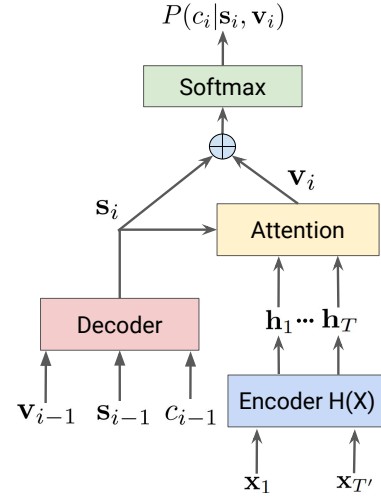


Fig. 7. An attention-based encoder decoder (AED) model [14], [15], [46]. The output distribution is conditioned on the decoder state, \mathbf{s}_i (which summarizes the previously decoded symbols), and the context vector, \mathbf{v}_i (which summarizes the encoder output based on the decoder state). In the seminal work of Chan et al., [15], for example, this is accomplished by concatenating the two vectors, as denoted by the \oplus symbol in the figure.

we denote by $C_e = (c_1, \dots, c_L, \langle \text{eos} \rangle)$, the ground-truth symbol sequence of length $(L + 1)$ augmented with the $\langle \text{eos} \rangle$ symbol. AED models compute the conditional probability of the output sequence augmented with the $\langle \text{eos} \rangle$ symbol as:

$$\begin{aligned}
 P(C_e|X) &= P(C_e|H(X)) \\
 &= \prod_{i=1}^{L+1} P(c_i|c_{i-1}, \dots, c_0 = \langle \text{sos} \rangle, H(X)) \\
 &= \prod_{i=1}^{L+1} P(c_i|c_{i-1}, \dots, c_0 = \langle \text{sos} \rangle, \mathbf{v}_i) \\
 &= \prod_{i=1}^{L+1} P(c_i|\mathbf{s}_i, \mathbf{v}_i)
 \end{aligned} \tag{5}$$

where, \mathbf{v}_i corresponds to a *context vector*, which summarizes the relevant portions of the encoder output, $H(X)$, given the sequence of previous predictions c_{i-1}, \dots, c_0 ; and, \mathbf{s}_i corresponds to the corresponding decoder state after outputting the sequence of previous symbols, which is produced by updating the decoder state based on the previous context vector and output label:

$$\mathbf{s}_i = \text{Decoder}(\mathbf{v}_{i-1}, \mathbf{s}_{i-1}, c_{i-1})$$

The symbol $c_0 = \langle \text{sos} \rangle$ is a special start-of-sentence symbol which serves as the first input to the attention-based decoder before it has produced any outputs. As can be seen in Eq. (5), an important benefit of AED models over models such as CTC or RNN-T is that they do not make any independence assumptions between model outputs and the input acoustics, and are thus more general than the implicit alignment models, while being considerably easier to train and implement since we do not have to explicitly marginalize over all possible alignment sequences. However, this comes at a cost: previously generated context vectors (which are analogous to the decoded partial alignment in explicit alignment models) are

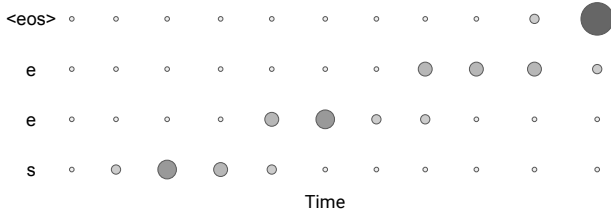


Fig. 8. Unlike models such as RNN-T or CTC, AED models do not have explicit alignment. However, it is possible to interpret the attention weights $\alpha_{t,i}$ for a particular output symbol c_i as an alignment weight which is represented above for the target sequence $C = (s, e, e, \langle eos \rangle)$. In this representation, the size of the circle and the darkness level are proportional to the corresponding attention weights; thus the total probability mass is the same for each row. As illustrated above, the first few frames correspond to the first symbol $c_1 = s$, while the latter frames correspond to the second ‘e’: $c_3 = e$.

not revised as the decoding proceeds. Stated another way, while the encoder processing $H(X)$ might be bi-directional, the decoding process in AED models reveals a left-right asymmetry [47].

1) *Computing the Context Vector in AED models:* As we mentioned before, the context vector, \mathbf{v}_i , is computed by employing the attention mechanism [36]. The central idea behind these approaches is to define a state vector \mathbf{s}_i which corresponds to the state of the model after outputting c_1, \dots, c_{i-1} . The attention function, $\text{atten}(\mathbf{h}_t, \mathbf{s}_i) \in \mathbb{R}$, then defines a score between the model state after outputting $i-1$ previous symbols, and each of the encoded frames in $H(X)$. These scores can then be normalized using the softmax function to define a set of weights corresponding to each \mathbf{h}_t as:

$$\alpha_{t,i} = \frac{\exp\{\text{atten}(\mathbf{h}_t, \mathbf{s}_i)\}}{\sum_{t'=1}^T \exp\{\text{atten}(\mathbf{h}_{t'}, \mathbf{s}_i)\}}$$

Intuitively, the weight $\alpha_{t,i}$ represents the relevance of a particular encoded frame \mathbf{h}_t when outputting the next symbol c_i , after the model has already output the symbols c_1, \dots, c_{i-1} , as illustrated in Figure 8. The context vector summarizes the encoder output based on the computed attention weights:

$$\mathbf{v}_i = \sum_t \alpha_{t,i} \mathbf{h}_t$$

A number of possible attention mechanisms have been explored in the literature: the most common forms include dot-product attention [15] and additive attention [36], though a number of other variants have also been explored in the literature (e.g., Gaussian attention [48], etc.) Apart from the specific choice of the attention mechanism, a common technique to improve performance involves the use of multiple independent attention heads – $\mathbf{v}_i^1, \dots, \mathbf{v}_i^K$ – which are then concatenated together to obtain the final context vector $\mathbf{v}_i = [\mathbf{v}_i^1; \dots; \mathbf{v}_i^K]$, in the so-called multi-head attention approach [31], or indeed by stacking together multiple attention-based layers in the transformer decoder presented by Vaswani et al. [31].

C. Attention-based E2E Approaches with Alignment Modeling

AED models, which make no conditional independence assumptions, are extremely powerful, often outperforming

explicit attention E2E approaches such as CTC, or RNN-T [49]. However, these models also have some significant disadvantages, most notably that the models are fundamentally non-streaming – i.e., the models must process all acoustic frames before they can generate any output hypotheses. A somewhat related issue is that the models are extremely sensitive to the length of the acoustic sequences [50], which requires special processing for long-form audio [50].

There have been a number of works that have examined techniques to build streaming AED models. Generally speaking, these models are motivated by the observation that speech (unlike tasks such as machine translation) exhibits a ‘local’ relationship between the encoded frames (assuming that the encoder is uni-directional) and the output units; thus, unlike the general AED model which computes the context vector, \mathbf{v}_i , as a sum over all input frames \mathbf{h}_t , the various proposed models constrain this sum to be computed over a subset of frames to allow for streaming decoding. In the context of our presentation, it is easiest to think of these models as consisting of an underlying alignment (whether known or unknown) which can be used to perform streaming inference.

The Neural Transducer (NT) [37] explicitly partitions the input encoder frames into T^W non-overlapping chunks of length W : $H_1^W = [\mathbf{h}_1, \dots, \mathbf{h}_W]$; \dots ; $H_{T^W}^W = [\mathbf{h}_{T^W+1}, \dots, \mathbf{h}_{T^W W}]$, where $T^W = \lceil \frac{T}{W} \rceil$, and $\mathbf{h}_t = \mathbf{0}$ if $t > T$. Unlike the AED model which examines all encoded frames when computing the context vector, the NT model is restricted to process a single chunk at a time; the model only advances to the next chunk when it outputs a special end-of-chunk symbol (analogous to $\langle eos \rangle$ in the AED model); inference in the model terminates when the model has output the end-of-chunk symbol in the final chunk $H_{T^W}^W$. If the alignments of the ground-truth output sequence, C , with respect to the W -length chunks are unknown, then it is possible to train the system by using a rough initial alignment where symbols are distributed equally among the T^W chunks, followed by iterative refinement by computing the most likely output alignments given the current model parameters [37] similar to forced-alignments in HMM-based systems. An alternate approach [51] consists of using a separate system (e.g., a classical hybrid system) to get initial alignments (e.g., word-level alignments), which can be used to assign sub-word units to the individual chunks.

An alternative approach, proposed by Raffel et al. [38], modifies the vanilla AED model by explicitly introducing an alignment module which scans the encoder frames, $H(X)$, from left-to-right to identify whether the current frame should be used to emit any outputs, which is modeled as a Bernoulli random variable. If a frame, τ , is selected, then the model produces an output based on the local encoder frame, \mathbf{h}_τ . Once the next output is generated, the process is repeated starting from the currently selected frame, thus allowing multiple outputs to be generated at the same frame. This results in a model which corresponds to hard monotonic alignments between the input speech and the output labels since the models are constrained to generate outputs in a streaming fashion. A Monotonic Chunkwise Attention (MoChA) model [39] improves upon the work of Raffel et al., by allowing the model to generate the next output using a context vector computed

using attention over a local window of frames to the left of the selected frame τ : $\mathbf{h}_{\tau-W+1}, \dots, \mathbf{h}_\tau$. Thus, the MoChA model consists of a two-level process – identifying frames where output should be produced following [38], followed by an AED model over frames to the left of the selected frame. A refinement to the MoChA model, proposed by Arivazhagan et al. [40] – the monotonic infinite lookback (MILK) attention model – computes the context vector over all frames to the left of the selected frame τ (i.e., $\mathbf{h}_1, \dots, \mathbf{h}_\tau$) at each step. Another two-fold approach to enable streaming operation is presented in [52] under the term of triggered attention, where a CTC-network is used to trigger, i.e. control the activation of an AED model with a limited decoder delay. In [53], a number of local monotonic attention variants is compared. [54] discusses segmental attention variants, while in [55] the related decoding and the relevance of segment length modeling is investigated, leading to improved generalization towards long sequences. Segmental attention models are related to transducer models [56]. However, segmental E2E ASR models are not limited to be realized based on the attention mechanism and may not only be related to a direct HMM [57], but also have been shown to be equivalent to neural transducer modeling [58].

III. ARCHITECTURE IMPROVEMENTS TO BASIC E2E MODELS

In this section, we expand on the vanilla E2E models described thus far. Specifically, we describe various algorithmic changes to these models which are critical for improvement compared to classical ASR systems. First, we describe various ways of combining different complementary E2E models to improve performance. Next, we introduce ways to incorporate context into these models to improve performance on rare proper noun entities. Next, we describe improved encoder and decoder architectures that take better advantage of the many cores on a TPU. Finally, we discuss how to improve the latency of the model through an integrated E2E endpointer. More details about these topics are discussed below.

A. Combinations of Models

Complementarity exists between different end-to-end models, and there have been numerous attempts that look at combining these methods.

For example, [59] found that attention-based models do very poorly in long or noisy utterances, mainly because the model has too much flexibility in predicting alignments since it sees the entire utterance. In contrast, models such as CTC, which have left-to-right constraints during decoding, are much better in these cases. The paper looks at a multi-task learning strategy with both CTC and attention-based models, which gives between a 5-14% relative improvement in word error rate over attention-based models on a WSJ and Chime task.

In addition, [60] explores combining the benefits of RNN-T and AED. Specifically, RNN-T decodes utterances in a left-to-right fashion, which has also shown improvements for long and noisy utterances. On the other hand, since AED sees the entire utterance, it often shows improvements for utterances where surrounding context is needed to predict the current word,

for example, numerics (1.15). To combine RNN-T and AED, the authors look at producing a first-pass decode with RNN-T, that is then rescored with AED. To reduce computation, the authors look to share the encoder between RNN-T and AED. The authors find RNN-T+AED gives a 17-22% relative improvement in word error rate over RNN-T alone on a Voice search task. Other flavors of streaming 1st-pass following by attention-based 2nd-pass rescoring, such as deliberation [61], have also been explored.

One of the issues with rescoring is that we are limited to the lattice produced by the 1st-pass system. To address this, methods which run a 2nd-pass beam search have also been explored. To be competitive with a classical-ASR system, the 2nd-pass must be streaming so that it can complete in real time. With this in mind, techniques such as Cascaded Encoder [62], Y-architecture [63] and Universal ASR [64], are such examples.

B. Incorporating Context

Contextual biasing to a specific domain, including a user’s song names, app names and contact names, is an important component of any production-level automatic speech recognition (ASR) system. Contextual biasing is particularly challenging in E2E models because these models keep a small list of candidates during beam search, and also do poorly on proper nouns, which is the main source of biasing phrases. There have been a few approaches in the literature to incorporate context.

One approach is to construct a stand-alone weighted finite state transducer (FST) representing the biasing phrases. The scores from the biasing FST are interpolated with the scores of the E2E model during beam search, with special care taken to ensure we do not over- or under-bias phrases. This technique is known as shallow-fusion contextual biasing [65].

Another approach looks at injecting biasing phrases into the model in an all-neural way. For example, [66] represents a set of biasing phrases by embedding vectors. These vectors are fed as additional input to an attention-based model, which can then choose to attend to the phrases and hence boost the chances of predicting the phrases. Furthermore, [67] looked at biasing towards dialog context in an all-neural way. In addition, [68] looks at using phoneme and grapheme information to embed biasing phrases. Finally, [69] uses an utterance-wise context vector like an i-vector computed by a pooling across frame-by-frame hidden state vectors obtained from a sub network (this sub network is called a sequence-summary network).

C. Encoder/Decoder Structure

There have been improvements to encoder architectures of E2E models over time. The first end-to-end models used long short-term memory recurrent neural networks (LSTMs), for both the encoder and decoder. The main drawback of these sequential models is that each frame depends on the computation from the previous frame, and therefore multiple frames cannot be batched in parallel.

With the improvement of hardware, specifically on-device Edge Tensor Processing Units (TPUs), with thousands of cores, architectures that can better take advantage of the

hardware, have been explored. Such architectures include convolution-based architectures, such as ContextNet [70]. The use of self-attention to replace the sequential recurrence in LSTMs was explored in Transformers for ASR [71], [72]. Finally, combining self-attention with convolution, known as Conformer [73], or multi-layer perceptron [74], was also explored. Both Transformer and Conformer have shown competitive performance to LSTMs on many tasks [75], [76].

On the decoder side, research for transducer models has shown that a large LSTM decoder can be replaced with a simple embedding lookup table, that attends to only a few previous tokens from the model [34], [77], [78], [79], [80]. This demonstrates that most of the power of the E2E model is in the encoder, which has been a consistent theme of both E2E as well as classical hybrid HMM models.

D. Integrated Endpointing

An important characteristic of streaming speech recognition systems is that they must endpoint quickly, so that the ASR result can be finalized and sent to the server for the appropriate action to be performed. Within this, endpointing is typically done with an external voice-activity detector. Since endpointing is both an acoustic and language model decision, recent works in streaming RNN-T models [81], [82] have looked to predict a microphone closing token $\langle \text{eos} \rangle$ at the end of the utterance. For example, our sentence may be “What’s the weather $\langle \text{eos} \rangle$ ”. These models have shown improved latency and WER tradeoff by having the endpointing decision predicted as part of the model. Furthermore, [83], [84] explored using the CTC blank symbol for endpoint detection.

IV. TRAINING E2E MODELS

In general, training of E2E models follows deep learning schemes [85], [86], with specific consideration of the sequential structure and the latent alignment problem to be handled in ASR. E2E ASR models may be trained end-to-end, notwithstanding potential elaborate training schedules and extensive data augmentation. One of the appeals of end-to-end models is that they do not assume conditional independence between the input frames. Given a training set $\mathcal{T} = \{(X_i, C_i)\}_{i=1}^N$, the training criterion \mathcal{L} to be minimized (which is equivalent to maximizing the total conditional log-likelihood) can be written as: $\mathcal{L} = \sum_{i=1}^N \log P(C_i|X_i)$.

A. Alignment in Training

E2E models such as RNN-T and CTC introduce an additional blank token $\langle b \rangle$ for alignment. Therefore optimization implies marginalizing across all alignments, which requires the forward-backward algorithm [87], [88] for efficient computation of the training criterion and its gradient, with minor modifications for CTC, RNN-T, and RNA models, as well as classical (full-sum) hybrid ANN/HMMs corresponding to the differences in alignments defined in each of these models. In comparison, AED models do not have a latent variable for explicit alignment. We refer the interested reader to the individual papers for further details on the training algorithms [89], [90], [12], [13], [42], [33], [14], [15], [46].

As part of the training procedure, all E2E as well as classical hidden Markov models for ASR provide mechanisms to solve the underlying sequence alignment problem - either explicitly via corresponding latent variables, as in CTC, RNN-T or RNA, and also hybrid ANN/HMM, or implicitly, as in AED models. Also, the distinction between speech and silence needs to be considered, which may be handled explicitly by introducing silence as a latent label (hybrid ANN/HMM), or implicitly by not labeling silence at all, as currently is the standard in virtually all E2E models.

E2E models also may take advantage of hierarchical training schedules. These schedules may comprise several separated training passes and explicit, initially generated alignments that are kept fixed for some Viterbi-style [91], [92], [93] training epochs before reenabling E2E-style full-sum training that marginalizes over all possible alignments. Such an alternative approach is employed by Zeyer et al. [45], where an initial full-sum RNN-T model is used to generate an alignment and continue with framewise cross-entropy training. This greatly simplifies the training process by replacing the summation over all possible alignments in Eq. (4) by a single term corresponding to the alignment sequence generated. Recently, a similar procedure has been introduced in [94] also employing E2E models, only. In this work, CTC is used to initialize the training and to generate an initial alignment, followed by intermediate Viterbi-style RNN-T training and final full-sum fine tuning. This process showed improved convergence compared to full-sum-only training approaches.

It is interesting to note that in contrast to the RNN-T and RNA label-topologies, CTC does not require alignments with single label emissions per label position. However, training CTC models eventually does lead to single label emissions per hypothesized label. An analysis of this property of CTC training which is usually called *peaky behavior* can be found in [95] and references therein. [96] even introduces a CTC variant without non-blank loop transitions.

B. Training with External Language Models

E2E ASR models generally are normalized on sequence level. Therefore, sequence training with the maximum mutual information criterion [97] is the same as standard cross entropy/conditional likelihood training. However, once external language models are included in the training phase, sequence normalization needs to be included explicitly, leading to MMI sequence discriminative training. This has been exploited as a further approach to combine E2E models with external language models trained on text-only data already in the training phase [98], [99], [100].

C. Minimum Error Training

Since the objective of speech recognition is to minimize word error rate (WER), there has been a growing number of research studies that incorporate this into the objective function. These methods, known as sequence/discriminative learning, have shown great improvements for classical ASR [101], [102], [103], [104], [105], and have since been explored in E2E models. Typically these losses are constructed by

running in 'beam-search' mode rather than teacher-forcing mode, and construct a loss from the errors made from the candidate hypotheses in the beam. Thus, this type of training first requires training the model to optimize $P(C|X)$ so that we can learn a good set of weights to run a beam search. However, also direct approaches have been introduced that avoid this separation to train discriminatively from scratch [32], [106].

Papers that explore penalizing word errors include, Minimum Word Error Rate (MWER) training [107], where the loss function is constructed such that the expected number of word errors are minimized. Further work includes MWER for RNN-T and self-attention-T [108], as well as MWER using prefix search instead of n-best [109]. Also, there have been studies that consider MWER in terms of reinforcement learning [110], [111]. Finally, Optimal Completion Distillation (OCD) [112] looks to minimize the total edit distance using an efficient dynamic programming algorithm. Finally, another body of research with sequence training introduce a separate external language model at training time, [113], which can also be done efficiently via approximate lattice recombination [99] and also lattice-free approaches [100].

D. Pretraining

All E2E models as well as classical hidden Markov models for ASR provide holistic models that in principle enable training from scratch. However, many strategies exist to initialize and guide the training process to reach optimal performance and/or to obtain efficient convergence by applying pretraining and model growing [114], [115]. Supervised layer-wise pretraining has been successfully applied for classical [4], [116], as well as attention-based ASR models [117], which can be combined with intermediate subsampling schemes [118], and model growing [119]. Pretraining approaches utilizing untranscribed audio, large-scale semi-supervised data and/or multilingual data [120], [121], [122], [123], [124], [125], [126], [127], [128], [129], [130], [131] would deserve a self-contained survey and they are applicable for hybrid DNN/HMM and E2E approaches likewise - they will not be further discussed here.

E. Training Schedules and Curricula

Dedicated training schedules have been developed to guide the optimization process and as part of that reach proper alignment behavior explicitly or implicitly [118], [45], [94].

Many approaches exist for learning rate control [132], [133]: NewBob [134], [135] and enhancements [133], global vs. parameter-wise learning rate control (exponential decay, power decay, etc.) [136], learning rate warmup [31], warm restarts/cosine annealing [137], weight decay vs. gradually decreasing batch size [138], fine-tuning [139] or population-based training [140]. For a survey of meta learning also cf. [141].

Sequence learning approaches also consider curriculum learning [142], [143], e.g. by considering short sequences first [144], [145], interim increase of subsampling [118] initially more subsampling, or for multi-speaker ASR training sort

mixed speech by SNR and start with speakers of balanced energy and mixed gender [146].

F. Optimization and Regularization

Optimization usually is based on stochastic gradient descent [147], with momentum [148], [149], and a number of corresponding adaptive approaches, most prominently Adam [150] and variants thereof [150], [116], [151].

Investing more training epochs seems to provide improvements [45, Table 8], and also averaging over epochs has been reported to help [75]. For a discussion of the double descent effect and its relation to the amount of training data, label noise and early stopping cf. [152].

Regularization strongly contributes to training performance, incl. L2 and weight decay [153], [137], weight noise [154], adaptive mean L1/L2 [155], gradient noise [156], dropout [157], [158], [159], layer dropout [160], [161], [162], dropconnect [163], zoneout [164], smoothing of attention scores [14], label smoothing [165], scheduled sampling [166], auxiliary loss [165], [167], variable backpropagation through time [168], [169], mixup [170], increased frame rate [151], or batch normalization [171].

G. Data Augmentation

Training of E2E ASR models also benefit from data augmentation methods, which might also be viewed as regularization methods. However, their diversity and impact on performance justifies a separate overview.

Most data augmentation methods perform data perturbation by exploiting certain dimensions of speech signal variation: speed perturbation [172], [173], vocal tract length perturbation [174], [172], frequency axis distortion [172], sequence noise injection [175], SpecAugment [176], or semantic mask [177]. Also, text-only data may be used to generate data using text-to-speech (TTS) on feature [178] or signal level [179]. In a comparison of the effect of TTS-based data augmentation on different E2E ASR architectures in [179], AED seemed to be the only architecture that took advantage of data generated by TTS, significantly.

In a recent study [145] and corresponding follow-up work [151], many of the regularization and data augmentation methods listed here have been exploited jointly leading to state-of-the-art performance on the Switchboard task for a single-headed AED model.

V. DECODING E2E MODELS

This section mainly describes several decoding algorithms for end-to-end speech recognition. The basic decoding algorithm of end-to-end ASR tries to estimate the most likely sequence \hat{C} among all possible sequences, as follows:

$$\hat{C} = \arg \max_{C \in \mathcal{U}^*} P(C|X)$$

where $*$ means a Kleene closure to represent a set of all possible sequences composed of token vocabulary \mathcal{U} . $P(C|X)$ is a probabilistic distribution function obtained by an E2E ASR system. The following section describes how to obtain the recognition result \hat{C} .

A. Greedy search

The Greedy search algorithm is mainly used in CTC, which ignores the dependency of the output labels as follows:

$$\hat{A} = \prod_{t=1}^T \left(\arg \max_{a_t} P(a_t|X) \right)$$

where a_t is an alignment token introduced in Section II-A1. The original character sequence is obtained by converting alignment token sequence \hat{A} to the corresponding token sequence \hat{C} . The argmax operation can be performed in parallel over input frame t , yielding fast decoding [12], [180], although the lack of the output dependency causes relatively poor performance than the attention and RNN-T based methods in general.

CTC's fast decoding is further boosted with transformer [31], [71], [75] and its variants [73], [76] since their entire computation across the frame is parallelized [161], [181]. For example, the non-autoregressive models, including Imputer [182], Mask-CTC [181], Insertion-based modeling [183], Continuous integrate-and-fire (CIF) [184] and other variants [185], [186] have been actively studied as an alternative non-autoregressive model to CTC. [186] shows that CTC greedy search and its variants achieve 0.06 real-time factor (RTF: (decoding time) / (input length)) by using Intel(R) Xeon(R) Silver 4114 CPU, 2.20GHz. The paper also shows that the degradation of the non-autoregressive models from the attention/RNN-T methods with beam search is not significantly large (19.7% with self-conditioned CTC [185] vs. 18.5/18.9% with attention/RNN-T).

The greedy search algorithm is also used as approximate decoding for the attention, RNA, CTC, and RNN-T based methods as follows:

$$\hat{c}_i = \arg \max_{c_i} P(c_i|\hat{C}_{1:i-1}, X) \text{ for } i = 1, \dots, N$$

$$\hat{a}_t = \arg \max_{a_t} P(a_t|\hat{A}_{1:t-1}, X) \text{ for } t = 1, \dots, T$$

The greedy search algorithm does not consider alternate hypotheses in a sequence compared with the beam search algorithm described below. However, it is known that the degradation of the greedy search algorithm is not so large [15], [33], especially when the model is well trained in matched conditions³.

B. Beam search

The beam search algorithm is introduced to approximately consider a subset of possible hypotheses \tilde{C} among all possible hypotheses U^* during decoding, i.e., $\tilde{C} \subset U^*$. A predicted output sequence \hat{C} is selected among a hypothesis subset \tilde{C} instead of all possible hypotheses U^* , i.e.,

$$\hat{C} = \arg \max_{C \in \tilde{C}} P(C|X) \quad (6)$$

The beam search algorithm is to find a set of possible hypotheses \tilde{C} , which can include promising hypotheses efficiently

by avoiding the combinatorial explosion encountered with all possible hypotheses U^* .

There are two major beam search categories: 1) *frame synchronous* beam search and 2) *label synchronous* beam search. The major difference between them is whether it performs hypothesis pruning for every input frame t or every output token i . The following sections describe these two algorithms in more detail.

C. Label synchronous beam search

Suppose we have a set of partial hypotheses up to $(i-1)$ th token $\tilde{C}_{1:i-1}$. A set of all possible partial hypotheses up to i th token $C_{1:i}$ is expanded from $\tilde{C}_{1:i-1}$ as follows:

$$C_{1:i} = \{(\tilde{C}_{1:i-1}, c_i = c)\}_{c \in \mathcal{U}} \quad (7)$$

The number of hypotheses $|C_{1:i}|$ would be $|\tilde{C}_{1:i-1}| \times |\mathcal{U}|$ at most. The beam search algorithm prunes the low probability score hypotheses from $C_{1:i}$ and only keeps a certain number (beam size Δ) of hypotheses at i among $C_{1:i}$. This pruning step is represented as follows:

$$\tilde{C}_{1:i} = \text{NBEST}_{C_{1:i} \in C_{1:i}} P(C_{1:i}|X), \text{ where } |\tilde{C}_{1:i}| = \Delta \quad (8)$$

Note that $\text{NBEST}(\cdot)$ is an operation to extract top Δ hypotheses in terms of the probability score $P(C_{1:i}|X)$ computed from an end-to-end neural network, or a fusion of multiple scores described in Section VI-B.

In the label synchronous beam search, the length of the output sequence (N) is not given. Therefore, during this pruning process, we also add the hypothesis that reaches the end of an utterance (i.e., predict the end of sentence symbol (eos)) to a set of hypotheses \tilde{C} in Eq. (6) as a promising hypothesis.

Since the label synchronous beam search does not explicitly depend on the alignment information, sequence hypotheses of the same length might cover a completely different number of encoder frames, unlike the frame synchronous beam search, as pointed out by [58]. As a result, we observe that the scores of very short and long segment hypotheses often become the same range, and the beam search wrongly selects such hypotheses. [190] shows an example of such extreme cases, which results in large deletion and insertion errors for short and long-segment hypotheses, respectively. Thus, the label synchronous beam search requires heuristics to limit the output sequence length to avoid extremely long/short output sequences. Usually, the minimum and maximum length thresholds are determined proportionally to the input frame length $|X|$ with tunable parameters ρ_{\min} and ρ_{\max} as $L_{\min} = \lfloor \rho_{\min}|X| \rfloor$, $L_{\max} = \lfloor \rho_{\max}|X| \rfloor$. Although these are quite intuitive ways to control the length of a hypothesis, the minimum and maximum output lengths depend on the token unit or type of script in each language. The other heuristics is to provide the additional score related to the output length or attention weights, including the length penalty and the coverage term [191], [187]. The end-point detection [192] is also used to estimate the hypothesis length automatically. [188] redefines the implicit length model of the attention decoder to take into

³ On the other hand, in the AED models, increasing the search space does not consistently improve the speech recognition performance [187], [188], which is also observed in neural machine translation [189].

account beam search, resulting in consistent behavior without degradation for increasing beam sizes.

The label synchronous beam search algorithms of CTC are realized by marginalizing all possible alignments for each label hypothesis [12].

D. Frame synchronous beam search

In contrast to the label synchronous case in Eq. (8), the frame synchronous beam search algorithm performs pruning at every input frame t , as follows:

$$\tilde{C}_{1:i(t)} = \text{NBEST}_{C_{1:i(t)}} P(C_{1:i(t)}|X), \text{ where } |\tilde{C}_{1:i(t)}| = \Delta$$

where $C_{1:i(t)}$ is an $i(t)$ -length label sequence obtained from the alignment $A_{1:t}$, which is introduced in Section II-A. $P(C_{1:i(t)}|X)$ is obtained by summing up all possible alignments $A_{1:t} \in \mathcal{A}_{(X, C_{1:i(t)})}$. A set of alignments \mathcal{A} depends on explicit alignment approaches, including CTC, RNN-T, and RNA. $C_{1:i(t)}$ is an expanded partial hypotheses up to input frame t , similar to Eq. (7).

Compared with the label synchronous algorithm, the frame synchronous algorithm needs to handle additional output token transitions inside the beam search algorithm. The frame synchronous algorithm can be easily extended in online and/or streaming decoding thanks to the explicit alignment information with input frame and output token.

Classical approaches to beam search for HMM, but also CTC and RNN-T variants, are based on weighted finite state transducers (WFST) [41], [193], [194] or lexical prefix trees [195], [196], [79]. They are categorized as frame synchronous beam search. These methods are often combined with an N-gram language model or a full-context neural language model [197], [198]. RNN-T [13], [199] and CTC prefix search [200] can deal with a neural language model by incorporating the language model score in the label transition state. Triggered attention approaches [201], [202] allow us to use AED models in frame-synchronous beam search together with CTC and neural LM, which applies on-the-fly rescoring to the hypotheses given by CTC prefix search using the AED and LM scores.

E. Block-wise decoding

Another beam search implementation uses a fixed-length block unit for the input feature. In this block processing, we can use the future context inside the block by using the non-causal encoder network based on the BLSTM, output-delayed unidirectional LSTM, or transformer (and its variants). This future context information avoids the degradation of the fully causal network. In this setup, the chunk size becomes the trade-off of controlling the latency and accuracy. This technique is used in both RNN-T [203], [204], [205] and AED [39], [206], [207]. Block-wise processing is especially important for AED since it can provide block-wise monotonic alignment constraint between the input feature and output label, and realize block-wise streaming decoding.

F. Model fusion during decoding

Similar to the classical HMM-based beam search, we combine various scores obtained from different modules, including the main end-to-end ASR and LM scores.

1) *Synchronous score fusion*: The most simple score fusion is performed when the scores of multiple modules are synchronized. In this case, we can simply add the multiple scores at each frame t or label i . The most well-known score combination is the LM shallow fusion.

LM shallow fusion: As discussed in Section VI, various neural LMs can be integrated with end-to-end ASR. The most simple integration is based on LM shallow fusion [208][209][210], as discussed in Section VI-B1, which (log-)linearly add the LM $P_{\text{lm}}(C_{1:i})$ to e2e ASR scores $P(C_{1:i}|X)$ during beam search in Eq. (8) as follows:

$$\log P(C_{1:i}|X) \rightarrow \log P(C_{1:i}|X) + \gamma \log P_{\text{lm}}(C_{1:i})$$

where γ is a language model weight. Of course, we can combine the other scores, such as the length penalty and coverage terms, as discussed in Section V-C.

2) *Asynchronous score fusion*: If we combine the frame-dependent score functions $P(a_t|\cdot)$ (e.g., CTC, RNN-T) and label-dependent score functions $P(c_i|\cdot)$ (e.g., attention, language model). We have to deal with the mismatch between the frame and label time indexes i and t .

In the time-synchronous beam search, this fusion is performed by incorporating the language model score in the label transition state [211], [212], [213]. [200] also combines a word-based language model and token-based CTC model by incorporating the language model score triggered by the word delimiter (space) symbol.

In the label-synchronous beam search, we first compute the label-dependent scores from the frame-dependent score function by marginalizing all possible alignments given a hypothesis label sequence. CTC/attention joint decoding [190] is a typical example, where the CTC score was computed by marginalizing all possible alignments based on the CTC forward algorithm [180]. This approach eliminates the wrong alignment issues and difficulties of finding the correct end of sentences in the label-synchronous beam search [190], [214].

Note that the model fusion method during beam search can realize simple one-pass decoding, while it limits the time unit of the models to be the same or it requires additional dynamic programming to adjust the different time units, especially for the label-synchronous beam search. This dynamic programming computation becomes significantly large when the length of the utterance becomes larger and requires some heuristics to reduce the computational cost [215].

G. Lexical constraint during score fusion

Classically, we use a word-based language model to capture the contextual information with the word unit, and also consider the word-based lexical constraint for ASR. However, end-to-end ASR often uses a letter or token unit and it causes further unit mismatch during beam search. As described in previous sections, the classical approach of incorporating the lexical constraint from the token unit to the word unit is based on a WFST. This method first makes a TLG transducer composed of the token (T), word lexicon (L), and word-based language transducers (G) [194]. This TLG transducer is used for both CTC [194] and attention-based [46].

Another approach used in the time synchronous beam search is to insert the word-based language model score triggered by the word delimiter (space) symbol [216]. To synchronize the word-based language model with a character-based end-to-end ASR, [217] combines the word and character-based LMs with the prefix tree representation, while [192], [218] uses look-ahead word probabilities to predict next characters instead of using the character-based LM. The prefix tree representation is also used for the sub-word token unit case [219], [220].

H. Multi-pass fusion

The previous fusion methods are performed during the beam search, which enables the one-pass algorithm. The popular alternative methods are based on multi-pass algorithms where we do not care about the synchronization and perform n-best or lattice scoring by considering the entire context within an utterance. [15] uses the N-best rescoring techniques to integrate a word-based language model. [47] combines forward and backward searches within a multi-pass decoding framework to combine bidirectional LSTM decoder networks. Recently two-pass algorithms of switching different end-to-end ASR systems have been investigated, including RNN-T \rightarrow attention [221] CTC \rightarrow attention [222], [223]. This aims to provide the streamed output in the first pass and the re-scoring with attention in the second pass refines the previous output to satisfy the real-time interface requirement and high recognition performance.

In addition to the N-best output in the above discussion, there is a strong demand of generating a lattice output for better multi-pass decoding thanks to richer hypothesis information in a lattice. The lattice output can also be used for spoken term detection, spoken language understanding, and word posteriors. However, due to the lack of Markov assumptions, RNN-T and AED cannot merge the hypothesis and cannot generate a lattice, unlike the HMM-based or CTC systems. To tackle this issue, there are several studies of modifying these models by limiting the output dependencies in the fixed length (i.e., finite-history) [224], [34], or keeping the original RNN-T structure but merging the similar hypotheses during beam search [80].

I. Vectorization across both hypotheses and utterances

We can accelerate the decoding process by vectorizing multiple hypotheses during the beam search, where we replace the score accumulation steps for each hypothesis with vector-matrix operations for the vectorized hypotheses. It has been studied in RNN-T [212], [213], [225] and attention-based [215]. This modification allows us to take advantage of the parallel computing capabilities of multi-core CPUs and GPUs, resulting in significant speedups and also enabling us to process multiple utterances in a batch simultaneously.

Major deep neural network and end-to-end ASR toolkits support this vectorization. For example, Tensorflow⁴[226], and FAIRESEQ⁵[227] provide a vectorized beam search interface for a generic sequence to sequence task, and it can

be used for attention-based end-to-end ASR. The end-to-end ASR toolkit including ESPnet⁶[215], ESPRESSO⁷[218], and RETURNN⁸[228] also support the vectorized beam search algorithm.

VI. LM INTEGRATION

Language models (LMs) have long been used for ASR in combination with acoustic models to improve the recognition accuracy [2]. The main role of the LM is to help the ASR system generate the most probable sentence hypothesis in terms of language. Practically, an LM is designed as a probabilistic model such as an N -gram model [2] or a neural network LM [8], [229], which can be trained with a large number of example sentences. The LM provides a probability distribution $P(C)$ over a random variable of sentence, C , which is used to score sentence hypotheses and encourage the system to choose a more likely hypothesis.

As mentioned in Section VII, hybrid ASR systems typically utilize a separate LM in the inference stage, while end-to-end (E2E) systems basically utilize a single ASR model including a network component that plays a role of LM, where the entire network has been trained jointly. For example, the prediction network of RNN-T and the decoder network of AED models take on the role of LM. Therefore, E2E ASR does not seem to require separate LMs anymore. Nevertheless, many studies have demonstrated that separate LMs help improve the recognition accuracy in E2E ASR.

There are presumably three reasons that E2E ASR still requires an external LM:

a) *Compensation for poor generalization:* E2E models need to learn a more complicated mapping function than classical modular-based models such as acoustic models. Consequently, E2E models tend to face overfitting problems if the amount of training data is not sufficient. Pretrained LMs potentially compensate for the less generalized predictions made by E2E models.

b) *Use of external text data:* E2E models need to be trained using paired speech and text data, while LMs can be trained with only text data. Generally, text data can be collected more easily than the paired data. The training speed of an LM is also faster than that of E2E models for the same number of sentences. Accordingly, the LM can be improved more effectively with external text data, providing additional performance gain to the ASR system.

c) *Domain adaptation:* Domain adaptation helps improve recognition accuracy when the E2E model is applied to a specific domain. However, domain adaptation of the E2E model requires a certain amount of paired data in the target domain. Also, when multiple domains are assumed, it may be costly to maintain multiple E2E models for the domains the system supports. If a pre-trained LM for the target domain is available, it may more easily improve recognition accuracy for domain-specific words and speaking styles without updating the E2E model.

⁴ https://www.tensorflow.org/api_docs/python/tf/contrib/seq2seq/BeamSearchDecoder

⁵ https://github.com/pytorch/fairseq/blob/master/fairseq/sequence_generator.py

⁶ <https://github.com/espnet/espnet>

⁷ <https://github.com/freewym/espreso>

⁸ <https://github.com/rwth-i6/returnn>

This section reviews various types of LMs used for E2E ASR and fusion techniques to incorporate them into the main E2E network.

A. Language models

An LM provides a prior probability distribution $P(C)$. If sentence C can be decomposed into a sequence of tokens such as characters, subwords, and single words, the probability distribution can be computed based on the chain rule as:

$$P(C) = \prod_{i=1}^{L+1} P(c_i | c_{0:i-1})$$

where c_i denotes the i -th token of C , and $c_{0:i-1}$ represents token sequence c_0, c_1, \dots, c_{i-1} , assuming $c_0 = \langle \text{sos} \rangle$ and $c_{L+1} = \langle \text{eos} \rangle$.

Most LMs are designed to provide the conditional probability $P(c_i | c_{0:i-1})$, i.e., they are modeled to predict the next token given a sequence of the preceding tokens. We briefly review such LMs here.

1) *N-gram LM*: N -gram LMs have long been used for ASR [2]. Early E2E systems in [194], [46], [187] also employed an N -gram LM. The N -gram models rely on the Markov assumption that the probability distribution of the next token depends only on the previous $N - 1$ tokens, i.e., $P(c_i | c_{0:i-1}) \approx P(c_i | c_{i-N+1:i-1})$, where N is typically 3 to 5 for word-based models and a larger number for subword- and character-based models. The maximum likelihood estimates of N -gram probabilities are determined based on the counts of N sequential tokens in the training data set as

$$P(c_i | c_{i-N+1:i-1}) = \frac{\mathcal{K}(c_{i-N+1}, \dots, c_i)}{\sum_{c_i} \mathcal{K}(c_{i-N+1}, \dots, c_i)}$$

where $\mathcal{K}(\cdot)$ denotes the count of each token sequence. Since the data size is finite, it is important to apply a smoothing technique to avoid estimating the probabilities based on zero or very small counts for rare token sequences. Those techniques compensate the N -gram probabilities with lower order models, e.g., $(N - 1)$ -gram models, according to the magnitude of the count [230].

The advantage of the N -gram models is their simplicity, although they underperform state-of-the-art neural LMs. In the training, the main step is to just count the N tuples in the data set, which is required only once. In the decoding, the LM probabilities can be obtained very quickly by table lookup or can be attached to a decoding graph, e.g., WFST, in advance.

2) *FNN-LM*: The feed-forward neural network (FNN) LM was proposed in [8], which estimates N -gram probabilities using a neural network. The network accepts $N - 1$ tokens, and predicts the next token as

$$\begin{aligned} P(c_i | c_{i-N+1:i-1}) &= \text{softmax}(W_o h_i + b_o) \\ h_i &= \tanh(W_h e_i + b_h) \\ e_i &= \text{concat}(E(c_{i-N+1}), \dots, E(c_{i-1})) \end{aligned}$$

where W_o and W_h are weight matrices, and b_o and b_h are bias vectors. $E(y)$ provides an embedding vector of c , and

$\text{concat}(\cdot)$ operation concatenates given vectors⁹. This model first maps each input token to an embedding space, and then obtains hidden vector h_i as a context vector representing the previous $N - 1$ tokens. Finally, it outputs the probability distribution of the next token through the softmax layer. Although this LM still relies on the Markov assumption, it outperforms classical N -gram LMs described in the previous section. The superior performance of FNN-LM is primarily due to the distributed representation of each token and context. The LM learns to represent token/context vectors such that semantically similar tokens/contexts are placed close to each other in the embedding and context spaces. Since this representation has a better smoothing effect than the count-based one used for N -gram LMs, FNN-LM can provide a better generalization than N -gram LMs for predicting the next token. Neural network-based LMs basically utilize this type of representation.

3) *RNN-LM*: A recurrent neural network (RNN) LM was introduced to exploit longer contextual information over $N - 1$ previous tokens using recurrent connections [229]. Unlike FNN-LM, the hidden vector is computed as

$$\begin{aligned} h_i &= \text{recurrence}(e_i, h_{i-1}) \\ e_i &= E(c_{i-1}) \end{aligned}$$

where $\text{recurrence}(e_i, h_{i-1})$ represents a recursive function, which accepts previous hidden vector h_{i-1} with input e_i , and outputs next hidden vector h_i . In the case of simple (Elman-type) RNN, the function can be computed as

$$\text{recurrence}(e, h) = \tanh(W_h e + W_r h + b_h)$$

where W_r is a weight matrix for the recurrent connection, which is applied to the previous hidden vector h . This recurrent loop makes it possible to hold the contextual information in the hidden vector without limiting the context to $N - 1$ tokens. However, the past information decays exponentially as tokens are processed with this recursion. Therefore, currently stacked LSTM layers are more widely used for the recurrence part, which have separate internal memory cells and gating mechanisms to keep the long-range contextual information [231]. With this mechanism, RNN-LMs outperform other N -gram-based models in many tasks.

4) *ConvLM*: ConvLM [232] replaces the recurrent connections used in RNN-LMs with gated temporal convolutions. The hidden vector is computed as

$$\begin{aligned} h_i &= h'_i \otimes \sigma(g_i) \\ h'_i &= e_{i-k+1:i} * W + b \\ g_i &= e_{i-k+1:i} * V + c \end{aligned}$$

where \otimes is element-wise multiplication $*$ is a temporal convolution operation, and k is the patch size. $\sigma(g_i)$ represents a gating function of convoluted activation h'_i , where $\sigma(\cdot)$ is a sigmoid function. W and V are matrices for convolution and gating blocks are typically stacked multiple times with residual connections. In [233], a ConvLM with 14 blocks has been applied for E2E ASR. The advantage of ConvLM is its computational

⁹ We omit the optional direct connection from the embedding layer to the softmax layer in [8] for simplicity

efficiency, achieving similar performance to that of RNN-LMs, even with a fixed context size consisting of short tokens such as letters and word pieces. Specifically, its highly parallelizable architecture is useful to train the model with a large training data set.

5) *Transformer LM*: Transformer architecture [31] has been applied to LMs [234] and used for ASR [235], [75], where the LMs are designed as a Transformer decoder without any inputs from other modules such as encoders. The hidden vector is computed as

$$\begin{aligned} h_i &= \text{FFN}(h'_i) + h'_i \\ h'_i &= \text{MHA}(e_i, e_{1:i}, e_{1:i}) + e_i \end{aligned}$$

where $\text{FFN}(\cdot)$ and $\text{MHA}(\cdot, \cdot, \cdot)$ denote a feed forward network and a multi-head attention module, respectively. The multihead attention and feed-forward blocks are typically stacked multiple times, e.g., 6 times [75], to obtain the final hidden vector. The advantage of Transformer LMs is that they can take all previous tokens into account through the self-attention mechanism without summarizing them into a fixed-size memory like RNN-LMs. Thus, the long previous context can be fully utilized to predict the next token, achieving better performance than RNN-LMs. However, the computational complexity increases quadratically as the length of the sequence. Therefore, the length of the context is typically limited to a fixed size or within every single sentence. To overcome this limitation, Transformer-XL [236] reuses already computed activations, which includes information on farther previous tokens, and the model is trained with a truncated back-propagation through time (BPTT) algorithm. Compressive Transformer [237] extends this approach to utilize even longer contextual information by incorporating a compression step to keep older but important information in a fixed-size memory network.

B. Fusion approaches

There are several ways to incorporate LMs into E2E ASR. Researchers have investigated various LM fusion approaches to improve ASR accuracy in different situations.

1) *Shallow fusion*: Shallow fusion is the most popular approach to combine the pre-trained E2E model and LM in the inference time. As we described in Section V-F, the shallow fusion simply combines the E2E and LM scores by a log-linear combination as

$$\text{Score}(C|X) = \log P(C|X) + \gamma \log P(C) \quad (9)$$

where γ is a scaling factor for the LM [208][209][210]. The advantage of this approach is that it is easy and effective when there are no major differences between the source and target domains.

2) *Deep fusion*: Deep fusion [238] is an approach to combine an LM with an E2E model using a joint network. All the network parameters are trained jointly so that the models collaborate better to improve the recognition accuracy, where the joint network is used to combine the E2E and LM states through a gating mechanism that controls the contribution of the LM according to the current state.

3) *Cold fusion*: Cold fusion [239] is another approach to combine the LM like Deep fusion, but the E2E model is learned with a pretrained LM while freezing the LM parameters. Since the E2E model is aware of the LM throughout training, it learns to use the LM to reduce language specific information and capture only the relevant information to map the source to the target sequence. This mechanism reduces the role of LM in the E2E model and alleviates the language bias of the training data. Accordingly, the E2E model becomes more robust to domain mismatches between the training data and the target domain. Unlike Deep fusion, Cold fusion makes it possible to combine the E2E model with a pretrained LM for the target domain, improving the recognition accuracy. Component fusion [240] extends Cold fusion to use a pretrained LM with transcriptions of the training data for the E2E model, more focusing on reducing the bias of the training data.

4) *Internal LM estimation*: There is another approach to reduce language bias in training data through Shallow fusion. The language bias is a problem when a big domain mismatch exists between the source domain (training data) and the target domain (test data) because the E2E model scores are strongly dependent on the language priors in the source domain. To remove such a bias from the score, we can explicitly estimate the LM that represents the language priors, called *Internal LM*, and subtract the LM score from the ASR score of Eq. (9), i.e.,

$$\text{Score}(C|X) = \log P_\varphi(C|X) - \gamma_\varphi \log P_\varphi(C) + \gamma_\tau \log P_\tau(C)$$

where subscripts φ and τ indicate the source and target domains, respectively. γ_φ and γ_τ are their scaling factors. Subtracting the internal LM score corresponds to approximating acoustic probability density $P_\varphi(X|C)$ because $P_\varphi(X|C) \propto P_\varphi(C|X)/P_\varphi(C)$ is satisfied for fixed X , where the ASR score can be seen as a classical hybrid ASR system. Accordingly, the subtracted E2E model score plays a role of acoustic model and makes it more domain independent in terms of language, achieving a higher recognition accuracy in combination with the external LM $P_\tau(C)$.

The density ratio method [241] trains an internal LM using the transcript of the training data. Hybrid autoregressive transducer (HAT) [34] extends RNN-T so that the model becomes the internal LM when the encoder output is eliminated, i.e., set to zero. This approach simplifies the framework by utilizing the prediction network as the internal LM, which avoids training an additional LM and using it in the inference time. In the work of [242], an approach similar to HAT has been proposed where the internal LM is formulated on top of standard RNN-T and attention-based encoder-decoder models, respectively. In [98], several techniques to estimate internal LMs have been proposed for AED models, where an estimated bias vector is fed to the LM instead of a zero vector. The bias vector can be estimated by averaging encoder states or context vectors, or by a small LSTM predicting the context vector based on the decoder label context, only. These techniques to estimate the internal LM were also evaluated for RNN-T in [243].

C. Use of large-scale pretrained LMs

In recent years, LMs trained with large-scale text data are available for different NLP tasks. BERT [244] and GPT-2 [245] are representative models based on Transformer LMs. Such LMs have also been applied to E2E ASR systems in different ways, e.g., N-best rescoring [246] and dialog context embedding [247].

VII. RELATIONSHIP TO CLASSICAL ASR

E2E systems provide a number of properties that set them apart from classical ASR systems. Ideally, E2E systems define ASR models that integrate all knowledge sources into a single global joint model that does not utilize secondary knowledge sources and avoids the classical separation into acoustic and language models. These global joint models are completely trained from scratch using a single global training criterion based on a single kind of (transcribed) training data and thus require less ASR domain-specific knowledge, provided sufficient amounts of training data are available. Similarly, recognition may be performed in a single pass and without the use of an explicit lexicon.

E2E systems share some of their properties with classical ASR systems, while other E2E properties are sacrificed for reasons of performance and depending on the amount of training data available. In the following, we will discuss various relationships that can be observed between E2E and classical ASR approaches.

First of all, E2E models introduce alternative alignment modeling approaches to ASR. While the attention mechanism provides a qualitatively novel approach to map acoustic observation sequences to label sequences, transducer approaches [12], [13], [33], [211] handle the alignment problem in a way that can be interpreted to be similar to HMMs with a specific model topology, including marginalization over alignments [90], [248], [249]. CTC models can also be employed in an HMM-like fashion during decoding [194]. Moreover, transducer approaches are equivalent to segmental models/direct HMM [58].

The most prominent property shared between E2E and classical statistical ASR systems is the single-pass decoding strategy, integrating all knowledge sources involved (models, components) before performing a final decision [93]. This includes the use of full label context dependency both for E2E systems [180], [44], [187], [250], [145], [219], [251], [252], as well as classical systems via full-context language models [253], [197], [198], [254]. In classical ASR systems even HMM alignment path summation may be retained in search [255]. Both E2E as well as classical ASR systems employ beam search in decoding. However, compared to classical search approaches, E2E beam search usually is highly simplified with very small beam sizes around 1 to 100 [14], [15], [187], [118]. Very small beam sizes also partly mask a length bias exhibited by E2E attention-based encoder-decoder models [256], [257], thus trading model errors against search errors [258]. An overview of approaches to handle the length bias beyond using small beam sizes in ASR is presented in [188].

Another prominent feature of E2E systems is their direct character-level modeling avoiding phoneme-based modeling and pronunciation lexica [18], [216], [194], [15], [259], [187], [260], [261], [262], [112], [263], with some even heading for whole-word modeling [259], [25]. However, character-level modeling also is viable with classical hybrid HMM architectures [264] and has been shown to work even with standard HMM models w/o neural networks [265].

Many classical ASR search paradigms are based on multipass approaches that successively generate search space representations applying increasingly complex acoustic and/or language models [266], [267], [196]. However, multipass strategies also are employed using E2E models, which however softens the E2E concept. Decoder model combination is pursued in a two-pass approach, while even retaining latency constraints as in [60]. Further multipass approaches incl. E2E adaptation approaches [268], [269], [270], [271].

The architecture of classical ASR systems provides a separation into acoustic model and language model. In contrast to this, E2E models avoid this separation and define a joint model. While this allows for training with a single objective, it limits training of the (implicit) prior to the transcriptions of the audio training data. To exploit further text-only training data, usually a separate LM is combined with E2E models, nonetheless. However, due to the implicit prior of E2E models, i.e. the internal language model, combination with separate language models is not straightforward and requires corresponding internal language model estimation and compensation approaches, e.g. [241], [34], [242], [98], [272]. At least from the recognition accuracy perspective, it remains unclear, if the clear separation of acoustic modeling and language modeling in the classical ASR architecture is a disadvantage because of separate training objectives, or rather an advantage, since text-only training data may be used easily. Also, the language model training objective, i.e. language model perplexity, is observed to correlate well with word error rate [273], [274], [275], [276]. Furthermore, discriminative approaches to language modeling [277], [278] may be viewed as a step towards joint modeling.

While standard hybrid ANN/HMM training for ASR using frame-wise cross entropy already is discriminative, it is not yet sequence discriminative, requires prior alignments and also lacks consideration of an (external) language model during training. However, these potential shortcomings may be remedied by using sequence discriminative training criteria [97] and lattice-free training approaches [32].

In contrast to strict E2E systems, the classical ASR architecture includes the use of secondary knowledge sources beyond the primary training data, i.e. (transcribed) speech audio for acoustic model training, and textual data for language model training. Most prominently, this includes the use of a pronunciation lexicon and the definition of a phoneme set. Secondary resources like pronunciation lexica may be helpful in low-resource scenarios. However, their generation often is costly and may even introduce errors, like pronunciations from a lexicon not reflecting the actual pronunciations observed. Therefore, for large enough training resources, secondary knowledge sources might become obsolete [279], or even

harmful, in case of erroneous information introduced [280], [281].

Classical ASR models usually are trained successively, with knowledge derived from models trained earlier injected into later training stages, e.g. in the form of HMM state alignments. However, such approaches from classical ASR might also be interpreted as specific training schedules. Initializing deep learning models using HMM alignments obtained from acoustic models based on mixtures of Gaussians may be interpreted in this way, with the Gaussian mixtures serving as an initial shallow model. In classical ASR, also approaches training deep neural networks from scratch while avoiding intermediate training of Gaussians has been proposed [282], [283], [284], also in combination with character-level modeling [264]. Another step towards more integrated training of classical systems has been to apply discriminative training criteria avoiding intermediate (usually lattice-based) representations of competing word sequences [285], [32], [286], [287], [106].

The training of classical ASR systems usually applies secondary objectives to solve subtasks like phonetic clustering. The classification and regression trees (CART) approach is used to cluster triphone HMM states [24], [288]. More recent approaches proposed clustering within a neural network modeling framework, while still retaining secondary clustering objectives [289], [283]. However, also in E2E approaches secondary objectives are used, most prominently for subword generation, e.g. via byte-pair encoding [27]. Also, available pronunciation lexica can be utilized indirectly for assisting subword generation for E2E systems [290], [291], which are shown to outperform byte-pair encoding. Within classical ASR systems, phonetic clustering also can be avoided completely by modeling phonemes in context directly [292].

It is interesting to observe that specifically attention-based encoder-decoder models require larger numbers of training epochs to reach high performance, e.g. for a comparison of systems trained on Switchboard 300h cf. Table 5 in [293]. Also, attention-based encoder-decoder models have been shown to suffer from low training resources [294], [295], which can be improved by a number of approaches, including regularization techniques [145] as well as data augmentation using SpecAugment [296] and text-to-speech (TTS) [21]. SpecAugment also is shown to improve classical hybrid HMM models [297]. TTS on the other hand considerably improved attention-based encoder-decoder models trained on limited resources, but did not reach the performance of other E2E approaches or hybrid HMM models, which in turn were not considerably improved by TTS [179]. Multilingual approaches also help improve ASR development for low resource tasks, again both for classical [298], as well as for E2E systems [299], [300].

Speech recognition research has always been pushed by international evaluation campaigns (e.g. NIST) and corresponding benchmark tasks. The competition between classical and E2E approaches is nicely reflected in the widely used Librispeech [301] and Switchboard [302] tasks, showing that E2E models gain momentum. On Librispeech, current best published classical hybrid systems range around 2.3% (test-clean) and 4.9% (test-other) word error rate [303], [294],

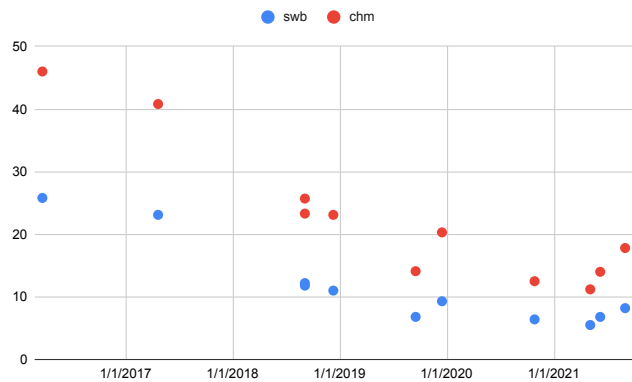


Fig. 9. E2E ASR performance improvement in the switchboard task.

while there already are a number of E2E systems providing similar performance [296], [176], [304], [177], with some E2E systems clearly outperforming former state-of-the-art results with word error rates down to 1.8% (test-clean) and 3.7% (test-other) [305] with similar results reported in [73], [70]. Merging insights from classical HMM-based and monotonic RNN-T provided similarly well results with a limited training budget [94]. Finally, when trained on Switchboard 300h, the current best result, obtained with an E2E system [151] is 5.4% compared to 6.6% word error rate for the best hybrid system result [306] on the HUBS'00 Switchboard test set.

VIII. OVERALL PERFORMANCE TRENDS OF E2E APPROACHES IN COMMON BENCHMARKS

This section summarizes various techniques with the common ASR benchmarks based on Librispeech [301] in Figure 10 and switchboard (SWBD) [302] in Figure 9 to see the trajectory of the techniques developed in end-to-end ASR. We choose these two databases because they are widely used in speech and machine learning communities and cover spontaneous (SWBD) and read speech (Librispeech) speaking styles. Figures 9 and 10 show that the performance improvement from the initial trials [261], [118] based on the E2E models is significant, and the error rates of all tasks become less than half¹⁰.

Although the overall trends show that the ASR performance was steadily improved as time goes, there are several remarkable gains. One significant gain observed in both benchmarks in the middle of 2019 comes from the data augmentation method represented by SpecAugment [176], [177], as discussed in Section IV-G. The subsequent gains mostly come from the exploration of the new E2E architectures, including transformer [75], [307], conformer [73], [76], and contextnet [70] on top of SpecAugment, as discussed in Section III-C. Such an exploration is also performed in language modeling to improve the ASR performance [235], [75]. The final gain observed in the Librispeech benchmark in 2021 is based on self-supervised learning [22], [308] and semi-supervised

¹⁰ For readers who want to know the latest update of these benchmarks can also check https://github.com/syhw/wer_are_we and <https://github.com/thu-spmi/ASR-Benchmarks/blob/main/README.md>.

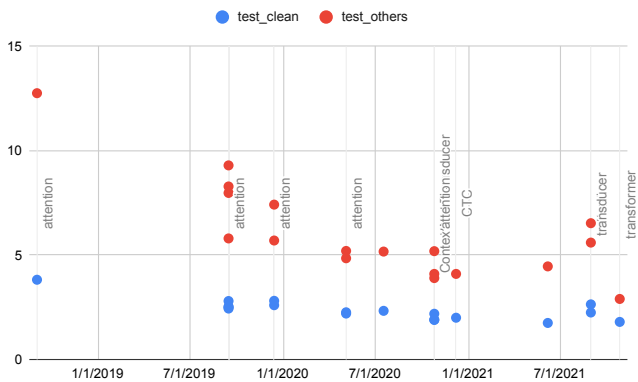


Fig. 10. E2E ASR performance improvement in the Librispeech task.

learning [304], [309]. These techniques utilize a considerable amount of unlabeled in-domain speech data (e.g., Libri-light 60K hours [310]).

IX. DEPLOYMENT OF E2E MODELS

Many of the ideas discussed in this paper have been explored by various industry research labs [311], [312], [313], [314], [315] *inter alia*. In this section, we review the development of on-device production-level systems at Google as a typical case study for the deployment. The first streaming E2E model, deployed to production, was launched in 2019 for the Pixel 4 smartphone [212], [316]. This model used a streaming RNN-T first pass system, while re-scoring first-pass hypotheses with an AED system in the second pass. In addition, FST-based contextual biasing [65] was employed in the model, which was critical to obtain accurate results for diverse queries. This model ran on CPU and was much faster than real time.

In 2020, for the Pixel 5 smartphone [317], the system was improved further to reduce user-perceived latency (i.e., the time between when the user speaks, and when words appear on the device). This included advancements such as end-to-end endpointing [82] to encourage faster microphone closing; as well as FastEmit [64] to encourage the model to emit tokens earlier.

Finally, in 2021 the model was further improved for the Pixel 6 smartphone [318], to take advantage of the tensor processing unit (TPU) [319] on the device. This includes using conformer layers for the encoder [73]; a small embedding prediction network for the decoder [77]; a 2-pass cascaded encoder to run a 2nd-pass beam search [62]; and, a neural LM re-scoring to help improve accuracy long-tail named entities. This model is the best ASR system that Google has released to date, both in terms of quality and latency, and is significantly better than the 80GB model in the cloud.

X. AREAS FOR FUTURE WORK

Currently, E2E models dominate the academic debate on ASR. This, at least partly, is not (yet?) reflected in the corresponding commercial deployment of E2E ASR architectures. E2E models are not yet the perfect match for all ASR

conditions and further research is needed to take advantage of the benefits of E2E modeling.

E2E models seem to perform really well when training data is abundant, while not scaling well to low-resource conditions. Similarly, domain change requires a flexible exchange of language models, which is natural for classical ASR models based on a separation of acoustic and language models. Ongoing research on the use of external language models in E2E models and internal language model estimation already is promising, but can be expected to see further improvements.

Top E2E ASR systems usually require orders of magnitude more training epochs than comparable classical ASR systems, and further research into efficient and robust optimization and training schedules is needed.

The high level of integration of E2E models also involves a loss in modularity, which might support the explainability and reusability of models. Also, more efficient training schedules might take advantage of modularity. One assumed advantage of E2E models is that everything is trained from data and secondary knowledge sources (e.g. pronunciation lexica and phoneme sets) are avoided. However, rare events, like rare words in ASR still provide a challenge, which needs further research.

With the missing separation of acoustic and language models, the question arises of how to exploit text-only resources in E2E model training - do we foresee solutions beyond training data generation using TTS? We note that a number of recent works have explored approaches to combine speech and text modalities by attempting to implicitly or explicitly map them into a shared space [320], [321], [322], [323], [324], [325], [130], [326]. Furthermore, high-performance E2E solutions exist for both discriminative problems like ASR, as well as generative problems like TTS, how can both be exploited jointly to support semi-supervised training based on text-only and/or audio-only data on top of transcribed speech audio [20], [327]?

More specifically, for the AED architecture we observe a length bias. Although many heuristics are known to tackle length bias in AED, we are still missing a well-founded explanation for it, as well as a corresponding remedy of the original model.

Other open research problems include speaker adaptation and robustness to recording conditions, especially in mismatch situations.

The E2E principle also provides a promising candidate to solve multichannel ASR by providing an E2E solution jointly tackling the source separation, speaker diarization and speech recognition problem [328], [329].

Finally, we need to investigate, if E2E is a suitable guiding principle, and how different E2E ASR models relate to each other as well as to classical ASR approaches. The most important guiding principle of ASR research and development has been performance, and ASR has been boosted strongly by widely used benchmark tasks and international evaluation campaigns. With the current diversity of classical and E2E models, we also need to resolve the question of what constitutes state-of-the-art in ASR today, and can we expect a common state-of-the-art ASR architecture in the future?

XI. CONCLUSIONS

In this work, we presented a detailed overview of end-to-end approaches to ASR. Such models, which have grown in popularity over the last few years, propose to use highly integrated neural network components which allow input speech to be converted directly into output text sequences through character-based output units. Thus, such models eschew the classical modular ASR architecture consisting of an acoustic model, a pronunciation model, and a language model, in favor of a single compact structure, and rely on the data to learn effectively. These design choices enable the deployment of highly accurate on-device speech recognition models (see Section IX), but also come with a number of downsides which are still areas of active research (see Section X). Finally, we note that Jinyu Li's excellent overview article [330], is complementary to our article, offering another perspective on end-to-end ASR.

ACKNOWLEDGMENT

The authors would like to thank Julian Dierkes, Yifan Peng, Zoltán Tüske, Albert Zeyer and Wei Zhou for their help on refining our manuscript.

REFERENCES

- [1] T. Bayes, "An Essay Towards Solving a Problem in the Doctrine of Chances," *Philosophical Transactions of the Royal Society of London*, vol. 53, pp. 370–418, 1763.
- [2] F. Jelinek, *Statistical Methods for Speech Recognition*. Cambridge, MA: MIT Press, 1997.
- [3] H. A. Bourlard and N. Morgan, *Connectionist Speech Recognition: a Hybrid Approach*. Norwell, MA: Kluwer Academic Publishers, 1993.
- [4] F. Seide, G. Li, and D. Yu, "Conversational Speech Transcription Using Context-Dependent Deep Neural Networks," in *Proc. Interspeech*, Florence, Italy, Aug. 2011, pp. 437–440.
- [5] V. Fontaine, C. Ris, and H. Leich, "Nonlinear Discriminant Analysis for Improved Speech Recognition," in *Proc. Eurospeech*, Rhodes, Greece, Sep. 1997, pp. 1–4.
- [6] H. Hermansky, D. Ellis, and S. Sharma, "Tandem connectionist Feature Extraction for Conventional HMM Systems," in *Proc. IEEE ICASSP*, vol. 3, Istanbul, Turkey, Jun. 2000, pp. 1635–1638.
- [7] M. Nakamura and K. Shikano, "A Study of English Word Category Prediction Based on Neural Networks," in *Proc. IEEE ICASSP*, Glasgow, UK, May 1989, pp. 731–734.
- [8] Y. Bengio, R. Ducharme, and P. Vincent, "A Neural Probabilistic Language Model," in *Proc. NIPS*, vol. 13, Denver, CO, Nov. 2000, pp. 932–938.
- [9] H. Schwenk and J.-L. Gauvain, "Connectionist Language Modeling for Large Vocabulary Continuous Speech Recognition," in *Proc. IEEE ICASSP*, Orlando, FL, May 2002, pp. 765–768.
- [10] Z. Tüske, P. Golik, R. Schlüter, and H. Ney, "Acoustic Modeling with Deep Neural Networks Using Raw Time Signal for LVCSR," in *Proc. Interspeech*, Singapore, Sep. 2014, pp. 890–894.
- [11] T. N. Sainath, R. J. Weiss, K. W. Wilson, A. Narayanan, M. Bacchiani, and A. Senior, "Speaker Location and Microphone Spacing Invariant Acoustic Modeling from Raw Multichannel Waveforms," in *Proc. IEEE ASRU*, Scottsdale, AZ, Dec. 2015, pp. 30–36.
- [12] A. Graves, S. Fernández, F. Gomez, and J. Schmidhuber, "Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks," in *Proc. ICML*, Pittsburgh, PA, Jun. 2006, pp. 369–376.
- [13] A. Graves, "Sequence Transduction with Recurrent Neural Networks," Nov. 2012, arXiv:1211.3711. [Online]. Available: <https://arxiv.org/abs/1211.3711>
- [14] J. K. Chorowski, D. Bahdanau, D. Serdyuk, K. Cho, and Y. Bengio, "Attention-Based Models for Speech Recognition," in *Proc. NIPS*, vol. 28, Laval, Québec, Canada, Dec. 2015, pp. 577–585.
- [15] W. Chan, N. Jaitly, Q. Le, and O. Vinyals, "Listen, Attend and Spell: A Neural Network for Large Vocabulary Conversational Speech Recognition," in *Proc. IEEE ICASSP*, Shanghai, China, Mar. 2016, pp. 4960–4964.
- [16] P. Liang, A. Bouchard-Côté, D. Klein, and B. Taskar, "An End-to-End Discriminative Approach to Machine Translation," in *Proc. ACL*, Sydney, Australia, Jul. 2006, p. 761–768.
- [17] R. Collobert, J. Weston, L. Bottou, M. Karlen, K. Kavukcuoglu, and P. Kuksa, "Natural Language Processing (Almost) from Scratch," *Journal of Machine Learning Research*, vol. 12, pp. 2493–2537, 2011.
- [18] A. Graves and N. Jaitly, "Towards End-to-End Speech Recognition with Recurrent Neural Networks," in *Proc. ICML*, Beijing, China, Jun. 2014, pp. 1764–1772.
- [19] "Cambridge Dictionary," <https://dictionary.cambridge.org/dictionary/english/end-to-end>, accessed: 2020-02-21.
- [20] A. Tjandra, S. Sakti, and S. Nakamura, "Listening While Speaking: Speech Chain by Deep Learning," in *Proc. IEEE ASRU*. Okinawa, Japan: IEEE, Dec. 2017, pp. 301–308.
- [21] M. K. Baskar, S. Watanabe, R. Astudillo, T. Hori, L. Burget, and J. Černocký, "Semi-Supervised Sequence-to-Sequence ASR Using Unpaired Speech and Text," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 3790–3794.
- [22] A. Baevski, Y. Zhou, A. Mohamed, and M. Auli, "wav2vec 2.0: A Framework for Self-Supervised Learning of Speech Representations," in *Proc. NeurIPS*, Vancouver, BC, Canada, Dec. 2020, pp. 12 449–12 460.
- [23] X. Chang, T. Maekaku, Y. Fujita, and S. Watanabe, "End-to-End Integration of Speech Recognition, Speech Enhancement, and Self-Supervised Learning Representation," Apr. 2022, arXiv:2204.00540. [Online]. Available: <https://arxiv.org/abs/2204.00540>
- [24] L. Breiman, J. Friedman, C. Stone, and R. Olshen, *Classification and Regression Trees*. Belmont, CA: Taylor & Francis, 1984.
- [25] H. Soltau, H. Liao, and H. Sak, "Neural Speech Recognizer: Acoustic-to-Word LSTM Model for Large Vocabulary Speech Recognition," Oct. 2016, arXiv:1610.09975. [Online]. Available: <https://arxiv.org/abs/1610.09975>
- [26] G. K. Zipf, *Human Behavior and the Principle of Least Effort*. Boston, MA: Addison-Wesley Press, 1949.
- [27] R. Sennrich, B. Haddow, and A. Birch, "Neural Machine Translation of Rare Words with Subword Units," in *Proc. ACL*, Berlin, Germany, Aug. 2015, pp. 1715–1725.
- [28] R. Pang, T. N. Sainath, R. Prabhavalkar, S. Gupta, Y. Wu, S. Zhang, and C.-c. Chiu, "Compression of End-to-End Models," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 27–31.
- [29] M. Schuster and K. Nakajima, "Japanese and Korean Voice Search," in *Proc. IEEE ICASSP*, Kyoto, Japan, Mar. 2012, pp. 5149–5152.
- [30] S. Hochreiter and J. Schmidhuber, "Long Short-Term Memory," *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [31] A. Vaswani, N. Shazeer, N. Parmar, J. Uszkoreit, L. Jones, A. N. Gomez, Ł. Kaiser, and I. Polosukhin, "Attention is All You Need," in *Proc. NIPS*, Los Angeles, CA, Dec. 2017, pp. 5998–6008.
- [32] D. Povey, V. Peddinti, D. Galvez, P. Ghahremani, V. Manohar, X. Na, Y. Wang, and S. Khudanpur, "Purely Sequence-Trained Neural Networks for ASR Based on Lattice-Free MMI," in *Proc. Interspeech*. San Francisco, CA: ISCA, Sep. 2016, pp. 2751–2755. [Online]. Available: <https://doi.org/10.21437/Interspeech.2016-595>
- [33] H. Sak, M. Shannon, K. Rao, and F. Beaufays, "Recurrent Neural Aligner: An Encoder-Decoder Neural Network Model for Sequence to Sequence Mapping," in *Proc. Interspeech*, vol. 8, Stockholm, Sweden, Aug. 2017, pp. 1298–1302.
- [34] E. Variiani, D. Rybach, C. Allauzen, and M. Riley, "Hybrid Autoregressive Transducer (HAT)," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6139–6143.
- [35] Y. Wu, M. Schuster, Z. Chen, Q. V. Le, M. Norouzi, W. Macherey, M. Krikun, Y. Cao, Q. Gao, K. Macherey, J. Klingner, A. Shah, M. Johnson, X. Liu, Ł. Kaiser, S. Gouws, Y. Kato, T. Kudo, H. Kazawa, K. Stevens, G. Kurian, N. Patil, W. Wang, C. Young, J. Smith, J. Riesa, A. Rudnick, O. Vinyals, G. Corrado, M. Hughes, and J. Dean, "Google's Neural Machine Translation System: Bridging the Gap Between Human and Machine Translation," Oct. 2016, arXiv:1609.08144. [Online]. Available: <https://arxiv.org/abs/1609.08144>
- [36] D. Bahdanau, K. Cho, and Y. Bengio, "Neural Machine Translation by Jointly Learning to Align and Translate," May 2014, arXiv:1409.0473. [Online]. Available: <https://arxiv.org/abs/1409.0473>

- [37] N. Jaitly, Q. V. Le, O. Vinyals, I. Sutskever, D. Sussillo, and S. Bengio, "An Online Sequence-to-Sequence Model Using Partial Conditioning," in *Proc. NIPS*, Barcelona, Spain, Dec. 2016, pp. 5067–5075.
- [38] C. Raffel, M.-T. Luong, P. J. Liu, R. J. Weiss, and D. Eck, "Online and Linear-Time Attention by Enforcing Monotonic Alignments," in *Proc. ICML*, Sydney, Australia, Aug. 2017, pp. 2837–2846.
- [39] C.-C. Chiu and C. Raffel, "Monotonic Chunkwise Attention," in *Proc. ICLR*, Apr. 2018, arXiv:1712.05382.
- [40] N. Arivazhagan, C. Cherry, W. Macherey, C.-C. Chiu, S. Yavuz, R. Pang, W. Li, and C. Raffel, "Monotonic Infinite Lookback Attention for Simultaneous Machine Translation," in *Proc. ACL*, Florence, Italy, Jun. 2019, pp. 1313–1323.
- [41] M. Mohri, F. Pereira, and M. Riley, "Weighted Finite-State Transducers in Speech Recognition," *Computer Speech & Language*, vol. 16, no. 1, pp. 69–88, 2002.
- [42] A. Graves, A.-r. Mohamed, and G. Hinton, "Speech Recognition with Deep Recurrent Neural Networks," in *Proc. IEEE ICASSP*, Vancouver, BC, Canada, May 2013, pp. 6645–6649.
- [43] N. Moritz, T. Hori, S. Watanabe, and J. Le Roux, "Sequence Transduction with Graph-Based Supervision," in *Proc. IEEE ICASSP*, Singapore, May 2022, pp. 7212–7216.
- [44] A. Tripathi, H. Lu, H. Sak, and H. Soltau, "Monotonic Recurrent Neural Network Transducer and Decoding Strategies," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 944–948.
- [45] A. Zeyer, A. Merboldt, R. Schlüter, and H. Ney, "A New Training Pipeline for an Improved Neural Transducer," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 2812–2816.
- [46] D. Bahdanau, J. Chorowski, D. Serdyuk, P. Brakel, and Y. Bengio, "End-to-End Attention-Based Large Vocabulary Speech Recognition," in *Proc. IEEE ICASSP*, Shanghai, China, Mar. 2016, pp. 4945–4949.
- [47] M. Mimura, S. Sakai, and T. Kawahara, "Forward-Backward Attention Decoder," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 2232–2236.
- [48] A. Graves, "Generating Sequences with Recurrent Neural Networks," Aug. 2013. [Online]. Available: <https://arxiv.org/abs/1308.0850>
- [49] R. Prabhavalkar, K. Rao, T. N. Sainath, B. Li, L. Johnson, and N. Jaitly, "A Comparison of Sequence-to-Sequence Models for Speech Recognition," in *Proc. Interspeech*, Stockholm, Sweden, Aug. 2017, pp. 939–943.
- [50] C.-C. Chiu, W. Han, Y. Zhang, R. Pang, S. Kishchenko, P. Nguyen, A. Narayanan, H. Liao, S. Zhang, A. Kannan, R. Prabhavalkar, Z. Chen, T. Sainath, and Y. Wu, "A Comparison of End-to-End Models for Long-Form Speech Recognition," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 889–896.
- [51] T. N. Sainath, C.-C. Chiu, R. Prabhavalkar, A. Kannan, Y. Wu, P. Nguyen, and Z. Chen, "Improving the Performance of Online Neural Transducer Models," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 5864–5868.
- [52] N. Moritz, T. Hori, and J. Le Roux, "Triggered Attention for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Brighton, England, May 2019, pp. 5666–5670.
- [53] A. Merboldt, A. Zeyer, R. Schlüter, and H. Ney, "An Analysis of Local Monotonic Attention Variants," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 1398–1402.
- [54] A. Zeyer, R. Schlüter, and H. Ney, "A Study of Latent Monotonic Attention Variants," Mar. 2021, arXiv:2103.16710. [Online]. Available: <http://arxiv.org/abs/2103.16710>
- [55] A. Zeyer, R. Schmitt, W. Zhou, R. Schlüter, and H. Ney, "Monotonic Segmental Attention for Automatic Speech Recognition," Doha, Qatar, Jan. 2023, to appear; arXiv:2210.14742. [Online]. Available: <https://arxiv.org/abs/2210.14742>
- [56] Z. Tian, J. Yi, Y. Bai, J. Tao, S. Zhang, and Z. Wen, "Synchronous Transformers for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, arXiv:1912.02958. [Online]. Available: <https://arxiv.org/abs/1912.02958>
- [57] E. Beck, M. Hannemann, P. Doetsch, R. Schlüter, and H. Ney, "Segmental Encoder-Decoder Models for Large Vocabulary Automatic Speech Recognition," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018.
- [58] W. Zhou, A. Zeyer, A. Merboldt, R. Schlüter, and H. Ney, "Equivalence of Segmental and Neural Transducer Modeling: A Proof of Concept," in *Proc. Interspeech*, Brno, Czechia, Aug. 2021, pp. 2891–2895.
- [59] S. Kim, T. Hori, and S. Watanabe, "Joint CTC-Attention Based End-to-End Speech Recognition Using Multi-Task Learning," in *Proc. IEEE ICASSP*, New Orleans, LA, Mar. 2017, pp. 4835–4839.
- [60] T. N. Sainath, R. Pang, D. Rybach, Y. He, R. Prabhavalkar, W. Li, M. Visontai, Q. Liang, T. Strohmaier, Y. Wu, I. McGraw, and C. Chung-Cheng, "Two-Pass End-to-End Speech Recognition," in *Proc. Interspeech*, Brighton, UK, May 2019, pp. 2773–2777.
- [61] K. Hu, T. N. Sainath, R. Pang, and R. Prabhavalkar, "Deliberation Model Based Two-Pass End-to-End Speech Recognition," in *Proc. IEEE ICASSP*. Barcelona, Spain: IEEE, May 2020, pp. 7799–7803.
- [62] A. Narayanan, T. N. Sainath, R. Pang, J. Yu, C.-C. Chiu, R. Prabhavalkar, E. Variani, and T. Strohmaier, "Cascaded Encoders for Unifying Streaming and Non-Streaming ASR," in *Proc. IEEE ICASSP*, Toronto, Ontario, Canada, Jun. 2021, pp. 5629–5633.
- [63] A. Tripathi, J. Kim, Q. Zhang, H. Lu, and H. Sak, "Transformer Transducer: One Model Unifying Streaming and Non-Streaming Speech Recognition," Oct. 2020, arXiv:2010.03192. [Online]. Available: <https://arxiv.org/abs/2010.03192>
- [64] J. Yu, W. Han, A. Gulati, C.-C. Chiu, B. Li, T. N. Sainath, Y. Wu, and R. Pang, "Universal ASR: Unify and Improve Streaming ASR with Full-Context Modeling," Oct. 2020, arXiv:2010.06030. [Online]. Available: <https://arxiv.org/abs/2010.06030>
- [65] D. Zhao, T. N. Sainath, D. Rybach, P. Rondon, D. Bhatia, B. Li, and R. Pang, "Shallow-Fusion End-to-End Contextual Biasing," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 1418–1422.
- [66] G. Pundak, T. N. Sainath, R. Prabhavalkar, A. Kannan, and D. Zhao, "Deep Context: End-to-end Contextual Speech Recognition," in *Proc. IEEE SLT*, Athens, Greece, Dec. 2018, pp. 418–425.
- [67] S. Kim and F. Metze, "Dialog-Context Aware End-to-End Speech Recognition," in *Proc. IEEE SLT*, Athens, Greece, Dec. 2018, pp. 434–440.
- [68] A. Bruguier, R. Prabhavalkar, G. Pundak, and T. N. Sainath, "Phoebe: Pronunciation-Aware Contextualization for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 6171–6175.
- [69] M. Delcroix, S. Watanabe, A. Ogawa, S. Karita, and T. Nakatani, "Auxiliary Feature Based Adaptation of End-to-End ASR Systems," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 2444–2448.
- [70] W. Han, Z. Zhang, Y. Zhang, J. Yu, C.-C. Chiu, J. Qin, A. Gulati, R. Pang, and Y. Wu, "ContextNet: Improving Convolutional Neural Networks for Automatic Speech Recognition with Global Context," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 3610–3614.
- [71] L. Dong, S. Xu, and B. Xu, "Speech-Transformer: A No-Recurrence Sequence-to-Sequence Model for Speech Recognition," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 5884–5888.
- [72] Q. Zhang, H. Lu, H. Sak, A. Tripathi, E. McDermott, S. Koo, and S. Kumar, "Transformer Transducer: A Streamable Speech Recognition Model with Transformer Encoders and RNN-T Loss," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7829–7833.
- [73] A. Gulati, J. Qin, C.-C. Chiu, N. Parmar, Y. Zhang, J. Yu, W. Han, S. Wang, Z. Zhang, Y. Wu, and R. Pang, "Conformer: Convolution-Augmented Transformer for Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 5036–5040.
- [74] Y. Peng, S. Dalmia, I. Lane, and S. Watanabe, "Branchformer: Parallel MLP-Attention Architectures to Capture Local and Global Context for Speech Recognition and Understanding," in *Proc. ICML*. Baltimore, MD: PMLR, Jul. 2022, pp. 17 627–17 643.
- [75] S. Karita, N. Chen, T. Hayashi, T. Hori, H. Inaguma, Z. Jiang, M. Someki, N. E. Y. Soplin, R. Yamamoto, X. Wang, S. Watanabe, T. Yoshimura, and W. Zhang, "A Comparative Study on Transformer vs RNN in Speech Applications," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 449–456.
- [76] P. Guo, F. Boyer, X. Chang, T. Hayashi, Y. Higuchi, H. Inaguma, N. Kamo, C. Li, D. Garcia-Romero, J. Shi, J. Shi, S. Watanabe, K. Wei, W. Zhang, and Y. Zhang, "Recent Developments on ESPNET Toolkit Boosted by Conformer," in *Proc. IEEE ICASSP*. Toronto, Ontario, Canada: IEEE, Jun. 2021, pp. 5874–5878.
- [77] R. Botros, T. Sainath, R. David, E. Guzman, W. Li, and Y. He, "Tied & Reduced RNN-T Decoder," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 4563–4567.
- [78] M. Ghosli, X. Liu, J. Apfel, R. Cabrera, and E. Weinstein, "RNN-Transducer with Stateless Prediction Network," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7049–7053.
- [79] W. Zhou, S. Berger, R. Schlüter, and H. Ney, "Phoneme Based Neural Transducer for Large Vocabulary Speech Recognition," in *Proc. IEEE ICASSP*, Toronto, Ontario, Canada, Jun. 2021, pp. 5644–5648.
- [80] R. Prabhavalkar, Y. He, D. Rybach, S. Campbell, A. Narayanan, T. Strohmaier, and T. N. Sainath, "Less is More: Improved RNN-T Decoding Using Limited Label Context and Path Merging," in *Proc. IEEE ICASSP*, Toronto, Ontario, Canada, Jun. 2021, pp. 5659–5663.

- [81] S.-Y. Chang, B. Li, and G. Simko, "A Unified Endpointer Using Multitask and Multidomain Training," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 100–106.
- [82] B. Li, S.-y. Chang, T. N. Sainath, R. Pang, Y. He, T. Strohmaier, and Y. Wu, "Towards Fast and Accurate Streaming End-To-End ASR," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6069–6073.
- [83] T. Yoshimura, T. Hayashi, K. Takeda, and S. Watanabe, "End-To-End Automatic Speech Recognition Integrated with CTC-Based Voice Activity Detection," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6999–7003.
- [84] Y. Fujita, T. Wang, S. Watanabe, and M. Omachi, "Toward Streaming ASR with Non-Autoregressive Insertion-Based Model," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 3740–3744.
- [85] Y. Bengio, "Practical Recommendations for Gradient-Based Training of Deep Architectures," Jun. 2012, arXiv:1206.5533. [Online]. Available: <https://arxiv.org/abs/1206.5533>
- [86] J. Schmidhuber, "Deep Learning in Neural Networks: An Overview," *Neural Networks*, vol. 61, pp. 85–117, Jan. 2015, arXiv:1404.7828. [Online]. Available: <https://arxiv.org/abs/1404.7828>
- [87] L. Baum, "An Inequality and Associated Maximization Technique in Statistical Estimation for Probabilistic Functions of Markov Processes," *Inequalities*, vol. 3, pp. 1–8, 1972.
- [88] L. Rabiner and B.-H. Juang, "An Introduction to Hidden Markov Models," *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 3, no. 1, pp. 4–16, 1986.
- [89] Y. Bengio, R. De Mori, G. Flammia, and R. Kompe, "Neural Network-Gaussian Mixture Hybrid for Speech Recognition or Density Estimation," in *Proc. NIPS*, vol. 4, Colorado, Dec. 1991, pp. 175–182.
- [90] P. Haffner, "Connectionist Speech Recognition with a Global MMI Algorithm," in *Proc. Eurospeech*, Berlin, Germany, Dec. 1993, pp. 1929–1932.
- [91] R. E. Bellman, *Dynamic Programming*. Princeton, NJ: Princeton University Press, 1957.
- [92] A. Viterbi, "Error Bounds for Convolutional Codes and an Asymptotically Optimal Decoding Algorithm," *IEEE Transactions on Information Theory*, vol. 13, pp. 260–269, 1967.
- [93] H. Ney, "The Use of a One-Stage Dynamic Programming Algorithm for Connected Word Recognition," *IEEE Transactions on Acoustics, Speech, and Signal Processing*, vol. 32, no. 2, pp. 263–271, 1984.
- [94] W. Zhou, W. Michel, R. Schlüter, and H. Ney, "Efficient Training of Neural Transducer for Speech Recognition," Apr. 2022, arXiv:2204.10586. [Online]. Available: <https://arxiv.org/abs/2204.10586>
- [95] A. Zeyer, R. Schlüter, and H. Ney, "Why does CTC Result in Peaky Behavior?" Preprint arXiv:2105.14849, May 2021, arXiv:2105.14849. [Online]. Available: <http://arxiv.org/abs/2105.14849>
- [96] A. Laptev, S. Majumdar, and B. Ginsburg, "CTC Variations Through New WFST Topologies," in *Proc. Interspeech*, Incheon, Korea, Sep. 2022. [Online]. Available: <https://doi.org/10.21437>
- [97] X. He, L. Deng, and W. Chou, "Discriminative Learning in Sequential Pattern Recognition – A Unifying Review for Optimization-Oriented Speech Recognition," *IEEE Signal Processing Magazine*, vol. 25, no. 5, pp. 14–36, 2008.
- [98] M. Zeineldeen, A. Glushko, W. Michel, A. Zeyer, R. Schlüter, and H. Ney, "Investigating Methods to Improve Language Model Integration for Attention-Based Encoder-Decoder ASR Models," in *Proc. Interspeech*, Brno, Czechia, Aug. 2021, pp. 2856–2860.
- [99] N.-P. Wynands, W. Michel, J. Rosendahl, R. Schlüter, and H. Ney, "Efficient Sequence Training of Attention Models using Approximate Recombination," in *Proc. IEEE ICASSP*, Singapore, May 2022, arXiv:2110.09245.
- [100] Z. Yang, W. Zhou, R. Schlüter, and H. Ney, "Lattice-Free Sequence Discriminative Training for Phoneme-based Neural Transducers," in *Proc. IEEE ICASSP*, Rhodes, Greece, Oct. 2022, submitted, preprint: arXiv:NNNN.NNNN.
- [101] V. Valtchev, J. J. Odell, P. C. Woodland, and S. J. Young, "MMIE Training of Large Vocabulary Recognition Systems," *Speech Communication*, vol. 22, no. 4, pp. 303–314, 1997.
- [102] D. Povey and P. Woodland, "Improved Discriminative Training Techniques for Large Vocabulary Continuous Speech Recognition," in *Proc. IEEE ICASSP*, Salt Lake City, UT, May 2001, pp. 45–48.
- [103] R. Schlüter, W. Macherey, B. Müller, and H. Ney, "Comparison of Discriminative Training Criteria and Optimization Methods for Speech Recognition," *Speech Communication*, vol. 34, no. 3, pp. 287–310, May 2001, EURASIP Best Paper Award.
- [104] B. Kingsbury, "Lattice-Based Optimization of Sequence Classification Criteria for Neural-Network Acoustic Modeling," in *Proc. IEEE ICASSP*, Taipei, Taiwan, Apr. 2009, pp. 3761–3764.
- [105] G. Heigold, R. Schlüter, H. Ney, and S. Wiesler, "Discriminative Training for Automatic Speech Recognition: Modeling, Criteria, Optimization, Implementation, and Performance," *IEEE Signal Processing Magazine*, vol. 29, no. 6, pp. 58–69, Nov. 2012.
- [106] W. Michel, R. Schlüter, and H. Ney, "Comparison of Lattice-Free and Lattice-Based Sequence Discriminative Training Criteria for LVCSR," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 1601–1605. [Online]. Available: <http://arxiv.org/abs/1907.01409>
- [107] R. Prabhavalkar, T. N. Sainath, Y. Wu, P. Nguyen, Z. Chen, C.-C. Chiu, and A. Kannan, "Minimum Word Error Rate Training for Attention-Based Sequence-to-Sequence Models," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 4839–4843.
- [108] C. Weng, C. Yu, J. Cui, C. Zhang, and D. Yu, "Minimum Bayes Risk Training of RNN-Transducer for End-to-End Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 966–970.
- [109] M. K. Baskar, L. Burget, S. Watanabe, M. Karafiát, T. Hori, and J. H. Černocký, "Promising Accurate Prefix Boosting for Sequence-to-Sequence ASR," in *Proc. IEEE ICASSP*. Brighton, UK: IEEE, May 2019, pp. 5646–5650.
- [110] A. Tjandra, S. Sakti, and S. Nakamura, "Sequence-to-Sequence ASR Optimization via Reinforcement Learning," in *Proc. IEEE ICASSP*. Calgary, Alberta, Canada: IEEE, Apr. 2018, pp. 5829–5833.
- [111] S. Karita, A. Ogawa, M. Delcroix, and T. Nakatani, "Sequence Training of Encoder-Decoder Model Using Policy Gradient for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*. Calgary, Alberta, Canada: IEEE, Apr. 2018, pp. 5839–5843.
- [112] S. Sabour, W. Chan, and M. Norouzi, "Optimal Completion Distillation for Sequence Learning," in *Proc. ICLR*, New Orleans, LA, May 2019, arXiv:1810.01398.
- [113] W. Michel, R. Schlüter, and H. Ney, "Early Stage LM Integration Using Local and Global Log-Linear Combination," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 3605–3609. [Online]. Available: <http://https://arxiv.org/abs/2005.10049>
- [114] G. E. Hinton, S. Osindero, and Y.-W. Teh, "A Fast Learning Algorithm for Deep Belief Nets," *Neural Computation*, vol. 18, no. 7, pp. 1527–1554, Jul. 2006.
- [115] Y. Bengio, P. Lamblin, D. Popovici, and H. Larochelle, "Greedy Layer-Wise Training of Deep Networks," in *Proc. NIPS*, Barcelona, Spain, Dec. 2006, pp. 153–160.
- [116] A. Zeyer, P. Doetsch, P. Voigtlaender, R. Schlüter, and H. Ney, "A Comprehensive Study of Deep Bidirectional LSTM RNNs for Acoustic Modeling in Speech Recognition," in *Proc. IEEE ICASSP*, New Orleans, LA, Mar. 2017, pp. 2462–2466.
- [117] A. Zeyer, T. Alkhouli, and H. Ney, "RETURNN as a Generic Flexible Neural Toolkit with Application to Translation and Speech Recognition," in *Proc. ACL*, Melbourne, Australia, Jul. 2018, pp. 128–133.
- [118] A. Zeyer, K. Irie, R. Schlüter, and H. Ney, "Improved Training of End-to-End Attention Models for Speech Recognition," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 7–11.
- [119] A. Zeyer, A. Merboldt, R. Schlüter, and H. Ney, "A Comprehensive Analysis on Attention Models," in *Proc. NIPS*, Montreal, Canada, Dec. 2018.
- [120] Y. Chung, C. Wu, C. Shen, H. Lee, and L. Lee, "Audio Word2Vec: Unsupervised Learning of Audio Segment Representations using Sequence-to-sequence Autoencoder," *CoRR*, vol. abs/1603.00982, 2016. [Online]. Available: <http://arxiv.org/abs/1603.00982>
- [121] Y.-C. Chen, S.-F. Huang, H.-y. Lee, Y.-H. Wang, and C.-H. Shen, "Audio Word2vec: Sequence-to-Sequence Autoencoding for Unsupervised Learning of Audio Segmentation and Representation," *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, vol. 27, no. 9, pp. 1481–1493, 2019.
- [122] S. Scanzio, P. Laface, L. Fissore, R. Gemello, and F. Mana, "On the Use of a Multilingual Neural Network Front-End," in *Proc. Interspeech*, Brisbane, Australia, Sep. 2008, pp. 2711–2714.
- [123] Z. Tüske, J. Pinto, D. Willett, and R. Schlüter, "Investigation on Cross- and Multilingual MLP features under matched and mismatched acoustical conditions," in *IEEE International Conference on Acoustics, Speech, and Signal Processing*, Vancouver, Canada, May 2013, pp. 7349–7353.
- [124] S. Zhou, S. Xu, and B. Xu, "Multilingual End-to-End Speech Recognition with a Single Transformer on Low-Resource Languages," Jun. 2018, arXiv:1806.05059. [Online]. Available: <https://arxiv.org/abs/1806.05059>

- [125] O. Adams, M. Wiesner, S. Watanabe, and D. Yarowsky, "Massively Multilingual Adversarial Speech Recognition," Apr. 2019, arXiv:1904.02210. [Online]. Available: <https://arxiv.org/abs/1904.02210>
- [126] W. Hou, Y. Dong, B. Zhuang, L. Yang, J. Shi, and T. Shinozaki, "Large-scale end-to-end multilingual speech recognition and language identification with multi-task learning," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 1037–1041.
- [127] V. Pratap, A. Sriram, P. Tomasello, A. Hannun, V. Liptchinsky, G. Synnaeve, and R. Collobert, "Massively Multilingual ASR: 50 Languages, 1 Model, 1 Billion Parameters," 2020, arXiv:2007.03001. [Online]. Available: <https://arxiv.org/abs/2007.03001>
- [128] B. Li, R. Pang, T. N. Sainath, A. Gulati, Y. Zhang, J. Qin, P. Haghani, W. R. Huang, M. Ma, and J. Bai, "Scaling End-to-End Models for Large-Scale Multilingual ASR," in *Proc. IEEE ASRU*, 2021, pp. 1011–1018.
- [129] Y. Zhang, D. S. Park, W. Han, J. Qin, A. Gulati, J. Shor, A. Jansen, Y. Xu, Y. Huang, S. Wang, Z. Zhou, B. Li, M. Ma, W. Chan, J. Yu, Y. Wang, L. Cao, K. C. Sim, B. Ramabhadran, T. N. Sainath, F. Beaufays, Z. Chen, Q. V. Le, C.-C. Chiu, R. Pang, and Y. Wu, "BigSSL: Exploring the frontier of large-scale semi-supervised learning for automatic speech recognition," *IEEE Journal of Selected Topics in Signal Processing*, vol. 16, no. 6, pp. 1519–1532, oct 2022. [Online]. Available: <https://arxiv.org/abs/2109.13226>
- [130] Z. Chen, Y. Zhang, A. Rosenberg, B. Ramabhadran, P. J. Moreno, A. Bapna, and H. Zen, "MAESTRO: Matched Speech Text Representations through Modality Matching," in *Proc. Interspeech*, Incheon, South Korea, Sep. 2022, arXiv:2204.03409. [Online]. Available: <https://arxiv.org/abs/2204.03409>
- [131] A. Radford, J. W. Kim, C. McLeavey, P. Mishkin, T. Xu, G. Brockman, and I. Sutskever, "Introducing Whisper - Robust Speech Recognition via Large-Scale Weak Supervision," Sep. 2022. [Online]. Available: <https://openai.com/blog/whisper/>
- [132] T. P. Vogl, J. Mangis, A. Rigler, W. Zink, and D. Alkon, "Accelerating the Convergence of the Back-Propagation Method," *Biological Cybernetics*, vol. 59, no. 4, pp. 257–263, 1988.
- [133] N. S. Keskar and G. Saon, "A Nonmonotone Learning Rate Strategy for SGD Training of Deep Neural Networks," in *Proc. IEEE ICASSP*, Queensland, Australia: IEEE, Apr. 2015, pp. 4974–4978.
- [134] S. Renals, N. Morgan, H. Bourlard, C. Wooters, and P. Kohn, "Connectionist Speech Recognition: Status and Prospects," ICSI, 1991, Tech. Rep. TR-OI-070.
- [135] D. Johnson, D. Ellis, C. Oei, C. Wooters, and P. Faerber, "QuickNet," ICSI, Berkeley, 2004. [Online]. Available: <http://www.icsi.berkeley.edu/Speech/qn.html>
- [136] A. Senior, G. Heigold, M. Ranzato, and K. Yang, "An Empirical Study of Learning Rates in Deep Neural Networks for Speech Recognition," in *Proc. IEEE ICASSP*. Vancouver, BC, Canada: IEEE, May 2013, pp. 6724–6728.
- [137] I. Loshchilov and F. Hutter, "Decoupled Weight Decay Regularization," in *Proc. ICLR*, New Orleans, LA, May 2019, arXiv:1711.05101.
- [138] S. L. Smith, P.-J. Kindermans, C. Ying, and Q. V. Le, "Don't Decay the Learning Rate, Increase the Batch Size," in *Proc. ICLR*, New Orleans, LA, May 2018, arXiv:1711.00489.
- [139] J. Howard and S. Ruder, "Universal Language Model Fine-Tuning for Text Classification," in *Proc. ACL*, Melbourne, Australia, Jun. 2018, pp. 328–339.
- [140] M. Jaderberg, V. Dalibard, S. Osindero, W. M. Czarnecki, J. Donahue, A. Razavi, O. Vinyals, T. Green, I. Dunning, K. Simonyan, C. Fernando, and K. Kavukcuoglu, "Population Based Training of Neural Networks," Nov. 2017, arXiv:1711.09846. [Online]. Available: <https://arxiv.org/abs/1711.09846v1>
- [141] T. Hospedales, A. Antoniou, P. Micaelli, and A. Storkey, "Meta-Learning in Neural Networks: A Survey," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. PP, pp. 1–20, 2021.
- [142] J. L. Elman, "Learning and Development in Neural Networks: The Importance of Starting Small," *Cognition*, vol. 48, no. 1, pp. 71–99, 1993. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/0010027793900584>
- [143] Y. Bengio, J. Louradour, R. Collobert, and J. Weston, "Curriculum Learning," in *Proc. ICML*, Montreal, Quebec, Canada, Jun. 2009, p. 41–48.
- [144] D. Amodei, R. Anubhai, E. Battenberg, C. Case, J. Casper, B. Catanzaro, J. Chen, M. Chrzanowski, A. Coates, G. Diamos, E. Elsen, J. Engel, L. Fan, C. Fougner, T. Han, A. Hannun, B. Jun, P. LeGresley, L. Lin, S. Narang, A. Ng, S. Ozair, R. Prenger, J. Raiman, S. Satheesh, D. Seetapun, S. Sengupta, Y. Wang, Z. Wang, C. Wang, B. Xiao, D. Yogatama, J. Zhan, and Z. Zhu, "Deep Speech 2: End-to-End Speech Recognition in English and Mandarin," in *Proc. ICML*, New York City, NY, Jun. 2016, pp. 173–182.
- [145] Z. Tüske, G. Saon, K. Audhkhasi, and B. Kingsbury, "Single Headed Attention Based Sequence-to-Sequence Model for State-of-the-Art Results on Switchboard," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 551–555.
- [146] W. Zhang, X. Chang, Y. Qian, and S. Watanabe, "Improving End-to-End Single-Channel Multi-Talker Speech Recognition," *IEEE/ACM Trans. Audio, Speech, and Language Processing*, vol. 28, pp. 1385–1394, 2020.
- [147] B. Polyak, "Some Methods of Speeding up the Convergence of Iteration Methods," *USSR Computational Mathematics and Mathematical Physics*, vol. 4, no. 5, pp. 1–17, 1964. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/004155364901375>
- [148] Y. Nesterov, "A method of solving a convex programming problem with convergence rate $O(\frac{1}{k^2})$," *Soviet Mathematics Doklady*, vol. 27, pp. 372–376, 1983.
- [149] I. Sutskever, J. Martens, G. Dahl, and G. Hinton, "On the Importance of Initialization and Momentum in Deep Learning," in *Proc. ICML*, Atlanta, GA, Jun. 2013, pp. 1139–1147.
- [150] D. P. Kingma and J. Ba, "Adam: A Method for Stochastic Optimization," Apr. 2014, arXiv:2104.02387. [Online]. Available: <https://arxiv.org/abs/1412.6980>
- [151] Z. Tüske, G. Saon, and B. Kingsbury, "On the Limit of English Conversational Speech Recognition," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 2062–2066.
- [152] P. Nakkiran, G. Kaplun, Y. Bansal, T. Yang, B. Barak, and I. Sutskever, "Deep Double Descent: Where Bigger Models and More Data Hurt," Dec. 2019, arXiv:1912.02292. [Online]. Available: <https://arxiv.org/abs/1912.02292>
- [153] A. Krogh and J. Hertz, "A Simple Weight Decay Can Improve Generalization," in *Neural Information Processing Systems (NIPS)*, Denver, CO, Dec. 1991, pp. 950–957.
- [154] A. F. Murray and P. J. Edwards, "Enhanced MLP Performance and Fault Tolerance Resulting from Synaptic Weight Noise during Training," *IEEE Transactions on Neural Networks*, vol. 5, no. 5, pp. 792–802, Sep. 1994.
- [155] A. Graves, "Practical Variational Inference for Neural Networks," *Advances in Neural Information Processing Systems*, vol. 24, 2011.
- [156] A. Neelakantan, L. Vilnis, Q. V. Le, I. Sutskever, L. Kaiser, K. Kurach, and J. Martens, "Adding Gradient Noise Improves Learning for Very Deep Networks," Nov. 2015, arXiv:1511.06807. [Online]. Available: <https://arxiv.org/abs/1511.06807>
- [157] G. E. Hinton, N. Srivastava, A. Krizhevsky, I. Sutskever, and R. R. Salakhutdinov, "Improving Neural Networks by Preventing Co-Adaptation of Feature Detectors," Jul. 2012, arXiv:1207.0580. [Online]. Available: <https://arxiv.org/abs/1207.0580>
- [158] A. Krizhevsky, I. Sutskever, and G. E. Hinton, "ImageNet Classification with Deep Convolutional Neural Networks," in *Advances in Neural Information Processing Systems (NIPS)*, vol. 25, Lake Tahoe, NV, Dec. 2012.
- [159] Y. Gal and Z. Ghahramani, "Dropout as a Bayesian Approximation: Representing Model Uncertainty in Deep Learning," in *Proc. ICML*, New York City, NY, Jun. 2016, pp. 1050–1059.
- [160] G. Huang, Y. Sun, Z. Liu, D. Sedra, and K. Q. Weinberger, "Deep Networks with Stochastic Depth," in *European Conference on Computer Vision*, Amsterdam, Netherlands, Oct. 2016, pp. 646–661.
- [161] N.-Q. Pham, T.-S. Nguyen, J. Niehues, M. Müller, and A. Waibel, "Very Deep Self-Attention Networks for End-to-End Speech Recognition," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 66–70.
- [162] J. Lee and S. Watanabe, "Intermediate Loss Regularization for CTC-Based Speech Recognition," in *Proc. IEEE ICASSP*, Toronto, Ontario, Canada, Jun. 2021, pp. 6224–6228.
- [163] L. Wan, M. Zeiler, S. Zhang, Y. Le Cun, and R. Fergus, "Regularization of Neural Networks using DropConnect," in *Proc. ICML*, 2013, pp. 1058–1066.
- [164] D. Krueger, T. Maharaj, J. Kramár, M. Pezeshki, N. Ballas, N. R. Ke, A. Goyal, Y. Bengio, A. Courville, and C. Pal, "Zoneout: Regularizing RNNs by Randomly Preserving Hidden Activations," Jun. 2016, arXiv:1606.01305. [Online]. Available: <https://arxiv.org/abs/1606.01305>
- [165] C. Szegedy, V. Vanhoucke, S. Ioffe, J. Shlens, and Z. Wojna, "Rethinking the Inception Architecture for Computer Vision," in *IEEE Conf. on Computer Vision and Pattern Recognition*, Las Vegas, NV, Jun. 2016, pp. 2818–2826.

- [166] S. Bengio, O. Vinyals, N. Jaitly, and N. Shazeer, "Scheduled Sampling for Sequence Prediction with Recurrent Neural Networks," *Proc. NIPS*, vol. 28, Dec. 2015.
- [167] T. Trinh, A. Dai, T. Luong, and Q. Le, "Learning Longer-Term Dependencies in RNNs with Auxiliary Losses," in *Proc. ICML*, Stockholm, Sweden, Jul. 2018, pp. 4965–4974.
- [168] R. J. Williams and J. Peng, "An Efficient Gradient-Based Algorithm for On-Line Training of Recurrent Network Trajectories," *IEEE Neural Computation*, vol. 2, no. 4, pp. 490–501, 1990.
- [169] S. Merity, N. S. Keskar, and R. Socher, "An Analysis of Neural Language Modeling at Multiple Scales," Mar. 2018, arXiv:1803.08240. [Online]. Available: <https://arxiv.org/abs/1803.08240>
- [170] L. Meng, J. Xu, X. Tan, J. Wang, T. Qin, and B. Xu, "MixSpeech: Data Augmentation for Low-resource Automatic Speech Recognition," in *Proc. IEEE ICASSP*. Toronto, Ontario, Canada: IEEE, Jun. 2021, pp. 7008–7012.
- [171] S. Ioffe and C. Szegedy, "Batch Normalization: Accelerating Deep Network Training by Reducing Internal Covariate Shift," in *Proc. ICML*, Lille, France, Jul. 2015, pp. 448–456.
- [172] N. Kanda, R. Takeda, and Y. Obuchi, "Elastic Spectral Distortion for Low Resource Speech Recognition with Deep Neural Networks," in *Proc. IEEE ASRU*, Olomouc, Czech Republic, Dec. 2013, pp. 309–314.
- [173] T. Ko, V. Peddinti, D. Povey, and S. Khudanpur, "Audio Augmentation for Speech Recognition," in *Proc. Interspeech*, Dresden, Germany, Sep. 2015.
- [174] N. Jaitly and G. E. Hinton, "Vocal Tract Length Perturbation (VTLP) Improves Speech Recognition," in *Proc. ICML*, vol. 117, Jun. 2013, p. 21.
- [175] G. Saon, Z. Tüske, K. Audhkhasi, and B. Kingsbury, "Sequence Noise Injected Training for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Brighton, England, May 2019, pp. 6261–6265.
- [176] D. S. Park, Y. Zhang, C.-C. Chiu, Y. Chen, B. Li, W. Chan, Q. V. Le, and Y. Wu, "SpecAugment on Large Scale Datasets," in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 6879–6883.
- [177] C. Wang, Y. Wu, Y. Du, J. Li, S. Liu, L. Lu, S. Ren, G. Ye, S. Zhao, and M. Zhou, "Semantic Mask for Transformer Based End-to-End Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 971–975.
- [178] T. Hayashi, S. Watanabe, Y. Zhang, T. Toda, T. Hori, R. Astudillo, and K. Takeda, "Back-Translation-Style Data Augmentation for End-to-End ASR," in *Proc. IEEE SLT*. Athens, Greece: IEEE, Dec. 2018, pp. 426–433.
- [179] N. Rossenbach, M. Zeineldeen, B. Hilmes, R. Schlüter, and H. Ney, "Comparing the Benefit of Synthetic Training Data for Various Automatic Speech Recognition Architectures," in *Proc. IEEE ASRU*, Cartagena, Colombia, Dec. 2021, arXiv:2104.05379.
- [180] A. Graves, "Connectionist Temporal Classification," in *Supervised Sequence Labelling with Recurrent Neural Networks*. Heidelberg, Germany: Springer, 2012, ch. Connectionist Temporal Classification, pp. 61–93.
- [181] Y. Higuchi, S. Watanabe, N. Chen, T. Ogawa, and T. Kobayashi, "Mask CTC: Non-Autoregressive End-to-End ASR with CTC and Mask Predict," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 3655–3659.
- [182] W. Chan, C. Saharia, G. Hinton, M. Norouzi, and N. Jaitly, "Imputer: Sequence Modelling via Imputation and Dynamic Programming," in *Proc. ICML*. PMLR, Jul. 2020, pp. 1403–1413.
- [183] Y. Fujita, S. Watanabe, M. Omachi, and X. Chang, "Insertion-Based Modeling for End-to-End Automatic Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 3660–3664.
- [184] L. Dong and B. Xu, "Cif: Continuous Integrate-and-Fire for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6079–6083.
- [185] J. Nozaki and T. Komatsu, "Relaxing the Conditional Independence Assumption of CTC-Based ASR by Conditioning on Intermediate Predictions," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 3735–3739.
- [186] Y. Higuchi, N. Chen, Y. Fujita, H. Inaguma, T. Komatsu, J. Lee, J. Nozaki, T. Wang, and S. Watanabe, "A Comparative Study on Non-Autoregressive Modelings for Speech-to-Text Generation," Oct. 2021, arXiv:2110.05249. [Online]. Available: <https://arxiv.org/abs/2110.05249>
- [187] J. Chorowski and N. Jaitly, "Towards Better Decoding and Language Model Integration in Sequence to Sequence Models," in *Proc. Interspeech*, Stockholm, Sweden, Aug. 2017, pp. 523–527.
- [188] W. Zhou, R. Schlüter, and H. Ney, "Robust Beam Search for Encoder-Decoder Attention Based Speech Recognition without Length Bias," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 1768–1772.
- [189] P. Koehn and R. Knowles, "Six Challenges for Neural Machine Translation," in *First Workshop on Neural Machine Translation*. Vancouver, BC, Canada: Association for Computational Linguistics, Aug. 2017, pp. 28–39.
- [190] T. Hori, S. Watanabe, and J. Hershey, "Joint CTC Attention Decoding for End-to-End Speech Recognition," in *Proc. ACL*, Vancouver, BC, Canada, Jul. 2017, pp. 518–529.
- [191] Z. Tu, Z. Lu, Y. Liu, X. Liu, and H. Li, "Modeling Coverage for Neural Machine Translation," in *Proc. ACL*, Berlin, Germany, May 2016, pp. 76–85.
- [192] T. Hori, J. Cho, and S. Watanabe, "End-to-End Speech Recognition with Word-Based RNN Language Models," in *Proc. IEEE SLT*. Athens, Greece: IEEE, Dec. 2018, pp. 389–396.
- [193] T. Hori and A. Nakamura, *Speech Recognition Algorithms Using Weighted Finite-State Transducers*. San Rafael, CA: Morgan & Claypool Publishers, 2013.
- [194] Y. Miao, M. Gowayed, and F. Metzke, "EESN: End-to-End Speech Recognition Using Deep RNN Models and WFST-Based Decoding," in *Proc. IEEE ASRU*, Scottsdale, AZ, Dec. 2015, pp. 167–174.
- [195] R. Haeb-Umbach and H. Ney, "Improvements in Beam Search for 10000-Word Continuous-Speech Recognition," *IEEE Transactions on Speech and Audio Processing*, vol. 2, no. 2, pp. 353–356, 1994.
- [196] H. Ney and S. Ortmanns, "Progress in Dynamic Programming Search for LVCSR," *Proceedings of the IEEE*, vol. 88, no. 8, pp. 1224–1240, Aug. 2000. [Online]. Available: <http://dx.doi.org/10.1109/5.880081>
- [197] T. Hori, Y. Kubo, and A. Nakamura, "Real-Time One-Pass Decoding with Recurrent Neural Network Language Model for Speech Recognition," in *Proc. IEEE ICASSP*, Florence, Italy, May 2014, pp. 6364–6368.
- [198] E. Beck, W. Zhou, R. Schlüter, and H. Ney, "LSTM Language Models for LVCSR in First-Pass Decoding and Lattice-Rescoring," Jul. 2019, arXiv:1907.01030. [Online]. Available: <https://arxiv.org/abs/1907.01030>
- [199] G. Saon, Z. Tüske, and K. Audhkhasi, "Alignment-Length Synchronous Decoding for RNN Transducer," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7804–7808.
- [200] A. Y. Hannun, A. L. Maas, D. Jurafsky, and A. Y. Ng, "First-Pass Large Vocabulary Continuous Speech Recognition Using Bi-Directional Recurrent DNNs," Dec. 2014, arXiv:1408.2873. [Online]. Available: <https://arxiv.org/abs/1408.2873>
- [201] N. Moritz, T. Hori, and J. Le Roux, "Triggered Attention for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*. Brighton, UK: IEEE, May 2019, pp. 5666–5670.
- [202] N. Moritz, T. Hori, and J. Le, "Streaming Automatic Speech Recognition with the Transformer Model," in *Proc. IEEE ICASSP*. Barcelona, Spain: IEEE, May 2020, pp. 6074–6078.
- [203] M. Jain, K. Schubert, J. Mahadeokar, C.-F. Yeh, K. Kalgaonkar, A. Srimam, C. Fuegen, and M. L. Seltzer, "RNN-T for Latency Controlled ASR with Improved Beam Search," Nov. 2019, arXiv:1911.01629. [Online]. Available: <https://arxiv.org/abs/1911.01629>
- [204] C.-F. Yeh, J. Mahadeokar, K. Kalgaonkar, Y. Wang, D. Le, M. Jain, K. Schubert, C. Fuegen, and M. L. Seltzer, "Transformer-Transducer: End-to-Snd Speech Recognition with Self-Attention," in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 7829–7833.
- [205] L. Lu, C. Liu, J. Li, and Y. Gong, "Exploring Transformers for Large-Scale Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 5041–5045.
- [206] T. Wang, Y. Fujita, X. Chang, and S. Watanabe, "Streaming End-to-End ASR Based on Blockwise Non-Autoregressive Models," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 3755–3759.
- [207] E. Tsunoo, Y. Kashiwagi, and S. Watanabe, "Streaming Transformer ASR with Blockwise Synchronous Beam Search," in *Proc. IEEE SLT*. Shenzhen, China: IEEE, Jun. 2021, pp. 22–29.
- [208] K. Hwang and W. Sung, "Character-level language modeling with hierarchical recurrent neural networks," in *Proc. IEEE ICASSP*. New Orleans, LA: IEEE, Mar. 2017, pp. 5720–5724.
- [209] T. Hori, S. Watanabe, Y. Zhang, and W. Chan, "Advances in Joint CTC-Attention Based End-to-End Speech Recognition with a Deep CNN Encoder and RNN-LM," in *Proc. Interspeech*, Stockholm, Sweden, Aug. 2017, pp. 949–953.
- [210] A. Kannan, Y. Wu, P. Nguyen, T. N. Sainath, Z. Chen, and R. Prabhavalkar, "An Analysis of Incorporating an External Language Model into a Sequence-to-Sequence Model," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 1–5828.

- [211] R. Collobert, C. Puhrsch, and G. Synnaeve, “Wav2Letter: An End-to-End Convnet-Based Speech Recognition System,” Sep. 2016, arXiv:1609.03193. [Online]. Available: <https://arxiv.org/abs/1609.03193>
- [212] Y. He, T. N. Sainath, R. Prabhavalkar, I. McGraw, R. Alvarez, D. Zhao, D. Rybach, A. Kannan, Y. Wu, R. Pang, Q. Liang, D. Bhatia, Y. Shang-guan, B. Li, G. Pundak, K. C. Sim, T. Bagby, S.-y. Chang, K. Rao, and A. Gruenstein, “Streaming End-to-End Speech Recognition for Mobile Devices,” in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 6381–6385.
- [213] G. Saon, Z. Tüske, D. Bolanos, and B. Kingsbury, “Advancing RNN Transducer Technology for Speech Recognition,” in *Proc. IEEE ICASSP*. Toronto, Ontario, Canada: IEEE, Jun. 2021, pp. 5654–5658, arXiv:2103.09935. [Online]. Available: <https://arxiv.org/abs/2103.09935>
- [214] S. Watanabe, T. Hori, S. Kim, J. R. Hershey, and T. Hayashi, “Hybrid CTC Attention Architecture for End-to-End Speech Recognition,” *IEEE Journal of Selected Topics in Signal Processing*, vol. 11, no. 8, pp. 1240–1253, 2017.
- [215] H. Seki, T. Hori, S. Watanabe, N. Moritz, and J. Le Roux, “Vectorized Beam Search for CTC-Attention-Based Speech Recognition,” in *Proc. Interspeech*, Brighton, UK, May 2019, pp. 3825–3829.
- [216] A. Hannun, C. Case, J. Casper, B. Catanzaro, G. Diamos, E. Elsen, R. Prenger, S. Satheesh, S. Sengupta, A. Coates, and A. Y. Ng, “Deep Speech: Scaling up End-to-End Speech Recognition,” Dec. 2014, arXiv:1412.5567. [Online]. Available: <https://arxiv.org/abs/1412.5567>
- [217] T. Hori, S. Watanabe, and J. R. Hershey, “Multi-Level Language Modeling and Decoding for Open Vocabulary End-to-End Speech Recognition,” in *Proc. IEEE ASRU*. Okinawa, Japan: IEEE, Dec. 2017, pp. 287–293.
- [218] Y. Wang, T. Chen, H. Xu, S. Ding, H. Lv, Y. Shao, N. Peng, L. Xie, S. Watanabe, and S. Khudanpur, “Espresso: A Fast End-to-End Neural Speech Recognition Toolkit,” in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 136–143.
- [219] Z. Tüske, K. Audhkhasi, and G. Saon, “Advancing Sequence-to-Sequence Based Speech Recognition,” in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 3780–3784.
- [220] J. Drexler and J. Glass, “Subword Regularization and Beam Search Decoding for End-to-End Automatic Speech Recognition,” in *Proc. IEEE ICASSP*. Brighton, UK: IEEE, May 2019, pp. 6266–6270.
- [221] T. N. Sainath, R. Pang, D. Rybach, Y. He, R. Prabhavalkar, W. Li, M. Visontai, Q. Liang, T. Strohmaier, Y. Wu, I. McGraw, and C.-C. Chiu, “Two-Pass End-to-End Speech Recognition,” in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 2773–2777.
- [222] Z. Yao, D. Wu, X. Wang, B. Zhang, F. Yu, C. Yang, Z. Peng, X. Chen, L. Xie, and X. Lei, “WeNet: Production Oriented Streaming and Non-Streaming End-to-End Speech Recognition Toolkit,” Brno, Czechia, pp. 4054–4058, Sep. 2021.
- [223] D. Wu, B. Zhang, C. Yang, Z. Peng, W. Xia, X. Chen, and X. Lei, “U2++: Unified Two-Pass Bidirectional End-to-End Model for Speech Recognition,” Dec. 2021, arXiv:2106.05642. [Online]. Available: <https://arxiv.org/abs/2106.05642>
- [224] M. Zapotocny, P. Pietrzak, A. Lancucki, and J. Chorowski, “Lattice Generation in Attention-Based Speech Recognition Models,” in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 2225–2229.
- [225] J. Kim, Y. Lee, and E. Kim, “Accelerating RNN Transducer Inference via Adaptive Expansion Search,” *IEEE Signal Processing Letters*, vol. 27, pp. 2019–2023, 2020.
- [226] M. Abadi, P. Barham, J. Chen, Z. Chen, A. Davis, J. Dean, M. Devin, S. Ghemawat, G. Irving, M. Isard, M. Kudlur, J. Levenberg, R. Monga, S. Moore, D. G. Murray, B. Steiner, P. Tucker, V. Vasudevan, P. Warden, M. Wicke, Y. Yu, and X. Zheng, “TensorFlow: A system for Large-Scale Machine Learning,” in *Proc. OSDI*, Savannah, GA, Nov. 2016, pp. 265–283.
- [227] M. Ott, S. Edunov, A. Baevski, A. Fan, S. Gross, N. Ng, D. Grangier, and M. Auli, “FAIRSEQ: A Fast, Extensible Toolkit for Sequence Modeling,” in *Proc. NAACL*, Minneapolis, MN, Jun. 2019, pp. 48–53.
- [228] P. Doetsch, A. Zeyer, P. Voigtlaender, I. Kulikov, R. Schlüter, and H. Ney, “RETURNN: The RWTH Extensible Training Framework for Universal Recurrent Neural Networks,” in *Proc. IEEE ICASSP*. New Orleans, LA: IEEE, Mar. 2017, pp. 5345–5349.
- [229] T. Mikolov, M. Karafiát, L. Burget, J. Černocký, and S. Khudanpur, “Recurrent Neural Network Based Language Model,” in *Proc. Interspeech*, Makuhari, Japan, Sep. 2010, pp. 1045–1048.
- [230] S. F. Chen and J. Goodman, “An Empirical Study of Smoothing Techniques for Language Modeling,” in *Proc. ACL*, Santa Cruz, CA, Jun. 1996, pp. 310–318.
- [231] M. Sundermeyer, R. Schlüter, and H. Ney, “LSTM Neural Networks for Language Modeling,” in *Proc. Interspeech*, Portland, OR, Sep. 2012, pp. 194–197.
- [232] Y. N. Dauphin, A. Fan, M. Auli, and D. Grangier, “Language Modeling with Gated Convolutional Networks,” in *Proceedings of the 34th International Conference on Machine Learning-Volume 70*. JMLR. org, 2017, pp. 933–941.
- [233] N. Zeghidour, Q. Xu, V. Liptchinsky, N. Usunier, G. Synnaeve, and R. Collobert, “Fully Convolutional Speech Recognition,” Feb. 2018, arXiv:1812.06864. [Online]. Available: <https://arxiv.org/abs/1812.06864>
- [234] R. Al-Rfou, D. Choe, N. Constant, M. Guo, and L. Jones, “Character-Level Language Modeling with Deeper Self-Attention,” in *Proc. AIII*, vol. 33, Honolulu, Hawaii, Feb. 2019, pp. 3159–3166.
- [235] K. Irie, A. Zeyer, R. Schlüter, and H. Ney, “Language Modeling with Deep Transformers,” in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 3905–3909.
- [236] Z. Dai, Z. Yang, Y. Yang, J. G. Carbonell, Q. Le, and R. Salakhutdinov, “Transformer-XL: Attentive Language Models Beyond a Fixed-Length Context,” in *Proc. ACL*, Florence, Italy, Jul. 2019, pp. 2978–2988.
- [237] J. W. Rae, A. Potapenko, S. M. Jayakumar, and T. P. Lillicrap, “Compressive Transformers for Long-Range Sequence Modelling,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 6154–6158, 2020.
- [238] C. Gulcehre, O. Firat, K. Xu, K. Cho, L. Barrault, H.-C. Lin, F. Bougares, H. Schwenk, and Y. Bengio, “On Using Monolingual Corpora in Neural Machine Translation,” Jun. 2015, arXiv:1503.03535. [Online]. Available: <https://arxiv.org/abs/1503.03535>
- [239] A. Sriram, H. Jun, S. Satheesh, and A. Coates, “Cold Fusion: Training Seq2Seq Models Together with Language Models,” in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 387–391.
- [240] C. Shan, C. Weng, G. Wang, D. Su, M. Luo, D. Yu, and L. Xie, “Component Fusion: Learning Replaceable Language Model Component for End-to-End Speech Recognition System,” in *Proc. IEEE ICASSP*. Brighton, UK: IEEE, May 2019, pp. 5361–5365.
- [241] E. McDermott, H. Sak, and E. Variiani, “A Density Ratio Approach to Language Model Fusion in End-To-End Automatic Speech Recognition,” in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 434–441.
- [242] Z. Meng, S. Parthasarathy, E. Sun, Y. Gaur, N. Kanda, L. Lu, X. Chen, R. Zhao, J. Li, and Y. Gong, “Internal Language Model Estimation for Domain-Adaptive End-to-End Speech Recognition,” in *Proc. IEEE SLT*, Shenzhen, China, Dec. 2020, pp. 243–250.
- [243] W. Zhou, Z. Zheng, R. Schlüter, and H. Ney, “On Language Model Integration for RNN Transducer based Speech Recognition,” in *Proc. IEEE ICASSP*, Singapore, May 2022, pp. 8407–8411, arXiv:2110.06841. [Online]. Available: <http://arxiv.org/abs/2110.06841>
- [244] J. Devlin, M.-W. Chang, K. Lee, and K. Toutanova, “BERT: Pre-Training of Deep Bidirectional Transformers for Language Understanding,” in *Proc. ACL*, Florence, Italy, Jul. 2019, pp. 4171–4186.
- [245] A. Radford, J. Wu, R. Child, D. Luan, D. Amodei, and I. Sutskever, “Language Models are Unsupervised Multitask Learners,” 2019, openAI blog. [Online]. Available: https://cdn.openai.com/better-language-models/language_models_are_unsupervised_multitask_learners.pdf
- [246] J. Salazar, D. Liang, T. Q. Nguyen, and K. Kirchhoff, “Masked Language Model Scoring,” in *Proc. ACL*, Jul. 2020, pp. 2699–2712.
- [247] S. Kim, S. Dalmia, and F. Metze, “Gated Embeddings in End-to-End Speech Recognition for Conversational-Context Fusion,” in *Proc. ACL*, Florence, Italy, Jul. 2019, pp. 1131–1141.
- [248] A. Zeyer, E. Beck, R. Schlüter, and H. Ney, “CTC in the Context of Generalized Full-Sum HMM Training,” in *Proc. Interspeech*, Stockholm, Sweden, Aug. 2017, pp. 944–948.
- [249] T. Raissi, W. Zhou, S. Berger, R. Schlüter, and H. Ney, “HMM vs. CTC for Automatic Speech Recognition: Comparison Based on Full-Sum Training from Scratch,” in *Proc. IEEE SLT*, Doha, Qatar, Jan. 2023, arXiv:2210.09951. [Online]. Available: <http://arxiv.org/abs/2210.09951>
- [250] A. Hannun, A. Lee, Q. Xu, and R. Collobert, “Sequence-to-Sequence Speech Recognition with Time-Depth Separable Convolutions,” in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 3785–3789.
- [251] M. Li, M. Liu, and H. Masanori, “End-to-End Speech Recognition with Adaptive Computation Steps,” in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 6246–6250.
- [252] P. Bahar, N. Makarov, A. Zeyer, R. Schüter, and H. Ney, “Exploring a Zero-Order Direct HMM Based on Latent Attention for Automatic Speech Recognition,” in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7854–7858.

- [253] Z. Huang, G. Zweig, and B. Dumoulin, "Cache Based Recurrent Neural Network Language Model Inference for First Pass Speech Recognition," in *Proc. IEEE ICASSP*, Florence, Italy, May 2014, pp. 6354–6358.
- [254] J. Jorge, A. Giménez, J. Iranzo-Sánchez, J. Civera, A. Sanchis, and A. Juan, "Real-Time One-Pass Decoder for Speech Recognition Using LSTM Language Models," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 3820–3824.
- [255] W. Zhou, R. Schlüter, and H. Ney, "Full-Sum Decoding for Hybrid HMM Based Speech Recognition Using LSTM Language Model," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7834–7838.
- [256] P. Sountsov and S. Sarawagi, "Length Bias in Encoder Decoder Models and a Case for Global Conditioning," in *Proc. EMNLP*, Austin, TX, Nov. 2016, pp. 1516–1525.
- [257] K. Murray and D. Chiang, "Correcting Length Bias in Neural Machine Translation," in *Proc. WMT*, Brussels, Belgium, Oct. 2018, pp. 212–223.
- [258] F. Stahlberg and B. Byrne, "On NMT Search Errors and Model Errors: Cat Got Your Tongue?" in *Proc. EMNLP*. Hong Kong, China: Association for Computational Linguistics, Nov. 2019, pp. 3354–3360.
- [259] L. Lu, X. Zhang, and S. Renals, "On Training the Recurrent Neural Network Encoder-Decoder for Large Vocabulary End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Shanghai, China, Mar. 2016, pp. 5060–5064.
- [260] Y. Zhang, W. Chan, and N. Jaitly, "Very Deep Convolutional Networks for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, New Orleans, LA, Mar. 2017, pp. 4845–4849.
- [261] S. Toshniwal, H. Tang, L. Lu, and K. Livescu, "Multitask Learning with Low-Level Auxiliary Tasks for Encoder-Decoder based Speech Recognition," Apr. 2017, arXiv:1704.01631. [Online]. Available: <https://arxiv.org/abs/1704.01631>
- [262] A. Renduchintala, S. Ding, M. Wiesner, and S. Watanabe, "Multi-Modal Data Augmentation for End-to-End ASR," in *Proc. Interspeech*, Hyderabad, India, Mar. 2018, pp. 2394–2398.
- [263] C. Weng, J. Cui, G. Wang, J. Wang, C. Yu, D. Su, and D. Yu, "Improving Attention Based Sequence-to-Sequence Models for End-to-End English Conversational Speech Recognition," in *Proc. Interspeech*, Hyderabad, India, Sep. 2018, pp. 761–765.
- [264] D. Le, X. Zhang, W. Zheng, C. Fügen, G. Zweig, and M. L. Seltzer, "From Senones to Chenones: Tied Context-Dependent Graphemes for Hybrid Speech Recognition," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 457–464.
- [265] S. Kanthak and H. Ney, "Context-Dependent Acoustic Modeling Using Graphemes for Large Vocabulary Speech Recognition," in *Proc. IEEE ICASSP*, Orlando, FL, May 2002, pp. 845–848.
- [266] N. Deshmukh, A. Ganapathiraju, and J. Picone, "Hierarchical Search for Large-Vocabulary Conversational Speech Recognition: Working Toward a Solution to the Decoding Problem," *IEEE Signal Processing Magazine*, vol. 16, no. 5, pp. 84–107, 1999.
- [267] L. Nguyen and R. Schwartz, "Single-Tree Method for Grammar-Directed Search," in *Proc. IEEE ICASSP*, vol. 2, Phoenix, AZ, Mar. 1999, pp. 613–616.
- [268] L. Sari, N. Moritz, T. Hori, and J. Le Roux, "Unsupervised Speaker Adaptation using Attention-based Speaker Memory for End-to-End ASR," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 2–6.
- [269] F. Weninger, J. Andrés-Ferrer, X. Li, and P. Zhan, "Listen, Attend, Spell and Adapt: Speaker Adapted Sequence-to-Sequence ASR," in *Proc. Interspeech*. Graz, Austria: ISCA, Sep. 2019, pp. 3805–3809.
- [270] Z. Meng, Y. Gaur, J. Li, and Y. Gong, "Speaker Adaptation for Attention-Based End-to-End Speech Recognition," in *Proc. Interspeech*. Graz, Austria: ISCA, Sep. 2019, pp. 241–245.
- [271] N. Tomashenko and Y. Estève, "Evaluation of Feature-Space Speaker Adaptation for End-to-End Acoustic Models," in *Proc. LREC*. Miyazaki, Japan: ELRA, May 2018, pp. 3163–3170.
- [272] A. Zeyer, A. Merboldt, W. Michel, R. Schlüter, and H. Ney, "Librispeech Transducer Model with Internal Language Model Prior Correction," in *Proc. Interspeech*, Brno, Czech Republic, Apr. 2021, pp. 2052–2056.
- [273] L. R. Bahl, F. Jelinek, and R. L. Mercer, "A Maximum Likelihood Approach to Continuous Speech Recognition," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 5, no. 2, pp. 179–190, Mar. 1983.
- [274] J. Makhoul and R. Schwartz, "State of the Art in Continuous Speech Recognition," *Proc. NAS*, vol. 92, no. 22, pp. 9956–9963, Oct. 1995.
- [275] D. Klakow and J. Peters, "Testing the Correlation of Word Error Rate and Perplexity," *Speech Communication*, vol. 38, no. 1, pp. 19–28, 2002.
- [276] M. Sundermeyer, H. Ney, and R. Schlüter, "From Feedforward to Recurrent LSTM Neural Networks for Language Modeling," *IEEE/ACM Trans. Audio, Speech, and Language Processing*, vol. 23, no. 3, pp. 517–529, Mar. 2015.
- [277] Y. Tachioka and S. Watanabe, "Discriminative Method for Recurrent Neural Network Language Models," in *Proc. IEEE ICASSP*, South Brisbane, Australia, Apr. 2015, pp. 5386–5390.
- [278] T. Hori, C. Hori, S. Watanabe, and J. R. Hershey, "Minimum Word Error Training of Long Short-Term Memory Recurrent Neural Network Language Models for Speech Recognition," in *Proc. IEEE ICASSP*, Shanghai, China, Mar. 2016, pp. 5990–5994.
- [279] T. N. Sainath, R. Prabhavalkar, S. Kumar, S. Lee, A. Kannan, D. Rybach, V. Schogol, P. Nguyen, B. Li, Y. Wu, Z. Chen, and C.-C. Chiu, "No Need for a Lexicon? Evaluating the Value of the Pronunciation Lexica in End-to-End Models," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 5859–5863.
- [280] C. Wooters and A. Stolcke, "Multiple-Pronunciation Lexical Modeling in a Speaker Independent Speech Understanding System," in *Proc. ICSLP*, Yokohama, Japan, Sep. 1994, pp. 1363–1366.
- [281] I. McGraw, I. Badr, and J. R. Glass, "Learning Lexicons From Speech Using a Pronunciation Mixture Model," *IEEE/ACM Trans. Audio, Speech, and Language Processing*, vol. 21, no. 2, pp. 357–366, 2012.
- [282] A. Senior, G. Heigold, M. Bacchiani, and H. Liao, "GMM-Free DNN Acoustic Model Training," in *Proc. IEEE ICASSP*, Florence, Italy, May 2014, pp. 5602–5606. [Online]. Available: <https://doi.org/10.1109/ICASSP.2014.6854675>
- [283] G. Gosztołya, T. Grósz, and L. Tóth, "GMM-Free Flat Start Sequence-Discriminative DNN Training," in *Proc. Interspeech*, N. Morgan, Ed. San Francisco, CA: ISCA, Sep. 2016, pp. 3409–3413. [Online]. Available: <https://doi.org/10.21437/Interspeech.2016-391>
- [284] H. Hadian, H. Sameti, D. Povey, and S. Khudanpur, "Flat-Start Single-Stage Discriminatively Trained HMM-Based Models for ASR," *IEEE/ACM Trans. Audio, Speech, and Language Processing*, vol. 26, no. 11, pp. 1949–1961, 2018.
- [285] H. Soltau, B. Kingsbury, L. Mangu, D. Povey, G. Saon, and G. Zweig, "The IBM 2004 Conversational Telephony System for Rich Transcription," in *Proc. IEEE ICASSP*, Philadelphia, PA, Mar. 2005, pp. 205–208.
- [286] H. Hadian, D. Povey, H. Sameti, J. Trmal, and S. Khudanpur, "Improving LF-MMI Using Unconstrained Supervisions for ASR," in *Proc. IEEE SLT*, Athens, Greece, Dec. 2018, pp. 43–47. [Online]. Available: <https://doi.org/10.1109/SLT.2018.8639684>
- [287] N. Kanda, Y. Fujita, and K. Nagamatsu, "Lattice-Free State-Level Minimum Bayes Risk Training of Acoustic Models," in *Proc. Interspeech*, B. Yegnanarayana, Ed. Hyderabad, India: ISCA, Sep. 2018, pp. 2923–2927. [Online]. Available: <https://doi.org/10.21437/Interspeech.2018-79>
- [288] S. J. Young and P. C. Woodland, "The Use of State Tying in Continuous Speech Recognition," in *Proc. Eurospeech*, Berlin, Germany, Dec. 1993, pp. 2203–2206.
- [289] S. Wiesler, G. Heigold, M. Nußbaum-Thom, R. Schlüter, and H. Ney, "A Discriminative Splitting Criterion for Phonetic Decision Trees," in *Proc. Interspeech*, Makuhari, Japan, Sep. 2010, pp. 54–57, one of shortlist for Best Student Paper Award.
- [290] H. Xu, S. Ding, and S. Watanabe, "Improving End-to-End Speech Recognition with Pronunciation-Assisted Sub-Word Modeling," in *Proc. IEEE ICASSP*, Brighton, UK, Sep. 2019, pp. 7110–7114.
- [291] W. Zhou, M. Zeineldeen, Z. Zheng, R. Schlüter, and H. Ney, "Acoustic Data-Driven Subword Modeling for End-to-End Speech Recognition," in *Proc. Interspeech*, Brno, Czechia, Aug. 2021, pp. 2886–2890.
- [292] T. Raissi, E. Beck, R. Schlüter, and H. Ney, "Towards Consistent Hybrid HMM Acoustic Modeling," Apr. 2021, arXiv:2104.02387. [Online]. Available: <https://arxiv.org/abs/2104.02387>
- [293] M. Zeineldeen, A. Zeyer, W. Zhou, T. Ng, R. Schlüter, and H. Ney, "A Systematic Comparison of Grapheme-Based vs. Phoneme-Based Label Units for Encoder-Decoder-Attention Models," Nov. 2020, arXiv:2005.09336. [Online]. Available: <https://arxiv.org/abs/2005.09336>
- [294] C. Lüscher, E. Beck, K. Irie, M. Kitzka, W. Michel, A. Zeyer, R. Schlüter, and H. Ney, "RWTH ASR Systems for LibriSpeech: Hybrid vs Attention," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 231–235.

- [295] D. Park, Y. Zhang, Y. Jia, W. Han, C.-C. Chiu, B. Li, Y. Wu, and Q. Le, "Improved Noisy Student Training for Automatic Speech Recognition," in *Proc. Interspeech*, Shanghai, China, Oct. 2020, pp. 2817–2821.
- [296] D. S. Park, W. Chan, Y. Zhang, C.-C. Chiu, B. Zoph, E. D. Cubuk, and Q. V. Le, "SpecAugment: A Simple Data Augmentation Method for Automatic Speech Recognition," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 2613–2617.
- [297] W. Zhou, W. Michel, K. Irie, M. Kitzka, R. Schlüter, and H. Ney, "The RWTH ASR System for TED-LIUM Release 2: Improving Hybrid HMM with SpecAugment," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7839–7843.
- [298] J. Cui, B. Kingsbury, B. Ramabhadran, A. Sethy, K. Audhkhasi, X. Cui, E. Kislal, L. Mangu, M. Nussbaum-Thom, M. Picheny, Z. Tüske, P. Golik, R. Schlüter, H. Ney, M. J. F. Gales, K. M. Knill, A. Ragni, H. Wang, and P. Woodland, "Multilingual Representations for Low Resource Speech Recognition and Keyword Search," in *Proc. IEEE ASRU*, Scottsdale, AZ, Dec. 2015, pp. 259–266.
- [299] O. Adams, M. Wiesner, S. Watanabe, and D. Yarowsky, "Massively Multilingual Adversarial Speech Recognition," in *Proc. NAACL*, Minneapolis, MN, Jun. 2019, pp. 96–108.
- [300] A. Kannan, A. Datta, T. N. Sainath, E. Weinstein, B. Ramabhadran, Y. Wu, A. Bapna, Z. Chen, and S. Lee, "Large-Scale Multilingual Speech Recognition with a Streaming End-to-End Model," in *Proc. Interspeech*, Graz, Austria, Sep. 2019, pp. 2130–2134.
- [301] V. Panayotov, G. Chen, D. Povey, and S. Khudanpur, "Librispeech: an ASR Corpus Based on Public Domain Audio Books," in *Proc. IEEE ICASSP*, Queensland, Australia, Apr. 2015, pp. 5206–5210.
- [302] J. Godfrey, E. Holliman, and J. McDaniel, "SWITCHBOARD: Telephone Speech Corpus for Research and Development," in *Proc. IEEE ICASSP*, vol. 1, San Francisco, CA, Mar. 1992, pp. 517–520 vol.1.
- [303] Y. Wang, A. Mohamed, D. Le, C. Liu, A. Xiao, J. Mahadeokar, H. Huang, A. Tjandra, X. Zhang, F. Zhang, C. Fuegen, G. Zweig, and M. L. Seltzer, "Transformer-Based Acoustic Modeling for Hybrid Speech Recognition," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6874–6878.
- [304] G. Synnaeve, Q. Xu, J. Kahn, E. Grave, T. Likhomanenko, V. Pratap, A. Sriram, V. Liptchinsky, and R. Collobert, "End-to-End ASR: from Supervised to Semi-Supervised Learning with Modern Architectures," in *Proc. ICML*, Jul. 2020, arXiv:1911.08460.
- [305] K. Kim, F. Wu, Y. Peng, J. Pan, P. Sridhar, K. J. Han, and S. Watanabe, "E-branchformer: Branchformer with enhanced merging for speech recognition," in *Proc. IEEE SLT*, Doha, Qatar, Jan. 2023, to appear; arXiv:2210.00077. [Online]. Available: <https://arxiv.org/abs/2210.00077>
- [306] M. Kitzka, P. Golik, R. Schlüter, and H. Ney, "Cumulative Adaptation for BLSTM Acoustic Models," in *Interspeech*, Graz, Austria, Sep. 2019, pp. 754–758.
- [307] A. Zeyer, P. Bahar, K. Irie, R. Schlüter, and H. Ney, "A Comparison of Transformer and LSTM Encoder Decoder Models for ASR," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 8–15.
- [308] W.-N. Hsu, B. Bolte, Y.-H. H. Tsai, K. Lakhotia, R. Salakhutdinov, and A. Mohamed, "HuBERT: Self-Supervised Speech Representation Learning by Masked Prediction of Hidden Units," *IEEE/ACM Trans. Audio, Speech, and Language Processing*, vol. 19, pp. 3451–3460, 2021.
- [309] E. G. Ng, C.-C. Chiu, Y. Zhang, and W. Chan, "Pushing the Limits of Non-Autoregressive Speech Recognition," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 3725–3729.
- [310] J. Kahn, M. Riviere, W. Zheng, E. Kharitonov, Q. Xu, P. E. Mazare, J. Karadayi, V. Liptchinsky, R. Collobert, C. Fuegen, T. Likhomanenko, G. Synnaeve, A. Joulin, A. Mohamed, and E. Dupoux, "Libri-Light: A Benchmark for ASR with Limited or no Supervision," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 7669–7673.
- [311] C.-C. Chiu, T. N. Sainath, Y. Wu, R. Prabhavalkar, P. Nguyen, Z. Chen, A. Kannan, R. J. Weiss, K. Rao, E. Gonina, N. Jaitly, B. Li, J. Chorowski, and M. Bacchiani, "State-of-the-Art Speech Recognition with Sequence-to-Sequence Models," in *Proc. IEEE ICASSP*, Calgary, Alberta, Canada, Apr. 2018, pp. 4774–4778.
- [312] K. Kim, K. Lee, D. Gowda, J. Park, S. Kim, S. Jin, Y.-Y. Lee, J. Yeo, D. Kim, S. Jung, J. Lee, M. Han, and C. Kim, "Attention Based On-Device Streaming Speech Recognition with Large Speech Corpus," in *Proc. IEEE ASRU*, Sentosa, Singapore, Dec. 2019, pp. 956–963.
- [313] R. Hsiao, D. Can, T. Ng, R. Travadi, and A. Ghoshal, "Online Automatic Speech Recognition with Listen, Attend and Spell Model," *IEEE Signal Processing Letters*, vol. 27, pp. 1889–1893, 2020.
- [314] Y. Shi, Y. Wang, C. Wu, C.-F. Yeh, J. Chan, F. Zhang, D. Le, and M. Seltzer, "Emformer: Efficient Memory Transformer based Acoustic Model for Low Latency Streaming Speech Recognition," in *Proc. IEEE ICASSP*. Toronto, Ontario, Canada: IEEE, Jun. 2021, pp. 6783–6787.
- [315] X. Chen, Y. Wu, Z. Wang, S. Liu, and J. Li, "Developing Real-Time Streaming Transformer Transducer for Speech Recognition on Large-Scale Dataset," in *Proc. IEEE ICASSP*. Toronto, Ontario, Canada: IEEE, Jun. 2021, pp. 5904–5908.
- [316] T. N. Sainath, Y. He, B. Li, A. Narayanan, R. Pang, A. Bruguier, S.-y. Chang, W. Li, R. Alvarez, Z. Chen, C.-C. Chiu, D. Garcia, A. Gruenstein, K. Hu, M. Jin, A. Kannan, Q. Liang, I. McGraw, C. Peysner, R. Prabhavalkar, G. Pundak, D. Rybach, Y. Shanguan, Y. Sheth, T. Strohman, M. Visontai, Y. Wu, Y. Zhang, and D. Zhao, "A Streaming On-Device End-To-End Model Surpassing Server-Side Conventional Model Quality and Latency," in *Proc. IEEE ICASSP*, Barcelona, Spain, May 2020, pp. 6059–6063.
- [317] B. Li, A. Gulati, J. Yu, T. N. Sainath, C.-C. Chiu, A. Narayanan, S.-Y. Chang, R. Pang, Y. He, J. Qin, W. Han, Q. Liang, Y. Zhang, T. Strohman, and Y. Wu, "A Better and Faster End-to-End Model for Streaming ASR," in *Proc. IEEE ICASSP*, Toronto, Ontario, Canada, Jun. 2021, pp. 5634–5638.
- [318] T. N. Sainath, Y. He, A. Narayanan, R. Botros, R. Pang, D. Rybach, C. Allauzen, E. Variiani, J. Qin, Q.-N. Le-The, S.-Y. Chang, B. Li, A. Gulati, J. Yu, C.-C. Chiu, D. Caseiro, W. Li, Q. Liang, and P. Roudon, "An Efficient Streaming Non-Recurrent On-Device End-to-End Model with Improvements to Rare-Word Modeling," in *Proc. Interspeech*, Brno, Czechia, Sep. 2021, pp. 1777–1781.
- [319] N. P. Jouppi, C. Young, N. Patil, D. Patterson, G. Agrawal, R. Bajwa, S. Bates, S. Bhatia, N. Boden, A. Borchers *et al.*, "In-Datcenter Performance Analysis of a Tensor Processing Unit," in *Proc. of the 44th Annual International Symposium on Computer Architecture*, Toronto, Ontario, Canada, Jun. 2017, pp. 1–12.
- [320] A. Bapna, Y.-A. Chung, N. Wu, A. Gulati, Y. Jia, J. H. Clark, M. Johnson, J. Riesa, A. Conneau, and Y. Zhang, "SLAM: A Unified Encoder for Speech and Language Modeling via Speech-Text Joint Pre-Training," Oct. 2021, arXiv:2110.10329. [Online]. Available: <https://arxiv.org/abs/2110.10329>
- [321] A. Bapna, C. Cherry, Y. Zhang, Y. Jia, M. Johnson, Y. Cheng, S. Khanuja, J. Riesa, and A. Conneau, "mSLAM: Massively Multilingual Joint Pre-Training for Speech and Text," Feb. 2022, arXiv:2202.01374. [Online]. Available: <https://arxiv.org/abs/2202.01374>
- [322] Y. Tang, H. Gong, N. Dong, C. Wag, W. Hsu, J. Gu, A. Baeviski, X. Li, A. Mohamed, M. Auli, and J. Pino, "Unified Speech-Text Pre-training for Speech Translation and Recognition," in *Proc. ACL*, Dublin, Ireland, May 2022, pp. 1488–1499, arXiv:2204.05409. [Online]. Available: <https://arxiv.org/abs/2204.05409>
- [323] Y.-A. Chung, C. Zhu, and M. Zeng, "SPLAT: Speech-Language Joint Pre-Training for Spoken Language Understanding," in *Proc. NAACL*, Jun. 2021, pp. 1897–1907, arXiv:2010.02295. [Online]. Available: <https://arxiv.org/abs/2010.02295>
- [324] J. Ao, R. Wang, L. Zhou, C. Wang, S. Ren, Y. Wu, S. Liu, T. Ko, Q. Li, Y. Zhang, Z. Wei, Y. Qian, J. Li, and F. Wei, "SpeechT5: Unified-Modal Encoder-Decoder Pre-Training for Spoken Language Processing," in *Proc. ACL*, Dublin, Ireland, May 2022, pp. 5723–5738, arXiv:2110.07205. [Online]. Available: <https://arxiv.org/abs/2110.07205>
- [325] S. Thomas, H. J. Kuo, B. Kingsbury, and G. Saon, "Towards Reducing the Need for Speech Training Data to Build Spoken Language Understanding Systems," in *Proc. IEEE ICASSP*, Singapore, May 2022, pp. 7932–7936, arXiv:2203.00006. [Online]. Available: <https://arxiv.org/abs/2203.00006>
- [326] T. N. Sainath, R. Prabhavalkar, A. Bapna, Y. Zhang, Z. Huo, Z. Chen, B. Li, W. Wang, and T. Strohman, "JOIST: A joint speech and text streaming model for ASR," in *Proc. IEEE SLT*, Doha, Qatar, Jan. 2023, to appear; arXiv:2210.07353. [Online]. Available: <https://arxiv.org/abs/2210.07353>
- [327] T. Hori, R. Astudillo, T. Hayashi, Y. Zhang, S. Watanabe, and J. Le Roux, "Cycle-Consistency Training for End-to-End Speech Recognition," in *Proc. IEEE ICASSP*, Brighton, UK, May 2019, pp. 6271–6275.
- [328] T. Ochiai, S. Watanabe, T. Hori, and J. R. Hershey, "Multichannel End-to-End Speech Recognition," in *Proc. ICML*. Sydney, Australia: PMLR, Aug. 2017, pp. 2632–2641.
- [329] X. Chang, W. Zhang, Y. Qian, J. Le Roux, and S. Watanabe, "MIMO-Speech: End-to-End Multi-Channel Multi-Speaker Speech Recognition," in *Proc. IEEE ASRU*. Sentosa, Singapore: IEEE, Dec. 2019, pp. 237–244.

- [330] J. Li, "Recent Advances in End-to-End Automatic Speech Recognition," Nov. 2021, preprint arXiv:2111.01690. [Online]. Available: <https://arxiv.org/abs/2111.01690>

PLACE
PHOTO
HERE

Rohit Prabhavalkar Rohit Prabhavalkar received his PhD in Computer Science and Engineering from The Ohio State University, USA, in 2013. Following his PhD, Rohit joined the Speech Technologies group at Google where he is currently a Staff Research Scientist. At Google, his research has focused primarily on developing compact acoustic models which can run efficiently on mobile devices, and on developing improved end-to-end automatic speech recognition systems. Rohit has co-authored over 50 refereed papers, which have received two best paper awards (ASRU 2017; ICASSP 2018). He currently serves as a member of the IEEE Speech and Language Processing Technical Committee (2018–2024) and as an associate editor of the IEEE/ACM Transactions on Audio, Speech, and Language Processing.

PLACE
PHOTO
HERE

Ralf Schlüter Ralf Schlüter received his Dr.rer.nat. degree in Computer Science in 2000 and habilitated in Computer Science in 2019, both at RWTH Aachen University. In May 1996, Ralf Schlüter joined the Computer Science Department at RWTH Aachen University, where he currently is Lecturer and Academic Director, leading the Automatic Speech Recognition Group at the Chair Computer Science 6 – Machine Learning and Human Language Technology. In 2019, Ralf also joined AppTek GmbH Aachen as Senior Researcher. His research interests cover sequence classification, specifically all aspects of automatic speech recognition, decision theory, stochastic modeling, and signal analysis. Ralf served as Subject Editor for Speech Communication (2013-2019).

PLACE
PHOTO
HERE

Takaaki Hori received his PhD degree in system and information engineering from Yamagata University, Yonezawa, Japan, in 1999. From 1999 to 2015, he had been engaged in researches on speech recognition and spoken language processing at Cyber Space Laboratories and Communication Science Laboratories in Nippon Telegraph and Telephone (NTT) Corporation, Japan. From 2015 to 2021, he was a Senior Principal Research Scientist at Mitsubishi Electric Research Laboratories (MERL), USA. He is currently a Machine Learning Researcher at Apple. His research interests include automatic speech recognition, spoken language understanding, and language modeling. He served as a member of the IEEE Speech and Language Processing Technical Committee (2020–2022).

PLACE
PHOTO
HERE

Shinji Watanabe Shinji Watanabe is an Associate Research Professor at Johns Hopkins University, Baltimore, MD, USA. He received his PhD degree in 2006 from Waseda University, Tokyo, Japan. He was a research scientist at NTT Communication Science Laboratories, Kyoto, and a Senior Principal Research Scientist at Mitsubishi Electric Research Laboratories (MERL). His research interests include automatic speech recognition, speech enhancement, and machine learning for speech and language processing. He served an Associate Editor of the IEEE Transactions on Audio Speech and Language Processing, and is a member of several technical committees including the IEEE Signal Processing Society Speech and Language Technical Committee.

PLACE
PHOTO
HERE

Tara Sainath received her PhD in Electrical Engineering and Computer Science from MIT in 2009. The main focus of her PhD work was in acoustic modeling for noise robust speech recognition. After her PhD, she spent 5 years at the Speech and Language Algorithms group at IBM T.J. Watson Research Center, before joining Google Research. She has served as a Program Chair for ICLR in 2017 and 2018. Also, she has co-organized numerous special sessions and workshops, including Interspeech 2010, ICML 2013, Interspeech 2016 and ICML 2017. In addition, she is a member of the IEEE Speech and Language Processing Technical Committee (SLTC) as well as the Associate Editor for IEEE/ACM Transactions on Audio, Speech, and Language Processing.