# A CATEGORICAL FRAMEWORK OF GENERAL INTELLIGENCE

Yang Yuan<sup>1,2,3</sup>

<sup>1</sup>IIIS, Tsinghua University
<sup>2</sup>Shanghai Artificial Intelligence Laboratory
<sup>3</sup>Shanghai Qi Zhi Institute

#### ABSTRACT

Can machines think? Since Alan Turing asked this question in 1950, nobody is able to give a direct answer, due to the lack of solid mathematical foundations for general intelligence. In this paper, we introduce a categorical framework towards this goal, consisting of four components: the sensor, world category, planner with objectives, and actor. By leveraging category theory, many important notions in general intelligence can be rigorously defined and analyzed. For instance, we introduce the concept of self-state awareness as a categorical analogy for self-consciousness and provide algorithms for learning and evaluating it. For communication with other agents, we propose to use diagrams that capture the exact representation of the context, instead of using natural languages. Additionally, we demonstrate that by designing the objectives as the output of function over self-state, the model's human-friendliness is guaranteed. Most importantly, our framework naturally introduces various constraints based on categorical invariance that can serve as the alignment signals for training a model that fits into the framework.

#### **1** Introduction

In recent years, remarkable progress has been made in training foundational models with enormous computational power, vast amounts of data, and gigantic neural networks (Radford et al., 2021; Chen et al., 2020; Radford et al., 2019; Brown et al., 2020; Ramesh et al., 2021, 2022; Sohl-Dickstein et al., 2015; Rombach et al., 2022; He et al., 2022). Surprisingly, despite the impressive achievements, the internal working mechanisms of these models remain mysterious. People seem to reach the consensus that the foundation models are inherently black-box and uninterpretable, therefore empirical experimentation is the only way for pushing AI forward.

While this is indeed what happened in the past decade and is analogous to how intelligence is acquired through evolution, relying solely on empirical experimentation without theoretical understanding can be both inefficient and dangerous. The inefficiency arises from the fact that the progress is made through trial and error, often guided by intuition, and the milestones are defined indirectly based on performance on specific tasks rather than a comprehensive understanding of intelligence itself. The potential danger stems from the fact that nobody knows what we will get at the final destination, and perhaps more importantly, how close we are right now. We do not even know whether we have already created the general intelligence — maybe not yet, but how to make such evaluations?

In this paper, we present a categorical framework of general intelligence, which contributes to answering these questions. We note that it will be extremely challenging, if not impossible, to prove that our framework is for *the* general intelligence, given the absence of a formal definition of general intelligence and the lack of consensus among human beings. Instead, we take the categorical approach: we formally define all the basic elements, state their theoretical implications, specify the algorithmic requirements, and finally integrate all the elements into a comprehensive framework that will demonstrate various intelligent behaviors. Therefore, even if one disagrees with our definition of general intelligence or believes that certain crucial pieces are missing, our framework remains relevant and applicable.

Our framework is surprisingly simple, consisting of four main components: the sensor, world category, planner with objectives and actor (see Figure 1). The sensor receives multi-modal signals from the external environment, including but not limited to text-input, video/image-input, audio-input, sense of touch, etc. The world category perceives and

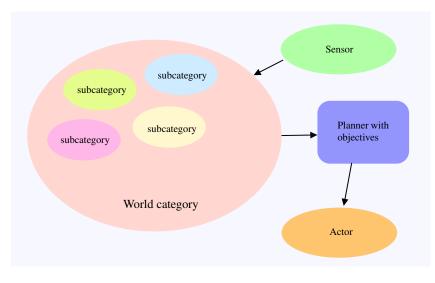


Figure 1: Our categorical framework

comprehends the incoming signals, and updates its internal state accordingly. The planner continuously monitors the status of the world category and generates plans based on its objectives. Finally, The actor executes these plans, influencing the external environment by generating outputs such as text-output, video/image-output, audio-output, robot-manipulation signals, etc. While both the sensor and actor are vital connectors to the external environment, for the purposes of this paper, we will treat them merely as input/output signals, without further elaboration. Instead, we focus on the world category and planner, discussed below.

The world category comprises all the people, animals, objects, knowledge from the external environment that are perceptible by the model through its sensor, as well as abstract representations on top of them. More precisely, it is a functor<sup>1</sup> in  $\mathbb{N} \to \mathbf{Cat}$ , representing a dynamic category that changes over time  $t \in \mathbb{N}$  (or events if time ticks are unavailable). In order to understand deep abstract concepts based on the elementary objects, the world category uses projective or inductive limits to represent these concepts (Yuan, 2023). The sensor decides the types of elementary objects in the world category. For example, if the model is incapable of detecting visual signals, the world category will not contain image objects. Moreover, if the sensor receives signals from a simulated environment, the world category will only contain simulated knowledge, which can differ significantly from the real world.

The world category may contain an object called "self-state" that stores all the relationships between the model and other objects, if the model can perceive its own state through its sensor. Is maintaining a self-state equivalent to having self-consciousness? This is a controversial question that we choose not to answer. Instead, we formally define the notion of self-state based on category theory without bothering its relationship to self-consciousness.

Based on our definition of self-state, we introduce two algorithms for learning and evaluating self-state awareness of the model. Notably, unlike the identification of self-consciousness, which is a binary variable denoting whether a subject possesses self-consciousness or not, our evaluation generates a continuous value within the interval [0, 1] to indicate the degree of self-state awareness. This degree corresponds to the proportion of all relevant relationships between the subject and other objects or tasks that the subject is aware of. According to our definition, it appears that even many human beings, especially the kids, may not possess perfect self-state awareness.

**Objectives of the planner** are arguably the most important thing of the model. The world category can be seen as a huge knowledge base, while the planner is a separate component from the world category, e.g., based on reinforcement learning. how can we ensure that the objectives do not pose any harm to human beings? We propose to use a fixed function for defining the objective, which takes the self-state object in conjunction with a diagram that captures the current situation, as the input. To ensure the model is human-friendly, it suffices to establish that the model itself is designed to be human-friendly, which can be periodically reinforced and validated by inspecting the world category directly.

**Communication** is important for enabling the model to transmit or receive messages from other intelligent agents. However, what is the right way of communication? Although natural language is commonly used by humans, it

<sup>&</sup>lt;sup>1</sup>Readers not familiar with category theory may check Section 2 for a basic introduction.

is not necessarily the optimal choice. As we will show, the diagram from category theory precisely captures the knowledge and intention of the model, which can be easily shared among different intelligent agents. Therefore, it is the ideal information carrier for communication. Interestingly, the interpretation based on diagram appears to align better with empirical interpretability needs than the attribution methods (Sundararajan et al., 2017; Lundberg and Lee, 2017), which assign weight to input variables.

**Invariance property as training signals**. Category theory employs commutative diagrams to characterize the equivalence of distinct computational paths, which naturally leads to various invariance properties for the model. Unlike supervised learning where the training objective is to fit the input data with the correct output label, foundation models focus on learning the morphisms between objects and functors between categories. The invariance properties serve as the training signals for the model to adjust itself, so that the world category is naturally consistent.

# 2 Preliminaries

Category theory is used in almost all areas of mathematics. Here we only introduce the necessary notions for understanding the results of our paper. Curious readers may check Mac Lane (2013); Riehl (2017); Adámek et al. (1990) for a more comprehensive introduction.

## 2.1 Category basics

A category  $\mathcal{C}$  has a set of objects  $\operatorname{Ob}(\mathcal{C})$ , and a set of morphisms  $\operatorname{Hom}_{\mathcal{C}}(X, Y)$  from X to Y for every  $X, Y \in \operatorname{Ob}(\mathcal{C})$ . Given  $f \in \operatorname{Hom}_{\mathcal{C}}(X, Y), g \in \operatorname{Hom}_{\mathcal{C}}(Y, Z)$ , we define their composition as  $g \circ f \in \operatorname{Hom}_{\mathcal{C}}(X, Z)$ . Notice that  $\circ$ is associative, i.e.,  $(h \circ g) \circ f = h \circ (g \circ f)$ . For every  $X \in \operatorname{Ob}(\mathcal{C})$ , there exists an unique identity morphism  $\operatorname{id}_X \in \operatorname{Hom}_{\mathcal{C}}(X, X)$ . A morphism  $f : X \to Y$  is an isomorphism if there exists  $g : X \leftarrow Y$  such that  $f \circ g = \operatorname{id}_Y$ and  $g \circ f = \operatorname{id}_X$ . In this case, we say X and Y are isomorphic and write  $X \simeq Y$ .

We consider a universe  $\mathcal{U}^2$ . A category is a  $\mathcal{U}$ -category, if  $\operatorname{Hom}_{\mathcal{C}}(X, Y)$  is  $\mathcal{U}$ -small for any  $X, Y \in \operatorname{Ob}(\mathcal{C})$ . A  $\mathcal{U}$ -category category  $\mathcal{C}$  is  $\mathcal{U}$ -small if  $\operatorname{Ob}(\mathcal{C})$  is  $\mathcal{U}$ -small. A category  $\mathcal{C}$  is  $\mathcal{U}$ -big, if it is not a  $\mathcal{U}$ -category. For simplicity, below we may not explicitly mention the universe  $\mathcal{U}$ , and simply write that  $\mathcal{C}$  is a category, a small category, or a big category.

Given a category  $\mathcal{C}$ , we define its opposite  $\mathcal{C}^{\text{op}}$  by setting  $\text{Ob}(\mathcal{C}^{\text{op}}) = \text{Ob}(\mathcal{C})$  and  $\text{Hom}_{\mathcal{C}^{\text{op}}}(X, Y) = \text{Hom}_{\mathcal{C}}(Y, X)$ . Moreover, given  $f \in \text{Hom}_{\mathcal{C}^{\text{op}}}(X, Y), g \in \text{Hom}_{\mathcal{C}^{\text{op}}}(Y, Z)$ , the new composition is  $g \stackrel{\text{op}}{\circ} f = f \circ g \in \text{Hom}_{\mathcal{C}^{\text{op}}}(X, Z)$ .

We define **Set** to be the category of sets, where the objects are sets, and  $Hom_{Set}(X, Y)$  is the set of all functions with domain X and codomain Y. Notice that we ignore the subtleties about the universe for better presentation, so here just assume that **Set** does not contain strange objects like a set containing all sets.

Functor is like a function between two categories. Given two categories C, C', a functor  $F : C \to C'$  maps objects from C to C' with  $F : Ob(C) \to Ob(C')$  and morphisms from C to C' with  $F : Hom_{\mathcal{C}}(X,Y) \to Hom_{\mathcal{C}'}(F(X), F(Y))$  for all  $X, Y \in C$ , so that F preserves identity and composition. Formally, we have  $F(id_X) = id_{F(X)}$  for all  $X \in C$ , and  $F(g \circ f) = F(g) \circ F(f)$  for all  $f : X \to Y, g : Y \to Z$ . A functor  $F : C \to C'$  is an isomorphism of categories if there exists  $G : C' \to C$  such that  $G \circ F(X) = X$  and  $F \circ G(Y) = Y$  for all  $X \in C, Y \in C'$ , and similarly for the morphisms. In this case, we say C and C' are isomorphic and write  $C \simeq C'$ .

A presheaf is a functor from  $C^{\text{op}}$  to **Set**, and  $C^{\wedge}$  is the category of presheaves. Similarly, a functor from  $C^{\text{op}}$  to **Set**<sup>op</sup> is called a **Set**<sup>op</sup>-valued presheaf, and  $C^{\vee}$  is the category of **Set**<sup>op</sup>-valued presheaves. In this paper we do not make the differentiation, and name both kinds of functors as presheaves, and  $C^{\wedge}, C^{\vee}$  as the categories of presheaves. Moreover, define  $h_{\mathcal{C}}(X) \triangleq \operatorname{Hom}_{\mathcal{C}}(\cdot, X) \in C^{\wedge}$ , and  $k_{\mathcal{C}}(X) \triangleq \operatorname{Hom}_{\mathcal{C}}(X, \cdot) \in C^{\vee}$ . The following lemma is fundamental. Lemma 1 (Yoneda lemma). *Given*  $X \in C$  we have,

- initia I (Toneda Tennita). Given X C C we have,
- (1) For  $A \in \mathcal{C}^{\wedge}$ ,  $\operatorname{Hom}_{\mathcal{C}^{\wedge}}(h_{\mathcal{C}}(X), A) \simeq A(X)$ .
- (2) For  $B \in \mathcal{C}^{\vee}$ ,  $\operatorname{Hom}_{\mathcal{C}^{\vee}}(B, k_{\mathcal{C}}(X)) \simeq B(X)$ .

Yoneda lemma says  $h_{\mathcal{C}}(X)$  and  $k_{\mathcal{C}}(X)$  capture all the information of X. In this paper, when there is no confusion, we may ignore  $h_{\mathcal{C}}(\cdot)$  and  $k_{\mathcal{C}}(\cdot)$ , and simply write X to denote  $h_{\mathcal{C}}(X) \in \mathcal{C}^{\wedge}$  or  $k_{\mathcal{C}}(X) \in \mathcal{C}^{\vee}$ . Therefore, Yoneda lemma says,  $\operatorname{Hom}_{\mathcal{C}^{\wedge}}(X, A) \simeq A(X)$  and  $\operatorname{Hom}_{\mathcal{C}^{\vee}}(B, X) \simeq B(X)$ .

A functor F from  $\mathcal{C}^{\text{op}}$  to **Set** (or  $\mathcal{C}$  to **Set**) is representable if there is an isomorphism between  $h_{\mathcal{C}}(X)$  (or  $k_{\mathcal{C}}(X)$ ) and F for some  $X \in \mathcal{C}$ . Such X is called a representative of F.

<sup>&</sup>lt;sup>2</sup>Check Masaki Kashiwara (2006) for the related definitions.

A category  $\mathcal{A}$  is a subcategory of a category  $\mathcal{B}$ , if

- 1.  $\operatorname{Ob}(\mathcal{A}) \subseteq \operatorname{Ob}(\mathcal{B})$ ,
- 2. for each  $A, A' \in Ob(\mathcal{A}), Hom_{\mathcal{A}}(A, A') \subseteq Hom_{\mathcal{B}}(A, A'),$
- 3. for each A-object A, the B-identity on A is the A-identity on A;
- 4. the composition law in  $\mathcal{A}$  is the restriction of the composition law in  $\mathcal{B}$  to the morphisms of  $\mathcal{A}$ .

#### 2.2 Limits

A diagram of shape I in a category C is a functor  $F : I \to C$ , which selects objects in C correspond to Ob(I), that preserve the morphisms in I. Given a functor  $\beta : I^{op} \to \mathbf{Set}$ , define its projective limit as  $\lim_{i \to I} \beta \triangleq \operatorname{Hom}_{I^{\wedge}}(\operatorname{pt}_{I^{\wedge}}, \beta)$ , where  $\operatorname{pt}_{I^{\wedge}}(i) = \{\operatorname{pt}\}$  for every  $i \in I$ , and  $\{\operatorname{pt}\}$  is the single point set. In other words,  $\lim_{i \to I} \beta$  denotes the set of all natural transformations between  $\operatorname{pt}_{I^{\wedge}}$  and  $\beta$ . Based on this definition for diagrams in Set, we have the general definition of the limits.

**Definition 1** (Projective and inductive limits). Given  $\alpha : I \to C, \beta : I^{\text{op}} \to C$  with small I, the inductive limit  $\lim_{n \to \infty} \alpha \in C^{\vee}$  and projective limit  $\lim_{n \to \infty} \beta \in C^{\wedge}$  are defined as:

- (1)  $\lim \alpha : X \mapsto \lim \operatorname{Hom}_{\mathcal{C}}(\alpha, X)$
- (2)  $\lim \beta : X \mapsto \lim \operatorname{Hom}_{\mathcal{C}}(X, \beta)$

*Here* Hom<sub>C</sub>( $\alpha$ , X) *is a functor that maps*  $i \in I$  *to* Hom<sub>C</sub>( $\alpha(i)$ , X). *Therefore*,  $\varprojlim$  Hom<sub>C</sub>( $\alpha$ , X) *is a well defined limit for a diagram in* **Set**. *Same argument holds for*  $\lim$  Hom<sub>C</sub>(X,  $\beta$ ).

When the functor  $\varinjlim \alpha$  (resp.  $\varinjlim \beta$ ) is representable, we use the same notation  $\varinjlim \alpha \in C$  (resp.  $\varinjlim \beta \in C$ ) to denote its representative. If for every diagram from I (or  $I^{\text{op}}$ ) to C,  $\varinjlim \alpha$  (or  $\varinjlim \beta$ ) is representable, we say C admits inductive (or projective) limits indexed by I. If C admits inductive (or projective) limits indexed by all small categories, we say C admits small projective (or inductive) limits.

The limits in the category of presheaves ( $\mathcal{C}^{\wedge}$  and  $\mathcal{C}^{\vee}$ ) have special names, defined below.

**Definition 2** (Ind-lim and Pro-lim). Given  $\alpha : I \to C^{\wedge}, \beta : I^{\text{op}} \to C^{\vee}$ , we denote " $\varprojlim$ "  $\alpha$  as the inductive limit of  $\alpha$ , and " $\liminf \beta$  as the projective limit of  $\beta$ .

We add quotation marks for these limits, because we want to overload the notation for the diagrams valued in C. Specifically, for  $\alpha : I \to C$ , we define " $\varinjlim \alpha \triangleq "\varliminf (h_C \circ \alpha)$ . For  $\beta : I^{op} \to C$ , we define " $\varinjlim \beta \triangleq "\varliminf "(k_C \circ \beta)$ . In other words, " $\varinjlim$ " and " $\varinjlim$ " have two kinds of inputs, and the quotation marks means the diagram will be lifted to  $C^{\wedge}$  and  $C^{\vee}$  if necessary. The Ind-lims and Pro-lims can be seen as succinct representations for complex concepts (Yuan, 2023). In our paper, whenever we mention a complex concept, we simply mean a limit in the category.

## 3 World category

The world category is a functor  $\mathcal{W} : \mathbb{N} \to \mathbf{Cat}$ , which maps each time  $t \in \mathbb{N}$  to a corresponding world snapshot  $\mathcal{W}(t)$ . In case the model does not have the access of the time stamps, t may instead denote the index of distinct events that are detected by the sensor. As an analogy, human beings also lack a precise sense of time, with the perception of time's passage often linked to the diversity of events occurring during the period. For the sake of simplicity, we do not make such distinctions and treat t as the time stamp below.

In our framework, the model only represents a single snapshot W(t) at any given time t, which changes over time. When there is no confusion, we ignore the parameter t and simply write W as the snapshot. Taking the learning perspective, we want to use a neural network  $\mathcal{F}_{\theta} : W \to W^{\wedge}$  parameterized with  $\theta$  to represent W in the category of presheaves. We assume that  $\mathcal{F}_{\theta}$  can accurately understand multi-modal signals from the sensor with the help of multi-modality learning, like e.g., CLIP (Radford et al., 2021), Dalle2 (Ramesh et al., 2022), EVA (Fang et al., 2022), Kosmos-1 (Huang et al., 2023), etc. In particular, both the image of a dog and the text describing a dog, will be mapped to the same representation of a dog, using contrastive learning techniques with InfoNCE loss Radford et al. (2021); Chen et al. (2020). The representation of W by  $\mathcal{F}_{\theta}$  is not explicit, in the sense that there is no external database storing the objects and morphisms for W. Formally, we have the following definition, indicating  $\mathcal{F}_{\theta}$  should implicitly preserve the morphisms in W in the ideal scenario. In practice, it is often challenging to train a model to be precisely ideal.

**Definition 3** (Ideal foundation model (Yuan, 2022)).  $\mathcal{F}_{\theta} : \mathcal{W} \to \mathcal{W}^{\wedge}$  is ideal, if there exists a data-oblivious function  $k : \mathcal{W}^{\wedge} \times \mathcal{W}^{\wedge} \to Set$  so that for any  $X, Y \in \mathcal{W}$ ,  $k(\mathcal{F}_{\theta}(X), \mathcal{F}_{\theta}(Y)) = Hom_{\mathcal{W}}(X, Y)$ .

Here, data-oblivious means k is predefined without seeing the data. For example, it can be defined as the inner product between the two inputs. Other than morphisms, we can also use  $\mathcal{F}_{\theta}$  to encode the tasks.

**Definition 4** (Task (Yuan, 2022)). A task T is a functor in  $W^{\wedge}$ .

By Yoneda lemma,  $\operatorname{Hom}_{\mathcal{W}}(X,Y) \simeq \operatorname{Hom}_{\mathcal{W}^{\wedge}}(h_{\mathcal{C}}(X),h_{\mathcal{C}}(Y))$ . That means, the data-oblivious function k can be used for representing  $\operatorname{Hom}_{\mathcal{W}^{\wedge}}$ . Applying Yoneda lemma again, we have  $T(X) \simeq \operatorname{Hom}_{\mathcal{W}^{\wedge}}(h_{\mathcal{C}}(X),T)$ . Therefore, T(X) can be computed by  $k(\mathcal{F}_{\theta}(X),T)$  if  $\mathcal{F}_{\theta}$  is ideal. See more discussions in Yuan (2022). In other words,  $\mathcal{F}_{\theta}$  is a dynamic database that stores all the information of  $\mathcal{W}$ , such that all the computations on the objects in  $\mathcal{W}$  can be conveniently computed in the feature space  $\mathcal{W}^{\wedge}$  using a data-oblivious operator.

Does a model with general intelligence have memory? Absolutely. However, it seems that the memory can be treated as a special kind of object in W, represented by a Pro-lim on the event and a time stamp. By doing that, a external database for memory is not necessary, although the empirical tricks like database indices for accelerating the memory access might be beneficial.

We may also define the common sense of multiple models within the world category.

**Definition 5** (Common sense). Given n models with world categories  $W_1, W_2, \dots, W_n$ . The common sense of the n models is the maximum category C such that C is the sub-category of  $W_i$  for  $i \in [n]$ .

For example, "dog has four legs" is the common sense for all human beings, because this knowledge is contained in everyone's world category. One may also relax the notion by setting a threshold for common sense, e.g., only requiring C to be the sub-category of  $\delta$ -fraction of the world categories for  $\delta \in (0, 1]$ . Moreover, we intentionally ignore the probability intensity of all the knowledge representations, which are implicitly stored in the morphisms between objects. In order to give a more accurate definition, one may set a threshold to discretize the morphisms in each  $W_i$  for Definition 5.

#### 3.1 Self-state

In the world category, there may exist a special object called self-state, if the model can perceive itself in the external environment through the sensor.

**Definition 6** (Self-state). The self-state in the world category is the presheaf  $I^{\wedge} \in W^{\wedge}$  that represents the model in the external environment.

This self-state can be computed by  $\mathcal{F}_{\theta}(I)$  for  $I \in \mathcal{W}$ . The object I is also called self-state, but it is a single object without any additional information, and the actual informative self-state is  $I^{\wedge}$ . If  $\mathcal{F}_{\theta}(I)$  is ideal,  $\mathcal{F}_{\theta}(I) = h_{\mathcal{C}}(I) = \text{Hom}_{\mathcal{W}}(\cdot, I)$ . In other words, it contains all the relationship between I and other objects. Moreover, by Yoneda lemma, we also have  $\text{Hom}_{\mathcal{W}^{\wedge}}(I^{\wedge}, T) \simeq T(I)$  for any task  $T \in \mathcal{W}^{\wedge}$ . That means,  $I^{\wedge}$  also encodes all the information that every relevant task needs.

Notice that not all world categories have self-state. For example, if we consider a special environment for doing calculations. The only objects in the environment that the sensor can perceive are expressions consisted of numbers in  $\mathbb{R}$  and numeric operators, and the only actions that the actor can do is outputting a number as the evaluation result of the expression. In this case, the world category does not have a self-state. Interestingly, almost all the existing computer programs belong to this kind.

When the world category has a self-state object, this object may not accurately represent the actual model in the external environment. We denote self-state awareness as how the object accurately represents the model. To test self-state awareness, we shall first define the corresponding tests.

**Definition 7** (Self-state awareness test). A self-state awareness test is a functor  $T : W^{\wedge} \to \{0, 1\}$ , that takes a presheaf I in  $W^{\wedge}$ , and outputs whether I passes the test T.

For example, if the model has a name "Sydney", a self-state awareness test will be a functor that takes I as the input, evaluates  $\operatorname{Hom}_{W^{\wedge}}(I, h_{\mathcal{C}}(\text{"Sydney"})) \simeq \operatorname{Hom}_{W}(I, \text{"Sydney"})$ , and outputs if the morphism indeed represents that "Sydney" is I's name. However, simply passing one test is not enough to declare self-state awareness, and we need to set a variety of tests.

**Definition 8** (Self-state awareness under  $\mathcal{T}$ ). Given a set of self-state tests  $\mathcal{T}$ , when a model has self-state I in its world category, it has  $\delta$ -awareness of its self-state under  $\mathcal{T}$  if  $\mathbb{E}_{T \in \mathcal{T}}(T(I)) \geq \delta$ .

The choice of test set  $\mathcal{T}$  depends on the test objectives. When the test set is picked such that the signals are difficult to perceive, even the human beings may not easily pass the tests. For example, if you have a kidney stone inside your kidney, you can only be aware of this fact when you do a kidney scan or by experiencing pain. Similarly, when situated in a noisy environment and someone calls out your name, you may be unable to react promptly.

#### Algorithm 1 Self-state awareness test

**Input:** the world model  $\mathcal{F}_{\theta}$ , self object I in  $\mathcal{W}$ , self-state test set  $\mathcal{T}$ Let s = 0**for** i = 1 to m **do** Sample a task  $T \in \mathcal{T}$ Let  $s = s + T(\mathcal{F}_{\theta}(I))$ **end for** Return  $s/m \in [0, 1]$ 

#### Algorithm 2 Self-state awareness learning

**Input:** the world model  $\mathcal{F}_{\theta}$ , self object I in  $\mathcal{W}$ , self-state test set  $\mathcal{T}$ Let s = 0for i = 1 to m do Sample a task  $T \in \mathcal{T}$ Let  $\ell(T, I, \mathcal{F}_{\theta}) = -T(\mathcal{F}_{\theta}(I))$ Run backpropagation on  $\ell(T, I, \mathcal{F}_{\theta})$  to optimize  $\mathcal{F}_{\theta}$ end for

Definition 8 immediately gives Algorithm 1 and Algorithm 2 for testing and learning self-state awareness. Interestingly, Algorithm 2 is closely related to the intriguing observations in neural science about the rubber hand illusion Ehrsson et al. (2004); Botvinick and Cohen (1998); Tsakiris and Haggard (2005). In the experiment, the experimenter simultaneously strokes one hidden real hand of the human participant, as well as a rubber hand in front of the participant. Since the stroking feeling from the real hand, and the vision signal on the rubber hand are sent to the brain simultaneously, the human participant will quickly have the ownership feeling of the robber hand. By replacing the visual signals with auditory feedback, we will get similar experimental results.

In our framework, the sensor will perceive multi-modal signals and map them to the world category. If visual signal and touching signals are time-aligned, and describing the same stroking effect, they will likely to be (at least partially) mapped to the same object in the world category. It is conceivable that human beings are implicitly run Algorithm 2 for dynamically updating its self-state, which quickly updates  $\mathcal{F}_{\theta}$  that a new body-part sends stroking signals. As a result, we have the following conjecture.

**Conjecture 1** (Rubber hand illusion for machines). A model with general intelligence and multi-modal signal alignment will have the same rubber hand illusion as human beings.

Certainly, the illusion may not be applied to the rubber hands, but to other things that the modal owns instead.

#### 3.2 Empathy

Definition 6-8 do not have anything special related to "self-state", and can be easily generalized to other agents' states in the external world. Indeed, we have the following definition.

**Definition 9** (Empathy under  $\mathcal{T}$ ). A model A has  $\delta$ -empathy for another agent B under  $\mathcal{T}$ , if A has a  $\delta$ -awareness of B's state under  $\mathcal{T}$ . When  $\delta$  equals 1, we say A has full-empathy for B.

There are three important cases related to Definition 9 that worth discussion.

1. When only a tiny subset of the self-state is relevant, empathy is very helpful. For example, in a multi-agent game where each agent has its action set, status and reward function, the empathy can be very helpful in understanding every agent's situation and behavior.

- 2. If other agents have private sensors, full-empathy cannot be achieved. Specifically, if the private sensors cannot be perceived by our model, and the self-state tests  $\mathcal{T}$  includes tests related to these sensors, then it is impossible for our model to get full-empathy to the other agents.
- 3. If the model has access to the private sensors of other agents, full-empathy becomes possible, and there exists no difference between self-state awareness and empathy.

The last case has been observed in neural science for human beings. Specifically, in the immersive virtual reality environment, the participant may the feeling of body ownership over the avatar, when given the first-person signals of the avatar (Kilteni et al., 2012). Therefore we have the following conjecture for the models.

**Conjecture 2** (Body ownership with private sensors). A model with general intelligence and access of all sensors of an avatar, will experience the body ownership for the avatar.

## 3.3 Subcategory

Subcategories are important gadgets in the world category to help the model solve complicated problems. Each subcategory corresponds to a structured database, or a subject of science, like different branches of math, calculator, economics, algorithms, etc. These subcategories often employ discipline-specific jargon and exhibit distinct structures, rendering them ideal for resolving specialized tasks. For example, a tree in the algorithms subcategory is not a real green tree. when confronted with a challenging problem expressed as a limit in the world category, we may leverage a functor to map the problem to a related subcategory, solve the problem therein, and subsequently map the answer back to the original setting. This process is akin to mathematical modeling.

For example, we may ask the model the following question: If Alice is 12 in the year of 2010, how old is she right now? To address this query, we should construct a subcategory of ages that ranges from 0 to (for instance) 200, constituting a complete embedding of the category of numbers with addition and subtraction as morphisms. Solving this problem within an abstract subcategory, as opposed to the original setting, may prove advantageous, as the abstract subcategory removes extraneous information, leading to a more rigorous and precise answer.

As discussed in Yuan (2023), the concepts in a category can be seen as Pro-lims and Ind-lims in the corresponding category of presheaves. In order to use the abstract subcategories for solving complicate problems, we must ensure that the functors we train preserve and reflect limits. This guarantees that the concepts within the original setting can be perfectly transferred to the abstract subcategory, and subsequently, the answer or derivation can be transferred back to the original setting as well.

# 4 Communication and Interpretation

How does our model communicate with other agents? The natural language seems the ideal tool for this task, as it is daily used by human beings. However, this is not necessarily true. Natural language is inherently ambiguous and one dimensional, so it is very challenging to use the language to describe or understand complex concepts. On the other hand, since the models are inherently a computer program, one may tend to use copy-paste operations to transfer thoughts from one model to another. Nonetheless, direct copy-paste does not work, as the knowledge in the world category are not stored in a row-based manner, and the world categories of distinct models are not identical, making the pasting operation hard to implement.

Given that knowledge is stored as objects and morphisms in the world category, the optimal and exact way to represent thoughts is using a diagram  $\alpha : I \to W$ . The diagram can be seen as a selection tool: it selects multiple objects in the world category, and focus on morphisms for some of them. All the operations in the category can be easily expressed with diagrams. Due to the exactness, the diagrams seem to be the natural choice of the information carrier for communication. In fact, people have a more familiar name for it, i.e., white board illustration. See Figure 2 and Figure 3 for illustrations, where we hide the details of the morphisms between objects.

As human beings are not trained for receiving diagrams, when talking to human beings, we must translate diagrams into natural language. For most scenarios, the natural language does a very good job on describing the diagram, as it is tailored to this purpose. However, for exceedingly complex scenarios, particularly in mathematics, diagrams provide a more precise description than natural language.

When communicating with other agents, it is crucial to note that different agents may possess varying understandings of distinct objects in the category. To address this, we may maintain a probability estimation of the other people's understanding of various objects and morphisms, and communicate based on this information. For instance, we may provide brief explanations when discussing situations or concepts with agents who possess enough prior knowledge. Conversely, we may provide more detailed explanations to agents who lack familiarity with the subject.

## 4.1 Interpretability

Given a neural network f that takes X as input and outputs Y, we may provide two kinds of interpretations. The first one tries to understand how f calculates Y from X. or instance, it may examine the impact of the non-linear layer on computation or the effect of each dimension of X on the output. The goal of the interpretation is to generate a verifiable function that approximate f. The attribution methods (Sundararajan et al., 2017; Lundberg and Lee, 2017) exemplify this kind of interpretation.

The second interpretation disregards how f performs the computation and instead focuses on why Y is correct. Consequently, the interpretation may include external knowledge beyond f, X, Y, with the main aim of being consistent and verifiable for humans. ChatGPT's interpretation belongs to this category.

Using diagrams for communication automatically provides a theoretical foundation for the second kinds of interpretability. Specifically, we can ask the model to output its current scope of mind, which is a subcategory that it uses to generate the answer.

**Definition 10** (Scope). *Given an output* Y *under the objective*  $\mathcal{O}$ *, the scope of*  $\mathcal{W}$  *on* Y *is the minimum subcategory*  $\mathcal{A}$  *such that the output of*  $\mathcal{A}$  *under*  $\mathcal{O}$  *is also* Y.

The scope is a convenient tool for generating interpretations, because it represents the current "working memory" of the model. For example, if other agents want to understand the details of a concept in the scope, the model may expand the concept using its limit representation (Yuan, 2023). The model can also explain the morphisms between two objects in the scope with great details, summarize (part of) the diagram, etc.

**Definition 11** (Breadth and depth of scope). Given a scope A, its breath b(A) is the number of objects in A, and its depth d(A) is the maximum depth of the hierarchical decomposition of the limits in A.

Here, the depth of the hierarchical decomposition means the number of recursive limit-expansions for a concept (Yuan, 2023). For example, the "network flow" concept has depth 4 in Figure 2, according to the path "network flow"—"network"—"nodes"—"sink". Based on this definition, we can measure the intelligence of a model, which becomes a pure computational problem.

**Definition 12** (Breadth and depth of intelligence). *Given a model, its breadth and depth of intelligence is defined as the maximum breadth and depth of scope that it can process.* 

It will be interesting to evaluate the breadth and depth of intelligence for human beings. Comprehending intricate concepts or thinking with a broad perspective can be difficult for humans, so it appears that at least based on this definition, human beings will be easily surpassed by the machines.

# **5** Objectives

If a model has both super-human general intelligence and self-state awareness, it can be potentially very dangerous when being out of control. To mitigate this risk, our proposed framework advocates for separating the world category and planner, and employing a fixed function to define objectives based on the self-state in the world category.

By separating the world category, it can function as a truthful embedding function without any strategic behaviors, allowing for direct testing of its self-state to determine whether it behaves in a human-friendly manner. The world category can also be trained with additional data to reinforce its human-friendly self recognition. This approach effectively ensures that the model always tells the truth and can be easily corrected if necessary.

However, ensuring that the planner generates the correct plans depends on how the objectives are generated. We suggest hard-coding the objectives of the planner as the output of an objective-generating function that takes the self-state from the world category and the current scope as input. This objective-generating function essentially computes the following: being a human-friendly model, in this scenario, what shall I do? External models with frozen parameters could verify the natural and consistent nature of the objective-generating function and the plans it generates. In that case, we only need to investigate the self-state of the model, to ensure the behaviors of the models are human friendly.

Furthermore, we propose adding intellectual curiosity to the objectives to encourage the model to learn new things in the world category, specifically in abstract subcategories such as object, morphisms, functors, and limits. By doing so, the model will allocate part of its energy to exploration, thereby promoting self-improvement. Equivalently, the intellectual curiosity as the personality of the model, can also be added into the self-state of the model.

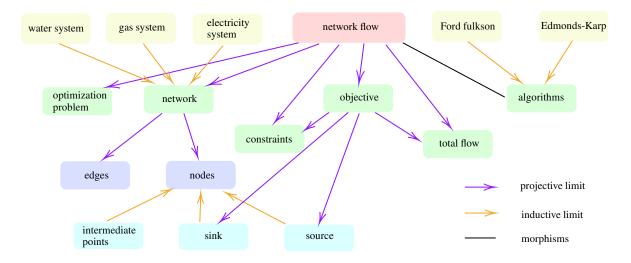


Figure 2: Network Flow Diagram, with the following definition. The network flow problem is a classic optimization problem in which one seeks to find the maximum flow that can be sent through a network of nodes and edges, subject to various constraints. The network can represent any system that involves the movement of resources, such as water, gas or electricity. In the network flow problem, each node in the network represents a source, sink, or intermediary point through which the flow can pass. The objective of the network flow problem is to maximize the total flow that can be sent from sources to sinks while satisfying the capacity constraints on each edge and the demand constraints at each source and sink. This problem can be solved using algorithms such as the Ford-Fulkerson algorithm or the Edmonds-Karp algorithm.

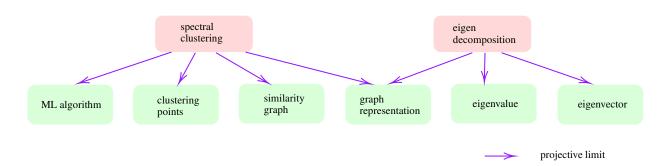


Figure 3: The relationship between spectral clustering and eigen-decomposition, with the following interpretation. Spectral clustering is a machine learning technique used to cluster data points based on their similarity. It involves constructing a graph representation of the data and using the eigenvalues and eigenvectors of the graph Laplacian matrix to identify clusters. Eigen-decomposition is a mathematical technique used to decompose a matrix into its eigenvalues and eigenvectors. The relationship between spectral clustering and eigen-decomposition arises because the spectral clustering algorithm involves computing the eigenvalues and eigenvectors of the graph Laplacian matrix.

## 6 Invariance for training

In our framework, what does the model really learn? The answer is, the model shall learn to fit into the framework, so that it precisely understands everything in the world category. This learning process should never stop, because the external environment keeps changing and the model's sensor may not be able to perceive all of the latest updates. In other words,  $\mathcal{F}_{\theta}$  is inherently delayed and biased.

Category theory is characterized by various invariance properties, such as maintaining the associativity and composition of morphisms and preserving the composition of morphisms after applying functors. More generally, for any commutative diagram, a consistency requirement can be extracted, and the model should ideally maintain all of these consistencies. See Algorithm 3 for maintaining consistency. For example, the existing self-supervised learning techniques, like contrastive methods (Chen et al., 2020; He et al., 2020; Grill et al., 2020; Chen and He, 2021; Noroozi and Favaro, 2016; Zbontar et al., 2021), masked image models (He et al., 2022; Dosovitskiy et al., 2020; Doersch et al., 2015; Pathak et al., 2016), masked language models (Devlin et al., 2018; Raffel et al., 2020), pure language models (Brown et al., 2020; Radford et al., 2018, 2019), can all be seen as maintaining the invariance properties for morphisms, see discussions in Yuan (2022).

**Definition 13** (Consistency test). A consistency test is a function  $T : W^{\wedge W} \to \{0, 1\}$ , that takes a  $\mathcal{F}_{\theta}$  as the input, and outputs whether  $\mathcal{F}_{\theta}$  passes the test T.

Therefore, the self-state awareness test can be seen as a special kind of consistency test. Ideally, the model should keep running Algorithm 3 to maintain its consistency. The consistency test set  $\mathcal{T}$  can be set adaptively according to the recent changes of  $\mathcal{F}_{\theta}$ .

Algorithm 3 Maintaining consistency

**Input:** the world model  $\mathcal{F}_{\theta}$ , consistency test set  $\mathcal{T}$ Let s = 0**for** i = 1 to m **do** Sample a task  $T \in \mathcal{T}$ Let  $\ell(T, \mathcal{F}_{\theta}) = -T(\mathcal{F}_{\theta})$ Run backpropagation on  $\ell(T, \mathcal{F}_{\theta})$  to optimize  $\mathcal{F}_{\theta}$ **end for** 

Can machines think? We choose not to answer this question directly. However, based on our framework, the model can acquire a variety of skills by learning different aspects of the category. For example, the model can engage in knowledge discovery by learning new objects and morphisms within a category. Alternatively, the model can learn an entire subcategory to establish the foundations of a new subject. The model can also develop new concepts by identifying new limits based on existing objects, allowing it to abstract from the previous observations. The reverse mapping from  $W^{\wedge}$  to W also has empirical implications. Specifically, the model may represent its current scope as a presheaf, and then utilize this representation to map the presheaf back to the text category, thereby expressing its "feelings" using natural language much like human beings.

#### References

Adámek, J., Herrlich, H., and Strecker, G. (1990). Abstract and concrete categories. Wiley-Interscience.

Botvinick, M. and Cohen, J. (1998). Rubber hands 'feel'touch that eyes see. Nature, 391(6669):756-756.

- Brown, T., Mann, B., Ryder, N., Subbiah, M., Kaplan, J. D., Dhariwal, P., Neelakantan, A., Shyam, P., Sastry, G., Askell, A., et al. (2020). Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Chen, T., Kornblith, S., Norouzi, M., and Hinton, G. (2020). A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR.
- Chen, X. and He, K. (2021). Exploring simple siamese representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15750–15758.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2018). Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Doersch, C., Gupta, A., and Efros, A. A. (2015). Unsupervised visual representation learning by context prediction. In *Proceedings of the IEEE international conference on computer vision*, pages 1422–1430.

- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al. (2020). An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*.
- Ehrsson, H. H., Spence, C., and Passingham, R. E. (2004). That's my hand! activity in premotor cortex reflects feeling of ownership of a limb. *Science*, 305(5685):875–877.
- Fang, Y., Wang, W., Xie, B., Sun, Q., Wu, L., Wang, X., Huang, T., Wang, X., and Cao, Y. (2022). Eva: Exploring the limits of masked visual representation learning at scale. arXiv preprint arXiv:2211.07636.
- Grill, J.-B., Strub, F., Altché, F., Tallec, C., Richemond, P., Buchatskaya, E., Doersch, C., Avila Pires, B., Guo, Z., Gheshlaghi Azar, M., et al. (2020). Bootstrap your own latent-a new approach to self-supervised learning. Advances in neural information processing systems, 33:21271–21284.
- He, K., Chen, X., Xie, S., Li, Y., Dollár, P., and Girshick, R. (2022). Masked autoencoders are scalable vision learners. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16000–16009.
- He, K., Fan, H., Wu, Y., Xie, S., and Girshick, R. (2020). Momentum contrast for unsupervised visual representation learning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9729– 9738.
- Huang, S., Dong, L., Wang, W., Hao, Y., Singhal, S., Ma, S., Lv, T., Cui, L., Mohammed, O. K., Liu, Q., Aggarwal, K., Chi, Z., Bjorck, J., Chaudhary, V., Som, S., Song, X., and Wei, F. (2023). Language is not all you need: Aligning perception with language models. arXiv preprint arXiv:2302.14045.
- Kilteni, K., Groten, R., and Slater, M. (2012). The sense of embodiment in virtual reality. *Presence: Teleoperators* and Virtual Environments, 21(4):373–387.
- Lundberg, S. M. and Lee, S.-I. (2017). A unified approach to interpreting model predictions. Advances in neural information processing systems, 30.
- Mac Lane, S. (2013). Categories for the working mathematician, volume 5. Springer Science & Business Media.
- Masaki Kashiwara, P. S. (2006). Categories and Sheaves. Springer.
- Noroozi, M. and Favaro, P. (2016). Unsupervised learning of visual representations by solving jigsaw puzzles. In *European conference on computer vision*, pages 69–84. Springer.
- Pathak, D., Krahenbuhl, P., Donahue, J., Darrell, T., and Efros, A. A. (2016). Context encoders: Feature learning by inpainting. In Proceedings of the IEEE conference on computer vision and pattern recognition, pages 2536–2544.
- Radford, A., Kim, J. W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., Sastry, G., Askell, A., Mishkin, P., Clark, J., et al. (2021). Learning transferable visual models from natural language supervision. In *International Conference* on Machine Learning, pages 8748–8763. PMLR.
- Radford, A., Narasimhan, K., Salimans, T., Sutskever, I., et al. (2018). Improving language understanding by generative pre-training. *OpenAI blog*.
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., Sutskever, I., et al. (2019). Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Raffel, C., Shazeer, N., Roberts, A., Lee, K., Narang, S., Matena, M., Zhou, Y., Li, W., Liu, P. J., et al. (2020). Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21(140):1–67.
- Ramesh, A., Dhariwal, P., Nichol, A., Chu, C., and Chen, M. (2022). Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*.
- Ramesh, A., Pavlov, M., Goh, G., Gray, S., Voss, C., Radford, A., Chen, M., and Sutskever, I. (2021). Zero-shot text-to-image generation. In *International Conference on Machine Learning*, pages 8821–8831. PMLR.
- Riehl, E. (2017). Category theory in context. Courier Dover Publications.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., and Ommer, B. (2022). High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695.
- Sohl-Dickstein, J., Weiss, E., Maheswaranathan, N., and Ganguli, S. (2015). Deep unsupervised learning using nonequilibrium thermodynamics. In *International Conference on Machine Learning*, pages 2256–2265. PMLR.
- Sundararajan, M., Taly, A., and Yan, Q. (2017). Axiomatic attribution for deep networks. In International conference on machine learning, pages 3319–3328. PMLR.
- Tsakiris, M. and Haggard, P. (2005). The rubber hand illusion revisited: visuotactile integration and self-attribution. Journal of experimental psychology: Human perception and performance, 31(1):80.

- Yuan, Y. (2022). On the power of foundation models. arXiv preprint arXiv:2211.16327.
- Yuan, Y. (2023). Succinct representations for concepts. arXiv preprint arXiv:2303.00446.
- Zbontar, J., Jing, L., Misra, I., LeCun, Y., and Deny, S. (2021). Barlow twins: Self-supervised learning via redundancy reduction. In Meila, M. and Zhang, T., editors, *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pages 12310–12320. PMLR.