

Colo-SCRL: Self-Supervised Contrastive Representation Learning for Colonoscopic Video Retrieval

Qingzhong Chen

School of Biomedical Engineering
Shanghai Jiao Tong University
Shanghai, China
chenqz1998@sjtu.edu.cn

Shilun Cai

Endoscopy Center
Zhongshan Hospital of Fudan University
Shanghai, China
caishilun1988@qq.com

Crystal Cai

School of Biomedical Engineering
Shanghai Jiao Tong University
Shanghai, China
crystal.cai@sjtu.edu.cn

Zefang Yu

School of Electronic Information
and Electrical Engineering
Shanghai Jiao Tong University
Shanghai, China
yuzefang@sjtu.edu.cn

Dahong Qian*

School of Biomedical Engineering
Shanghai Jiao Tong University
Shanghai, China
dahong.qian@sjtu.edu.cn

Suncheng Xiang*

School of Biomedical Engineering
Shanghai Jiao Tong University
Shanghai, China
xiangsunsheng17@sjtu.edu.cn

Abstract—Colonoscopic video retrieval, which is a critical part of polyp treatment, has great clinical significance for the prevention and treatment of colorectal cancer. However, retrieval models trained on action recognition datasets usually produce unsatisfactory retrieval results on colonoscopic datasets due to the large domain gap between them. To seek a solution to this problem, we construct a large-scale colonoscopic dataset named Colo-Pair for medical practice. Based on this dataset, a simple yet effective training method called *Colo-SCRL* is proposed for more robust representation learning. It aims to refine general knowledge from colonoscopies through masked autoencoder-based reconstruction and momentum contrast to improve retrieval performance. To the best of our knowledge, this is the first attempt to employ the contrastive learning paradigm for medical video retrieval. Empirical results show that our method significantly outperforms current state-of-the-art methods in the colonoscopic video retrieval task.

Index Terms—Colonoscopic video retrieval, contrastive learning, general knowledge

I. INTRODUCTION

Colorectal cancer (CRC) is the second leading cause of cancer death globally with an estimated 151,030 new cases and 52,580 deaths in 2022 [1]. As the gold standard for CRC screening, colonoscopies can significantly reduce the risk of death from CRC by early detection of tumors and removal of precancerous lesions [2]. For polyps found in previous colonoscopies, it usually takes time and tremendous efforts to locate and match them during colonoscopic polyp treatment. The repeated operation to find such polyps not only delays the treatment time, but also easily leads to patients developing abdominal distension, abdominal pain and other complications.

* indicates corresponding author. This work was partially supported by Wego Joint Lab.

Essentially, localization failure is a missed diagnosis of known polyps. Therefore, timely and accurate localization of polyps through colonoscopies is of great clinical significance for the prevention and treatment of CRC.

As illustrated in Fig. 1, given the query video clip, colonoscopic video retrieval aims to accurately locate the similar clip which semantically corresponds to the given query one. Up until now, no solution to this problem has been proposed in the deep learning community. Inspired by computer vision technology [3]–[7], we take a big step forward and develop a colonoscopic video retrieval approach to solve the aforementioned problems. Specifically, we capture polyp areas from the first colonoscopy screening and treat them as the query video clips to be retrieved. We then retrieve video clips of matched polyp areas from the second colonoscopy screening. When the polyp areas are successfully matched, physicians are alerted to pay attention to the possible presence of previously found polyps in the nearby area. Unfortunately, high similarity of the inner colon environment, existence of numerous colon folds, peristalsis of the colon itself, and blind areas in colonoscopy all bring significant challenges for colonoscopic video retrieval. Additionally, data collection and labeling are time-consuming for pairwise polyp area data. Data scarcity also makes it difficult for methods that rely on a sufficient amount of data to work.

To address these challenges, we present the **Colo-Pair** dataset, a large-scale manually-constructed dataset of complete colonoscopy sequences acquired during regular medical practice, including slow and careful screening explorations. On top of this, a simple but effective Self-supervised Contrastive Representation Learning framework named *Colo-SCRL* is proposed to refine general knowledge from our colonoscopies.

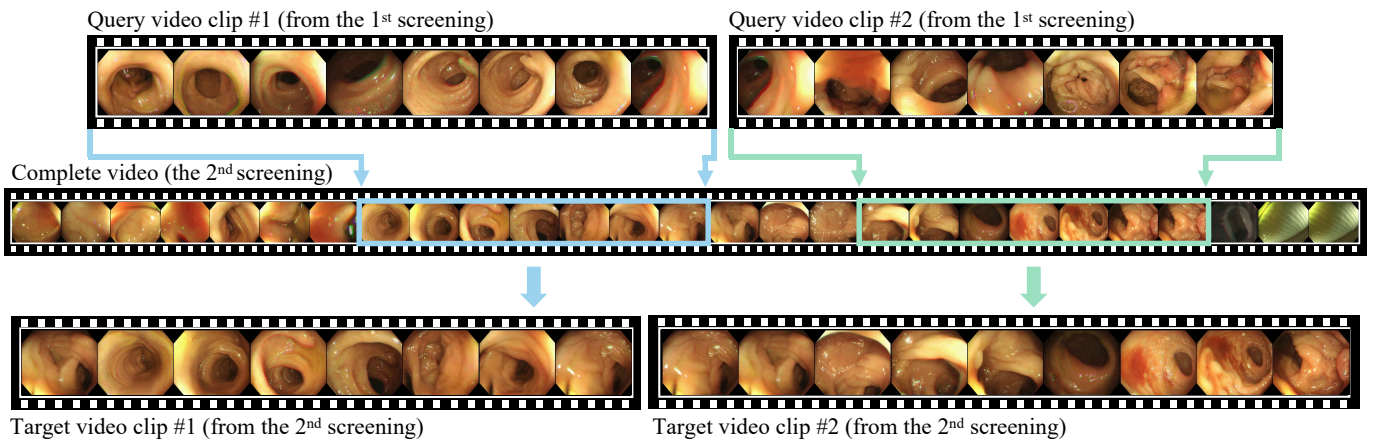


Fig. 1. Illustration of colonoscopic video retrieval. The top query video clips are polyp areas captured from the first colonoscopy screening. The middle video is the complete second colonoscopy screening which contains the corresponding target video clips, marked by the rectangles and shown in the bottom.

To be more specific, for the pre-training process, we employ the video masked autoencoder (VideoMAE), which inherits the merits of masking random cubes in the video and reconstructing the missing ones, to encourage extracting more effective video representations. For the downstream retrieval process, we build a contrastive video representation learning framework to learn spatial representations from unlabeled videos, which adopts InfoNCE contrastive loss to compare the similarity between positive and negative pairs. To the best of our knowledge, this is the first attempt to apply the contrast learning paradigm to medical video retrieval. We hope our dataset and method will shed light into future directions for the medical deep learning community.

Thus, our main contributions are summarized as follows:

- We construct the first colonoscopy video dataset with pairs of complete screenings from each patient to facilitate the development for medical practice.
- Based on this dataset, a self-supervised contrastive representation learning scheme *Colo-SCRL* is proposed to learn spatial representations from our video dataset on the colonoscopic video retrieval task.
- Extensive experiments on benchmarks demonstrate the superiority of our proposed framework compared with current state-of-the-art methods.

II. RELATED WORKS

A. Content-Based Video Retrieval

The research field of content-based video retrieval has gone through rapid development in recent years [3]–[5]. For example, Kordopatis-Zilos *et al.* introduced a video similarity learning architecture named ViSiL [3] and DnS [5] for video similarity learning. Shao *et al.* [4] proposed Temporal Context Aggregation for content-based video retrieval. However, these solutions are incapable of capturing a large variety of temporal similarity patterns due to their rigid aggregation approach, which hinders the further improvement for colonoscopic video retrieval tasks.

B. Self-Supervised Video Representation Learning

Self-supervised video representation learning has recently witnessed rapid progress in image classification, segmentation and object detection [8]–[13]. Inspired from this, investigations on video representation learning have now attracted enormous attention from both academia and industry. For example, He *et al.* [8] presented momentum contrast for unsupervised visual representation learning. Han *et al.* [9] proposed a novel self-supervised co-training scheme to improve the popular InfoNCE loss. Tong *et al.* [10] proposed an effective VideoMAE that unleashes the potential of vanilla vision transformer for video recognition. VideoMoCo, designed by Pan *et al.* [11] for self-supervised video representation learning, delves into MoCo and empowers its temporal representation by introducing temporally adversarial learning and temporal decay. Wang *et al.* [12] introduced a new task for self-supervised video representation learning by uncovering a set of spatio-temporal labels derived from appearance statistics. Although these methods have promoted the accuracy to a new degree, the performance of video representation learning is still unsatisfactory since previous approaches fail to explore the potential of the contrastive learning paradigm.

III. THE COLO-PAIR DATASET

As illustrated in Fig. 2, we manually construct the Colo-Pair dataset in this work. It is the first collection of complete paired colonoscopy sequences acquired during regular medical practice, *i.e.*, slow and careful screening explorations.

Specifically, the colonoscopy videos were collected from patients undergoing routine colonoscopy at Zhongshan Hospital of Fudan University¹. An Olympus CV-290 colonoscope with its built-in light source and image processor was used. Videos were recorded at 1920×1080 resolution with 25 frames per second. The dataset consists of 60 videos from 30 patients, with 62 query video clips and the corresponding polyp clips from the second screening manually annotated as positive

¹<https://www.zs-hospital.sh.cn/>

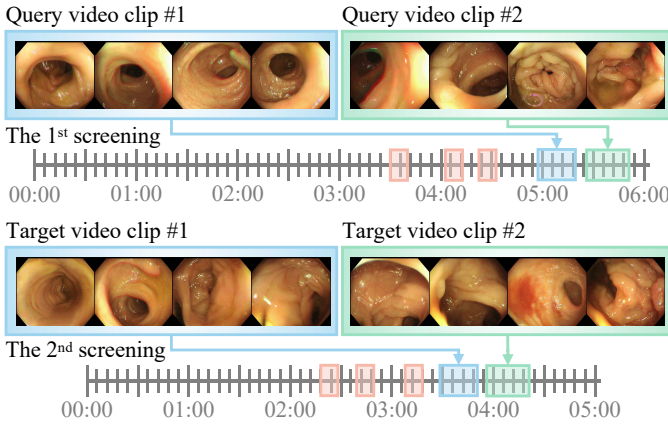


Fig. 2. An example of our colonoscopic dataset Colo-Pair. The top and bottom videos make up a pair of complete colonoscopic screenings from the same patient. The blue and green rectangles represent polyp areas to be retrieved, and the red ones represent anatomical landmarks, *i.e.*, ileocecal valve, hepatic flexure and splenic flexure, which act as prior knowledge to narrow the scope of video retrieval.

retrieval clips. We collected in total 9.6 hours of paired videos with full procedures, including two colonoscopy screenings for each patient, designed to facilitate the development and evaluation of polyp area location in real colonoscopy data. Additionally, we also provide labels of anatomical landmarks such as the ileocecal valve, the hepatic flexure, and the splenic flexure. These landmarks can not only act as prior knowledge during video retrieval but also promises to promote the development of other tasks, *e.g.*, colon segment classification [14].

We compare our constructed dataset with publicly available datasets in Table I, which shows that no other public dataset offers a comparable volume of full colonoscopies. More importantly, unlike other public datasets which provide only single colonoscopic screenings of each patient, we collect pairs of colonoscopy videos with semantic correspondence and manually label the corresponding clips, which satisfies the need for the retrieval task.

TABLE I
OVERVIEW OF EXISTING ENDOSCOPY DATASETS.

Dataset	Type of Data	Size of Dataset
Artefacts [15]	Images	5138 images
GIANA 2021 [16]	Images & short videos	38 videos & 3000 images
Kvasir [17]	Images	4000 images
Kvasir-Seg [18]	Images	8000 images
Nerthus [19]	Short videos	21 videos
Heilderberg [20]	Images	10040 images
HyperKvasir [21]	Images & short videos	110079 images & 374 short videos
Endomapper [22]	Videos	20 videos (~7.5 hours)
Colo-Pair (Ours)	Paired videos	60 videos (~9.6 hours)

IV. THE COLO-SCRL FRAMEWORK

A. Overview

As illustrated in Fig. 3, the training process of *Colo-SCRL* can be described in two steps. First, during the pre-training stage, the VideoMAE is employed to refine general colonoscopic knowledge through masking and reconstruction tasks and the learned encoder is transferred to downstream task. Second, during the downstream colonoscopic video retrieval stage, the core of contrastive video representation learning is an InfoNCE contrastive loss applied on features extracted from augmented videos.

B. Video Masked Autoencoder-Based Pre-training

We introduce a simple and data-efficient self-supervised learning method called VideoMAE for video transformer pre-training. The core of VideoMAE is to perform the masking and reconstruction tasks using an asymmetric encoder-decoder architecture [10]. Firstly, the joint space-time cube embedding is adopted in VideoMAE, where each input video clip $V \in \mathcal{R}^{Frame \times 3 \times H \times W}$ is divided into $2 \times 16 \times 16$ regular non-overlapping cubes as one token embedding. Secondly, these tokens are masked randomly at a high masking rate (90%), and only the remaining tokens are fed into the transformer encoder. Finally, a shallow decoder is placed on top of the visible tokens from the encoder and learnable mask tokens to reconstruct the video clip. We employ mean square error (MSE) loss as the loss function between the normalized masked tokens and the reconstructed ones in pixel level:

$$L_{MSE} = \frac{1}{\Omega} \sum_{p \in \Omega} |V(p) - \hat{V}(p)|^2 \quad (1)$$

where p is the token index, Ω is the masked token set, V is the input video clip and \hat{V} is the reconstructed one.

We utilize the temporal tube masking mechanism to improve the masking efficiency by alleviating information leakage due to temporal redundancy [10]. Temporal tube masking forces a mask to extend across the whole timeline, *i.e.*, different frames share the same masking map and temporal neighbors of masked cubes are also masked. Such mechanism encourages VideoMAE to utilize high-level semantics to recover missing space-time cubes and makes masked video reconstruction a meaningful self-supervised pre-training task.

C. Video Contrastive Representation Learning

Momentum Contrast. We introduce the Momentum Contrast (MoCo) strategy to build a large and consistent dictionary to cache a large number of features for unsupervised learning. It views the process of querying positive samples in contrast learning as a dictionary look-up task [8]. Given a dictionary queue including an encoded query q and encoded keys $\{k_0, k_1, k_2, \dots\}$, the contrastive loss function of MoCo can then be written as:

$$L_q = -\log \frac{\exp(q \cdot k_+ / \tau)}{\sum_{i=0}^K \exp(q \cdot k_i / \tau)} \quad (2)$$

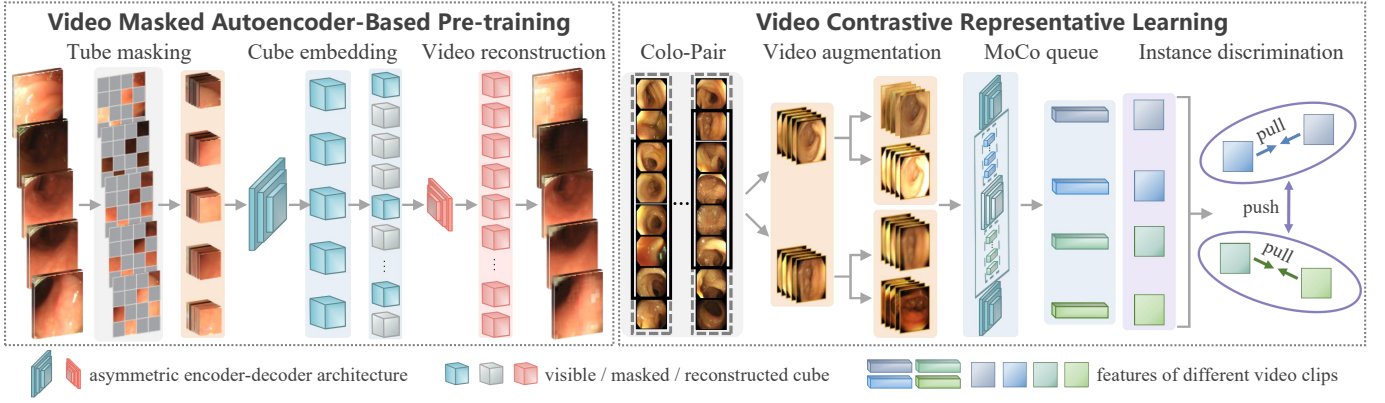


Fig. 3. Overview of the proposed *Colo-SCRL* framework. In the pre-training stage, we propose the use of VideoMAE and introduce the strategy of tube masking to effectively reduce the risk of time-dependent information leakage during video reconstruction. In the downstream colonoscopic video retrieval stage, we adopt the instance discrimination strategy to fine-tune the pre-trained encoder in an unsupervised way. MoCo-based learning is introduced to build a large and consistent dictionary, thus enhancing the discriminant ability of the model.

where similarity is measured by dot product and τ is a temperature parameter. The sum is over one positive and K negative samples. This loss function tries to classify q as k_+ in a softmax-based classifier. The query q denotes a representation of the input sample obtained by the encoder, and the keys k_i denote representations of the other training samples in the queue. We consider q and k_i as a positive pair if they originate from the same video clip and otherwise as a negative pair.

The critical part of MoCo is the dynamically-maintained and momentum-updated queue. The current mini-batch is enqueued and the oldest mini-batch is dequeued, following the FIFO (first in first out) scheme. Thus, dictionary size is decoupled from the mini-batch size. We denote the parameters of the encoder as θ_q and the parameters of the momentum encoder as θ_k . Only the encoder is updated by back-propagation with the computed contrastive loss in (2), while the momentum encoder is updated more slowly based on the encoder change as:

$$\theta_k \leftarrow m * \theta_k + (1 - m) * \theta_q \quad (3)$$

where $m \in [0,1)$ is a momentum coefficient. A large momentum (e.g., $m = 0.999$) ensures a stable key representation and works better than a relatively small one (e.g., $m = 0.9$) [8]. It suggests that the slowly updated key encoder makes good use of the queue. Thus, though the keys in the queue are encoded by different encoders (in different mini-batches), the differences between these encoders can be small.

Instance Discrimination. In self-supervised contrastive video representation learning, given a dataset D containing N raw video clips, the objective is to obtain a function $f(\cdot)$ to encode video clips for different downstream tasks, such as colonoscopic video retrieval.

Suppose there is a video augmentation function $\psi(\cdot; a)$, where a is collected from a set of pre-defined data augmentation transformations A (applied to D). For a sample x_i , its positive sample set P_i and negative sample set N_i are defined

as $P_i = \{\psi(x_i; a) | a \sim A\}$, and $N_i = \{\psi(x_n; a) | \forall n \neq i, a \sim A\}$. Given $z_i = f(\psi(x_i; \cdot))$, the contrastive loss function (InfoNCE [23]) in (2) can be specifically written as:

$$L_q = -\log \frac{\exp(z_i \cdot z_p / \tau)}{\exp(z_i \cdot z_p / \tau) + \sum_{n \in N_i} \exp(z_i \cdot z_n / \tau)} \quad (4)$$

which allows the positive pair (z_i, z_p) to attract mutually while the negative pair (z_i, z_n) repels each other. In essence, the optimization process can be regarded as instance discrimination [24] tasks, i.e., the augmented views of the same instance get higher similarity scores than those of other different instances.

Video Augmentation. Two random views of the same video clip are generated by employing random video augmentations and will exemplify a positive pair. A simple strategy is to use existing image-based data augmentation methods (e.g., random rotation, random cropping, color jittering and blurring) to each video frame. However, this strategy may negatively affect representation learning along the temporal dimension in videos [13]. Therefore, we make image augmentations consistent along the temporal dimension, i.e., hyper-parameters are generated only once per video clip and applied to all frames.

V. EXPERIMENTS

A. Experimental Settings

Implementation Details. All models are implemented in the Pytorch library with NVIDIA GeForce RTX 2080Ti GPUs. We choose the vanilla ViT [25] architecture as the feature extractor. At the pre-training stage, the parameter settings follow the practice of VideoMAE [10]. At the contrastive learning stage, we train the network with InfoNCE for 500 epochs, where an epoch means to have sampled every clip from each video. For optimization, we use Adam with 10^{-3} learning rate and 10^{-5} weight decay. The learning rate is decayed down by 1/10 twice when the validation loss plateaus. For data augmentation, we apply random cropping, horizontal flipping, Gaussian blur and color jittering, which are clip-wise consistent. It is worth mentioning that both non-polyp

region and polyp region video clips are used in the training stage, while the query and target video clips consist mainly of portions in which polyp regions are present in the evaluation stage.

Evaluation. We verify the effectiveness of *Colo-SCRL* and compare its performance with other methods on our Colo-Pair dataset. The standard evaluation metrics are employed to evaluate the performance of retrieval, including the standard rank at k ($R@k$) and mean Average Precision (mAP). $R@k$ is defined as the fraction of queries for which the correct items belong to the top- k ($k \in [1, 5, 10]$) retrieved items, and mAP is the average of all precision values computed when each relevant target is retrieved.

B. Comparison with Other Methods

In this section, we compare our proposed *Colo-SCRL* with eight state-of-the-art content-based video retrieval (CBVR) methods as shown in Table II. Among them, ViSiL, CgS^c, FgAttS_A^f and FgBinS_B^f are pre-trained on the FIVR-200K or DnS-100K dataset, and CoCLR and ViT are pre-trained on the UCF-101 dataset, considering that these methods fail to work when the number of positive samples for training is small. TCA and CVRL are trained on the Colo-Pair dataset. Benefiting from its automatic hard negative mining and the memory bank mechanism, TCA achieves the second-best results next to *Colo-SCRL*. However, the sampled keys in the memory bank for TCA are less consistent [8]. Our method explores the potential of MoCo to increase the capacity of negative samples, which allows it to be more memory-efficient and adaptable in real scenarios.

As shown in Table II, our method significantly outperforms the other eight methods, demonstrating the superiority of our self-supervised contrastive representation learning scheme. On the Colo-Pair dataset, our method achieves $R@1=22.6\%$, $R@5=41.9\%$, $R@10=58.1\%$ and $mAP=0.315$, showing **+6.5%**, **+6.4%**, **+4.9%** and **+0.037** relative improvement compared to the current state-of-the-art CBVR method, respectively.

C. Ablation Study

To verify the effectiveness of our key modules, we conduct ablation experiments in this subsection. Table III lists the

TABLE II
PERFORMANCE COMPARISON WITH OTHER METHODS ($R@k$: %) ON OUR COLO-PAIR DATASET. BEST RESULTS ARE MARKED IN BOLD.

Method	Venue	Video Retrieval \uparrow			
		R@1	R@5	R@10	mAP
ViSiL [3]	ICCV 19	14.5	30.6	51.6	0.249
CoCLR [9]	NIPS 20	6.5	22.6	33.9	0.163
TCA [4]	WCAV 21	16.1	35.5	53.2	0.278
ViT [25]	CVPR 21	9.7	30.6	43.5	0.204
CVRL [13]	CVPR 21	11.3	32.3	53.2	0.236
CgS ^c [5]	IJCV 22	8.1	35.5	45.2	0.214
FgAttS _A ^f [5]	IJCV 22	9.7	40.3	50.0	0.236
FgBinS _B ^f [5]	IJCV 22	9.7	32.3	48.4	0.212
<i>Colo-SCRL</i>	Ours	22.6	41.9	58.1	0.315

TABLE III

ABLATION RESULTS ON OUR *Colo-SCRL* MODULES ($R@k$: %). “BL”, “MAE” AND “CRL” REPRESENT THE BASELINE MODEL, VIDEO MAE AND CONTRASTIVE REPRESENTATION LEARNING, RESPECTIVELY. BEST RESULTS ARE MARKED IN BOLD.

BL	MAE	CRL	Video Retrieval \uparrow			mAP
			R@1	R@5	R@10	
✓	✗	✗	9.7	30.6	43.5	0.204
✓	✓	✗	16.1	38.7	50.0	0.270
✓	✗	✓	19.4	37.1	51.6	0.298
✓	✓	✓	22.6	41.9	58.1	0.315

detailed performances. Note that the baseline model only utilizes ViT pre-trained on the UCF-101 dataset as feature extractor. The best results in each column are indicated in bold. The check mark (✓) means that this module is added to the model and the cross mark (✗) means the opposite.

Effectiveness of Video Masked Autoencoder. To verify the effectiveness of VideoMAE-based pre-training (MAE) to the different schemes, we conducted two groups of ablation experiments, Group I (BL with / without MAE, row 1 VS row 2 in Table III) and Group II (BL + CRL with / without MAE, row 3 VS row 4 in Table III). According to the Table III, using VideoMAE-based pre-training on Colo-Pair, $R@1$, $R@5$, $R@10$ and mAP respectively improved by **+6.4%**, **+8.1%**, **+6.5%** and **+0.066** in Group I, and **+3.2%**, **+4.8%**, **+6.5%**, **+0.017** in Group II, demonstrating successful general knowledge refinement during the pre-training phase.

Effectiveness of Video Contrastive Representation Learning. To verify the superiority of video contrastive representation learning (CRL), we conducted two groups of ablation experiments, Group III (BL with / without CRL, row 1 VS row 3 in Table III) and Group IV (BL + MAE with / without CRL, row 2 VS row 4 in Table III). As shown in Table III, $R@1$, $R@5$, $R@10$ and mAP respectively improved by **+9.7%**, **+6.5%**, **+8.1%** and **+0.094** in Group III, and **+6.5%**, **+3.2%**, **+8.1%**, **+0.045** in Group IV, indicating discriminative feature is captured with contrastive representation learning.

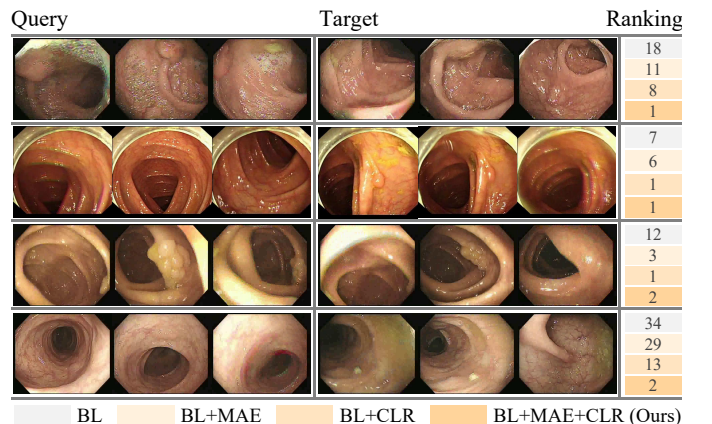


Fig. 4. Examples of ranking results between different ablation schemes of *Colo-SCRL*. Our method achieves more competitive performance compared with other settings overall.

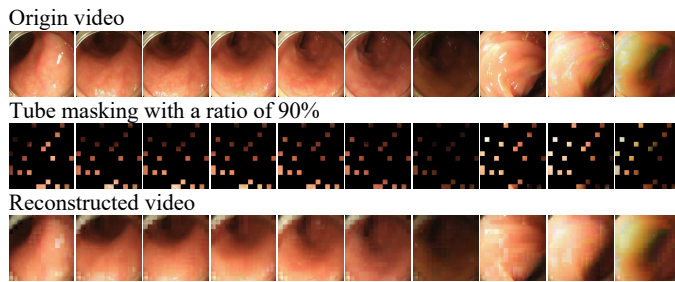


Fig. 5. VideoMAE-based reconstruction examples of Colo-Pair video.

Visualization and Qualitative Results. Fig. 4 shows the qualitative results of different ablation schemes. To this end, both the quantitative and qualitative results show steady improvement and demonstrate the effectiveness of our method. Fig. 5 also visualizes some examples of reconstruction results of a Colo-Pair video using VideoMAE.

D. Discussion

We take a big step forward in colonoscopic video retrieval and obtain encouraging results on the Colo-Pair dataset. A crucial but currently less explored way to assist colonoscopy screening is to retrieve video clips of locations near the target polyp, so as to alert the doctor to the possible presence of previously found polyps in the nearby area. It is a more challenging task since it requires relying solely on nonrigid tissue information in the vicinity of the polyp. In addition, polyps retrieved in the second colonoscopy screening may not be the same as query ones in the first colonoscopy screening, which may lead to missed diagnosis and misdiagnosis to a certain extent. Polyp matching is an effective way to solve this problem. Thus, our future work will focus on polyp-free scene localization and polyp matching for better assisting CRC screening.

VI. CONCLUSION

This paper investigates the problem of contrastive learning for medical video retrieval. Specifically, we manually construct a large-scale colonoscopic dataset named Colo-Pair for the first time in the medical community. On top it, a self-supervised contrastive learning representation framework is proposed for colonoscopic video retrieval. Comprehensive experiments conducted on benchmark datasets demonstrate that our method can achieve state-of-the-art retrieval performance compared with previous approaches, exhibiting strong evidence for its capability of preserving discriminative feature in representation learning. In the future, we will extend our method into other medical vision tasks, such as polyp-free scene localization and anatomical colon segment classification.

REFERENCES

[1] Rebecca L. Siegel, Kimberly D. Miller, Hannah E. Fuchs, et al., “Cancer statistics, 2022,” *CA: A Cancer Journal for Clinicians*, vol. 72, no. 1, 2022.

[2] Jianwei Xu, Qingwei Zhang, Yizhou Yu, et al., “Deep reconstruction-recoding network for unsupervised domain adaptation and multi-center generalization in colonoscopy polyp detection,” *Computer Methods and Programs in Biomedicine*, vol. 214, pp. 106576, 2022.

[3] Giorgos Kordopatis-Zilos, Symeon Papadopoulos, Ioannis Patras, et al., “Visil: Fine-grained spatio-temporal video similarity learning,” in *ICCV*, 2019, pp. 6351–6360.

[4] Jie Shao, Xin Wen, Bingchen Zhao, et al., “Temporal context aggregation for video retrieval with contrastive learning,” in *WCAV*, 2021, pp. 3268–3278.

[5] Giorgos Kordopatis-Zilos, Christos Tzelepis, Symeon Papadopoulos, et al., “Dns: Distill-and-select for efficient and accurate video indexing and retrieval,” *IJCV*, vol. 130, no. 10, pp. 2385–2407, 2022.

[6] Suncheng Xiang, Yuzhuo Fu, Guanjie You, et al., “Unsupervised domain adaptation through synthesis for person re-identification,” in *ICME*. IEEE, 2020, pp. 1–6.

[7] Suncheng Xiang, Dahong Qian, Mengyuan Guan, et al., “Less is more: Learning from synthetic data with fine-grained attributes for person re-identification,” *ACM Transactions on Multimedia Computing, Communications and Applications*, 2023.

[8] Kaiming He, Haoqi Fan, Yuxin Wu, et al., “Momentum contrast for unsupervised visual representation learning,” in *CVPR*, 2020, pp. 9729–9738.

[9] Tengda Han, Weidi Xie, and Andrew Zisserman, “Self-supervised co-training for video representation learning,” *NIPS*, vol. 33, pp. 5679–5690, 2020.

[10] Zhan Tong, Yibing Song, Jue Wang, et al., “Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training,” *arXiv preprint arXiv:2203.12602*, 2022.

[11] Tian Pan, Yibing Song, Tianyu Yang, et al., “Videomoco: Contrastive video representation learning with temporally adversarial examples,” in *CVPR*, 2021, pp. 11205–11214.

[12] Jiangliu Wang, Jianbo Jiao, Linchao Bao, et al., “Self-supervised video representation learning by uncovering spatio-temporal statistics,” *TPAMI*, 2021.

[13] Rui Qian, Tianjian Meng, Boqing Gong, et al., “Spatiotemporal contrastive video representation learning,” in *CVPR*, 2021, pp. 6964–6974.

[14] Heming Yao, Ryan W Stidham, Zijun Gao, et al., “Motion-based camera localization system in colonoscopy videos,” *Medical Image Analysis*, vol. 73, pp. 102180, 2021.

[15] Sharib Ali, Felix Zhou, Barbara Braden, et al., “An objective comparison of detection and segmentation algorithms for artefacts in clinical endoscopy,” *Scientific reports*, vol. 10, no. 1, pp. 1–15, 2020.

[16] Jorge Bernal, Yael Tudela, Marina Riera, and F Javier Sánchez, “Polyp detection in colonoscopy videos,” *Computer-Aided Analysis of Gastrointestinal Videos*, pp. 163–169, 2021.

[17] Konstantin Pogorelov, Kristin Ranheim Randel, Carsten Griwodz, et al., “Kvasir: A multi-class image dataset for computer aided gastrointestinal disease detection,” in *ACM MMSys*, 2017, pp. 164–169.

[18] Debesh Jha, Pia H Smedsrud, Michael A Riegler, et al., “Kvasir-seg: A segmented polyp dataset,” in *MMM*. Springer, 2020, pp. 451–462.

[19] Konstantin Pogorelov, Kristin Ranheim Randel, Thomas de Lange, et al., “Nerthus: A bowel preparation quality video dataset,” in *ACM MMSys*, 2017, pp. 170–174.

[20] Lena Maier-Hein, Martin Wagner, Tobias Ross, et al., “Heidelberg colorectal data set for surgical data science in the sensor operating room,” *Scientific data*, vol. 8, no. 1, pp. 1–11, 2021.

[21] Hanna Borgli, Vajira Thambawita, Pia H Smedsrud, et al., “Hyperkvasir, a comprehensive multi-class image and video dataset for gastrointestinal endoscopy,” *Scientific data*, vol. 7, no. 1, pp. 1–14, 2020.

[22] Pablo Azagra, Carlos Sostres, Ferrandez Á, et al., “Endomapper dataset of complete calibrated endoscopy procedures,” *arXiv preprint arXiv:2204.14240*, 2022.

[23] Aaron van den Oord, Yazhe Li, and Oriol Vinyals, “Representation learning with contrastive predictive coding,” *arXiv preprint arXiv:1807.03748*, 2018.

[24] Zhirong Wu, Yuanjun Xiong, Stella X Yu, et al., “Unsupervised feature learning via non-parametric instance discrimination,” in *CVPR*, 2018, pp. 3733–3742.

[25] Mathilde Caron, Hugo Touvron, Ishan Misra, et al., “Emerging properties in self-supervised vision transformers,” in *ICCV*, 2021, pp. 9650–9660.