

# An Alternative to WSSS? An Empirical Study of the Segment Anything Model (SAM) on Weakly-Supervised Semantic Segmentation Problems

Weixuan Sun<sup>1,2</sup> Zheyuan Liu<sup>1</sup> Yanhao Zhang<sup>2</sup> Yiran Zhong<sup>3</sup> Nick Barnes<sup>1</sup>  
<sup>1</sup>Australian National University <sup>2</sup>OPPO Research Institute <sup>3</sup>Shanghai AI Lab

## Abstract

*The Segment Anything Model (SAM) has demonstrated exceptional performance and versatility, making it a promising tool for various related tasks. In this report, we explore the application of SAM in Weakly-Supervised Semantic Segmentation (WSSS). Particularly, we adapt SAM as the pseudo-label generation pipeline given only the image-level class labels. While we observed impressive results in most cases, we also identify certain limitations. Our study includes performance evaluations on PASCAL VOC and MS-COCO, where we achieved remarkable improvements over the latest state-of-the-art methods on both datasets. We anticipate that this report encourages further explorations of adopting SAM in WSSS, as well as wider real-world applications. The code is available at [https://github.com/weixuansun/wsss\\_sam](https://github.com/weixuansun/wsss_sam).*

## 1. Introduction

Recent advancements in large foundation models have had a significant impact on the development of downstream deep-learning tasks. Large language models (LLMs) pre-trained on massive text corpus, e.g., ChatGPT<sup>1</sup> have demonstrated exceptional performance on a variety of Natural Language Processing (NLP) tasks. Concurrently, multi-modal pre-trained models including CLIP [32] and BLIP [25] have been successfully applied to a range of vision and/or language tasks. The impact of these models is revolutionary in their respective domains.

The Segment Anything Model (SAM) [17] is a recent image segmentation model that has demonstrated outstanding performance in various applications. SAM owes its impressive performances to two factors. First, the model is trained on a large visual dataset named SA-1B containing over 1B masks of 11M images. This dataset is collected in a model-in-the-loop manner with multiple levels of human guidance. The rich training data contributes to its abil-

ity to perform zero-shot segmentation on unseen images of varied distributions. Second, SAM is designed and trained to accept versatile prompts as input. To date, it supports points (via users clicking the mouse) or bounding boxes as prompts. This greatly improves the user experience when interacting with the model.

In this work, we focus on assessing the performance of SAM on image-level Weakly-Supervised Semantic Segmentation (WSSS). WSSS is initially proposed to reduce the label cost of fully supervised semantic segmentation [31]. Instead of exhaustively labeling every pixel within an image for its class, WSSS resorts to weaker, yet cheaper alternatives. Examples include only labeling spare points [3, 15], bounding boxes [8, 22, 35, 38], or scribbles [28, 41, 42] in an image, or using the image-level classification results as the label. The latter is the most common approach in recent work [13, 20, 39, 40, 45, 47, 49, 53], as such classification results can be readily obtained through any pre-trained vision backbones. Pseudo segmentation labels are then extracted from these weak labels and are used to train the specific segmentation model that targets a certain domain or industrial application. In this report, we aim to adapt SAM as the pseudo-label generation block in WSSS and examine its performance.

We note that the training approach used for SAM includes pixel labeled images, which means that it cannot be regarded a weakly supervised approach. However, given the availability of a foundation approach for segmentation, we aim to compare the performances of traditional WSSS approaches with a foundation approach that is given the WSSS labels for the particular dataset. This is not a ‘fair’ comparison, but we believe it is a practically valuable comparison. Further, the Segment Anything paper states explicitly that at the start of the first training stage, “SAM was trained using common public segmentation datasets”. The paper does not give further information so the training may have had exposure to fully labeled images that are similar to some among the standard datasets for WSSS. However, given that the SAM paper evaluates a zero-shot instance segmentation on

<sup>1</sup><https://openai.com/blog/chatgpt>

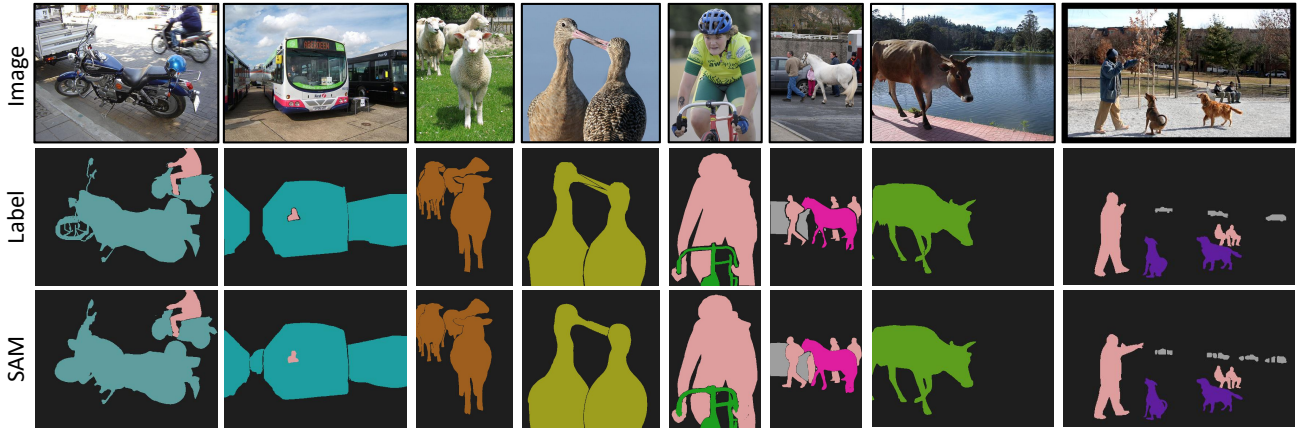


Figure 1. SAM generated pseudo-labels compared to the ground-truth in PASCAL VOC. In most cases, SAM performs closely to the human annotations.

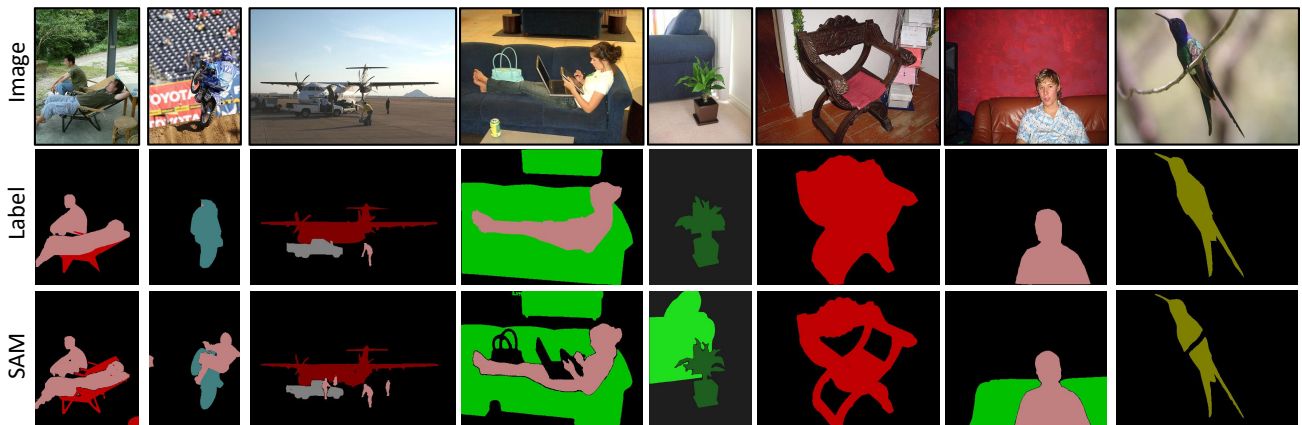


Figure 2. We observe that in some cases SAM performs better than the human annotated ground-truth. Notably, SAM is able to capture crisp boundaries, more detailed structures and finer-grained semantic classes.

COCO, we infer that it is unlikely that COCO data was used for training.

We show quantitative and qualitative comparisons with state-of-the-art methods on image-level WSSS methods. The main observation is that SAM performs favorably in most unprompted settings, while it fails in certain cases due to the issue of semantic obscurity. It suggests that SAM could potentially supersede the existing WSSS process as a practical approach. However, note that the question remains on how to effectively and efficiently apply it in real-world applications. Further, as stated, SAM does not qualify as a weakly-supervised approach.

## 2. SAM for Weakly-Supervised Semantic Segmentation

SAM is a powerful segmentation model comprised of a large image encoder, a prompt encoder, and a lightweight mask decoder. We refer readers to [17] on architectural details. The model currently supports point or bounding boxes as input prompts. We empirically confirm that it performs well with such types of prompts, highlighting its ability in handling weak supervision in these formats.

However, to date, SAM does not support text as prompts — the form of supervision used in image-level WSSS. To this end, we enlist Grounded-Segment-Anything<sup>2</sup> for our experiments on WSSS, which is an implementation that combines off-the-shelf image grounding methods with SAM. Specifically, for every image, we concatenate the

<sup>2</sup><https://github.com/IDEA-Research/Grounded-Segment-Anything>

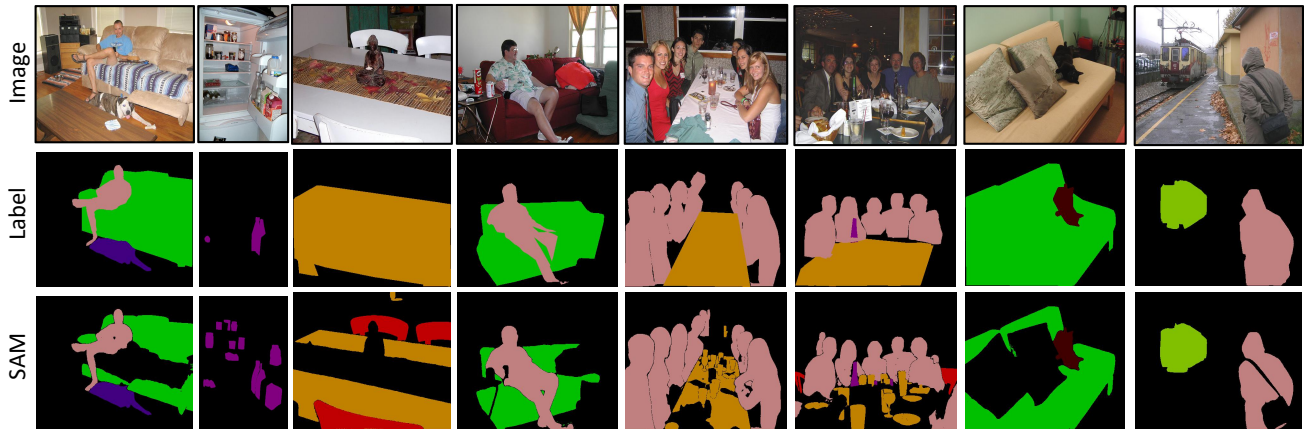


Figure 3. Examples of semantic obscurity. SAM-generated segmentation masks may have different semantic granularity compared to human annotations. For example, in the second column, human labellers only consider two containers as “bottles” while SAM labels many more items as “bottles”.

class labels in word(s) with full stops as the text prompt and generate grounded bounding boxes via Grounded-DINO [30]. Note that the text prompt is firstly tokenized into sub-words and grounding is then performed at the token level. Therefore, if a token (sub-word) is grounded in an image, we consider it as the grounding of its parent word. This approach enables us to map an arbitrary grounding back to one of the pre-defined class labels. For example, class “potted plant” is tokenized into four tokens: “pot”, “#ted”, “#pl” and “#ant”, where the special character “#” signifies that the corresponding token is an appending sub-word of the preceding token. The bounding box is assigned to the class “potted plant” whenever any of the four tokens is grounded. Once the grounded bounding boxes are generated, we feed them into SAM to produce instance masks. Finally, we join the instance segmentation masks into semantic segmentation pseudo-labels.

### 3. Experimental Results

#### 3.1. Experimental setup

**Datasets** We apply SAM on two common WSSS datasets in our experiments, PASCAL VOC and MS-COCO. PASCAL VOC has 10,582 training and 1,449 validation images. MS-COCO is relatively larger-scaled, with 80k training and 40k validation images.

**Implementation Details** We use Grounded-DINO [30] to generate bounding boxes from text prompts with Swin-T as the grounding backbone. For SAM, we use the ViT-H model to extract pseudo segmentation masks from bounding boxes. For the final semantic segmentation network, we use Deeplab-v2 [4] with ResNet-101 [12] as backbone. For MS-COCO, the model is pre-trained on ImageNet1k [9].

Methods	w/ saliency	Pseudo
EDAM (CVPR2021) [46]	✓	68.1
ReCAM (CVPR2022) [6]	✓	70.9
L2G (CVPR2022) [14]	✓	71.9
EPS (ECCV2020) [11]	✓	71.6
Du et al.(CVPR2022) [10]	✓	73.3
PSA (CVPR2018) [2]		61.0
SEAM (CVPR2020) [44]		63.6
CDA (ICCV2021) [36]		67.7
AdvCAM (CVPR2021) [20]		68.0
CPN (ICCV2021) [52]		67.8
Ru et al. (CVPR2022) [34]		68.7
Du et al.(CVPR2022) [10]		69.2
MCTformer (CVPR2022) [49]		69.1
CLIP-ES (CVPR2023) [29]		75.0
<b>SAM</b>		<b>88.3</b>

Table 1. Performance of pseudo segmentation labels on the PASCAL VOC *train* set. SAM-based pseudo masks outperform previous methods by a significant margin. Best number is in bold.

For PASCAL VOC, the model is pre-trained on COCO ground-truth following the setting of [4].

### 4. Quantitative Analysis

#### 4.1. PASCAL VOC

We present pseudo-label and final segmentation performances on PASCAL VOC in Table 1 and 2 respectively. As shown in Table 1, our pseudo segmentation masks achieve 88.3 mIoU, which outperforms previous state-of-the-art by 13.3 mIoU. It validates that SAM generates segmentation masks of extremely high quality for the targeted classes. In Table 2, SAM-based results achieve 77.2 mIoU on *val* set and 77.1 mIoU on *test* set, both surpassing previous

Methods	Venue	w/ saliency	Val	Test
NSRM [50]	CVPR2021	✓	70.4	70.2
InferCam [39]	WACV2022	✓	70.8	71.8
EDAM [46]	CVPR2021	✓	70.9	70.6
EPS [23]	CVPR2021	✓	71.0	71.8
DRS [16]	AAAI2021	✓	71.2	71.4
L2G [14]	CVPR2022	✓	72.1	71.7
Du et al. [10]	CVPR2022	✓	72.6	73.6
PSA [2]	CVPR2018		61.7	63.7
SEAM [44]	CVPR2020		64.5	65.7
CDA [36]	ICCV2021		66.1	66.8
ECS-Net [37]	ICCV2021		66.6	67.6
Du et al. [10]	CVPR2022		67.7	67.4
CPN [52]	ICCV2021		67.8	68.5
AdvCAM [20]	CVPR2021		68.1	68.0
Kweon et al. [18]	ICCV2021		68.4	68.2
ReCAM [6]	CVPR2022		68.5	68.4
SIPE [5]	CVPR2022		68.8	69.7
URN [26]	AAAI2022		69.5	69.7
ESOL [24]	NeurIPS2022		69.9	69.3
PMM [27]	ICCV2021		70.0	70.5
VWL-L [33]	IJCV2022		70.6	70.7
Lee et al. [21]	CVPR2022		70.7	70.1
MCTformer [49]	CVPR2022		71.9	71.6
OCR [7]	CVPR2023		72.7	72.0
CLIP-ES [29]	CVPR2023		73.8	73.9
<b>SAM</b>			<b>77.2</b>	<b>77.1</b>
full-supervision [4]			77.7	79.7

Table 2. Performance comparison of WSSS methods on PASCAL VOC 2012 *val* and *test* sets. w/ saliency: the method adopts extra saliency information. Best numbers are in bold.

Methods	w/ saliency	Pseudo
AdvCAM (CVPR2021) [20]		35.8
IRN (CVPR2018) [1]		42.4
ReCAM (CVPR2022) [6]	✓	46.3
<b>SAM</b>		<b>66.8</b>

Table 3. Performances of pseudo segmentation labels on MS COCO *train* set. SAM pseudo masks outperform previous methods by a significant margin. Best number is in bold.

state-of-the-art methods with clear margins. We note that the segmentation performances are approaching the fully-supervised results on PASCAL VOC.

## 4.2. MS-COCO

We show pseudo-label and segmentation performance comparison on MS-COCO in Table 3 and Table 4. Likewise in the PASCAL VOC, The SAM-based method achieves an appreciable segmentation mIoU of 55.6, which surpasses existing methods immensely. Compared to PASCAL VOC, MS-COCO is a larger dataset with more semantic classes and complex images that include multiple objects, this encouraging result further demonstrates that SAM could handle annotations of complex scenes.

Methods	Venue	w/ saliency	Val
AuxSegNet [48]	ICCV2021	✓	33.9
EPS [11]	CVPR2022	✓	35.7
L2G [14]	CVPR2022	✓	44.2
Wang et al. [43]	IJCV2020		27.7
Ru et al. [34]	CVPR2022		38.9
SEAM [44]	CVPR2020		31.9
CONTA [51]	NeurIPS2020		32.8
CDA [36]	ICCV2021		33.2
Ru et al. [33]	IJCV2022		36.2
URN [26]	AAAI2022		41.5
MCTformer [49]	CVPR2022		42.0
OCR [7]	CVPR2023		42.5
ESOL [24]	NeurIPS2022		42.6
SIPE [5]	CVPR2022		43.6
RIB [19]	NeurIPS2020		43.8
CLIP-ES [29]	CVPR2023		45.4
<b>SAM</b>			<b>55.6</b>

Table 4. Segmentation performance comparison of WSSS methods on MS COCO. w/ saliency: the method adopts extra saliency information. Best number is in bold.

## 5. Discussion

### 5.1. Why Don't We Directly Use SAM?

One might question the need for a Weakly Supervised Semantic Segmentation (WSSS) pipeline given the impressive performance of SAM. However, we argue that a WSSS pipeline is still beneficial for certain application scenarios. For instance, in many narrow-domain use cases, only specific semantic classes are of interest, which renders the open-vocabulary setup unnecessary and even prone to introducing errors. In contrast, a WSSS pipeline can be trained to respond to only a selected set of classes, which is more favored. Moreover, industrial or mobile environments that are often resource-limited and time-sensitive cannot accommodate the use of SAM, with its considerable VRAM usage and low inference speed. In such cases, training a specific semantic segmentation network in the WSSS fashion for the downstream tasks remains meaningful.

### 5.2. Pseudo Label Quality

SAM can generate high-quality segmentation masks as shown in Fig. 1. In addition, we observe that the pseudo-labels generated via SAM are more accurate than the manual annotations in some cases. As shown in Fig. 2, human annotations often contain imprecise polygons and ignore fine-grained details. In contrast, SAM is able to capture crisp boundaries, more detailed structures, and finer-grained semantic classes. We conjecture the possibility that SAM can be used to guide, or even correct human annotations when building future datasets.

### 5.3. The Issue of Semantic Obscurity

When generating pseudo-labels, we encounter the issue of “semantic obscurity”, which arises from the subjectivity of human annotations. A typical example is shown in Fig. 3, where ground-truth annotations in PASCAL VOC for “dining table” always include all objects that are placed on the table — “plate”, “bowl”, and “food” etc. However, the output of SAM stays true to the concept of “table” and contains nothing else. We suspect the issue is caused by the discrepancy between PASCAL VOC and the SAM SA-1B dataset, particularly the granularity of the annotations.

Granted, one could argue that the PASCAL VOC dataset is flawed in this regard. Nevertheless, to assess the true performance of SAM on said dataset, we attempt to relieve this issue by including some assist words, such as “bowl”, “plate”, “food”, “fruit”, “glass”, and “dishes” for the affected “dining table” class; and likewise, “halter” and “saddle” for the “horse” class. We derive these words through manual examination. Note that this mitigation strategy is by no means comprehensive, nor generalizable to datasets of larger scales (e.g., MS-COCO), as it might interfere with other classes. A systematic approach to addressing the semantic obscurity issue would be to construct hierarchical-structured semantic classes with better prompts. We leave this to future work.

### 5.4. Conclusion and Future Work

This report presents a preliminary investigation into the application of SAM as a foundation model in Weakly Supervised Semantic Segmentation (WSSS). Results from experiments conducted on two datasets demonstrate that SAM can yield competitive performance without the need for model fine-tuning, while for existing WSSS methods, the classification re-training and pseudo-label generation are burdensome necessities. Notably, we are not aiming to achieve SOTA results in a fair comparison, as SAM is trained with massive amounts of data and a training process that includes fully labeled images. This research concentrates on the direct application of the SAM as a foundation model, which enables a streamlined and simplified approach to WSSS.

Moving forward, a potential direction would be to adapt SAM into an automatic labeling tool for various real-world applications. Specifically, we shall explore the use of hierarchical-structured semantic classes and better prompts, which address the issue of semantic obscurity. We might also wish to investigate using SAM for segmenting “stuff” (i.e., non-object, background) classes such as “sky”, “sea” and “road”, in order to improve the overall scene understanding ability.

### References

- [1] Jiwoon Ahn, Sunghyun Cho, and Suha Kwak. Weakly supervised learning of instance segmentation with inter-pixel relations. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2209–2218, Long Beach, CA, USA, 2019. Computer Vision Foundation / IEEE.
- [2] Jiwoon Ahn and Suha Kwak. Learning pixel-level semantic affinity with image-level supervision for weakly supervised semantic segmentation. pages 4981–4990. Computer Vision Foundation / IEEE, 2018.
- [3] Amy Bearman, Olga Russakovsky, Vittorio Ferrari, and Li Fei-Fei. What’s the point: Semantic segmentation with point supervision. pages 549–565, 2016.
- [4] Liang-Chieh Chen, George Papandreou, Iasonas Kokkinos, Kevin Murphy, and Alan L Yuille. Deeplab: Semantic image segmentation with deep convolutional nets, atrous convolution, and fully connected crfs. 40(4):834–848, 2017.
- [5] Qi Chen, Lingxiao Yang, Jian-Huang Lai, and Xiaohua Xie. Self-supervised image-specific prototype exploration for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 4288–4298, June 2022.
- [6] Zhaozheng Chen, Tan Wang, Xiongwei Wu, Xian-Sheng Hua, Hanwang Zhang, and Qianru Sun. Class re-activation maps for weakly-supervised semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 969–978, 2022.
- [7] Zesen Cheng, Pengchong Qiao, Kehan Li, Siheng Li, Pengxu Wei, Xiangyang Ji, Li Yuan, Chang Liu, and Jie Chen. Out-of-candidate rectification for weakly supervised semantic segmentation, 2023.
- [8] Jifeng Dai, Kaiming He, and Jian Sun. Boxesup: Exploiting bounding boxes to supervise convolutional networks for semantic segmentation. pages 1635–1643, 2015.
- [9] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. pages 248–255. Computer Vision Foundation / IEEE, 2009.
- [10] Ye Du, Zehua Fu, Qingjie Liu, and Yunhong Wang. Weakly supervised semantic segmentation by pixel-to-prototype contrast. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4320–4329, 2022.
- [11] Junsong Fan, Zhaoxiang Zhang, and Tieniu Tan. Employing multi-estimations for weakly-supervised semantic segmentation. pages 332–348, 2020.
- [12] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- [13] Peng-Tao Jiang, Qibin Hou, Yang Cao, Ming-Ming Cheng, Yunchao Wei, and Hong-Kai Xiong. Integral object mining via online attention accumulation. pages 2070–2079, 2019.
- [14] Peng-Tao Jiang, Yuqi Yang, Qibin Hou, and Yunchao Wei. L2g: A simple local-to-global knowledge transfer framework for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16886–16896, June

- 2022.
- [15] Anna Khoreva, Rodrigo Benenson, Jan Hosang, Matthias Hein, and Bernt Schiele. Simple does it: Weakly supervised instance and semantic segmentation. pages 876–885. Computer Vision Foundation / IEEE, 2017.
- [16] Beomyoung Kim, Sangeun Han, and Junmo Kim. Discriminative region suppression for weakly-supervised semantic segmentation. pages 1754–1761, 2021.
- [17] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, Piotr Dollár, and Ross Girshick. Segment anything, 2023.
- [18] Hyeokjun Kweon, Sung-Hoon Yoon, Hyeonseong Kim, Daehee Park, and Kuk-Jin Yoon. Unlocking the potential of ordinary classifier: Class-specific adversarial erasing framework for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6994–7003, October 2021.
- [19] Jungbeom Lee, Jooyoung Choi, Jisoo Mok, and Sungroh Yoon. Reducing information bottleneck for weakly supervised semantic segmentation. *Advances in Neural Information Processing Systems*, 34, 2021.
- [20] Jungbeom Lee, Eunji Kim, and Sungroh Yoon. Anti-adversarially manipulated attributions for weakly and semi-supervised semantic segmentation. pages 4071–4080. Computer Vision Foundation / IEEE, 2021.
- [21] Jungbeom Lee, Seong Joon Oh, Sangdoon Yun, Junsuk Choe, Eunji Kim, and Sungroh Yoon. Weakly supervised semantic segmentation using out-of-distribution data. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16897–16906, 2022.
- [22] Jungbeom Lee, Jihun Yi, Chaehun Shin, and Sungroh Yoon. Bbam: Bounding box attribution map for weakly supervised semantic and instance segmentation, 2021.
- [23] Seungho Lee, Minhyun Lee, Jongwuk Lee, and Hyunjung Shim. Railroad is not a train: Saliency as pseudo-pixel supervision for weakly supervised semantic segmentation. pages 5495–5505. Computer Vision Foundation / IEEE, 2021.
- [24] Jinlong Li, Zequn Jie, Xu Wang, Xiaolin Wei, and Lin Ma. Expansion and shrinkage of localization for weakly-supervised semantic segmentation. *arXiv preprint arXiv:2209.07761*, 2022.
- [25] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International Conference on Machine Learning*, pages 12888–12900. PMLR, 2022.
- [26] Yi Li, Yiqun Duan, Zhanghui Kuang, Yimin Chen, Wayne Zhang, and Xiaomeng Li. Uncertainty estimation via response scaling for pseudo-mask noise mitigation in weakly-supervised semantic segmentation. *arXiv preprint arXiv:2112.07431*, 2021.
- [27] Yi Li, Zhanghui Kuang, Liyang Liu, Yimin Chen, and Wayne Zhang. Pseudo-mask matters in weakly-supervised semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6964–6973, October 2021.
- [28] Di Lin, Jifeng Dai, Jiaya Jia, Kaiming He, and Jian Sun. Scribblesup: Scribble-supervised convolutional networks for semantic segmentation. pages 3159–3167. Computer Vision Foundation / IEEE, 2016.
- [29] Yuqi Lin, Minghao Chen, Wenxiao Wang, Boxi Wu, Ke Li, Binbin Lin, Haifeng Liu, and Xiaofei He. Clip is also an efficient segmenter: A text-driven approach for weakly supervised semantic segmentation, 2023.
- [30] Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei Yang, Hang Su, Jun Zhu, and Lei Zhang. Grounding dino: Marrying dino with grounded pre-training for open-set object detection. 2023.
- [31] Deepak Pathak, Evan Shelhamer, Jonathan Long, and Trevor Darrell. Fully convolutional multi-class multiple instance learning. *arXiv preprint arXiv:1412.7144*, 2014.
- [32] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [33] Lixiang Ru, Bo Du, Yibing Zhan, and Chen Wu. Weakly-supervised semantic segmentation with visual words learning and hybrid pooling. *International Journal of Computer Vision*, 130(4):1127–1144, 2022.
- [34] Lixiang Ru, Yibing Zhan, Baosheng Yu, and Bo Du. Learning affinity from attention: End-to-end weakly-supervised semantic segmentation with transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16846–16855, 2022.
- [35] Chunfeng Song, Yan Huang, Wanli Ouyang, and Liang Wang. Box-driven class-wise region masking and filling rate guided loss for weakly supervised semantic segmentation. pages 3136–3145. Computer Vision Foundation / IEEE, 2019.
- [36] Yukun Su, Ruizhou Sun, Guosheng Lin, and Qingyao Wu. Context decoupling augmentation for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 7004–7014, 2021.
- [37] Kunyang Sun, Haoqing Shi, Zhengming Zhang, and Yongming Huang. Ecs-net: Improving weakly supervised semantic segmentation by using connections between class activation maps. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 7283–7292, October 2021.
- [38] Weixuan Sun, Jing Zhang, and Nick Barnes. 3d guided weakly supervised semantic segmentation. In *Proceedings of the Asian Conference on Computer Vision*, 2020.
- [39] Weixuan Sun, Jing Zhang, and Nick Barnes. Inferring the class conditional response map for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 2878–2887, 2022.
- [40] Weixuan Sun, Jing Zhang, Zheyuan Liu, Yiran Zhong, and Nick Barnes. Getam: Gradient-weighted element-wise transformer attention map for weakly-supervised semantic segmentation. *arXiv preprint arXiv:2112.02841*, 2021.
- [41] Meng Tang, Federico Perazzi, Abdelaziz Djelouah, Ismail Ben Ayed, Christopher Schroers, and Yuri Boykov. On regularized losses for weakly-supervised cnn segmentation.

- pages 507–522, 2018.
- [42] Paul Vernaza and Manmohan Chandraker. Learning random-walk label propagation for weakly-supervised semantic segmentation. pages 7158–7166. Computer Vision Foundation / IEEE, 2017.
  - [43] Xiang Wang, Shaodi You, Xi Li, and Huimin Ma. Weakly-supervised semantic segmentation by iteratively mining common object features. pages 1354–1362. Computer Vision Foundation / IEEE, 2018.
  - [44] Yude Wang, Jie Zhang, Meina Kan, Shiguang Shan, and Xilin Chen. Self-supervised equivariant attention mechanism for weakly supervised semantic segmentation. pages 12275–12284. Computer Vision Foundation / IEEE, 2020.
  - [45] Yunchao Wei, Jiashi Feng, Xiaodan Liang, Ming-Ming Cheng, Yao Zhao, and Shuicheng Yan. Object region mining with adversarial erasing: A simple classification to semantic segmentation approach. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1568–1576, 2017.
  - [46] Tong Wu, Junshi Huang, Guangyu Gao, Xiaoming Wei, Xiaolin Wei, Xuan Luo, and Chi Harold Liu. Embedded discriminative attention mechanism for weakly supervised semantic segmentation. pages 16765–16774. Computer Vision Foundation / IEEE, 2021.
  - [47] Jinheng Xie, Jianfeng Xiang, Junliang Chen, Xianxu Hou, Xiaodong Zhao, and Linlin Shen. C2am: Contrastive learning of class-agnostic activation map for weakly supervised object localization and semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 989–998, June 2022.
  - [48] Lian Xu, Wanli Ouyang, Mohammed Bennamoun, Farid Boussaid, Ferdous Sohel, and Dan Xu. Leveraging auxiliary tasks with affinity learning for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6984–6993, October 2021.
  - [49] Lian Xu, Wanli Ouyang, Mohammed Bennamoun, Farid Boussaid, and Dan Xu. Multi-class token transformer for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4310–4319, 2022.
  - [50] Yazhou Yao, Tao Chen, Guo-Sen Xie, Chuanyi Zhang, Fumin Shen, Qi Wu, Zhenmin Tang, and Jian Zhang. Non-salient region object mining for weakly supervised semantic segmentation. pages 2623–2632. Computer Vision Foundation / IEEE, 2021.
  - [51] Dong Zhang, Hanwang Zhang, Jinhui Tang, Xiansheng Hua, and Qianru Sun. Causal intervention for weakly-supervised semantic segmentation. *arXiv preprint arXiv:2009.12547*, 2020.
  - [52] Fei Zhang, Chaochen Gu, Chenyue Zhang, and Yuchao Dai. Complementary patch for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 7242–7251, October 2021.
  - [53] Tianyi Zhang, Guosheng Lin, Weide Liu, Jianfei Cai, and Alex Kot. Splitting vs. merging: Mining object regions with discrepancy and intersection loss for weakly supervised semantic segmentation. 2020.