

Improving speech translation by fusing speech and text

Wenbiao Yin¹, Zhicheng Liu², Chengqi Zhao², Tao Wang², Jian Tong², Rong Ye²

¹Nanjing University ²ByteDance

wenbiaoyin@smail.nju.edu.cn

{liuzhicheng.lzc, zhaochengqi.d, wangtao.960826, tongjian, yerong}@bytedance.com

Abstract

In speech translation, leveraging multimodal data to improve model performance and address limitations of individual modalities has shown significant effectiveness. In this paper, we harness the complementary strengths of speech and text, which are disparate modalities. We observe three levels of modality gap between them, denoted by Modal input representation, Modal semantic, and Modal hidden states. To tackle these gaps, we propose Fuse-Speech-Text (FST), a cross-modal model which supports three distinct input modalities for translation: speech, text, and fused speech-text. We leverage multiple techniques for cross-modal alignment and conduct a comprehensive analysis to assess its impact on speech translation, machine translation, and fused speech-text translation. We evaluate FST on MuST-C, GigaST, and newstest benchmark. Experiments show that the proposed FST achieves an average 34.0 BLEU on MuST-C En→De/Es/Fr (vs SOTA +1.1 BLEU). Further experiments demonstrate that FST does not degrade on MT task, as observed in prior works. Instead, it yields an average improvement of 3.2 BLEU over the pre-trained MT model.

1 Introduction

Speech translation (ST) accepts speech signals as the input and outputs target translation. The field of speech translation can be broadly categorized into cascade system and end-to-end speech translation (E2E ST). Cascade system (Sperber et al., 2017; Zhang et al., 2019; Lam et al., 2021) usually combines automatic speech recognition (ASR) and machine translation (MT), the MT subsystem uses ASR transcripts as input, which provide clear expression but may contain errors stemming from ASR. While E2E ST (Tang et al., 2021a; Fang et al., 2022; Ye et al., 2022a) can directly map speech signals to the target translation, thus avoiding the problem of error propagation.

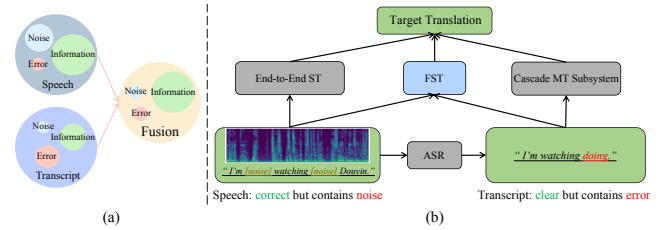


Figure 1: **Left:** Data distribution of speech and transcript. **Right:** The pipeline of our proposed FST.

We observe a noticeable modality distribution difference between speech and ASR transcript as shown in Figure 1a. Compared to ASR transcript, speech signals contain richer information, such as paralinguistics and speaker characteristics; they are harder to model and more susceptible to noise. In summary, speech signals contain accurate and abundant information and substantial noise, while ASR transcripts are clear but prone to errors.

As shown in Figure 1b, the speech signal conveys the message "I'm watching Douyin.", but the speech signal contains numerous blank segments and background noise. E2E ST may encounter challenges in accurately extracting information directly from speech, particularly in the presence of noise, without compromising the quality of the translation. Meanwhile, the ASR model mistakenly transcribes the speech as "I'm watch doing." The MT subsystem may identify the error in the word "doing" as the decoder assigns low probabilities to candidate words. However, the MT subsystem lacks additional information to correct the error.

Inspired by these findings, we propose a model that fuses speech and ASR transcript as input to leverage their complementary strengths. As shown in Figure 1b, our model supports three different modalities of input for translation: speech, text, and fused speech-text. Our model leverages corresponding speech representation to rectify errors when our model identifies the error in the word "doing" (as the decoder assigns low probabilities

to candidate words). Furthermore, we can enhance the training of our model by utilizing additional MT data.

However, speech and text are disparate modalities, we observe three levels of the modality gap between them, which impede the integration of speech and text: **1. Modal input representation:** The length of speech input representation obtained from speech pre-trained model frequently exceeds that of the corresponding transcript input representation by an order of magnitude or more. Furthermore, it is worth noting that while speech input representation is in continuous space, text input representation is in discrete space. **2. Modal semantic:** When using speech and golden transcript as input, the model relies heavily on the golden transcript information and neglects the speech information. This behavior is because the golden transcript is more straightforward and contains precise semantic information, adequate for achieving high translation quality. In contrast, speech representations obtained through the pre-trained model include four types of information(Chen et al., 2022): content, semantics, paralinguistics, and speaker characteristics, which is harder to model. However, when using speech and ASR transcript as input, solely relying on textual information is insufficient to achieve good translation quality. We expect the model to incorporate more speech information. **3. Modal hidden states:** It is observed that diverse modality inputs lead to distinctive hidden states in the encoder and distinct distributions in the decoder.

We propose several methods to bridge the modality gap to integrate speech and text better. **1.** We utilize a convolutional layer to shrink the length of speech representations by a factor of μ , which enable speech and text to have a comparable scale. Additionally, we explore mapping continuous speech representation to a discrete space using a codebook to align with text representation. **2.** We utilize an open-source ASR model to construct a dataset of <speech, ASR transcript> pair and employ prompt tags (<golden>/<asr>) to indicate whether the transcript contains errors. The prompt tags implicitly guide the model to utilize more speech information when the transcript is inaccurate. Meanwhile, we utilize the contrastive learning method to reduce the gap between the model semantic of speech and its corresponding transcript. **3.** We utilize Cross-Attentive Regular-

ization (CAR) to align the states of the encoder and Jensen-Shannon Divergence (JSD) loss to align the distribution of the decoder.

Our contributions are summarized as follows:

- We propose a model that fuses speech and text to improve speech translation, which supports three different modalities of input for translation: speech, text, and fused speech-text.
- To fuse speech and text as input and leverage their complementary strengths, we conducted a comprehensive analysis of the modality gap between speech and text. We propose targeted improvements to bridge the modality gap between speech and text.
- Our experiments show that our model achieves an average 34.0 BLEU on MuST-C En→De/Es/Fr (vs SOTA +1.1 BLEU); FST achieves an average improvement of 3.2 BLEU over the pre-trained MT model on MuST-C.

2 Related Work

Cascade ST Cascade ST, achieved by concatenating ASR and MT components, has been extensively employed in commercial speech translation systems. However, cascade ST is vulnerable to challenges such as error propagation and high latency. To overcome the error propagation, (Bertoldi and Federico, 2005; Beck et al., 2019; Sperber et al., 2019) proposed to feed the MT system with ASR data structures; (Peitz et al., 2012; Cheng et al., 2019; Di Gangi et al., 2019a) proposed to make MT robust to ASR errors, for instance by training it on parallel data incorporating factual or emulated ASR errors.

End-to-end ST To overcome the error propagation and high latency in the cascade ST systems, (Bérard et al., 2016; Duong et al., 2016) proposed an end-to-end architecture for speech translation, which has attracted extensive attention (Vila et al., 2018; Salesky et al., 2019; Gangi et al., 2019; Inaguma et al., 2021; Zhao et al., 2021). However, it is difficult to train an end-to-end speech translation model directly, primarily due to the inherent variability and complexity of speech signals and the scarcity of high-quality speech-translation datasets. Some training methods like pretraining (Weiss et al., 2017; Bérard et al., 2018; Bansal et al., 2019; Wang et al., 2020a; Tang et al., 2021b), multi-task learning(Le et al., 2020; Vydana et al., 2021;

Ye et al., 2021; Tang et al., 2022), data augmentation (Park et al., 2019; Jia et al., 2019; Bahar et al., 2019; Pino et al., 2020), meta-learning (Indurthi et al., 2020), contrastive learning (Li et al., 2021; Ye et al., 2022a), knowledge distillation (Liu et al., 2019; Tang et al., 2021a) and curriculum learning (Kano et al., 2017; Wang et al., 2020b), are proved to be effective.

3 Methods

3.1 Problem Formulation

The speech translation corpus is usually comprised of triples that include speech, transcript, and target translation, which can be denoted as $D = (s, x, y)$. Here, s is an audio sequence, x is the corresponding transcript, and y is the corresponding target translation.

3.2 Model Framework

As shown in Figure 2, our model consists of four sub-modules: Speech Encoder, Speech-Text Fusion Module, Transformer Encoder, and Transformer Decoder. Our model supports three different modalities as input: speech, text, and fused speech-text, and to output target translation. We abbreviate these three different input modalities for translation as ST, MT, and FT (fused speech-text translation), respectively.

Speech Encoder The speech encoder ($S-Enc$) consists of Wav2vec2.0 (Baevski et al., 2020b) and two additional convolutional layers. The input is a raw waveform signal sampled at 16kHz, and Wav2vec2.0 is used to extract low-level speech representations from it. However, the speech representation is much longer than the text, exceeding it by over ten times. To reduce the difference in representation length between speech and text as much as possible, we use two additional convolutional layers with stride 2 to shrink the length by a factor of 4. A greater degree of downsampling would have led to information loss, while a lesser degree of downsampling could have resulted in modal misalignment and compromised performance. Denote $a = S-Enc(s)$ as the speech representation.

To reduce the number of parameters and facilitate knowledge transfer, we share the *Transformer encoder* and *Transformer decoder* for ST, MT, and FT.

Transformer Encoder and Transformer Decoder The *Transformer encoder* and *Transformer decoder*

are composed of N_e transformer encoder layers and N_d transformer decoder layers, respectively, with the same configuration as the original implementation (Vaswani et al., 2017). For the MT task, the input of the *Transformer encoder* is the embedding of transcript $e = Emb(x)$. For the ST task, the input is the audio output representation of the speech encoder a . For the FT task, the input is the fused speech-text representation f (see details in Section 3.3). The *Transformer encoder* further extracts the high-level semantic hidden representations and facilitates knowledge sharing across the three modalities. The *Transformer decoder* generates corresponding target translation for ST, MT, and FT. Besides, we use ASR task to improve translation performance. The training losses of ST, MT, FT, and ASR are as follows:

$$\begin{aligned}\mathcal{L}_{ST} &= - \sum_n \log P(y_n | s_n) \\ \mathcal{L}_{MT} &= - \sum_n \log P(y_n | x_n) \\ \mathcal{L}_{FT} &= - \sum_n \log P(y_n | x_n, s_n) \\ \mathcal{L}_{ASR} &= - \sum_n \log P(x_n | s_n)\end{aligned}\tag{1}$$

\mathcal{L}_{ST} , \mathcal{L}_{MT} , \mathcal{L}_{FT} and \mathcal{L}_{ASR} are cross-entropy losses on <speech, target>, <transcript, target>, <speech, transcript, target> and <speech, transcript>, respectively.

3.3 Fusing speech and text

As we mentioned in Section 1, to leverage the complementary strengths between speech and text, we propose the **Fuse-Speech-Text (FST)** method. We first introduce FST in this section and later show how to bridge the modality gap between speech and text.

Here, we utilize an open-source ASR model to construct a <speech, ASR transcript, target> pair dataset. Given a speech-transcript-target pair (s, x, y) , the transcript x could be an ASR transcript or golden transcript, and the fused speech-text representation f is defined as:

$$f = Concat(P^s, S-Enc(s), P^t, P^g, Emb(x))\tag{2}$$

where P^s and P^t are prompt tags to identify whether the input modal is speech or text, and P^g is a prompt tag (<golden>/<asr>) to indicate whether the transcript contains errors. The prompt tags

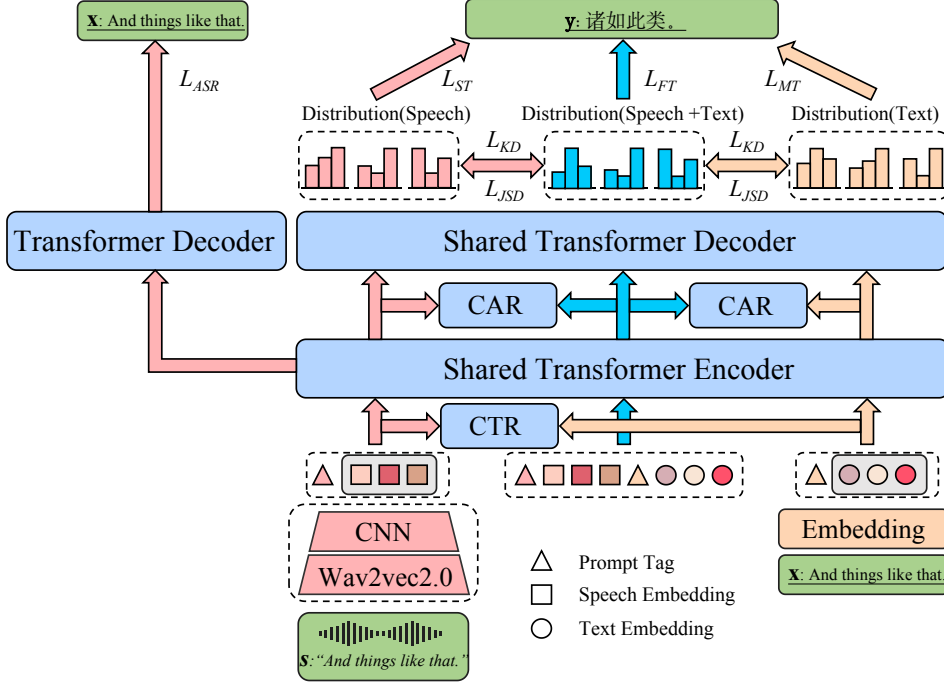


Figure 2: Overview of our proposed FST. FT denotes fused speech-text input for translation; here, we use the prompt tag to fuse speech and text. CTR denotes cross-modal contrastive learning; CAR denotes cross-attentive regularization.

implicitly guide the model to utilize more speech information when the transcript is inaccurate.

3.4 Align speech and text with FST

As we analyzed in Section 1, we observe three levels of the modality gap between speech and text: Modal input representation, Modal semantic, and Modal hidden states. We propose several methods to bridge the modality gap between speech and text. In addition to the speech subsampling and implicit guidance mentioned above, we introduce three additional methods in this section: Cross-modal Contrastive Learning, Cross-Attentive Regularization, Knowledge Distillation and Jensen-Shannon Divergence.

Cross-modal Contrastive Learning Given a positive example of speech-transcript (s, x) pair, we can get speech representation $a = S-Enc(s)$, transcript representation $e = Emb(x)$. We randomly pick a set of $B - 1$ transcripts $\{e_i^-\}_{i=1}^{B-1}$ from the same batch as negative examples. For speech representation a and transcript representation e , we first average them in terms of the time dimension and apply the multi-class N-pair contrastive loss(Sohn,

2016):

$$u = MeanPool(a)$$

$$v = MeanPool(e)$$

$$\mathcal{L}_{CTR} = - \sum_{s,x} \log \frac{\exp(sim(u,v)/\tau)}{\sum_{e_j \in \mathcal{A}} \exp(sim(u,v(e_j))/\tau)} \quad (3)$$

where $\mathcal{A} = \{e\} \cup \{e_i^-\}_{i=1}^{B-1}$, τ is the temperature hyper-parameter, and sim is the cosine similarity function.

Cross-Attentive Regularization The cross-attentive regularization(Tang et al., 2021a) (CAR) can increase the similarity among distinct modalities. The essence of CAR is to use a similarity matrix to project a tensor sequence onto a space of equivalent length as another tensor sequence, then compute $L2$ loss between the two sequences. Here, we utilize the CAR to compute losses separately between speech representation a and fused speech-text representation f and between text representation e and fused speech-text representation f . The CAR loss is defined as:

$$\mathcal{L}_{CAR} = \mathcal{L}_{CAR}(a, f) + \mathcal{L}_{CAR}(e, f) \quad (4)$$

Knowledge Distillation and Jensen-Shannon Divergence The ST task is more difficult than the

MT task since the speech signals are harder to model and more susceptible to noise. Previous works(Liu et al., 2019; Gaido et al., 2020; Tang et al., 2021a) utilize knowledge distillation to facilitate knowledge acquisition by an ST model from a well-trained MT model. However, in our work, the transcript may contain errors; the accuracy of the FT task is usually much higher than the corresponding ST and MT task. We designate the FT task as the teacher while ST and MT tasks as the student, minimizing the loss between the student and teacher outputs. The KD loss is defined as:

$$\begin{aligned}\mathcal{L}_{KD}(a, f) &= - \sum_n q(y_n|f_n) \log p(y_n|a_n) \\ \mathcal{L}_{KD}(e, f) &= - \sum_n q(y_n|f_n) \log p(y_n|e_n) \quad (5) \\ \mathcal{L}_{KD} &= \mathcal{L}_{KD}(a, f) + \mathcal{L}_{KD}(e, f)\end{aligned}$$

Furthermore, we endeavor to optimize the congruity of the ultimate distributions of the three modalities through the minimization of the Jensen-Shannon Divergence(Lin, 1991) (JSD) between the three output distributions, which is

$$\begin{aligned}\mathcal{L}_{JSD} &= \sum_n (JSD \{p(y_n|a_n) || p(y_n|, f_n)\} \\ &\quad + JSD \{p(y_n|e_n) || p(y_n|f_n)\}) \quad (6)\end{aligned}$$

The final training objective is as follows:

$$\begin{aligned}\mathcal{L} &= \alpha \mathcal{L}_{ST} + \alpha \mathcal{L}_{MT} + (1 - \alpha) \mathcal{L}_{KD} + \mathcal{L}_{FT} \\ &\quad + \mathcal{L}_{ASR} + \beta \mathcal{L}_{CTR} + \gamma \mathcal{L}_{CAR} + \delta \mathcal{L}_{JSD} \quad (7)\end{aligned}$$

where α , β , γ and δ are predefined hyper-parameters.

4 Experiments

4.1 Experimental setups

ST Datasets We conduct experiments on MuST-C¹(Di Gangi et al., 2019b) and GigaST²(Ye et al., 2022b). MuST-C is a multilingual speech translation dataset that contains translations from English to 8 languages. MuST-C contains several hundred hours of audio recordings from English TED Talks; we conduct experiments on MuST-C En→De/Es/Fr. We use the dev set for development and analysis and tst-COMMON set for test. GigaST is a large-scale pseudo speech translation dataset created by

¹We use v1.0 <https://ict.fbk.eu/must-c/>

²<https://st-benchmark.github.io/resources/GigaST>

	ST		MT Train		MT Test	WER
	#hours	#sents	name	#sents	name	
MuST-C						
En→De	408	234K	WMT17	4.5M	newstest2014	22.65
En→Es	504	270K	WMT17	4.1M	newstest2013	22.60
En→Fr	492	280K	WMT17	5.5M	newstest2014	22.08
GigaST						
En→Zh	9,780	7,650K	in-house	105M	newstest2019/2020	21.98

Table 1: Statistics of all datasets.

translating the text in GigaSpeech. We conduct experiments on GigaST En→Zh, and test on in-house cgtm, zhiyuan and aiconf datasets. We utilize an open-source ASR model (whisper base.en³) to construct a dataset of <speech, ASR transcript> pair, the Word Error Rate (WER) of our constructed datasets are shown in the last column of Table 1.

MT Datasets Our model allows us to use the external MT dataset for further training. We introduce external WMT datasets for En→De/Es/Fr and in-house MT dataset for En→Zh. The detailed statistics of all datasets are shown in Table 1.

Model Configuration For the speech encoder, we use Wav2vec2.0⁴ following the base configuration, which is only pre-trained on Librispeech(Panayotov et al., 2015) without any fine-tuning. Two layers of CNNs after the Wav2vec2.0 with kernel size 5, stride size 2, padding 2, and hidden dimension 1024. The transformer encoder and decoder follow the base configuration, with hidden size $h^d = 512$, 8 attention heads, and 2048 FFN hidden states. We use $N_e = 6$ transformer encoder layers and $N_d = 6$ transformer decoder layers.

Experiment Details We pre-trained the MT model on the external MT dataset; the learning rate is 5e-4. The FST model is initialized with a pre-trained MT model, and the learning rate is 6e-5. We use the raw 16kHz speech as input and jointly tokenize the bilingual text using SentencePiece(Kudo and Richardson, 2018). We use an Adam optimizer with $\beta_1 = 0.9$, $\beta_2 = 0.98$, and 20k warm-up updates. The dropout is set to 0.15, and the value of label smoothing is set to 0.1. For the training loss, we set weight of \mathcal{L}_{ST} and \mathcal{L}_{MT} $\alpha = 0.8$, contrastive temperature $\tau = 0.02$ and weight of \mathcal{L}_{CTR} $\beta = 1.0$, weight of \mathcal{L}_{CAR} $\gamma = 0.02$ and weight of \mathcal{L}_{JSD} $\delta = 1.0$. We use sacreBLEU⁵(Post, 2018)

³<https://huggingface.co/openai/whisper-base.en>

⁴https://dl.fbaipublicfiles.com/fairseq/wav2vec/wav2vec_small.pt

⁵<https://github.com/mjpost/sacrebleu>, sacreBLEU signature: nrefs:1 | bs:1000 | seed:12345 | case:mixed | eff:no | tok:13a | smooth:exp | version:2.0.0

Models	External Data				BLEU			
	Speech	Text	ASR	MT	De	Es	Fr	Avg.
Cascade Model								
Espnet(Inaguma et al., 2021)	-	-	-	-	23.6	-	33.8	-
W2V2-Transformer(Fang et al., 2022)	✓	-	-	✓	26.9	30.0	36.6	31.2
(Ye et al., 2021)	-	-	✓	✓	25.2	-	34.9	-
(Xu et al., 2021)	-	-	✓	✓	28.1	-	-	-
End-to-End Model								
MTL(Tang et al., 2021b)	-	-	-	✓	23.9	28.6	33.1	28.5
FAT-ST(Zheng et al., 2021)	✓	✓	✓	✓	25.5	30.8	-	-
JT-S-MT(Tang et al., 2021a)	-	-	-	✓	26.8	31.0	37.4	31.7
Chimera(Han et al., 2021)	✓	-	-	✓	27.1 [†]	30.6	35.6	31.1
XSTNet(Ye et al., 2021)	✓	-	-	✓	27.1	30.8	38.0	32.0
SATE(Xu et al., 2021)	-	-	✓	✓	28.1 [†]	-	-	-
STEMM(Fang et al., 2022)	✓	-	-	✓	28.7	31.0	37.4	32.4
TaskAware(Indurthi et al., 2021)	-	-	✓	✓	28.9	-	-	-
STPT(Tang et al., 2022)	✓	✓	✓	✓	-	33.1	39.7	-
ConST(Ye et al., 2022a)	✓	-	-	✓	28.3	32.0	38.3	32.9
FST-ST	-	-	-	✓	27.7	32.4	37.2	32.4
FST-FT	-	-	-	✓	29.2	33.9	38.9	34.0

Table 2: Case-sensitive detokenized BLEU scores on MuST-C tst-COMMON set. "Speech" denotes unlabeled audio data, "Text" denotes unlabeled text data, *e.g.* Europarl V7(Koehn, 2005), CC25(Liu et al., 2020), [†] use 40M OpenSubtitles(Lison and Tiedemann, 2016) as external MT data.

Models	De			Es			Fr			Avg.
	newstest	asr	golden	newstest	asr	golden	newstest	asr	golden	
Pre-trained 6E6D MT [‡]	23.7	24.3	30.4	31.8	29.5	34.2	34.7	32.2	39.9	31.2
Pre-trained 24E6D MT [‡]	27.5	25.7	31.9	34.8	32.0	37.0	38.1	34.2	41.5	33.6
STEMM (Fang et al., 2022)	-	-	31.5	-	-	-	-	-	-	-
FST-MT	25.0	28.6	34.2	32.9	33.5	37.7	35.9	37.7	44.1	34.4

Table 3: Case-sensitive detokenized BLEU scores on MuST-C tst-COMMON set and newstest. "asr" denotes use the ASR transcript as input, "golden" denotes use the golden transcript as input. [‡] are trained with the same external MT data and MuST-C <transcript, target> pair data.

to evaluate case-sensitive detokenized BLEU.

4.2 Baseline systems

We compare our method with several strong ST systems, including Espnet(Inaguma et al., 2021), W2V2-Transformer(Fang et al., 2022), MTL(Tang et al., 2021b), FAT-ST(Zheng et al., 2021), JT-S-MT(Tang et al., 2021a), Chimera(Han et al., 2021), XSTNet(Ye et al., 2021), SATE(Xu et al., 2021), STEMM(Fang et al., 2022), TaskAware(Indurthi et al., 2021), STPT(Tang et al., 2022), ConST(Ye et al., 2022a).

Besides, we implement several methods for fusing speech and text modalities. The only difference between our approach and others is the specific method for fusing speech and text. SA-CTR: our implementation involved drawing inspiration from

the image and text fusion techniques employed in Li et al.'s (2022) to propose a method for fusing speech and text. Codebook-Gumbel and Codebook-K-means: we utilize the method from Baevski et al. (2020a) to map the speech representation e onto a discrete space using a codebook; then we concatenate discrete speech representation and text representation as ours.

4.3 Main Results

Comparison with End-to-End Baselines As shown in Table 2, we compare our model with several strong end-to-end baselines. Many existing works rely on additional auxiliary data for better performance, *e.g.* large-scale MT data and unlabeled audio data. In the table, we provide a summary of the auxiliary data employed by these base-

Models	newstest2019	newstest2020	cgtn			zhiyuan			aiconf		
			asr	speech	fused	asr	speech	fused	asr	speech	fused
Pre-trained 6E6D MT [‡]	36.7	43.0	29.7	-	-	28.2	-	-	30.5	-	-
Pre-trained 24E6D MT [‡]	40.1	46.6	32.6	-	-	29.5	-	-	33.6	-	-
SA-CTR (Li et al., 2022)	36.8	43.1	31.0	31.8	31.0	28.3	29.4	29.1	31.6	32.4	32.1
Codebook-Gumbel(Baevski et al., 2020a)	36.8	43.0	30.9	30.0	31.7	28.1	28.4	28.9	31.7	31.6	32.5
Codebook-K-means(Baevski et al., 2020a)	36.9	43.2	31.0	31.3	31.8	28.2	29.3	29.0	31.5	31.7	32.3
FST	38.3	44.2	31.6	33.3	33.9	28.4	30.2	30.5	32.4	34.0	34.5

Table 4: Case-sensitive detokenized BLEU scores on En→Zh test sets. ‡ are trained with the same MT data and GigaST <transcript, target> pair data. "asr" denotes use the ASR transcript, "fused" denotes use ASR transcript and speech as input. Hubert large is used to extract speech features on the GigaST En→Zh.

Task Config.	MT newstest	MT asr	ST speech	FT fused
FST	25.0	28.6	27.7	29.2
- \mathcal{L}_{ASR}	24.9	28.5	27.4	28.9
- $\mathcal{L}_{ASR} - \mathcal{L}_{KD} - \mathcal{L}_{JSD}$	25.2	28.0	27.1	28.8
- $\mathcal{L}_{ASR} - \mathcal{L}_{KD} - \mathcal{L}_{JSD} - \mathcal{L}_{CTR} - \mathcal{L}_{CAR}$	24.8	27.6	26.4	28.5

Table 5: BLEU scores on MuST-C En→De tst-COMMON set and newstest set by removing individual losses.

lines, with a \checkmark denoting its usage in the corresponding column. Most previous strong baselines have leveraged two or more additional auxiliary datasets, such as STPT(Tang et al., 2022) and ConST(Ye et al., 2022a), whereas our model only utilizes additional MT data. Our E2E FST-ST achieves comparable results with the previous best models. When fusing speech and asr transcript as input, our FST-FT outperforms SOTA by an average of 1.1 BLEU on MuST-C.

Comparison with Cascade Baselines We compare our model with several strong cascade systems. W2V2-Transformer, Ye et al. (2021) and Xu et al. (2021) provided three strong cascade systems trained using MuST-C and external ASR and MT data. As shown in Table 2, our end-to-end FST-ST achieves comparable results with these strong cascade models, while our FST-FT significantly outperforms these strong cascade models.

Comparison with MT Baselines Our model is initialized with a pre-trained MT model and then jointly trained on multiple tasks. Previous work has encountered catastrophic forgetting problems on MT task during joint training(Fang et al., 2022), which significantly degrades performance on MT tasks. We evaluate our model on the MT task and show the result in Table 3 and Table 4. Our model achieves significant improvement on the MT task instead of a decline in performance. Our model even outperforms pre-trained 24E6D (24 transformer encoder layers and 6 transformer decoder layers) MT on MuST-C. However, with the increase of training data, our model performs lower

Task Model	MT newstest	MT asr	ST speech	FT fused
Wav2vec2.0	25.0	28.6	27.7	29.2
HuBERT Large	25.0	28.4	29.3	29.7
HuBERT Extra Large	25.1	28.4	30.0	30.3

Table 6: The impact of speech pre-trained model on MuST-C En→De tst-COMMON set and newstest set.

than pre-trained 24E6D MT when using ASR transcript as input (En→Zh). Nevertheless, our model can still outperform pre-trained 24E6D MT when fusing speech and text as input on En→Zh.

4.4 Ablation Study

As shown in Equation 7, our training objective contains eight terms. In addition to the cross-entropy objective $\mathcal{L}_{ST}, \mathcal{L}_{MT}, \mathcal{L}_{FT}$, we investigate the effects of the other auxiliary training objectives. By gradually removing each loss, Table 5 shows the improvements brought by each auxiliary training objective.

5 Analysis

5.1 Impact of Different Fusion Methods

We compare our model with different fusion methods, such as SA-CTR and STEMM. SA-CTR proposed a selective attention and gated fusion mechanism to fuse two different modalities; STEMM proposed the speech-text manifold mixup to mix up the representation sequences of different modalities. Our model achieves better results than theirs by utilizing a prompt-based approach. As Section 1 mentions, speech input representation is in continuous space, while text input representation is in discrete space. We utilize the method from Baevski et al. (2020a) to map the speech representation onto a discrete space using a codebook. However, Codebook-Gumbel and Codebook-K-means led to a decrease in BLEU score (shown in Table 4). Our conjecture here is that the existing speech pre-trained models extract continuous features that undergo a mapping

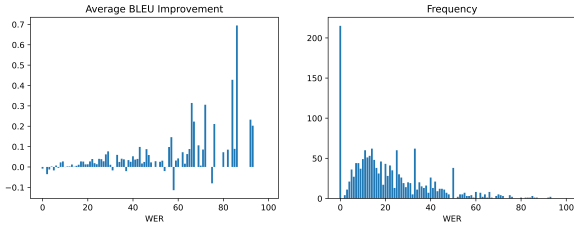


Figure 3: **Left:** The average BLEU improvement for ASR transcript resulting from using fuse-speech-text on En→Zh aiconf testset, under various conditions of WER. **Right:** The frequency distribution of WER on En→Zh aiconf testset.

process to a discrete space, resulting in the loss of audio information and a subsequent reduction in the BLEU score. Nonetheless, if the speech pre-trained models can extract high-quality discrete features, it is plausible that such discrete features could enhance performance.

5.2 Impact of Speech Pre-trained Model

We further explore the impact of the speech pre-trained model. Here, we report the results of Wav2vec2.0, HuBERT Large⁶ and HuBERT Extra Large⁷, which are widely used in speech translation. As shown in Tabel 6, as the strength of speech pre-trained models increases, the performance of the models on ST and FT improves. Intuitively, larger speech pre-trained models provide more complementary knowledge to complete the insufficient text representations.

5.3 Improvement of Different WER

We conduct an empirical study to examine the efficacy of our approach in enhancing BLEU score through the fusion of speech information under different WER present in the ASR transcript. As shown in Figure 3, when the word error rate of ASR transcript is minimal ($0 \leq \text{WER} < 5$), the fusion of speech information results in a slight decrease in BLEU score. This behavior is because the transcript is adequate for achieving high translation quality, and the fusion of speech information may introduce noise. As the WER increases, the advantages of integrating speech information become more pronounced.

Models	
CASE 1	
Ref.	src: I'm extraordinarily delight to be here. asr: I'm extraordinary. I'd like to be here. tgt: 我非常高兴来到这里。
FST-MT	tgt 我非常 <u>同寻常</u> ,我想在这里。
FST-ST	tgt 我非常高兴来到这里。
FST-FT	tgt 我非常高兴来到这里。
CASE 2	
Ref.	src: So you could think of the viruses like, they are people. asr: So you could think of the viruses like their people. tgt: 所以你可以把病毒想象成人。
FST-MT	tgt 所以你可以像他们的人民一样看待病毒。
FST-ST	tgt 所以你可以把病毒想象成他们的人。
FST-FT	tgt 所以你可以把病毒想象成人。

Table 7: Case study: cases are generated from FST-MT, FST-ST, and FST-FT on En→Zh aiconf testset. The **red underlined text** indicates inaccurate translations, and the **blue strikethrough** indicates missing translation.

5.4 Case Study

In this section, we present several cases generated by FST-MT, FST-ST, and FST-FT. In the first case, the ASR model mistakenly transcribes "delight" as "I'd like" due to the highly similar pronunciations of these two words. FST-MT fails to generate the correct translation as a result of errors present in the ASR transcript. Meanwhile, FST-ST produces omissions, as modeling direct speech to target translation proves to be more challenging. Notably, only FST-FT translates the sentence correctly, leveraging the complementary strengths of speech and text. In the second case, the speech signal contains numerous background noises; the ASR model mistakenly transcribes the "they are" as "their", FST-MT and FST-ST are mistranslated, and only FST-FT translates correctly. We believe this improvement comes from fusing speech and text.

6 Conclusion

In this paper, we propose FST, a cross-modal model which supports three distinct input modalities for translation: speech, text, and fused speech-text. We comprehensively analyze the modality gap between speech and text and utilize multiple techniques to bridge the modality gap. We then fuse speech and text to improve speech translation. Experiments and analysis demonstrate the effectiveness of our proposed method.

⁶https://dl.fbaipublicfiles.com/hubert/hubert_large_1160k.pt

⁷https://dl.fbaipublicfiles.com/hubert/hubert_xtralarge_1160k.pt

Limitations

This work improves speech translation by fusing speech and text, but the model is far from being achieved for industrialgrade implementations. Although the ChatGPT and Whisper models exhibit superior speech-to-text capabilities compared to our model, we maintain that fusing speech and text remains a viable approach in the era of large-scale models. There are two significant limitations in this study that could be addressed in future research. First, our model still relies on an ASR system to transcribe speech into text, which does not address the issue of high latency in the cascade system. Second, our model needs labeled data for training, especially the <speech, transcript, target> pair. Speech data is exceptionally scarce, and obtaining speech data for many languages around the world is particularly challenging.

References

- Alexei Baevski, Steffen Schneider, and Michael Auli. 2020a. *vq-wav2vec*: Self-supervised learning of discrete speech representations.
- Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. 2020b. *wav2vec 2.0*: A framework for self-supervised learning of speech representations. *Advances in neural information processing systems*, 33:12449–12460.
- Parnia Bahar, Albert Zeyer, Ralf Schlüter, and Hermann Ney. 2019. *On using SpecAugment for end-to-end speech translation*. In *Proceedings of the 16th International Conference on Spoken Language Translation*, Hong Kong. Association for Computational Linguistics.
- Sameer Bansal, Herman Kamper, Karen Livescu, Adam Lopez, and Sharon Goldwater. 2019. *Pre-training on high-resource speech recognition improves low-resource speech-to-text translation*. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 58–68, Minneapolis, Minnesota. Association for Computational Linguistics.
- Daniel Beck, Trevor Cohn, and Gholamreza Haffari. 2019. *Neural speech translation using lattice transformations and graph networks*. In *Proceedings of the Thirteenth Workshop on Graph-Based Methods for Natural Language Processing (TextGraphs-13)*, pages 26–31, Hong Kong. Association for Computational Linguistics.
- Alexandre Bérard, Laurent Besacier, Ali Can Kocabiyikoglu, and Olivier Pietquin. 2018. *End-to-end automatic speech translation of audiobooks*. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, page 6224–6228. IEEE Press.
- Alexandre Bérard, Olivier Pietquin, Laurent Besacier, and Christophe Servan. 2016. *Listen and Translate: A Proof of Concept for End-to-End Speech-to-Text Translation*. In *NIPS Workshop on end-to-end learning for speech and audio processing*, Barcelona, Spain.
- N. Bertoldi and M. Federico. 2005. *A new decoder for spoken language translation based on confusion networks*. In *IEEE Workshop on Automatic Speech Recognition and Understanding, 2005.*, pages 86–91.
- Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, et al. 2022. *Wavlm: Large-scale self-supervised pre-training for full stack speech processing*. *IEEE Journal of Selected Topics in Signal Processing*, 16(6):1505–1518.
- Qiao Cheng, Meiyuan Fan, Yaqian Han, Jin Huang, and Yitao Duan. 2019. *Breaking the data barrier: Towards robust speech translation via adversarial stability training*. In *Proceedings of the 16th International Conference on Spoken Language Translation*, Hong Kong. Association for Computational Linguistics.
- Matti Di Gangi, Robert Enyedi, Alessandra Brusadin, and Marcello Federico. 2019a. *Robust neural machine translation for clean and noisy speech transcripts*. In *Proceedings of the 16th International Conference on Spoken Language Translation*, Hong Kong. Association for Computational Linguistics.
- Mattia A. Di Gangi, Roldano Cattoni, Luisa Bentivogli, Matteo Negri, and Marco Turchi. 2019b. *MuST-C: a Multilingual Speech Translation Corpus*. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2012–2017, Minneapolis, Minnesota. Association for Computational Linguistics.
- Long Duong, Antonios Anastasopoulos, David Chiang, Steven Bird, and Trevor Cohn. 2016. *An attentional model for speech translation without transcription*. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 949–959, San Diego, California. Association for Computational Linguistics.
- Qingkai Fang, Rong Ye, Lei Li, Yang Feng, and Mingxuan Wang. 2022. *STEMM: Self-learning with speech-text manifold mixup for speech translation*. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 7050–7062, Dublin, Ireland. Association for Computational Linguistics.

- Marco Gaido, Mattia A. Di Gangi, Matteo Negri, and Marco Turchi. 2020. [End-to-end speech-translation with knowledge distillation: FBK@IWSLT2020](#). In *Proceedings of the 17th International Conference on Spoken Language Translation*, pages 80–88, Online. Association for Computational Linguistics.
- Mattia A. Di Gangi, Matteo Negri, and Marco Turchi. 2019. [Adapting Transformer to End-to-End Spoken Language Translation](#). In *Proc. Interspeech 2019*, pages 1133–1137.
- Chi Han, Mingxuan Wang, Heng Ji, and Lei Li. 2021. Learning shared semantic space for speech-to-text translation. In *Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021*, pages 2214–2225.
- Hirofumi Inaguma, Tatsuya Kawahara, and Shinji Watanabe. 2021. [Source and target bidirectional knowledge distillation for end-to-end speech translation](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 1872–1881, Online. Association for Computational Linguistics.
- S Indurthi, H Han, NK Lakumarapu, B Lee, I Chung, S Kim, and C Kim. 2020. Data efficient direct speech-to-text translation with modality agnostic meta-learning. In *Proc. ICASSP*.
- Sathish Indurthi, Mohd Abbas Zaidi, Nikhil Kumar Lakumarapu, Beomseok Lee, Hyojung Han, Seokchan Ahn, Sangha Kim, Chanwoo Kim, and Inchul Hwang. 2021. [Task aware multi-task learning for speech to text tasks](#). In *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7723–7727.
- Ye Jia, Melvin Johnson, Wolfgang Macherey, Ron J Weiss, Yuan Cao, Chung-Cheng Chiu, Naveen Ari, Stella Laurenzo, and Yonghui Wu. 2019. Leveraging weakly supervised data to improve end-to-end speech-to-text translation. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7180–7184. IEEE.
- Takatomo Kano, Sakriani Sakti, and Satoshi Nakamura. 2017. Structured-based curriculum learning for end-to-end english-japanese speech translation. In *Interspeech*.
- Philipp Koehn. 2005. Europarl: A parallel corpus for statistical machine translation. In *Proceedings of machine translation summit x: papers*, pages 79–86.
- Taku Kudo and John Richardson. 2018. [SentencePiece: A simple and language independent subword tokenizer and detokenizer for neural text processing](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 66–71, Brussels, Belgium. Association for Computational Linguistics.
- Tsz Kin Lam, Shigehiko Schamoni, and Stefan Riezler. 2021. [Cascaded models with cyclic feedback for direct speech translation](#). In *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7508–7512.
- Hang Le, Juan Pino, Changhan Wang, Jiatao Gu, Didier Schwab, and Laurent Besacier. 2020. [Dual-decoder transformer for joint automatic speech recognition and multilingual speech translation](#). In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 3520–3533, Barcelona, Spain (Online). International Committee on Computational Linguistics.
- Bei Li, Chuanhao Lv, Zefan Zhou, Tao Zhou, Tong Xiao, Anxiang Ma, and JingBo Zhu. 2022. [On vision features in multimodal machine translation](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6327–6337, Dublin, Ireland. Association for Computational Linguistics.
- Wei Li, Can Gao, Guocheng Niu, Xinyan Xiao, Hao Liu, Jiachen Liu, Hua Wu, and Haifeng Wang. 2021. [UNIMO: Towards unified-modal understanding and generation via cross-modal contrastive learning](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 2592–2607, Online. Association for Computational Linguistics.
- Jianhua Lin. 1991. Divergence measures based on the shannon entropy. *IEEE Transactions on Information theory*, 37(1):145–151.
- Pierre Lison and Jörg Tiedemann. 2016. [OpenSubtitles2016: Extracting large parallel corpora from movie and TV subtitles](#). In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, pages 923–929, Portorož, Slovenia. European Language Resources Association (ELRA).
- Yinhan Liu, Jiatao Gu, Naman Goyal, Xian Li, Sergey Edunov, Marjan Ghazvininejad, Mike Lewis, and Luke Zettlemoyer. 2020. Multilingual denoising pre-training for neural machine translation. *Transactions of the Association for Computational Linguistics*, 8:726–742.
- Yuchen Liu, Hao Xiong, Jiajun Zhang, Zhongjun He, Hua Wu, Haifeng Wang, and Chengqing Zong. 2019. [End-to-End Speech Translation with Knowledge Distillation](#). In *Proc. Interspeech 2019*, pages 1128–1132.
- Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. 2015. [Librispeech: An asr corpus based on public domain audio books](#). In *2015 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 5206–5210.

- Daniel S. Park, William Chan, Yu Zhang, Chung-Cheng Chiu, Barret Zoph, Ekin Dogus Cubuk, and Quoc V. Le. 2019. [SpecAugment: A simple data augmentation method for automatic speech recognition](#). In *Interspeech*.
- Stephan Peitz, Simon Wiesler, Markus Nußbaum-Thom, and Hermann Ney. 2012. [Spoken language translation using automatically transcribed text in training](#). In *Proceedings of the 9th International Workshop on Spoken Language Translation: Papers*, pages 276–283, Hong Kong, Table of contents.
- Juan Pino, Qiantong Xu, Xutai Ma, Mohammad Javad Dousti, and Yun Tang. 2020. [Self-Training for End-to-End Speech Translation](#). In *Proc. Interspeech 2020*, pages 1476–1480.
- Matt Post. 2018. [A call for clarity in reporting BLEU scores](#). In *Proceedings of the Third Conference on Machine Translation: Research Papers*, pages 186–191, Brussels, Belgium. Association for Computational Linguistics.
- Elizabeth Salesky, Matthias Sperber, and Alexander Waibel. 2019. [Fluent translations from disfluent speech in end-to-end speech translation](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2786–2792, Minneapolis, Minnesota. Association for Computational Linguistics.
- Kihyuk Sohn. 2016. Improved deep metric learning with multi-class n-pair loss objective. *Advances in neural information processing systems*, 29.
- Matthias Sperber, Graham Neubig, Jan Niehues, and Alex Waibel. 2017. [Neural lattice-to-sequence models for uncertain inputs](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1380–1389, Copenhagen, Denmark. Association for Computational Linguistics.
- Matthias Sperber, Graham Neubig, Ngoc-Quan Pham, and Alex Waibel. 2019. [Self-attentional models for lattice inputs](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 1185–1197, Florence, Italy. Association for Computational Linguistics.
- Yun Tang, Hongyu Gong, Ning Dong, Changhan Wang, Wei-Ning Hsu, Jiatao Gu, Alexei Baevski, Xian Li, Abdelrahman Mohamed, Michael Auli, and Juan Pino. 2022. [Unified speech-text pre-training for speech translation and recognition](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1488–1499, Dublin, Ireland. Association for Computational Linguistics.
- Yun Tang, Juan Pino, Xian Li, Changhan Wang, and Dmitriy Genzel. 2021a. [Improving speech translation by understanding and learning from the auxiliary text translation task](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4252–4261, Online. Association for Computational Linguistics.
- Yun Tang, Juan Pino, Changhan Wang, Xutai Ma, and Dmitriy Genzel. 2021b. [A general multi-task learning framework to leverage text data for speech to text tasks](#). In *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 6209–6213.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Laura Cross Vila, Carlos Escolano, José A. R. Fonollosa, and Marta Ruiz Costa-jussà. 2018. End-to-end speech translation with the transformer. In *IberSPEECH Conference*.
- Hari Krishna Vydana, Martin Karafiát, Katerina Zmolková, Lukáš Burget, and Honza Černocký. 2021. [Jointly trained transformers models for spoken language translation](#). In *ICASSP 2021 - 2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pages 7513–7517.
- Chengyi Wang, Yu Wu, Shujie Liu, Zhenglu Yang, and Ming Zhou. 2020a. Bridging the gap between pre-training and fine-tuning for end-to-end speech translation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 9161–9168.
- Chengyi Wang, Yu Wu, Shujie Liu, Ming Zhou, and Zhenglu Yang. 2020b. [Curriculum pre-training for end-to-end speech translation](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 3728–3738, Online. Association for Computational Linguistics.
- Ron J. Weiss, Jan Chorowski, Navdeep Jaitly, Yonghui Wu, and Z. Chen. 2017. Sequence-to-sequence models can directly translate foreign speech. In *Interspeech*.
- Chen Xu, Bojie Hu, Yanyang Li, Yuhao Zhang, Shen Huang, Qi Ju, Tong Xiao, and Jingbo Zhu. 2021. [Stacked acoustic-and-textual encoding: Integrating the pre-trained models into speech translation encoders](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 2619–2630, Online. Association for Computational Linguistics.
- Rong Ye, Mingxuan Wang, and Lei Li. 2021. End-to-end speech translation via cross-modal progressive training. In *Proc. of INTERSPEECH*.

- Rong Ye, Mingxuan Wang, and Lei Li. 2022a. [Cross-modal contrastive learning for speech translation](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5099–5113, Seattle, United States. Association for Computational Linguistics.
- Rong Ye, Chengqi Zhao, Tom Ko, Chutong Meng, Tao Wang, Mingxuan Wang, and Jun Cao. 2022b. Gigast: A 10,000-hour pseudo speech translation corpus. *arXiv preprint arXiv:2204.03939*.
- Pei Zhang, Niyu Ge, Boxing Chen, and Kai Fan. 2019. [Lattice transformer for speech translation](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 6475–6484, Florence, Italy. Association for Computational Linguistics.
- Jiawei Zhao, Wei Luo, Boxing Chen, and Andrew Gilman. 2021. [Mutual-learning improves end-to-end speech translation](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3989–3994, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Renjie Zheng, Junkun Chen, Mingbo Ma, and Liang Huang. 2021. Fused acoustic and text encoding for multimodal bilingual pretraining and speech translation. In *International Conference on Machine Learning*, pages 12736–12746. PMLR.