

Are Large Language Models Robust Coreference Resolvers?

Nghia T. Le and **Alan Ritter**
Georgia Institute of Technology
{nle18,alan.ritter}@cc.gatech.edu

Abstract

Recent work on extending coreference resolution across domains and languages relies on annotated data in both the target domain and language (Xia and Van Durme, 2021). At the same time, pre-trained large language models (LMs) have been reported to exhibit strong zero- and few-shot learning abilities across a wide range of NLP tasks. However, prior work mostly studied this ability using artificial sentence-level datasets such as the Winograd Schema Challenge. In this paper, we assess the feasibility of prompt-based coreference resolution by evaluating instruction-tuned language models on difficult, linguistically-complex coreference benchmarks (e.g., CoNLL-2012). We show that prompting for coreference can outperform current unsupervised coreference systems, although this approach appears to be reliant on high-quality mention detectors. Further investigations reveal that instruction-tuned LMs generalize surprisingly well across domains, languages, and time periods; yet continued fine-tuning of neural models should still be preferred if small amounts of annotated examples are available.¹

1 Introduction

Entity coreference resolution aims to find all spans within an input text that refer to the same entity. As an important information extraction sub-task, coreference resolution has received considerable attention from the NLP community over the years, with recent progress driven mostly by neural coreference models (Lee et al., 2017; Wu et al., 2020; Joshi et al., 2020). There has also been an increasing interest in the generalization of coreference systems to domains and languages beyond the popular CoNLL-2012 benchmark (Xia and Van Durme, 2021; Bohnet et al., 2022). Most work on extending coreference resolution to new domains and languages relies on target language annotated data in

the targeted domain, however the amount of labeled data needed to cover every possible domain in all languages is prohibitively expensive. Meanwhile, unsupervised (Haghighi and Klein, 2010) and few-shot (Le et al., 2022) coreference resolution has received less attention, despite the fact that learning with less labels is desirable when adapting to new languages or domains.

Concurrently, there has been a great deal of progress on zero- and few-shot learning by prompting pre-trained language models (LMs) (Ouyang et al., 2022; Touvron et al., 2023). There have also been attempts at evaluating pre-trained LMs coreference abilities under zero- and few-shot settings: Brown et al. (2020) demonstrated that prompting GPT-3 can resolve coreference on the Winograd Schema Challenges (WSC), Yang et al. (2022) showed that coreference resolution was a challenging task for GPT-2 when prompted with multiple-choice templates, and Agrawal et al. (2022) successfully reframed clinical pronoun resolution as span generation. While these studies reveal some evidence of the coreference abilities in large LMs, they either evaluate on sentence-level, artificial datasets that are designed more as an AI challenge task, use prompting methods that fail to beat reasonable baselines, or use non-standard datasets to evaluate language models' performance at coreference resolution. In contrast, the traditional dataset for coreference resolution, CoNLL-2012/OntoNotes, contains real-world document-level examples with complex linguistic annotations (Pradhan et al., 2012). Evaluating LMs using more realistic inputs in this setting is arguably more suitable for the evaluation of models' coreference capabilities.

In this paper, we aim to bridge the gap between coreference and language modeling literature by investigating to what extent instruction-tuned language models (e.g., InstructGPT) can perform coreference resolution via prompting. We show that prompting LMs is a feasible strategy

¹Our code and datasets are available at <https://github.com/nle18/coref-llms>

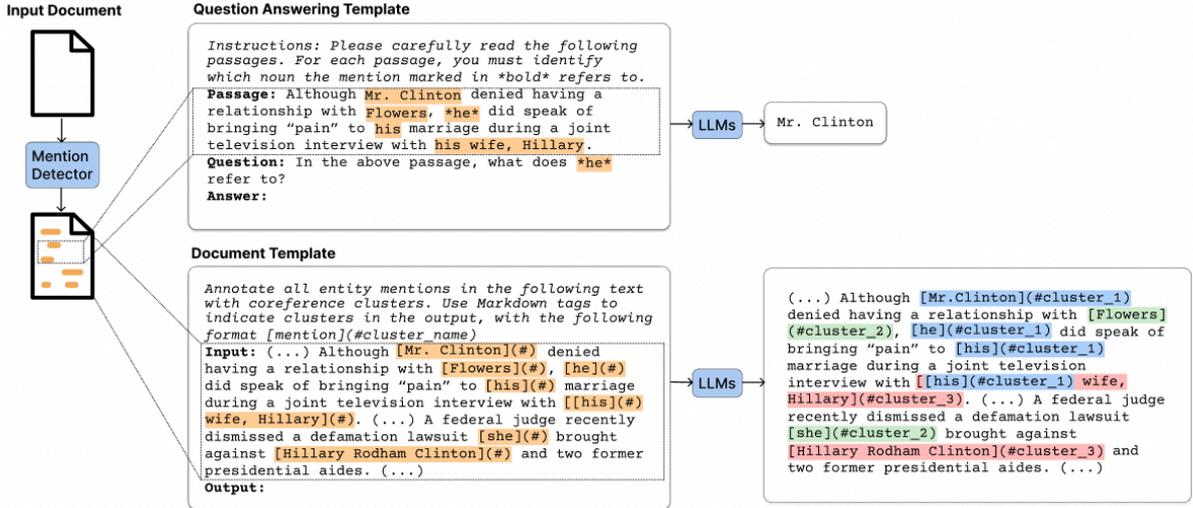


Figure 1: An example of coreference resolution with LMs prompting. Here we show two prompt templates experimented in this work: Question Answering and Document templates. In the QA template, the language model generates the answer when given a passage and an open-ended *wh*-question (Ouyang et al., 2022). In contrast, the document template marks the candidate mentions and asks the LM to annotate the cluster IDs for each mention directly within the text (represented by different colors). Both templates require a mention detector to generate candidate mentions.

for coreference resolution, outperforming previous unsupervised systems. Nonetheless, it still trails behind state-of-the-art supervised models and relies heavily on a robust mention detector. Finally, we explore the generalization ability of this approach by extending our analysis to a diverse range of domains, languages, and time periods. Our results indicate that continued learning should still be the preferred option if a large out-of-domain corpus and a few annotated in-domain documents are available. However, large instruction-tuned LMs can generalize surprisingly well across domains and languages, making them a robust option if no target language or in-domain data is available for fine-tuning.

2 Prompt-based Coreference Resolution

Previous work in zero- and few-shot coreference resolution assumes access to candidate mentions to resolve, usually pronouns in the passage (Ouyang et al., 2022; Agrawal et al., 2022). We adopt this formulation: given a document, we assume the existence of a set of candidate mentions (gold or predicted), then prompt an autoregressive language model with handcrafted prompts, and extract the predicted coreference links (Figure 1).

Prior work applying language models to resolve co-referring entity mentions has mainly experimented with question answering prompts for pro-

noun resolution (Ouyang et al., 2022; Agrawal et al., 2022) and demonstrated its effectiveness when comparing with other templates such as multiple-choice (Arora et al., 2022). However, in a preliminary study (§A.1), we found that prompting with a QA template struggled to compete with Stanford’s deterministic coreference systems (Lee et al., 2013), even when providing gold mentions and few-shot guidance (Agrawal et al., 2022), or when scaling to larger LMs (achieving 61 F_1 when comparing to 72 F_1 from Lee et al. (2013)). We also experimented with an alternative document-level template that is able to elicit more coreference links than the usual QA template, achieving an 81 F_1 . In this template, the mentions of the input text are first marked with special tokens indicating a span to annotate (e.g., *Mr. Clinton* → *[Mr. Clinton](#)*). The LM is then given instructions to annotate this marked span with the cluster ID, (e.g., *[Mr. Clinton](#)* → *[Mr. Clinton](#cluster_1)*). Given strong results over the QA template, we used this document template for all subsequent experiments.

3 CoNLL-2012 Experiments

We investigate the coreference abilities of large LMs on the CoNLL-2012 benchmark (Pradhan et al., 2012). We found that GPT models (InstructGPT, ChatGPT, and GPT-4) (OpenAI, 2023) yield competitive results with previous unsu-

pervised and rule-based models, while significantly outperforming them when gold mentions are provided.

3.1 Experimental Details

Dataset and Evaluation Metrics We evaluate our approach on the traditionally benchmarked English OntoNotes 5.0 dataset (Weischedel et al., 2011; Pradhan et al., 2012), which spans seven distinct genres such as news, telephone conversations, and religious text. We follow the standard train-dev-test splits from previous work and report CoNLL F₁, which averages over three coreference-based metrics MUC, B³, and CEAF_{φ₄}.

Settings We report results under two settings: predicted mentions, where only raw text is provided as input, and gold mentions, where the gold mention boundaries are provided as input. To obtain predicted mentions, we use the mentions output by dcoref as input into language model prompts.

3.2 Models

We report performance on seven instruction-tuned language models from the LLaMa-2 (Touvron et al., 2023) and OpenAI GPT (Ouyang et al., 2022) model families. We compare these models with various competitive supervised and unsupervised baselines from coreference literature.

Baselines We mainly consider Stanford’s deterministic resolver, which we refer to as dcoref (Lee et al., 2013). This coreference resolver consists of multiple sieves, where each sieve is a set of handcrafted rules that filter out mentions. The sieves are ordered from highest to lowest precision to minimize cascading errors from previous sieves. We use the open-sourced implementation of dcoref to obtain the results in this study.² For supervised systems, we compare to coref-mt5, a text-to-text approach based on mT5 from Bohnet et al. (2022), which is the state-of-the-art for supervised coreference, and SpanBERT+e2e, a span-based neural coreference system (Joshi et al., 2020). For unsupervised baselines, we include results from weak-SpanBERT (Stolfo et al., 2022), a system that trained a SpanBERT-based coarse-to-fine architecture on dcoref coreference predictions.

Llama 2 Models We use models from the Llama 2 model family (Touvron et al., 2023) as the primary open-sourced language models. In

²<https://nlp.stanford.edu/software/dcoref.html>

System	MUC	B ³	CEAF _{φ₄}	CoNLL
<i>Predicted mentions</i>				
<i>coref-mt5</i>	<i>87.8</i>	<i>82.6</i>	<i>79.5</i>	<i>83.3</i>
<i>SpanBERT+e2e</i>	<i>85.3</i>	<i>78.1</i>	<i>75.3</i>	<i>79.6</i>
dcoref	67.7	55.9	52.5	58.6
weak-SpanBERT	68.6	56.7	52.7	59.3
Llama-2-Chat (70B)	39.7	42.3	22.2	34.7
CodeLlama (34B)	57.5	40.6	25.3	41.1
InstructGPT	70.4	58.4	51.7	60.1
ChatGPT	66.9	55.5	46.5	56.3
GPT-4	73.7	62.7	52.3	62.9
<i>Gold mentions</i>				
dcoref	81.6	70.0	67.3	72.9
Llama-2-Chat (7B)	19.7	40.2	22.8	27.6
Llama-2-Chat (70B)	58.2	65.7	34.4	52.8
CodeLlama (7B)	71.5	54.5	31.1	52.4
CodeLlama (34B)	75.6	66.5	43.1	61.7
InstructGPT	89.2	79.4	73.7	80.8
ChatGPT	86.2	79.3	68.3	77.9
GPT-4	93.7	88.8	82.8	88.4

Table 1: Result on English OntoNotes test set for predicted mentions (top) and gold mentions (bottom). Fully supervised systems are *italicized*. Full results are reported in Table 11.

particularly, we consider Llama-2-Chat 7B and 70B, as well as CodeLlama 7B and 34B. Both Llama-2-Chat and CodeLlama were instruction-tuned versions of base Llama-2, with CodeLlama being specifically fine-tuned on code datasets (Rozière et al., 2023). To avoid hallucinations, we constrain the generation outputs as follows: for each given mention, we ask the model to generate the cluster ID. We then update the input sequence by appending the generated ID with the text segment between the current mention and the next mention. The process is repeated until all the mentions in the document are annotated, as in Figure 1.

GPT Models We also investigate the instruction-tuned 175B GPT-3 model (text-davinci-003) from the InstructGPT series, which we refer to as InstructGPT (Ouyang et al., 2022). Previous work has reported evidence of InstructGPT coreference abilities via few-shot prompting (Agrawal et al., 2022). In addition, we report performance on the most recent OpenAI language models, ChatGPT (gpt-35-turbo) as well as GPT-4 (OpenAI, 2023). Due to the cost of running these models, we generate outputs using greedy decoding with a single generation per input document rather than iterative decoding as described above for the open-sourced models.

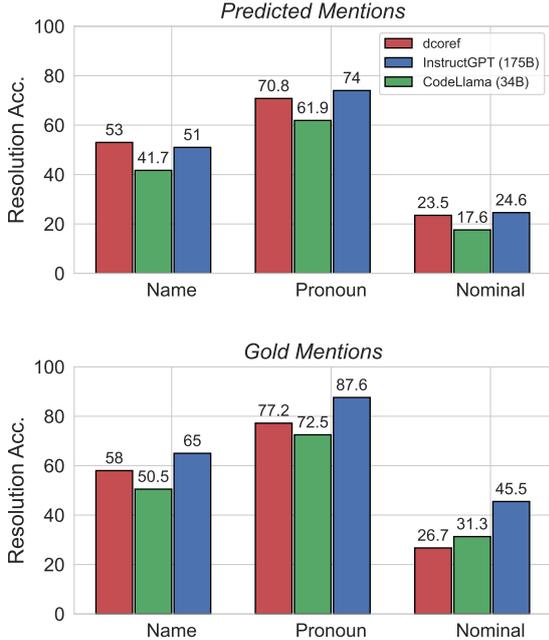


Figure 2: Resolution accuracy by mention types (amongst the recalled mentions) on OntoNotes dev set.

3.3 Results

Table 1 shows the results between different coreference systems. We note that prompting InstructGPT and GPT-4 outperforms weak-SpanBERT and dcoref for predicted mentions, with the performance gaps increase for gold mentions. This demonstrates the feasibility of prompting large LMs for coreference resolution, particularly in the setting where the mentions are known. However, this approach still considerably underperforms fully supervised systems. While all Llama-2 model variants underperform dcoref baseline, we note that CodeLlama significantly outperforms Llama-2-Chat. CodeLlama-7B even matches the performance of Llama-2-Chat-70B.

To further understand the strengths and weaknesses of instruction-tuned LMs for coreference, we break down the results according to different *resolution classes*, following Lu and Ng (2020). Specifically, for each coarse-grained mention class (named entity, pronoun, nominal), we compute the *resolution accuracy*, which is the percentage of anaphors correctly linked to an antecedent (Figure 2). We observe that InstructGPT does particularly well in pronoun resolution, corroborating previous work (Agrawal et al., 2022). It struggles more for named entities and the particularly difficult nominal resolution. However, InstructGPT still remains

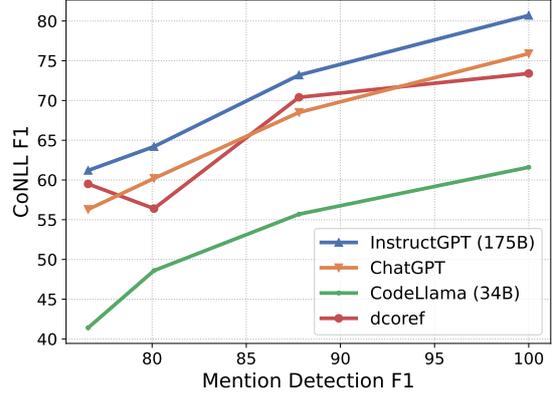


Figure 3: CoNLL F₁ as a function of MD F₁, on OntoNotes dev set. All models were fed the same outputs from mention detection systems detailed in §A.2.

Type	InstructGPT	dcoref
Name	50.0	78.7
Pronoun	75.9	94.7
Nominal	18.7	52.7
MD F ₁	46.5	76.6

Table 2: Mention detection recall broken down by mention types, on OntoNotes dev set. Last row shows the overall F₁. In addition to being overall worse than dcoref, InstructGPT particularly struggles on recalling nominal noun phrases.

competitive with dcoref for these classes, with the gaps increase when gold mentions are provided. In particular, InstructGPT (and even CodeLlama in gold mention setting) outperforms dcoref on the challenging nominal phrases case (Figure 2).

3.4 The Importance of Mention Detection

While prompting of LMs can be competitive with previous coreference systems, the quality of candidate mentions has a considerable effect on the final performance. We quantify the importance of high-quality Mention Detection (MD) by measuring the models’ performance when inputting candidate mention sets generated by different mention detectors (Figure 3). Furthermore, we analyze the performance of InstructGPT when prompting for mentions with a simple template that asks it to output a list of named entities, pronouns, and nominal phrases in the input text (Table 2).

InstructGPT consistently outperforms dcoref as MD performance increases. In general, coreference performances of all models improve as mention detection score increases. This is not surpris-

Mention Detection:	<i>[Nine years]</i> ago today, <i>[allegations of infidelity]</i> almost derailed <i>[Bill Clinton]</i> 's journey from hope to the White House. On <i>[January 1992]</i> , <i>[Gennifer Flowers]</i> <i>[claims]</i> <i>[she]</i> had a 12 - year affair with <i>[Bill Clinton]</i> . <i>[Flowers]</i> went on " <i>[Larry King]</i> Live" in 1998 at the height of the <i>[impeachment proceedings]</i> against <i>[Mr. Clinton]</i> . <i>[She]</i> said <i>[she]</i> felt vindicated when <i>[he]</i> admitted under oath that <i>[he]</i> 'd had <i>[an affair with]</i> <i>[her]</i> after denying <i>[it]</i> for years.
Antecedent Linking: (Gold Mentions)	Nine years ago today, <i>[allegations of infidelity]</i> ₁ almost derailed <i>[Bill Clinton's]</i> ₂ journey from hope to the White House. On January 1992, <i>[Gennifer Flowers]</i> ₃ <i>[claims]</i> ₁ <i>[she]</i> ₃ had a 12 - year affair with <i>[Bill Clinton]</i> ₂ . <i>[Flowers]</i> ₄ went on "Larry King Live" in 1998 at the height of the impeachment proceedings against <i>[Mr. Clinton]</i> ₂ . <i>[She]</i> ₃ said <i>[she]</i> ₃ felt vindicated when <i>[he]</i> ₂ admitted under oath that <i>[he]</i> ₂ 'd had <i>[an affair with]</i> ₃ <i>[her]</i> ₃ after denying <i>[it]</i> ₁ for years.

Table 3: Qualitative examples of InstructGPT mention detection (top) and coreference resolution when gold mentions are given (bottom). Spans predicted by the model are wrapped around square brackets, e.g., *[Nine years]* and *[Bill Clinton]*. Blue and red denote incorrect and correct predictions, respectively. **Mention Detection:** InstructGPT can predict most of the named entities and pronouns, but it still made numerous errors including extra entities (*Nine years*, *January 1992*, *Larry King*), span errors (*Bill Clinton* vs *Bill Clinton's*), and missing mentions (*Mr. Clinton*, *Flowers*). **Antecedent Linking:** InstructGPT exhibits near perfect antecedent linking ability, with the only exception being incorrectly linking *an affair with her* to *allegations of infidelity* (i.e. conflated entities error). Notably, it correctly resolved challenging cases like linking *claims* to *allegations of infidelity*. InstructGPT also exhibits some evidence of long-range ability when correctly resolving *it* to *allegations of infidelity*. The full example is shown in Table 14, and a negative example where InstructGPT struggles in antecedent linking is shown in Table 15.

ing, as it has been similarly reported in previous work studying mention detection of neural coreference resolution systems (Lu and Ng, 2020). We further observe that CodeLLama underperforms while ChatGPT performs comparable to dcoref baseline. Nonetheless, InstructGPT again consistently outperforms dcoref, regardless of MD performance.

InstructGPT struggles with generating candidate mentions. Table 2 shows that InstructGPT performs much worse than dcoref. Further analysis by mention types shows it particularly struggles to recall nominal mentions. A qualitative example in Table 3 demonstrates that while InstructGPT was able to recover a considerable portion of named entities and pronouns, it also made numerous errors, including span errors, extra entities, and missing mentions (Kummerfeld and Klein, 2013).

Given that what constitutes a mention can depend heavily on the annotation guidelines of specific datasets and domains, it may be challenging to ask a MD system to predict mentions without any labeled examples. Since Mention Detection plays a crucial role in coreference resolution (Wu and Gardner, 2021) as well as its generalizability to different domains, a high-quality mention detection appears to be a pre-requisite for prompt-based coreference resolution. Fortunately, however, mention annota-

tion has been shown to be much less costly than annotating full coreference chains (Gandhi et al., 2022).

4 Generalization Beyond OntoNotes

Although supervised neural models achieve superior results for coreference, they are also known to struggle when generalizing across domains, sometimes even underperforming rule-based systems (Moosavi and Strube, 2017). As such, recent research in coreference largely focus on the generalization ability of neural models beyond the OntoNotes dataset (Xia and Van Durme, 2021; Gandhi et al., 2022; Bohnet et al., 2022). Given that large LMs are pre-trained on lots of general-purpose corpus and not optimized for a single coreference dataset, we posit that these instruction-tuned language models can also be effective at coreference domain adaptation. Therefore, we study how well instruction-tuned LMs generalize to different domains (§4.1), languages (§4.2), and time periods (§4.3). We mainly report results for InstructGPT, given its competitive performance on OntoNotes (§3) while being less expensive than GPT-4. The diverse coreference datasets considered in this analysis are given in Table 4. Since mention detection has been shown to be fairly challenging (§3.4), we evaluate the experiments in this section using gold

Dataset	Test	Toks/Doc	% Sing.
OntoNotes ^{en}	348	489	0.0
LitBank	10	2105	19.8
Character Iden.	192	262	6.4
WikiCoref	30	1996	0.0
QuizBowlCoref	400	126	26.0
OntoNotes ^{zh}	218	412	0.0
OntoNotes ^{ar}	44	681	0.0
SemEval ^{ca}	167	293	45.9
SemEval ^{nl}	72	666	13.0
SemEval ^{it}	46	891	61.9
SemEval ^{es}	168	303	47.7
WSJ-1989	56	632	0.0
WSJ-2019	56	858	0.0
WSJ-2023	56	688	0.0

Table 4: Dataset statistics. The first five datasets are used as benchmarks in Toshniwal et al. (2021). We only include the number of test documents (first col.) since we evaluate the models on these datasets and did not explicitly use any train/dev data. A detailed version is shown in Table 12.

mentions.

4.1 Can prompting LMs generalize coreference across domains?

To study the robustness of our approach across domains, we use the datasets benchmarked in Toshniwal et al. (2021) due to the diversity in genres (news, Wikipedia, conversations), document lengths (long vs. short), and annotation guidelines (singletons vs. non-singletons). For evaluation, we follow the annotation schema of the corresponding dataset (i.e., if the dataset contains singletons, then we also output singletons). Similar to previous work in coreference domain adaptation (Xia and Van Durme, 2021; Toshniwal et al., 2021), we explore different systems where different types of source and target training data are available. Specifically, in addition to dcoref as in §3, we include the *trained models* TRANSFER-ON (Xia and Van Durme, 2021) and longdoc-PC (Toshniwal et al., 2021), which were respectively trained on the train set of OntoNotes^{en} (2,802 annotated documents of newswire and religious texts) and PreCo (36,120 documents of reading comprehension examinations, collected in Chen et al. (2018)). TRANSFER-ON was then further finetuned on 10 labeled documents from the target domains. Additionally, we include the *pretrained encoder* SpanBERT (Xia and Van Durme, 2021) as

a fine-tuning baseline (on a small amount of annotated data), where a pretrained SpanBERT encoder was not trained on a large source corpus and instead directly finetuned on 10 target documents.³

InstructGPT appears to be robust for coreference domain adaptation. Table 5 shows the coreference domain generalization for various systems. While InstructGPT is competitive with longdoc-PC, it still trails behind TRANSFER-ON considerably. This indicates that transfer learning is still a preferred method for coreference domain adaptation, particularly when a large corpus of training data and a few annotated documents in the target domain are available. On the other hand, when compared to models that were not trained on source coreference datasets such as dcoref and SpanBERT, InstructGPT outperforms them by a significant margin. This demonstrates the robustness of InstructGPT for coreference domain adaptation when using as a black-box model.

4.2 Can LMs also generalize coreference across languages?

To test the generalization of InstructGPT on resolving coreference across multiple languages, we experimented with Chinese and Arabic portions of OntoNotes and the multilingual coreference SemEval-2010 dataset (Recasens et al., 2010). A notable difference between OntoNotes and SemEval-2010 is the annotations of singletons, which has led to different evaluation methods for SemEval-2010. We follow the evaluation setting of previous work for each of the evaluated languages: excluding singletons from both predicted and evaluation clusters for Chinese and Arabic, while excluding singletons from predicted set but keeping them in evaluation sets for other languages. We refer to Section 5 of Bohnet et al. (2022) for more discussion on this.

Similar to §4.1, we compare InstructGPT with neural transfer-learning models from Xia and Van Durme (2021), TRANSFER-EN and XLM-R. Both use a pretrained XLM-RoBERTa-large encoder finetuned with 10 documents from the target language. We note that TRANSFER-EN was previously trained on English OntoNotes before continuing training on target language, which makes it a stronger model than XLM-R.⁴ TRANSFER-EN and XLM-R cor-

³Figure 1 of Xia and Van Durme (2021). Models summary detailed in Table 13

⁴Figure 6 of Xia and Van Durme (2021)

Model	# Train Docs	ON ^{en}	LB	CI	WC	QBC	Avg.
TRANSFER-ON (Xia and Van Durme, 2021)	2.8k → 10	-	85.0	-	-	85.0	85.0
SpanBERT (Xia and Van Durme, 2021)	0 → 10	-	69.0	-	-	65.0	67.0
dcoref (Lee et al., 2013)	0 → 0	72.9	55.4	-	<u>72.4</u>	34.8	59.0
longdoc-PC (Toshniwal et al., 2021)	36k → 0	<u>76.8</u>	<u>81.1</u>	<u>66.5</u>	67.0	<u>77.3</u>	73.7
CodeLlama (34B)	0 → 0	61.7	47.8	58.3	67.9	58.8	58.9
InstructGPT	-	80.8	77.0	72.6	72.9	68.3	<u>74.3</u>
ChatGPT	-	77.9	70.8	67.2	70.8	69.9	71.3

Table 5: CoNLL F₁ on different English coreference datasets, with the macro average shown in the last column. Best result is in **bold** while the second best is underlined. # train docs column indicates the number of train documents from the source domain → number of train documents from target domains. TRANSFER-ON and longdoc-PC were trained on large corpus of source examples; TRANSFER-ON and SpanBERT were fine-tuned on limited target examples; dcoref was not trained on any corpus. Overall, InstructGPT exhibits strong generalization results when using out-of-the-box.

Lang.	TRANSFER-EN 2.8k → 10	XLM-R 0 → 10	InstructGPT
Chinese (zh)	<u>75.0</u>	70.0	77.3
Arabic (ar)	80.0	49.0	<u>65.6</u>
Catalan (ca)	52.0	29.0	<u>41.9</u>
Dutch (nl)	71.0	42.0	<u>70.8</u>
Italian (it)	46.0	25.0	<u>41.4</u>
Spanish (es)	57.0	35.0	<u>42.2</u>

Table 6: CoNLL F₁ on the non-English portions of OntoNotes (Chinese and Arabic) and the SemEval-2010 dataset. Best result is in **bold** while the second best is underlined.

respond to TRANSFER-ON and SpanBERT from §4.1, respectively, with the only difference being the pre-trained encoder (XLM-R vs. SpanBERT).

InstructGPT can also effectively resolve coreference across language. From Table 6, we observe similar conclusions to §4.1: continued learning using a large source corpus with a handful of annotated examples from target languages still performs the best. Nonetheless, InstructGPT was able to outperform XLM-R across all languages, and is even on par with TRANSFER-EN for Chinese and Dutch. This result indicates the importance of a source English coreference corpus for continued learning.

4.3 What about different time periods?

An interesting dimension to analyze the robustness of coreference generalization is temporal changes (Agarwal and Nenkova, 2022; Liu and Ritter, 2023), since having coreference systems that can generalize beyond datasets that were created over a decade ago (e.g., OntoNotes) can be beneficial. To that end, we compare dcoref

Dataset	1989 (G)	1989 (S)	2019 (S)	2023 (S)	σ^2
dcoref	72.4	70.8	63.6	66.9	15.7
CodeLlama-34B	61.9	57.4	55.7	55.3	9.1
InstructGPT	80.9	78.2	80.5	81.7	2.3
ChatGPT	76.8	75.3	76.7	74.3	2.5

Table 7: CoNLL F₁ and variance (last column) on Wall Street Journal articles from different time periods. G and S denote Gold and Silver annotation, respectively. Prompting LMs appears more robust to temporal changes than dcoref.

and several instruction-tuned LMs on three new silver-annotated coreference datasets from different time periods: **WSJ-1989**, **WSJ-2019**, and **WSJ-2023**, each containing 56 Wall Street Journal articles from 1989, 2016-2019, and 2023, respectively. WSJ-1989 is a subset of the OntoNotes dev set and thus contains gold coreference annotation. WSJ-2019 was sampled from the RealNews dataset (Zellers et al., 2019) dated from February 2015 to February 2019, and WSJ-2023 from the WSJ website between May and June 2023. Since these two datasets do not have coreference annotations, we used SpanBERT (Joshi et al., 2020), which was fine-tuned on the in-domain OntoNotes train set, to obtain *silver annotations* for all three datasets. We then evaluate the models on these silver annotations, with mentions given as before. Further details on how we sampled and annotated these datasets are presented in §A.3.

Prompting instruction-tuned LMs is robust to temporal changes. Table 7 shows the results. We first observe a decrease when moving from gold to silver annotations for all models. More impor-

tantly, we see more degradation and variance in performance of dcoref for the different temporal datasets, whereas the variance is less pronounced for InstructGPT and ChatGPT. While CodeLlama-34B underperforms dcoref baseline, it also observes less variance when evaluated on different temporal datasets.

5 Related Work

Domain Adaptation for Coreference Previous work has reported that neural coreference resolution trained on a single dataset struggled with out-of-domain generalization, with some performing worse than rule-based systems (Moosavi and Strube, 2017). Several solutions to this challenge have been proposed with varying success: Xia and Van Durme (2021) showed that continued training can help generalize to different domains and languages with as few as 10 annotated documents, and Toshniwal et al. (2021) demonstrated joint training on large coreference corpora with different annotations can help neural models adapt to new domains.

Recently, Gandhi et al. (2022) demonstrated that adapting mention annotations to new domains instead of the entire coreference chains is more cost-efficient while also improves domain adaptation performance. Their findings are in line with insight from analyzing different components of neural coreference systems: improving mention detection provides the largest improvement to coreference performance (Lu and Ng, 2020; Wu and Gardner, 2021). We observe a similar trend with prompting InstructGPT.

Conditional Text Generation for Coreference

Research in coreference resolution has been dominated by neural span-based models that score coreference links between spans (Lee et al., 2017; Joshi et al., 2020). Recently, a new paradigm for coreference starts to emerge: formulating coreference resolution as conditional text generation (Liu et al., 2022; Bohnet et al., 2022). Both Liu et al. (2022) and Bohnet et al. (2022) fine-tuned T5-based models on sequences of structured-building actions, with the former achieving competitive results for structured prediction tasks and the latter achieving SOTA results for coreference resolution. While our work fall into this category, we are interested the intrinsic ability of the language model to resolve coreference, using an autoregressive language model on an instruction-based prompt format (as opposed to a more complex state-based

format).

Prompting LMs for Coreference With the success of zero-shot and few-shot prompting of large language models on various NLP benchmarks, we ask to what extent this success translates to more traditional NLP tasks like coreference resolution. Manning et al. (2020) shows evidence of linguistic abilities in masked LMs and Blevins et al. (2022) presents a structured prompting approach that achieves strong few-shot results for sequence tagging tasks. For coreference resolution, prior work has mostly focused on few-shot learning for sentence-level, syntactically simple coreference datasets such as Winograd Schema Challenge (Levesque et al., 2012) and for pronoun resolution on clinical data (Agrawal et al., 2022).

6 Conclusion

In this paper, we study how well instruction-tuned language models resolve coreference via prompting. We demonstrate the feasibility of this approach on the CoNLL-2012 benchmark, surpassing previous unsupervised systems but still underperforming state-of-the-art supervised models. Interestingly, prompting instruction-tuned LMs appears to generalize well across a wide range of domains, languages, and time periods, particularly if no training examples are given. Nonetheless, it still trails behind continued learning with a large training corpus in the source domain and a handful of annotated examples in the target domain.

Limitations

Because OpenAI GPT models are proprietary models, we do not know whether or not OntoNotes was included in its training data. However, at the time of writing, there is some evidence against OntoNotes data contamination. First, a previous probe that aims to measure data contamination and memorization of OntoNotes on ChatGPT showed negative results.⁵ Second, our experiment in §4.3 includes data sampled after the models’ training cutoff date (September 2021), yet still shows a robust F₁. Finally, the conclusions in this paper still stand regardless of whether or not these models trained on OntoNotes: (1) prompting instruction-tuned LMs is a feasible strategy for coreference resolution, and (2) although this approach has unique

⁵<https://hitz-zentroa.github.io/lm-contamination/blog/>

strengths and weaknesses, it is robust across many domains, languages, and time periods.

References

- Oshin Agarwal and Ani Nenkova. 2022. Temporal effects on pre-trained models for language processing tasks.
- Monica Agrawal, Stefan Heggelmann, Hunter Lang, Yoon Kim, and David Sontag. 2022. Large language models are few-shot clinical information extractors. In *EMNLP*.
- Simran Arora, Avani Narayan, Mayee F. Chen, Laurel Orr, Neel Guha, Kush Bhatia, Ines Chami, Frederic Sala, and Christopher Ré. 2022. Ask me anything: A simple strategy for prompting language models. *arXiv:2210.02441*.
- Terra Blevins, Hila Gonen, and Luke Zettlemoyer. 2022. Prompting language models for linguistic structure.
- Bernd Bohnet, Chris Alberti, and Michael Collins. 2022. Coreference resolution through a seq2seq transition-based system. *arXiv preprint arXiv:2211.12142*.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*.
- Hong Chen, Zhenhua Fan, Hao Lu, Alan Yuille, and Shu Rong. 2018. PreCo: A large-scale dataset in preschool vocabulary for coreference resolution. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. Unsupervised cross-lingual representation learning at scale. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*.
- Nupoor Gandhi, Anjalie Field, and Emma Strubell. 2022. Mention annotations alone enable efficient domain adaptation for coreference resolution.
- Aria Haghighi and Dan Klein. 2010. Coreference resolution in a modular, entity-centered model. In *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*.
- Mandar Joshi, Danqi Chen, Yinhan Liu, Daniel S. Weld, Luke Zettlemoyer, and Omer Levy. 2020. SpanBERT: Improving pre-training by representing and predicting spans. *Transactions of the Association for Computational Linguistics*.
- Daniel Jurafsky and James H. Martin. 2000. *Speech and Language Processing: An Introduction to Natural Language Processing, Computational Linguistics, and Speech Recognition*.
- Jonathan K. Kummerfeld and Dan Klein. 2013. Error-driven analysis of challenges in coreference resolution. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*.
- Nghia T Le, Fan Bai, and Alan Ritter. 2022. Few-shot anaphora resolution in scientific protocols via mixtures of in-context experts. *EMNLP Findings*.
- Heeyoung Lee, Angel Chang, Yves Peirsman, Nathanael Chambers, Mihai Surdeanu, and Dan Jurafsky. 2013. Deterministic coreference resolution based on entity-centric, precision-ranked rules. *Computational Linguistics*.
- Kenton Lee, Luheng He, Mike Lewis, and Luke Zettlemoyer. 2017. End-to-end neural coreference resolution. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*.
- Hector Levesque, Ernest Davis, and Leora Morgenstern. 2012. The Winograd schema challenge. In *Thirteenth international conference on the principles of knowledge representation and reasoning*.
- Shuheng Liu and Alan Ritter. 2023. Do conll-2003 named entity taggers still work well in 2023? *ACL*.
- Tianyu Liu, Yuchen Jiang, Nicholas Monath, Ryan Cotterell, and Mrinmaya Sachan. 2022. Autoregressive structure prediction with language models. In *Findings of the Association for Computational Linguistics: EMNLP 2022*.
- Jing Lu and Vincent Ng. 2020. Conundrums in entity coreference resolution: Making sense of the state of the art. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*.
- Christopher D. Manning, Kevin Clark, John Hewitt, Urvashi Khandelwal, and Omer Levy. 2020. Emergent linguistic structure in artificial neural networks trained by self-supervision. *Proceedings of the National Academy of Sciences*.
- Nafise Sadat Moosavi and Michael Strube. 2017. Lexical features in coreference resolution: To be used with caution. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*.
- OpenAI. 2022. [Introducing chatgpt](#).
- OpenAI. 2023. [Gpt-4 technical report](#).

- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. 2022. Training language models to follow instructions with human feedback.
- Sameer Pradhan, Alessandro Moschitti, Nianwen Xue, Olga Uryupina, and Yuchen Zhang. 2012. CoNLL-2012 shared task: Modeling multilingual unrestricted coreference in OntoNotes. In *Joint Conference on EMNLP and CoNLL - Shared Task*.
- Marta Recasens, Lluís Màrquez, Emili Sapena, M. Antònia Martí, Mariona Taulé, Véronique Hoste, Massimo Poesio, and Yannick Versley. 2010. SemEval-2010 task 1: Coreference resolution in multiple languages. In *Proceedings of the 5th International Workshop on Semantic Evaluation*.
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. 2023. [Code llama: Open foundation models for code](#).
- Alessandro Stolfo, Chris Tanner, Vikram Gupta, and Mrinmaya Sachan. 2022. A simple unsupervised approach for coreference resolution using rule-based weak supervision. In *Proceedings of the 11th Joint Conference on Lexical and Computational Semantics*.
- Shubham Toshniwal, Patrick Xia, Sam Wiseman, Karen Livescu, and Kevin Gimpel. 2021. On generalization in coreference resolution. In *Proceedings of the Fourth Workshop on Computational Models of Reference, Anaphora and Coreference*.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. 2023. Llama: Open and efficient foundation language models.
- Ralph Weischedel, Eduard Hovy, Mitchell Marcus, Martha Palmer, Robert Belvin, Sameer Pradhan, Lance Ramshaw, and Nianwen Xue. 2011. *OntoNotes: A Large Training Corpus for Enhanced Processing*.
- Wei Wu, Fei Wang, Arianna Yuan, Fei Wu, and Jiwei Li. 2020. CorefQA: Coreference resolution as query-based span prediction. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*.
- Zhaofeng Wu and Matt Gardner. 2021. Understanding mention detector-linker interaction in neural coreference resolution. In *Proceedings of the Fourth Workshop on Computational Models of Reference, Anaphora and Coreference*.
- Patrick Xia and Benjamin Van Durme. 2021. Moving on from OntoNotes: Coreference resolution model transfer. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*.
- Xiaohan Yang, Eduardo Peynetti, Vasco Meerman, and Chris Tanner. 2022. What GPT knows about who is who. In *Proceedings of the Third Workshop on Insights from Negative Results in NLP*.
- Rowan Zellers, Ari Holtzman, Hannah Rashkin, Yonatan Bisk, Ali Farhadi, Franziska Roesner, and Yejin Choi. 2019. Defending against neural fake news. In *Advances in Neural Information Processing Systems 32*.

A Appendix

A.1 Preliminaries on Prompt Formats

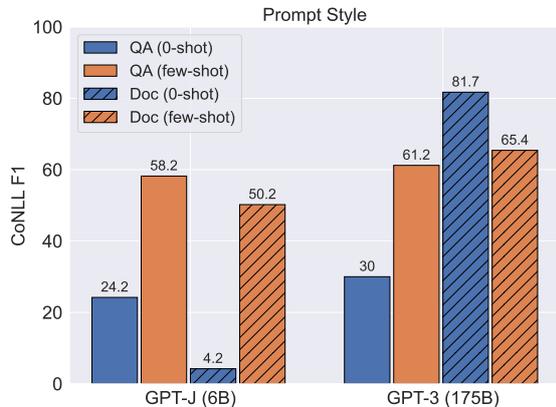


Figure 4: Results of different prompt templates for coreference on a subset of OntoNotes dev set, using gold mentions. Note that dcoref achieves 71.9 F₁ on the same dataset.

QA Prompting for Coreference During our preliminary studies, we experimented with different prompting approaches for coreference using QA template from previous work (Agrawal et al., 2022; Ouyang et al., 2022). However, we found that prompting InstructGPT this way, despite adding in-context examples to provide formatting guidance (Agrawal et al., 2022), performed consistently worse than the deterministic coreference system dcoref (Lee et al., 2013). Qualitative, while this format seems effective at resolving pronouns, it would struggle with more ambiguous nominal noun phrases. For example, asking it to resolve *an affair with her* in Table 3 using QA template would yield an incorrect answer *Gennifer Flowers*.

QA vs. Doc Template We then experimented with the Document template (Table 10) and found that it was more effective than the QA template at resolving coreference (Figure 4). Interestingly, adding in-context examples for this template would cause InstructGPT to perform worse than without in-context examples. We further note that this Document template is loosely similar to the entity-based approach to coreference, where the model links a mention with previous clusters, as opposed to the mention-paired approach exemplified by the QA template (Jurafsky and Martin, 2000). In addition, extracting the predicted clusters from the generated text is easier than other formats, as InstructGPT would directly annotate the text with

the cluster information (We extract cluster information using a simple fuzzy string matching algorithm by comparing the output text to input text, sentence-by-sentence).

A.2 Mention Detection Experiments

To experiment with different qualities of candidate mention sets, we adapted different existing methods for the task of Mention Detection: given an input document, extract all the candidate mentions from the text. For mention detection, we mainly consider the mention detector from dcoref as well as the prompting of InstructGPT for MD using template in Table 10. In addition, to see the effects of having high-quality mentions on dcoref and InstructGPT, we also consider outputs from SpanBERT-large trained on OntoNotes train set (Joshi et al., 2020) and a NER tagger with xlm-roberta-large (Conneau et al., 2020) trained on BIO labels adapted from OntoNotes annotations. We note that these systems are not directly comparable to each other, since they were trained on different annotations: SpanBERT-large on full coreference data and xlm-roberta-large on non-nested MD data.

	Train	P	R	F ₁
SpanBERT-large	CR	89.1	86.6	87.8
xlm-roberta-large	MD	83.3	76.3	80.1
dcoref	∅	75.8	77.4	76.6
InstructGPT	-	42.1	51.8	46.5

Table 8: MD results of different systems considered in Figure 3. SpanBERT-large was trained on full coreference (CR) data, xlm-roberta-large trained on mention-annotated-only (MD) OntoNotes train set, dcoref was not trained on any corpus, and InstructGPT exact training procedures are unknown.

A.3 Temporal Generalization for Coreference

Data Sampling To sample the appropriate data for this experiment, we start with the Wall Street Journal sections of the RealNews (Zellers et al., 2019) and OntoNotes dev set. We used SpanBERT (Joshi et al., 2020) to label all 56 WSJ articles from OntoNotes to obtain WSJ-1989 (CoNLL F₁ using SpanBERT on WSJ-1989 is shown on Table 9). To create WSJ-2019, we first labeled all 191 WSJ articles from RealNews using SpanBERT as above. We then sampled 56 articles using stratified sampling based on two features: document length and

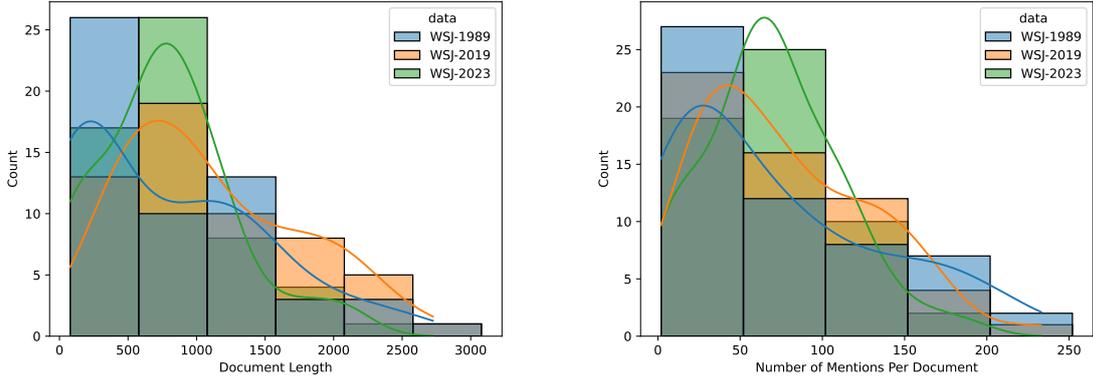


Figure 5: Distributions of WSJ-1989 (blue), WSJ-2019 (orange), and WSJ-2023 (green) based on document length (left) and number of mentions per document (right). The number of mentions per document is measured using the silver annotations from SpanBERT (Joshi et al., 2020).

number of mentions per document. Specifically, we partitioned the WSJ RealNews articles into bins based on document lengths (bin size = 500 tokens), and for each document-length bin we further partitioned based on the number of mentions (mention size = 50). We then sampled the appropriate number of documents (i.e., the number of WSJ-1989 documents in each partition) for each bin to obtain WSJ-2019. For WSJ-2023, we randomly collected 56 articles from the WSJ website dated between May and June 2023 based on document lengths and topics. The distributions of three datasets are shown in Figure 5.

Dataset	CoNLL F ₁
OntoNotes	79.2
WSJ-1989	74.5

Table 9: CoNLL F₁ when running SpanBERT (Joshi et al., 2020) on OntoNotes dev set and WSJ-1989.

A.4 OpenAI API Details

To maximize reproducibility, we use unconstrained greedy decoding with the temperature parameter set to 0 in all our GPT-related experiments. For InstructGPT, we generated approximately 18 million tokens for all our official experiments, or an equivalent of \$360. For ChatGPT and GPT-4, we generated approximately 15 million tokens (\$50) and 1 million tokens (\$60), respectively. InstructGPT experiments were conducted before June 2023, and ChatGPT/GPT-4 experiments before December 2023.

Question Answering Template

Instructions: Please carefully read the following passages. For each passage, you must identify which noun the mention marked in ***bold*** refers to.

Context: In the summer of 2005, a picture that people have long been looking forward to started emerging with frequency in various major Hong Kong media. With their unique charm, these well-known cartoon images once again caused Hong Kong to be a focus of worldwide attention. The world's fifth Disney park will soon open to the public here. The most important thing about Disney is that ***it*** is a global brand.

Question: What does ***it*** refer to?

Answer: ***it*** refers to Disney.

Document Template

Annotate all entity mentions in the following text with coreference clusters. Use Markdown tags to indicate clusters in the output, with the following format [mention](#cluster_name)

Input: In the summer of 2005, a picture that people have long been looking forward to started emerging with frequency in various major [Hong Kong](#) media . With [their](#) unique charm, [these well-known cartoon images](#) once again caused [Hong Kong](#) to be a focus of worldwide attention. [The world's fifth [Disney](#) park](#) will soon open to the public here. The most important thing about [Disney](#) is that [it](#) is a global brand.

Output: In the summer of 2005, a picture that people have long been looking forward to started emerging with frequency in various major [Hong Kong](#cluster_0) media. With [their](#cluster_1) unique charm, [these well-known cartoon images](#cluster_1) once again caused [Hong Kong](#cluster_0) to be a focus of worldwide attention. [The world's fifth [Disney](#cluster_3) park](#cluster_2) will soon open to the public here. The most important thing about [Disney](#cluster_3) is that [it](#cluster_3) is a global brand.

Mention Detection Template

In the following text, list all named entities, pronouns, and nominal noun phrases according to the OntoNotes conventions.

Input: In the summer of 2005, a picture that people have long been looking forward to started emerging with frequency in various major Hong Kong media. With their unique charm, these well-known cartoon images once again caused Hong Kong to be a focus of worldwide attention. The world's fifth Disney park will soon open to the public here. The most important thing about Disney is that it is a global brand.

Output:

Named Entities: Hong Kong

Pronouns: their, it, many, its, that, its, this

Nominal Noun Phrases: the summer of 2005, various major Hong Kong media, their unique charm, the world's fifth Disney park

Table 10: Examples of coreference and mention detection prompt templates used in this work.

System	MUC			B ³			CEAF _{ϕ_4}			CoNLL
	P	R	F ₁	P	R	F ₁	P	R	F ₁	F ₁
<i>Predicted mentions</i>										
<i>coref-mt5 (Bohnet et al., 2022)</i>	87.4	88.3	87.8	81.8	83.4	82.6	79.1	79.9	79.5	83.3
<i>SpanBERT+e2e (Joshi et al., 2020)</i>	85.8	84.8	85.3	78.3	77.9	78.1	76.4	74.2	75.3	79.6
<i>dcoref (Lee et al., 2013)</i>	67.7	67.8	67.7	59.3	52.8	55.9	49.3	56.0	52.5	58.6
<i>weak-SpanBERT (Stolfo et al., 2022)</i>	67.4	69.8	68.6	52.4	61.8	56.7	54.1	51.4	52.7	59.3
<i>Llama-2-Chat (Touvron et al., 2023)</i>	60.2	29.6	39.7	55.8	34.0	42.3	14.7	45.5	22.2	34.7
<i>CodeLlama (Rozière et al., 2023)</i>	54.3	61.0	57.5	34.3	49.6	40.6	22.4	29.1	25.3	41.1
<i>InstructGPT (Ouyang et al., 2022)</i>	71.1	69.7	70.4	58.1	58.6	58.4	60.6	45.1	51.7	60.1
<i>ChatGPT (OpenAI, 2022)</i>	67.3	66.5	66.9	54.3	56.8	55.5	43.9	49.5	46.5	56.3
<i>gpt-4 (OpenAI, 2023)</i>	73.9	73.5	73.7	60.8	64.7	62.7	49.3	55.7	52.3	62.9
<i>Gold mentions</i>										
<i>dcoref (Lee et al., 2013)</i>	90.0	74.5	81.6	84.2	59.7	70.0	74.4	61.4	67.3	72.9
<i>llama-2-7B-chat (Touvron et al., 2023)</i>	60.3	11.8	19.7	86.8	26.2	40.2	15.9	40.5	22.8	27.6
<i>Llama-2-Chat (Touvron et al., 2023)</i>	86.7	43.8	58.2	88.8	52.2	65.7	24.0	60.3	34.4	52.8
<i>codellama-7B (Rozière et al., 2023)</i>	72.2	70.7	71.5	45.2	68.7	54.5	30.1	32.1	31.1	52.4
<i>CodeLlama (Rozière et al., 2023)</i>	78.5	72.9	75.6	63.5	69.9	66.5	39.0	48.3	43.1	61.7
<i>InstructGPT (Ouyang et al., 2022)</i>	89.6	88.9	89.2	76.0	89.2	79.4	84.8	65.2	73.7	80.8
<i>ChatGPT (OpenAI, 2022)</i>	88.2	84.4	86.2	79.3	79.3	79.3	65.6	71.2	68.3	77.9
<i>gpt-4 (OpenAI, 2023)</i>	93.8	93.7	93.7	86.5	91.1	88.8	83.5	82.0	82.8	88.4

Table 11: Result on English OntoNotes test set for predicted mentions (top) and gold mentions (bottom). Fully supervised systems are italicized.

Dataset	Lang.	Train	Dev	Test	Toks/Doc (Test)	% Singletons	Domains
OntoNotes ^{en}	English	2802	343	348	489	0.0	News, magazine, transcripts, biblical text
Litbank	English	80	10	10	2105	19.8	Literature (Project Gutenberg)
Character Iden.	English	987	122	192	262	6.4	Movie conversations
WikiCoref	English	0	0	30	1996	0.0	Wikipedia
QuizBowlCoref	English	0	0	400	126	26.0	Trivia questions
OntoNotes ^{zh}	Chinese	1729	254	218	412	0.0	News, magazine
OntoNotes ^{ar}	Arabic	359	44	44	681	0.0	News
SemEval ^{ca}	Catalan	829	142	167	293	45.9	News
SemEval ^{nl}	Dutch	145	23	72	666	13.0	Magazine
SemEval ^{it}	Italian	80	18	46	891	61.9	Wikipedia, blogs, news, dialogues
SemEval ^{es}	Spanish	875	140	168	303	47.7	News
WSJ-1989	English	0	0	56	632	0.0	News (Wall Street Journal articles)
WSJ-2019	English	0	0	56	858	0.0	News (Wall Street Journal articles)
WSJ-2023	English	0	0	56	688	0.0	News (Wall Street Journal articles)

Table 12: Detailed statistics of datasets. Following prior work on multilingual coreference resolution (Bohnet et al., 2022; Xia and Van Durme, 2021), we excluded SemEval English as the data overlaps with English OntoNotes, and SemEval-2010 German due to licensing issues. We also excluded GAP, WSC, and PreCo from the benchmarks in Toshniwal et al. (2021): GAP and WSC due to the simplicity of these datasets as well as being extensively studied by previous work, and PreCo for not being able to obtain it despite contacting the authors.

Model	Prior Work	Description
InstructGPT	Ouyang et al. (2022)	pretrained on massive amount of data
dcoref	Lee et al. (2013)	deterministic system developed on OntoNotes ^{en} ; 0-shot on target data
longdoc-PC	Toshniwal et al. (2021)	joint training; 0-shot on target data
TRANSFER-ON	Xia and Van Durme (2021)	trained on OntoNotes ^{en} ; few-shot on target data
SpanBERT	Xia and Van Durme (2021)	pretrained on unlabeled corpus; few-shot on target data
TRANSFER-EN	Xia and Van Durme (2021)	trained on OntoNotes ^{en} ; few-shot on target data
XML-R	Xia and Van Durme (2021)	pretrained on unlabeled corpus; few-shot on target data

Table 13: Summary of models

Mention Detection: (InstructGPT)	[Nine years] ago today , allegations of infidelity almost derailed [Bill Clinton] 's journey from hope to the White House. [Bob Glascoff] tracks the life of the "other woman" in [today's edition] of "Headliners." On [January 1992] , [Gennifer Flowers] claims [she] had a 12 - year affair with [Bill Clinton] . Although Mr. Clinton denied having a relationship with Flowers , [he] did speak of bringing "pain" to [his] marriage during a [joint television interview] with [his] wife, Hillary . Flowers went on "[Larry King Live]" in 1998 at the height of the [impeachment proceedings] against Mr. Clinton . [She] said [she] felt vindicated when [he] admitted under oath that [he] 'd had an affair with [her] after denying [it] for years. A [federal judge] recently dismissed a [defamation lawsuit] [she] brought against [Hillary Rodham Clinton] and two former presidential aides. With "Headliners," I'm [Bob Glascoff] .
Predicted Mentions: (InstructGPT)	Nine years ago today , allegations of infidelity almost derailed [Bill Clinton's] ₃ journey from hope to the White House. Bob Glascoff tracks the life of the "other woman" in today's edition of "[Headliners] ₅ ." On January 1992, [Gennifer Flowers] ₆ claims [she] ₆ had a 12-year affair with [Bill Clinton] ₃ . Although [Mr. Clinton] ₃ denied having a relationship with [Flowers] ₆ , [he] ₃ did speak of bringing "pain" to [his] ₃ marriage during a joint television interview with [his] ₃ wife, Hillary . [Flowers] ₆ went on "[Larry King Live]" ₅ in 1998 at the height of the impeachment proceedings against [Mr. Clinton] ₃ . [She] ₆ said [she] ₆ felt vindicated when [he] ₃ admitted under oath that [he] ₃ 'd had [an affair with [her]] ₆ ₆ after denying [it] ₆ for years. A federal judge recently dismissed a defamation lawsuit [she] ₆ brought against Hillary Rodham Clinton and two former presidential aides. With "[Headliners] ₅ ," I'm Bob Glascoff .
Gold Mentions: (dcoref)	Nine years ago [today] ₁ , allegations of infidelity almost derailed [Bill Clinton's] ₃ journey from hope to the White House. Bob Glascoff tracks the life of the "other woman" in [today's] ₁ edition of "[Headliners] ₅ ." On January 1992, [Gennifer Flowers] ₆ claims [she] ₆ had a 12 - year affair with [Bill Clinton] ₃ . Although [Mr. Clinton] ₃ denied having a relationship with [Flowers] ₆ , [he] ₃ did speak of bringing "pain" to [his] ₃ marriage during a joint television interview with [his] ₃ wife, Hillary . [Flowers] ₆ went on "Larry King Live" in 1998 at the height of the impeachment proceedings against [Mr. Clinton] ₃ . [She] ₆ said [she] ₆ felt vindicated when [he] ₃ admitted under oath that [he] ₃ 'd had [an affair with [her]] ₆ ₈ after denying [it] ₈ for years. A federal judge recently dismissed a defamation lawsuit [she] ₆ brought against Hillary Rodham Clinton and two former presidential aides. With "[Headliners] ₅ ," [I] ₅ 'm Bob Glascoff.
Gold Mentions: (InstructGPT)	Nine years ago [today] ₁ , [allegations of infidelity] ₂ almost derailed [Bill Clinton's] ₃ journey from hope to the White House. [Bob Glascoff] ₄ tracks the life of [the "other woman"] ₆ in [today's] ₁ edition of "[Headliners] ₅ ." On January 1992, [Gennifer Flowers] ₆ [claims] ₂ [she] ₆ had a 12 - year affair with [Bill Clinton] ₃ . Although [Mr. Clinton] ₃ denied having a relationship with [Flowers] ₆ , [he] ₃ did speak of bringing "pain" to [his] ₃ marriage during a joint television interview with [his] ₃ wife, Hillary] ₇ . [Flowers] ₆ went on "Larry King Live" in 1998 at the height of the impeachment proceedings against [Mr. Clinton] ₃ . [She] ₆ said [she] ₆ felt vindicated when [he] ₃ admitted under oath that [he] ₃ 'd had [an affair with [her]] ₆ ₂ after denying [it] ₂ for years. A federal judge recently dismissed a defamation lawsuit [she] ₆ brought against [Hillary Rodham Clinton] ₇ and two former presidential aides. With "[Headliners] ₅ ," [I] ₄ 'm Bob Glascoff.
Gold Output:	Nine years ago [today] ₁ , [allegations of infidelity] ₂ almost derailed [Bill Clinton's] ₃ journey from hope to the White House. [Bob Glascoff] ₄ tracks the life of [the "other woman"] ₆ in [today's] ₁ edition of "[Headliners] ₅ ." On January 1992, [Gennifer Flowers] ₆ [claims] ₂ [she] ₆ had a 12 - year affair with [Bill Clinton] ₃ . Although [Mr. Clinton] ₃ denied having a relationship with [Flowers] ₆ , [he] ₃ did speak of bringing "pain" to [his] ₃ marriage during a joint television interview with [his] ₃ wife, Hillary] ₇ . [Flowers] ₆ went on "Larry King Live" in 1998 at the height of the impeachment proceedings against [Mr. Clinton] ₃ . [She] ₆ said [she] ₆ felt vindicated when [he] ₃ admitted under oath that [he] ₃ 'd had [an affair with [her]] ₆ ₈ after denying [it] ₈ for years. A federal judge recently dismissed a defamation lawsuit [she] ₆ brought against [Hillary Rodham Clinton] ₇ and two former presidential aides. With "[Headliners] ₅ ," [I] ₄ 'm Bob Glascoff.

Table 14: A qualitative examples of InstructGPT and dcoref coreference predictions under various setting: Row 1 shows InstructGPT mention detection result; Row 2 shows InstructGPT coreference results using dcoref predicted mentions; Row 3 and 4 show dcoref and InstructGPT coreference results using gold mentions; and last row is the gold output.

Mention Detection: (InstructGPT)	<p>[Mai Po Marshes] adjacent to [Wetland Park] is a [major wildlife habitat] within [Asia]. Each year, over 50,000 migratory birds fly over [Hong Kong]'s skyscrapers and choose to roost for winter here. As a result, [three different types of aviaries] were built in [[Hong Kong] [Wetland Park]]. These have become the best spots to observe birds. Among [common birds], a rather special one is the black-faced spoonbill. [It] is [an endangered bird species] throughout the [world]. Uh-huh. Ah, there are only about 1,500 in the [world]. Wow. Um, however, each year, about [two to three hundred] of [them] come to [Hong Kong] to spend the winter. Some of [them], er, have stayed in [[Hong Kong] [Wetland Park]]. Uh-huh. So, [our] park's logo is unique, featuring this black-faced spoonbill, [which] hopefully can draw [people's attention]. Uh-huh.</p>
Gold Mentions: (dcoref)	<p>Mai Po Marshes adjacent to [Wetland Park]₀ is a major wildlife habitat within Asia. Each year, over 50,000 migratory birds fly over [Hong Kong's]₁ skyscrapers and choose to roost for winter here. As a result, three different types of aviaries were built in [Hong Kong Wetland Park]₀. These have become the best spots to observe birds. Among common birds, [a rather special one]₂ is the black-faced spoonbill. [It]₂ is an endangered bird species throughout [the world]₃. Uh-huh. Ah, there are only about 1,500 in [the world]₃. Wow. Um, however, each year about two to three hundred of [them]₄ come to [Hong Kong]₁ to spend the winter. Some of [them]₄, er, have stayed in [Hong Kong Wetland Park]₀. Uh-huh. So, [our park's]₀ logo is unique, featuring this black-faced spoonbill, which hopefully can draw people's attention. Uh-huh.</p>
Gold Mentions: (InstructGPT)	<p>Mai Po Marshes adjacent to Wetland Park is a major wildlife habitat within Asia. Each year, over 50,000 migratory birds fly over [Hong Kong's]₁ skyscrapers and choose to roost for winter here. As a result, [three different types of aviaries]₂ were built in [Hong Kong Wetland Park]₁. [These]₂ have become the best spots to observe birds. Among common birds, [a rather special one]₃ is the black-faced spoonbill. [It]₃ is an endangered bird species throughout [the world]₄. Uh-huh. Ah, there are [only about 1,500 in [the world]₄]₄. Wow. Um, however, each year, [about two to three hundred of [them]₃]₃ come to [Hong Kong]₁ to spend the winter. Some of [them]₃, er, have stayed in [Hong Kong Wetland Park]₁. Uh-huh. So, [our park's]₁ logo is unique, featuring this black-faced spoonbill, which hopefully can draw people's attention. Uh-huh.</p>
Gold Output:	<p>Mai Po Marshes adjacent to [Wetland Park]₂ is a major wildlife habitat within Asia. Each year, over 50,000 migratory birds fly over [Hong Kong's]₀ skyscrapers and choose to roost for winter here. As a result, [three different types of aviaries]₁ were built in [Hong Kong Wetland Park]₂. [These]₁ have become the best spots to observe birds. Among common birds, [a rather special one]₃ is the black-faced spoonbill. [It]₃ is an endangered bird species throughout [the world]₄. Uh-huh. Ah, there are [only about 1,500 in [the world]₄]₅. Wow. Um, however, each year, [about two to three hundred of [them]₅]₆ come to [Hong Kong]₀ to spend the winter. Some of [them]₆, er, have stayed in [Hong Kong Wetland Park]₂. Uh-huh. So, [our park's]₂ logo is unique, featuring this black-faced spoonbill, which hopefully can draw people's attention. Uh-huh.</p>

Table 15: An example where InstructGPT struggles to resolve coreference, even on gold mentions. The most notable case is with nested mentions (e.g., [about two to three hundred of [them]₃]₃).