

Cross-thread critical sections and efficient dynamic race prediction methods

MARTIN SULZMANN, Karlsruhe University of Applied Sciences, Germany
PETER THIEMANN, University of Freiburg, Germany

The lock set method and the partial order method are two main approaches to guarantee that dynamic data race prediction remains efficient. There are many variations of these ideas. Common to all of them is the assumption that the events in a critical section belong to the same thread.

We have evidence that critical sections in the wild do extend across thread boundaries even if the surrounding acquire and release events occur in the same thread. We introduce the novel concept of a cross-thread critical section to capture such situations, offer a theoretical comprehensive framework, and study their impact on state-of-the-art data race analyses.

For the sound partial order relation WCP we can show that the soundness claim also applies to cross-thread critical sections. For DCtp the occurrence of cross-thread critical sections invalidates the soundness claim. For complete partial order relations such as WDP and PWR, cross-thread critical sections help to eliminate more false positives. The same (positive) impact applies to the lock set construction.

Our experimental evaluation confirms that cross-thread critical sections arise in practice. For the complete relation PWR, we are able to reduce the number of false positives. The performance overhead incurred by tracking cross-thread critical sections slows down the analysis by 10%-20%, on average.

Additional Key Words and Phrases: shared memory concurrency, dynamic analysis, data race, happens-before

1 INTRODUCTION

Concurrent programming techniques have become essential to fully leverage the potential of modern multicore architectures. However, concurrent programming is notoriously challenging and requires programmers to exercise great care to avoid bugs. One significant source of bugs in concurrent programs is data races, which occur when multiple threads read and write shared data concurrently without proper synchronization. Fortunately, there is a wealth of research and tools available to assist in detecting and predicting the presence of data races.

Dynamic analysis is one of the methods used for predicting data races. This approach aims to anticipate a program's behavior by examining a trace of events generated during the execution of a single program run that terminates successfully. These events typically involve acquiring or releasing locks or performing read and write operations on global variables. By analyzing this program trace, dynamic data race analysis can identify potential data races and help programmers identify areas where synchronization mechanisms, such as locks or atomic operations, should be employed to ensure thread safety and prevent bugs.

The key difficulty lies in predicting whether the trace can be reordered such that two conflicting memory operations appear adjacent to each other, but without affecting causal relationships between the events. This prediction should be accurate and efficient, where accuracy refers to the analysis yielding a reasonable number of false positives and/or false negatives. False positives occur when the analysis incorrectly issues a data race warning, while false negatives occur when the analysis fails to detect actual harmful reorderings.

Authors' addresses: Martin Sulzmann, Karlsruhe University of Applied Sciences, Moltkestrasse 30, Karlsruhe, 76133, Germany, martin.sulzmann@gmail.com; Peter Thiemann, University of Freiburg, Georges-Köhler-Allee 079, Freiburg, 79110, Germany, thiemann@acm.org.

Efficiency pertains to the scalability of the analysis to handle large program traces without significant performance or resource degradation. Unfortunately, the naive approach of exhaustive exploration to identify such reorderings is doomed as the non-deterministic nature of concurrent programs often allows for an exponentially large number of reorderings. Striking the right balance between accuracy and efficiency is crucial in developing effective techniques for predicting data races in concurrent programs.

There are two main approaches to retain efficiency. *Partial-order-based methods* derive a partial order from the program trace, the earliest instance being Lamport’s happens-before relation [Lamport 1978]. This relation orders a lock release before any acquisition of the same lock in the rest of the trace. Events belonging to the same thread are ordered according to the program order reflected in the trace. Two events are considered concurrent unless they are ordered by this relation. If conflicting memory operations are deemed concurrent, the method flags them as candidates for a data race. *Methods based on lock sets* [Dinning and Schonberg 1991] infer for each event the set of locks held by the current thread at this event. Two events are considered concurrent unless they are protected by a common lock. A data race warning is issued if the lock sets of conflicting memory operations are disjoint. For both approaches there are numerous refinements of the original ideas.

The standard lock set method has no false negatives, but it may exhibit false positives. To reduce the number of false positives one popular approach is to combine it with some form of partial order relation. A data race warning is only issued if the lock sets are disjoint and conflicting events are unordered. For example, the data race detection tools Eraser [Savage et al. 1997] and TSan V1 [Serebryany and Iskhodzhanov 2009] include fork/join dependencies that must be respected under any trace reordering. The partial orders WDP [Genç et al. 2019] and PWR [Genç et al. 2019; Sulzmann and Stadtmüller 2020] additionally include some dependencies among critical sections. The goal of WDP and PWR is to strengthen must-dependencies such as fork/join without ruling out viable trace reorderings. Analyses based on WDP or PWR remain complete (no false negatives).

In contrast, partial order-based methods can lead to false negatives. For example, HB is sensitive to the order of lock operations executed by the program. It is unable to predict races that result from schedules that reorder lock acquisition. CP [Smaragdakis et al. 2012] and its improvement WCP [Kini et al. 2017a] are refinements of HB that do consider schedules that acquire locks in a different order. Thus, some races, but not necessarily all, that result from alternative schedules can be found. SDP [Genç et al. 2019] is a further relaxation of WCP to detect even more races. CP, WCP, and SDP weaken the happens-before relation as much as possible without admitting invalid trace reorderings. DC [Roemer et al. 2018] is a partial order that is weaker than WCP, but stronger than WDP. It requires a subsequent vindication phase to reduce the number of false positives by attempting to construct a reordered trace that exhibits the race. DC_{tp} [Ogles et al. 2019] is a seemingly simpler variant which is specialized for single locks.

There are further approaches to dynamic data race analysis that have scalability issues for large programs. We discuss them in the related work (Section 8).

All of the aforementioned works rely on the same traditional concept of a critical section. By default, a critical section refers to a *sequence of events within a single thread*, bracketed by an acquire and the next following release operation on the same lock. We generalize critical sections to sequences of *events that must happen between an acquire and its corresponding release operation*. Crucially, our notion of a *cross-thread critical section* may also include events from threads other than the acquiring thread, but we still assume that the acquire and its corresponding release event come happen in the same thread! These situations arise in practice and affect the accuracy of data race prediction methods, thereby impacting the outcome of the analysis.

This work makes the following contributions:

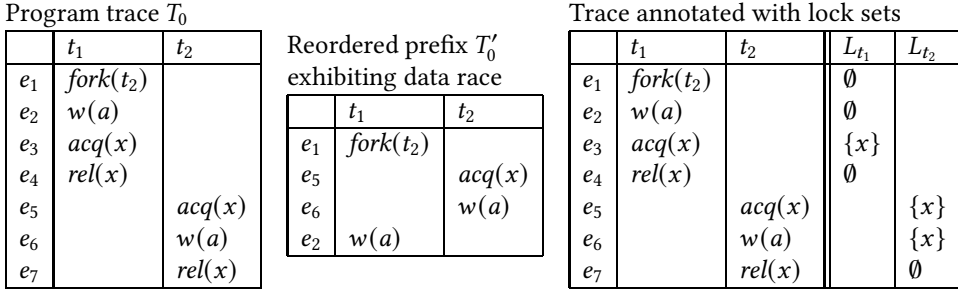


Fig. 1. Data race prediction using lock sets

- We propose the novel concept of a cross-thread critical section (CTCS) and introduce the associated lock set construction (Section 4).
- We study the theoretical impact of CTCS critical sections on lock set-based dynamic data race prediction methods (section 5). We show that they never increase the number of false positives. False negatives may arise, but we give a new thread-indexed CTCS construction that retains the no-false-negatives property of the standard lock set-based approach.
- We study the impact of CTCS on several popular, scalable partial order-based dynamic data race prediction methods. We find that the pure HB method is not affected by CTCS; the soundness proof of WCP can be adapted to CTCS; WDP and PWR can be adapted while retaining completeness; soundness of DC_{tp} , DC in the context of task parallel programs, is compromised and it is not clear to the authors how to fix it.
- Section 7 gives empirical evidence that CTCS occur in practice in a standard suite of traces and decrease the number of false positives in some instances. Our implementation relies on PWR. The adaptation to CTCS results in a slowdown of 20% on the average (worst case slowdown is 2.7x).

Section 2 presents an informal, example-driven overview of the contributions of the paper. Section 3 establishes mathematical preliminaries and notation.

2 OVERVIEW

This section offers an informal overview of the impact of cross-thread critical sections on dynamic data race prediction methods considered in the literature. As mentioned in the introduction, we concentrate on scalable methods, hence we review lock set-based methods, offer a first definition of cross-thread critical sections, and then discuss a selection of partial order-based methods for dynamic race prediction.

2.1 Lock sets for data race prediction

We review the use of lock sets for data race prediction with the example in figure 1. The diagram on the left represents a program run by a trace of events T_0 . It visualizes the interleaved execution of the program using a tabular notation with a separate column for each thread and one event per row. The textual order (from top to bottom) reflects the observed temporal order of events.

Each event takes place in a specific thread and represents an operation (formally defined in section 3). Operation $fork(t)$ starts a new thread with ID t and operation $join(t)$ synchronizes with the termination of thread t . We use x, y, z for locks and a, b, c for shared variables. Operations $acq(x)/rel(x)$ acquire/release lock x . Operations $r(a)/w(a)$ are shared memory read and write

Trace annotated with (standard) lock sets L and (cross-thread) lock sets C

	t_1	t_2	t_3	L_{t_1}	L_{t_2}	L_{t_3}	C_{t_1}	C_{t_2}	C_{t_3}
e_1	$fork(t_3)$			\emptyset			\emptyset		
e_2	$acq(x)$			$\{x\}$			$\{x\}$		
e_3	$fork(t_2)$			$\{x\}$			$\{x\}$		
e_4		$w(a)$			\emptyset			$\{x\}$	
e_5	$join(t_2)$			$\{x\}$			$\{x\}$		
e_6	$rel(x)$			\emptyset			\emptyset		
e_7			$acq(x)$			$\{x\}$			$\{x\}$
e_8			$w(a)$			$\{x\}$			$\{x\}$
e_9			$rel(x)$			\emptyset			\emptyset

Fig. 2. Cross-thread critical sections

operations on a . The same operation may appear multiple times in a trace, thus we use indices as in e_i to uniquely identify events in the trace.

Trace T_0 contains two conflicting memory operations in events e_2 and e_6 . Event e_6 is protected by lock x whereas event e_2 is unprotected. The conflict in T_0 appears to be harmless because all operations in thread t_1 are completed before the operations in thread t_2 are executed. However, there is a reordered prefix of T_0 (shown in T'_0) that puts the two write operations back to back, which indicates a data race.

Instead of considering all possible reorderings, the lock set method computes for each event the set of locks held when processing this event. Lock sets L_t are computed separately for each thread t . Initially, all lock sets are empty. Processing operation $acq(x)$ in thread t adds x to L_t . Processing operation $rel(x)$ in thread t removes x from L_t .

The right diagram in figure 1 shows trace T_0 annotated with lock sets. Columns L_{t_1} and L_{t_2} track the respective lock set after the operation in the trace. The observation that the lock sets of the conflicting events e_2 and e_6 are disjoint results in a data race warning.

2.2 Cross-thread critical sections

The use of locks allows us to regard certain subtraces as critical sections. We identify a critical section by an acquire event a and its matching release event r . Events e between a and r are part of this critical section, written $e \in CS(a, r)$. The standard assumption is that e , a , and r belong to the same thread and e appears between a and r in the textual order of the trace. This assumption goes back to the original intuition of a critical section as a sequence of instructions that is executed atomically [Dijkstra 1965]. In the present context, we need a more general definition.

Consider the sequence of events $[e_2, \dots, e_6]$ in figure 2. We regard this sequence as a critical section that extends across multiple threads. We call such critical sections *cross-thread* critical sections, written $CS_C(\cdot)$, characterized as follows:

- (1) r is the matching release for a with no other release on the same lock in between.
- (2) a and r belong to the same thread.
- (3) $e \in CS_C(a, r)$ if $a <_{mhb} e <_{mhb} r$ where $<_{mhb}$ denotes the *must* happen-before relation.

The novelty lies in the third condition. Event e can be in any thread as long as the acquire a must happen-before e , which in turn must happen-before the release r . That is, e is surrounded by a and r in any valid reordering of the trace. In our example, this ordering is guaranteed by a fork-join

dependency, but any other form of happens-before dependency (like write-read) would also work. Formal definitions of (cross-thread) critical sections are given in section 4.

Cross-thread critical sections are a significant addition to the toolbox of lock set-based data race prediction. Returning to the example in figure 2, we can see that the lock set of e_4 is empty (column L_{t_3}) if we rely on the standard lock set construction. This outcome leads to a data race warning between e_4 and e_8 that cannot be materialized by a reordering, i.e., a false positive. However, with lock sets based on cross-thread critical sections, the lock set of e_4 is $\{x\}$ (column C_{t_3}), which eliminates the false positive.

In section 5 we make this claim formal by showing that a lock set construction based on cross-thread critical sections strictly improves over the standard construction: it exhibits fewer false positives than the standard construction without introducing false negatives.

2.3 Partial order methods for data race prediction

Partial order methods define an ordering, say P , on events in a trace and consider unordered events as concurrent. If conflicting events are unordered they are potentially in a race. Ideally, P would relate events e and f iff e happens before f in any valid reordering of the trace. In this case, P would be *sound* (no false positives) and *complete* (no false negatives). Practical methods give up on soundness or completeness to obtain an efficiently computable relation.

Relations like HB, WCP, and SDP focus on soundness and thus *overapproximate* the must happen-before relation. That is, if e must happen before f , then e is before f in, say, HB. Complete relations like WDP and PWR *underapproximate* the must happen-before relation. That is, if neither e must happen before f nor f before e , then e and f are not ordered by, say, WDP. The relation DC is a bit of an outlier as it is neither sound nor complete.

In the following, we discuss these partial order relations and study the impact of cross-thread critical sections on each of them.

Happens-before. Lamport's happens-before (HB) relation [Lamport 1978] prescribes the trace order for all events in the same thread and that an acquire happens after any release of the same lock that occurs textually before it in the trace:

(PO) $e <_{hb} f$ if e and f are in the same thread and e appears before f in the trace.

(AcqRel) $r <_{hb} a$ if a is an acquire and r a release event on the same lock and r appears before a in the trace.

As an example consider the left trace in figure 3. HB dictates that $e_4 <_{hb} e_5$. Therefore the two conflicting events e_3 and e_7 are HB-ordered and HB reports no race.

Thanks to rule (AcqRel), HB maintains the order of critical sections according to the trace. Therefore HB already takes care of cross-thread critical sections. In the example in figure 2, rule (AcqRel) enforces $e_6 <_{hb} e_7$. Due to the join dependency we also have $e_4 <_{hb} e_5$. By (PO) we conclude that $e_4 <_{hb} e_8$. Hence, cross-thread critical sections neither affect the soundness of HB nor lead to extra false negatives.

The situation is different for approaches that may reorder critical sections.

Weak-causally precedes. The WCP relation (weak-causally precedes) [Kini et al. 2017a] only orders critical sections if they contain conflicting events:

(a) $r_1 <_{wcp} f$ if $e \in CS(a_1, r_1)$, $f \in CS(a_2, r_2)$, $CS(a_1, r_1)$ appears before $CS(a_2, r_2)$ in the trace and e and f are in a conflict.

There are no conflicts between critical sections in Figure 3. The two write events e_3 and e_7 are not WCP-ordered and WCP correctly finds a race, as materialized by the reordering on the right.

	t_1	t_2
e_1	$fork(t_2)$	
e_2	$acq(x)$	
e_3	$w(a)$	
e_4	$rel(x)$	
e_5		$acq(x)$
e_6		$rel(x)$
e_7		$w(a)$

Reordering exhibiting race		
	t_1	t_2
e_1	$fork(t_2)$	
e_5		$acq(x)$
e_6		$rel(x)$
e_2	$acq(x)$	
e_7		$w(a)$
e_3	$w(a)$	

Fig. 3. Comparison between HB and WCP. HB: no race (false negative). WCP: race

	t_1	t_2
e_1	$fork(t_2)$	
e_2	$w(a)$	
e_3	$acq(y)$	
e_4	$w(b)$	
e_5	$rel(y)$	
e_6		$acq(y)$
e_7		$w(b)$
e_8		$rel(y)$
e_9		$w(a)$

Reordering exhibiting race		
	t_1	t_2
e_1	$fork(t_2)$	
e_6		$acq(y)$
e_7		$w(b)$
e_8		$rel(y)$
e_9		$w(a)$
e_2	$w(a)$	

Fig. 4. WCP no race (false negative), SDP race

WCP checks for conflicts using the standard notion of a critical section $CS(\cdot)$. This sounds like trouble in situations as shown in figure 2. Events e_4 and e_8 are in a conflict, but e_4 is not part of a critical section (from WCP's point of view) so that rule (a) is not sufficient to order e_4 before e_8 .

However, WCP imposes two additional rules:

(b) Fork-join dependencies are WCP-ordered.

(c) WCP composes to the left and right with the HB relation. That is, $e <_{wcp} f$ if either $e <_{wcp} g$ and $g <_{hb} f$ or $e <_{hb} g$ and $g <_{wcp} f$.

From (b) we obtain $e_4 <_{wcp} e_5$. The happens-before relation yields $e_5 <_{hb} e_8$. Thus, we derive $e_4 <_{wcp} e_8$ via rule (c). We observe that WCP is unaware of cross-thread critical sections when applying rule (a). Thanks to the additional rules (b) and (c), WCP will not falsely issue a race warning, so its soundness is not affected for this example.

Strong dependently precedes. The SDP relation (strong dependently precedes) [Genç et al. 2019] relaxes WCP with the goal to eliminate some false negatives. To this end, SDP modifies WCP's rule (a) to ignore conflicts between write operations:

(a') $r_1 <_{sdp} f$ if $e \in CS(a_1, r_1)$, $f \in CS(a_2, r_2)$, $CS(a_1, r_1)$ appears before $CS(a_2, r_2)$ in the trace and e and f are in a conflict and either e or f is a read operation.

The example in figure 4 illustrates the difference. For WCP, we find $e_6 <_{wcp} e_8$ via rule (a) and by applying rule (c) we obtain that $e_3 <_{wcp} e_{10}$. So, WCP is unable to detect the race between conflicting events e_3 and e_{10} . In contrast, SDP replaces rule (a) by rule (a') with the result that e_3 and e_{10} are unordered under SDP and the race is detected.

	t_1	t_2	t_3
e_1	$fork(t_3)$		
e_2	$acq(x)$		
e_3	$fork(t_2)$		
e_4		$acq(y)$	
e_5		$rel(y)$	
e_6	$join(t_2)$		
e_7	$w(a)$		
e_8	$rel(x)$		
e_9			$acq(y)$
e_{10}			$acq(x)$
e_{11}			$rel(x)$
e_{12}			$w(a)$
e_{13}			$rel(y)$

	t_1	t_2	t_3
e_1	$fork(t_3)$		
e_2	$acq(x)$		
e_3	$fork(t_2)$		
e_9			$acq(y)$
e_{10}			$acq(x)$
e_4		$acq(y)$	

Fig. 5. Trace with no predictable race, nor a predictable deadlock

Moreover, SDP does not order the conflicting events e_5 and e_8 . This conflict would be a false positive, but SDP does not report it because the lock sets of e_5 and e_8 are not disjoint.

WCP soundness in the presence of cross-thread critical sections. WCP is (weakly) sound in the following way [Genç et al. 2019; Kini et al. 2017a]: If some trace exhibits a WCP-race then either there is a predictable race or a predictable deadlock. This property applies to the first race reported. Predictable race means that we can reorder the trace such that the two conflicting events appear right next to each other. Predictable deadlock means that a set of threads is blocked because each thread fails to acquire a lock because this lock has been acquired by some of the other threads.

The WCP relation is based on the standard definition of critical sections. Hence, we ask the question if cross-thread critical sections threaten soundness of WCP. Consider the trace in figure 5.

The conflicting events are not in a predictable race as there is no reordering under which we can place them next to each other, but there is a reordering that gets stuck (shown on the right of figure 5). In this reordering, thread t_2 attempts to acquire lock y , which is held by t_3 and thread t_3 attempts to acquire lock x , which is held by t_1 . See the highlighted blocked operations.

However, this form of *stuckness* is not a predictable deadlock. The difference to a (standard) predictable deadlock situation is that further threads, beyond the deadlocked threads t_2 and t_3 , are involved. Lock x is held by thread t_1 , not by thread t_2 , due to the cross-thread critical section.

We conclude that the standard notion of a predictable deadlock is insufficient in general to capture all stuck situations that arise due to cycles among acquire operations. Fortunately, WCP imposes strong conditions so that the conflicting events e_7 and e_{12} are ordered under WCP.

Rule (a) does not apply because conflicting events e_7 and e_{12} are not part of critical sections that share the same lock. From rule (b) we obtain $e_5 <_{wcp} e_6$. In combination with rule (c) we find that $e_2 <_{wcp} e_{11}$. At this point, it seems that e_7 and e_{12} are not ordered under WCP. However, WCP imposes the following fourth rule.

(d) $r_1 <_{wcp} r_2$ if $a_1 <_{wcp} r_2$ for critical sections $CS(a_1, r_1)$ and $CS(a_2, r_2)$.

Thus, we can conclude that $e_8 <_{wcp} e_{11}$. In combination with rule (c) we then obtain that $e_7 <_{wcp} e_{12}$.

	t_1	t_2	t_3	t_4
e_1	$fork(t_3)$			
e_2	$acq(x)$			
e_3	$w(a)$			
e_4	$fork(t_2)$			
e_5		$w(b)$		
e_6	$join(t_2)$			
e_7	$rel(x)$			
e_8			$acq(x)$	
e_9			$fork(t_4)$	
e_{10}				$w(b)$
e_{11}			$r(a)$	
e_{12}			$rel(x)$	

Fig. 6. DC_{tp} race (false positive), loosely released cross-thread critical section

In appendix A, we examine the WCP soundness proof in detail. The proof only assumes standard critical sections. We show which parts of the proofs are affected and show how the arguments can be generalized to take into account cross-thread critical sections. The same observations should apply to SDP as well but we have not yet fully worked out all details.

Does-not-commute for task parallel programs. The does-not-commute (DC) relation [Roemer et al. 2018] omits rule (c) from WCP, i.e., DC does not compose with HB. This modification leads to false positives, even for the first race reported. Ogles et al. [2019] consider the variant DC_{tp} in the context of task parallel programs. DC_{tp} applies the same partial order rules as DC but assumes that there is a single lock only. Hence, a successful program run will not end in a deadlock. We might expect that it becomes easier to obtain a soundness result as we do not need to consider the case of a predictable deadlock. This is not the case.

For the example in figure 2, DC_{tp} wrongly claims that there is a race. The two conflicting events e_4 and e_8 are unordered under DC_{tp} , because (a) DC_{tp} uses the standard notion of a critical section (like WCP and SDP), and (b) DC_{tp} does not compose with HB (unlike WCP and SDP). We conclude that DC_{tp} is unsound in the presence of cross-thread critical sections.

We might hope to restore soundness for DC_{tp} by adjusting rule (a) to replace standard critical sections $CS(\cdot)$ with cross-thread critical sections $CS_C(\cdot)$.

(a'') $r_1 <_{dc} f$ if $e \in CS_C(a_1, r_1)$, $f \in CS_C(a_2, r_2)$, $CS_C(a_1, r_1)$ appears before $CS_C(a_2, r_2)$ in the trace and e and f are in a conflict.

This change eliminates the false positive in figure 2, but is insufficient in general, as demonstrated with the trace in figure 6. The conflicting events e_5 and e_{10} are in a DC_{tp} race, but this race is not predictable. Event e_{10} is covered by a “loosely released” critical section. In combination with the write-read dependency among e_3 and e_{11} , we conclude that e_7 must happen-before e_8 .

In summary, we see that the adjustments to obtain soundness for DC_{tp} are non-trivial as we also need to reason about further variants of cross-thread critical sections. Hence, we focus our attention on partial order methods that are generally unsound (considering the first race reported) with the goal to eliminate as many false positives as possible.

WDP and PWR. The relations WDP [Genç et al. 2019] and its improvement PWR [Sulzmann and Stadtmüller 2020] underapproximate must happen-before relations by weakening rule (a):

(a'') $r_1 <_{pwr} f$ if $e \in CS(a_1, r_1)$, $f \in CS(a_2, r_2)$, $CS(a_1, r_1)$ appears before $CS(a_2, r_2)$ in the trace and e is a write and f is a read operation.

If $e <_{pwr} f$, then e appears before f in any correct reordering. Hence, a partial order-based race check using WDP and PWR guarantees that there are no false negatives. Like SDP, they make use of the lock set to eliminate some, but not all false positives.

WDP and PWR remain complete (no false negatives) in the presence of cross-thread critical sections, but we can improve their precision (eliminate more false positives). For example, in figure 2 the conflicting events e_4 and e_8 are unordered under PWR and their standard lock set is disjoint. By using cross-thread lock sets we can eliminate false positives like this one. We can also incorporate cross-thread critical sections into rule (a'') to eliminate further false positives. Details are discussed in section 6.

2.4 Implementation and experiments

For our experimental evaluation we enhanced the PWR data race predictor so that PWR is aware of cross-thread critical sections. The goal was to answer the following research questions.

RQ1 Can we compute cross-thread critical sections and the associated lock sets efficiently?

RQ2 What is the effect on the analysis results of incorporating cross-thread critical section?

As PWR underapproximates the must happen-before relation, we can use PWR to underapproximate the cross-thread lock set. That is, a PWR-computed cross-thread lock set may be smaller than the “true” cross-thread lock set, but the computation can be done efficiently and our experiments confirm that there are a number of examples where we can eliminate false positives. Details are discussed in section 7.

3 PRELIMINARIES

Events and Traces. We consider concurrent programs with shared variables and locks. Concurrency primitives are *acquire* and *release* of locks (mutexes) as well as *fork* to start a new thread and *join* to synchronize with its termination.

Definition 3.1 (Events and Traces).

T	::=	$[\] \mid e : T$	Traces
e	::=	(α, t, op)	Events
op	::=	$r(a) \mid w(a) \mid acq(x) \mid rel(x) \mid fork(t) \mid join(t)$	Operations
t, s, u	::=	$t_1 \mid t_2 \mid \dots$	Thread ids
x, y, z	::=	$x_1 \mid \dots$	Lock variables
a, b, c	::=	$a_1 \mid \dots$	Shared variables
α, β, δ	::=	$1 \mid 2 \mid \dots$	Unique event identifiers

A trace T is a list of events reflecting a single execution of a concurrent program under the sequential consistency memory model [Adve and Gharachorloo 1996]. We write $[o_1, \dots, o_n]$ for a list of objects as a shorthand of $o_1 : \dots : o_n : [\]$ and use the operator $++$ for list concatenation.

An event e is represented by a triple (α, t, op) where α is a unique event identifier, op is an operation, and t is the thread id in which the operation took place. The main thread has thread id t_1 . The unique event identifier allows us to unambiguously identify events in case of trace reordering.

The operations $r(a)$ and $w(a)$ denote read and write on a shared variable a . We let $acq(x)$ and $rel(x)$ denote acquire and release of a lock x . We write $fork(t)$ for the creation of a new thread with thread id t . We write $join(t)$ for a join with a thread with thread id t .

Our tabular notation for traces has one column per thread. The events for a thread are lined up in the thread's column and the trace position corresponds to the row number.

We write $e = (t, op)$ as a shorthand for $e = (\alpha, t, op)$ and $thread(e) = t$ to extract the thread id from this event. The notation $e \in T$ indicates that $T = [e_1, \dots, e_n]$ and $e = e_k$, for some $1 \leq k \leq n$. In this case, we define $pos_T(e) = k$. The set of events in a trace is $events(T) = \{e \mid e \in T\}$. The set of thread ids in a trace is $threads(T) = \{thread(e) \mid e \in T\}$.

For trace T and events $e, f \in events(T)$, we define $e <_{tr}^T f$ if $pos_T(e) < pos_T(f)$. We write $e <_{tr} f$ if the context uniquely identifies the trace T .

Well-formedness. Traces must be well-formed. We adopt the sequential consistency conditions for concurrent objects of Huang and others [Huang et al. 2014]. For example, events can only happen in a thread between its creation and its termination, each release must be preceded an acquire on the same lock etc.

Definition 3.2. A trace T is *well-formed* if the following conditions are satisfied:

- Lock-1:** For each pair of acquire events $a = (t, acq(y)), a' = (s, acq(y)) \in T$ where $a <_{tr} a'$ there exists a release event $r = (t, rel(y)) \in T$ such that $a <_{tr} r <_{tr} a'$.
- Lock-2:** For each release event $r = (t, rel(y)) \in T$ there exists an acquire $a = (t, acq(y)) \in T$ such that $a <_{tr} r$ and there is no release event $r' = (s, rel(y)) \in T$ with $a <_{tr} r' <_{tr} r$.
- Fork-1:** For each thread id $t \neq t_1$ there exists at most one event with operation $fork(t)$ in trace T and $fork(t_1)$ does not appear at all.
- Fork-2:** For each event $e = (t, op) \in T$ where $t \neq t_1$ there exists $f = (s, fork(t)) \in T$ where $f <_{tr} e$.
- Join:** For each join event $e = (s, join(t)) \in T$ we have that $s \neq t$ and for all events $f = (t, op) \in T$ we find that $f <_{tr} e$.

Conditions **Lock-1** and **Lock-2** together state that a correct lock admits an alternating sequence of acquire and release operations, where each acquire and release pair is from the same thread. Locks do not have to be released at the end of a trace.

Condition **Fork-1** states that a thread can be created at most once. Condition **Fork-2** states that each thread except the main thread is preceded by a fork event. Both conditions imply that for each event $(\beta, t, fork(s))$ we have $t \neq s$.

Condition **Join** states that all events from a joined thread appear before the join event. There can be several join events $join(t)$ for the same thread t . A join operation $join(t)$ does not necessarily have to appear in the thread that forked thread t .

Example 3.3. The trace in figure 7 is well-formed as all conditions of definition 3.2 are met. The event $join(t_2)$ appears twice, which is unusual, but accepted by our definition.

Trace Reordering and Must-Happen-Before. A trace represents one possible interleaving of concurrent events. In theory, there can be as many interleavings as there are permutations of the original trace. However, not all permutations are feasible in the sense that they could be reproduced by executing the program with a different schedule. In addition to well-formedness, a reordering must guarantee that (a) the program order and (b) last writes are maintained. A reordering maintains program order if the order of events within any thread remains the same. A reordering maintains last writes if any read observes the same write event. The latter ensures that every read obtains the same value, so that the control flow of the program remains the same. We now formalize the criteria for correct reorderings.

	t_1	t_2	t_3
e_1	$fork(t_2)$		
e_2	$fork(t_3)$		
e_3	$acq(x)$		
e_4		$acq(y)$	
e_5		$rel(y)$	
e_6			$acq(z)$
e_7			$join(t_2)$
e_8			$rel(z)$
e_9	$join(t_2)$		
e_{10}	$rel(x)$		

Fig. 7. Example of well-formed trace

From now on, we assume that T is a well-formed trace. The *projection* of T onto thread t is the trace $T' = proj(t, T)$ consisting of all events $e \in T$ with $thread(e) = t$ in the same order as in T . That is, (1) for each $e = (t, op) \in T$ we have that $e \in T'$, and (2) for each $e, f \in T'$, $pos_{T'}(e) < pos_{T'}(f)$ implies $pos_T(e) < pos_T(f)$.

We define T_a^{rw} as the set of all read/write events in T on some shared variable a . We define T^{rw} as the union of T_a^{rw} for all shared variables a .

Take events $e = (t, r(a)), f = (s, w(a)) \in T_a^{rw}$. We say that f is the *last write* for e w.r.t. T if (1) $f <_{tr} e$, and (2) there is no event $g = (u, w(a)) \in T$ such that $f <_{tr} g <_{tr} e$. That is, the last write appears before the read with no other write in between.

Definition 3.4 (Correct Trace Reordering). Trace T' is a *correctly reordered prefix* of T if the following conditions are satisfied:

WF: Trace T' is well-formed and $events(T') \subseteq events(T)$.

PO: For each thread id t , $proj(t, T')$ is a prefix of $proj(t, T)$.

LW: For each read event $e = (\alpha, t, r(a)) \in T'$ where $f = (\beta, s, w(a))$ is the last write for e w.r.t. T , it must be $f \in T'$ and f is also the last write for e w.r.t. T' .¹

By considering all (correct) trace reorderings that are derivable from a given trace, we can determine if an event *must happen before* another event.

Definition 3.5 (Must-Happen-Before Relation). The *must-happen-before relation* $<_{mhb}^T$ is a binary relation on $events(T)$ such that for all distinct events $e, f \in T$, $e <_{mhb}^T f$ if for all correctly reordered traces T' of T such that $e, f \in T'$ we have $e <_{tr}^{T'} f$.

We write $e \parallel_{mhb}^T f$ if neither $e <_{mhb}^T f$ nor $f <_{mhb}^T e$ holds.

We write $e <_{mhb} f$ if trace T is determined by the context.

LEMMA 3.6. The relation $<_{mhb}^T$ is a strict partial ordering on $events(T)$.

PROOF. Irreflexivity is immediate. For transitivity assume that $e <_{mhb}^T f$ and $f <_{mhb}^T g$. That is, for all correctly reordered traces T' , $e <_{tr}^{T'} f$ and $f <_{tr}^{T'} g$. Transitivity of $<_{tr}^{T'}$ yields $e <_{tr}^{T'} g$, which implies $e <_{mhb}^T g$. \square

¹Unique event identifiers are crucial for this condition.

Predictable data races. To talk about data races, we first define when two events are in conflict: they have to take place in different threads, they must refer to read/write operations, and one of them must be a write.

We generally assume that T is a well-formed trace. We omit indices if the trace T is clear from the context.

Definition 3.7. Let $e = (s, op), f = (t, op') \in T$. Events e and f are *conflicting* (notation: $e \times f$) if $s \neq t$ and there exists some variable a such that $op = \text{read}(a)$ and $op' = \text{write}(a)$ or $op = \text{write}(a)$ and $op' = \text{read}(a)$ or $op = \text{write}(a)$ and $op' = \text{write}(a)$.

Conflicting events are harmless as long as they are properly ordered. If they are not sufficiently constrained, we predict a data race.

Definition 3.8 (Predictable Data Race). Let $e, f \in T$ be two conflicting events.

We say that (e, f) are in a *predictable data race* (notation $e \bowtie^T f$) if there exists a correctly reordered prefix T' of T such that e and f appear right next to each other in T' .

Let $G_{DR}^T = \{(e, f) \mid e \bowtie^T f\}$ be the set of predictable data races.

The set G_{DR}^T serves as the ground truth for dynamic data race analysis. It is computable, but no efficient algorithm is known.

4 CROSS-THREAD CRITICAL SECTIONS

Informally, an event is part of a critical section if it must happen between an acquire of a lock and its matching release. In this case we say that the event *holds the lock* with the understanding that an event can hold more than one lock if it is bracketed by more than one matching pair of acquire and release operations. This observation gives rise to the notion of the lock set of an event.

We start this section by defining critical sections according to their standard use in the literature, point out that the fixation on a single thread is an intrinsic shortcoming of this definition, and propose alternative definitions that address this shortcoming.

We assume that T is a well-formed trace with a matching release event for each acquire.² Most definitions are indexed with a trace T ; we omit the index if it is clear from the context.

4.1 Standard Critical Sections

While the notion of a critical section goes back to Dijkstra [Dijkstra 1965], it is hard to find a mathematical definition. The following definition captures the usual understanding in the literature.

Definition 4.1 (Standard Critical Section). Suppose there are events $a = (t, \text{acq}(x)), r = (t, \text{rel}(x)) \in T$ for some lock x . We say that $e \in T$ is in the *standard critical section for lock x guarded by acquire a and release r* , written $e \in CS_S^T(x)^{(a,r)}$ if the following three conditions hold:

CS-BRACKET: $a <_{mhb}^T e <_{mhb}^T r$.

CS-MATCH: There is no release event $r' = (t, \text{rel}(x)) \in T$ and correct reordering T' of T such that $a <_{tr}^{T'} r' <_{tr}^{T'} e$.

CS-SAME-THREAD: $e = (\alpha, t, op)$ for some operation op in the same thread as a and r .

We call a, r a *matching acquire-release pair*. We omit guard events if they are clear from the context. Condition **CS-BRACKET** states that the acquire-release pair a and r must happen before and after e . Condition **CS-MATCH** guarantees that r is the matching release for the acquire event a . Condition **CS-SAME-THREAD** states that e is in the same thread as the acquire-release pair.

Lock x is held by some event e if the event is part of a critical section for lock x .

²This assumption imposes no restriction as we can always add missing release events at the end of a trace.

Definition 4.2 (Standard Locks Held). The *standard lock set* for an event $e \in T$ is defined by $LH_S^T(e) = \{x \mid \exists a, r \in T. e \in CS_S^T(x)^{\langle a, r \rangle}\}$.

4.2 Cross-Thread Critical Sections

Definition 4.1 does not capture all cases where an event must happen between an acquire-release pair because the definition insists that the event must be in the same thread as the acquire-release. As observed in the overview section in figure 2 there are acquire-release pair that guards events across thread boundaries.

Hence, we relax the notion of a critical section to include events from other threads simply by dropping condition **CS-SAME-THREAD**.

Definition 4.3 (Cross-Thread Critical Section). Suppose there are events $a = (t, acq(x)), r = (t, rel(x)) \in T$ for some lock x . We say that $e \in T$ is in the *cross-thread critical section* for lock x guarded by acquire a and release r , written $e \in CS_C^T(x)^{\langle a, r \rangle}$ if the following two conditions hold:

CS-CROSS-1: $a <_{mhb}^T e <_{mhb}^T r$.

CS-CROSS-2: There is no release event $r' = (t, rel(x)) \in T$ and correct reordering T' of T such that $a <_{tr}^{T'} r' <_{tr}^{T'} e$.

Again, a lock x is held by an event e if e is in a cross-thread critical section for x .

Definition 4.4 (Cross-Thread Locks Held). The *cross-thread lock set* for an event $e \in T$ is defined by $LH_C^T(e) = \{x \mid \exists a, r \in T. e \in CS_C^T(x)^{\langle a, r \rangle}\}$.

We revisit the examples from the overview section 2 and compare the critical sections and the lock sets of the standard construction with the ones of the cross-thread construction.

Example 4.5. Recall the trace in figure 2. We find that $CS_S(x)^{\langle e_7, e_9 \rangle} = CS_C(x)^{\langle e_7, e_9 \rangle} = \{e_8\}$ but $CS_S(x)^{\langle e_2, e_6 \rangle} = \{e_3, e_5\}$ and $CS_C(x)^{\langle e_2, e_6 \rangle} = \{e_3, e_4, e_5\}$. Hence, $LH_S(e_8) = LH_C(e_8) = \{x\}$ but $LH_S(e_4) = \{\}$ and $LH_C(e_4) = \{x\}$.

4.3 Properties

It is easy to see that each of the relaxations of the definition of a critical section potentially increases the lock set of each event.

LEMMA 4.6. (1) For each $e \in T$, we have $LH_S^T(e) \subseteq LH_C^T(e)$.

(2) There exist traces T and $e \in T$, such that $LH_S^T(e) \subsetneq LH_C^T(e)$.

PROOF. (1) The inclusions are immediate from the definitions of the different critical sections.

(2) Example 4.5 shows an event where the two lock sets are different. \square

5 DATA RACE PREDICTION BASED ON LOCK SETS

Lock sets can be exploited for data race prediction. To cater for the different lock set constructions in section 4, we define an abstract data race predictor for trace T parameterized by a *lock set function* L that maps *events*(T) to sets of lock variables. We predict a datarace if there is a pair of conflicting events in a trace with disjoint lock sets.

$$P_{DR}^T(L) := \{(e, f) \mid e, f \in T, e \approx f, L(e) \cap L(f) = \emptyset\}$$

Given any lock set function L , we can define false positives and false negatives of the corresponding predictor by comparing it with the ground truth given by G_{DR}^T .³

³The ground truth is usually unknown, but we can nevertheless use it in a mathematical definition.

Definition 5.1 (Data Race Prediction False Positives/False Negatives). Let L be a lock set function. We define $FP^T(L)$, the set of false positives, and $FN^T(L)$, the set of false negatives for data race prediction based on L .

$$\begin{aligned} FP^T(L) &:= P_{DR}^T(L) \setminus G_{DR}^T && \text{predicted, but no data race} \\ FN^T(L) &:= G_{DR}^T \setminus P_{DR}^T(L) && \text{data race, but not predicted} \end{aligned}$$

Next, we compare data race predictors for lock set functions $L_1 \subseteq L_2$ of different precision.⁴ Smaller lock sets lead to larger numbers of predicted dataraces and thus to a potentially larger number of false positives. On the other hand, smaller lock sets result in fewer false negatives.

LEMMA 5.2. *Let L_1, L_2 be lock set functions with $L_1 \subseteq L_2$.*

- (1) $P_{DR}^T(L_2) \subseteq P_{DR}^T(L_1)$,
- (2) $FP^T(L_2) \subseteq FP^T(L_1)$,
- (3) $FN^T(L_1) \subseteq FN^T(L_2)$.

For the proof, we recall a basic result from set theory.

LEMMA 5.3. *Let A, B, C, D be sets with $A \subseteq B$ and $C \subseteq D$. Then, $A \cap C \subseteq B \cap D$.*

PROOF OF LEMMA 5.2.

- (1) If $(e, f) \in P_{DR}^T(L_2)$, then $e \asymp f$ and $L_2(e) \cap L_2(f) = \emptyset$. By lemma 5.3, $L_1(e) \cap L_1(f) = \emptyset$, so that $(e, f) \in P_{DR}^T(L_1)$.
- (2) $FP^T(L_2) = P_{DR}^T(L_2) \setminus G_{DR}^T \stackrel{\text{item 1}}{\subseteq} P_{DR}^T(L_1) \setminus G_{DR}^T = FP^T(L_1)$.
- (3) $FN^T(L_1) = G_{DR}^T \setminus P_{DR}^T(L_1) \stackrel{\text{item 1}}{\subseteq} G_{DR}^T \setminus P_{DR}^T(L_2) = FN^T(L_2)$. □

Each of the lock set constructions in section 4 gives rise to a data race predictor by instantiating the lock set function L accordingly. From lemmas 4.6 and 5.2, we obtain several corollaries. We show that the predictor based on the standard construction $LH_S(\cdot)$ has no false negatives (lemma 5.7). The cross-thread predictor based on $LH_C(\cdot)$ may give rise to false negatives (Corollary 5.6), but they can be amended as shown in Section 5.1. On the other hand, the predictor based on $LH_C(\cdot)$ reports fewer races and has fewer false positives as $LH_S(\cdot)$ (Corollaries 5.4 and 5.5).

COROLLARY 5.4. $P_{DR}(LH_C(\cdot)) \subseteq P_{DR}(LH_S(\cdot))$.

COROLLARY 5.5. $FP(LH_C(\cdot)) \subseteq FP(LH_S(\cdot))$.

COROLLARY 5.6. $FN(LH_S(\cdot)) \subseteq FN(LH_C(\cdot))$.

Corollary 5.6 also follows from the fact that the standard lock set construction has no false negatives.

LEMMA 5.7. $FN(LH_S(\cdot)) = \emptyset$.

PROOF. Suppose that $(e, f) \in FN(LH_S(\cdot))$.

That is, $e \asymp f$, $e \not\prec^T f$, but there exists some lock x such that $x \in LH_S(e) \cap LH_S(f) \neq \emptyset$.

By definition of $LH_S(\cdot)$ there must be an acquire event $a \in T$ for lock x such that $a <_{mhb}^T e$ as well as an acquire event $a' \in T$ for lock x such that $a' <_{mhb}^T f$. From **CS-SAME-THREAD** we know that events a and e are in the same thread and that events a' and f are in the same thread.

As $e \not\prec^T f$, there is a correctly reordered prefix T' of T that puts e and f next to each other. As a and a' must appear before e and f in T' without an intervening release (**CS-MATCH**), we find a contradiction as T' would violate **Lock-1**. □

⁴For set-valued mappings L_1, L_2 , we lift the subset relation \subseteq pointwise, that is, we write $L_1 \subseteq L_2$ if, for all e , $L_1(e) \subseteq L_2(e)$.

Datarace prediction based on the cross-thread lock set construction gives rise to false negatives, but we eliminate this problem in Section 5.1 by improving the datarace predictor.

LEMMA 5.8. *There exists a trace T and event $e \in T$ such that $FN(LH_C(e)) \neq \emptyset$.*

PROOF. Consider the trace on the right. Here $LH_C(e_3) = LH_C(e_4) = \{x\}$ so that $P_{DR}(LH_C(\cdot)) = \emptyset$, although there is clearly a data race $e_3 \bowtie e_4$.

	t_1	t_2
e_1	$acq(x)$	
e_2	$fork(t_2)$	
e_3	$w(a)$	
e_4		$w(a)$
e_5	$join(t_2)$	
e_6	$rel(x)$	

□

5.1 Eliminating false negatives by thread indexing

Using insights from the proof of Lemma 5.7, we refine the cross-thread lock set construction to elide all false negatives. The key step in the proof is the observation that the acquire (and release) events guarding the conflicting events e and f are in the same thread as e and f by **CS-SAME-THREAD**, respectively. The cross-thread lock set construction omits the axiom **CS-SAME-THREAD**, so that the guarding events may end up in the same thread and coincide as in the proof of lemma 5.8.

We rule out such cases by demanding that the guarding events are in distinct threads. For this purpose, we modify the cross-thread lock set construction to retain the information which thread acquired each lock. Consequently, the resulting lock set function maps $events(T)$ to a set of thread-indexed lock variables (x, t) .

Definition 5.9 (Cross-Thread Locks Held by Thread). The cross-thread thread-indexed lock set for an event $e \in T$ is defined by $LH_{CT}^T(e) = \{(x, t) \mid \exists a, r \in T. e \in CS_C^T(x)^{\langle a, r \rangle}, t = thread(a)\}$.

We have to adapt the predictor to process this lock set construction. For thread-indexed lock sets M' and N' the intersection only includes lock variables with different indices, that is, locks that have been acquired in different threads.

$$M' \cap' N' := \{x \mid (x, s) \in M', (x, t) \in N', s \neq t\}$$

We define the predictor for indexed lock sets in terms of this operation:

$$P_{DR}^T(L') := \{(e, f) \mid e, f \in T, e \bowtie f, L'(e) \cap' L'(f) = \emptyset\}$$

LEMMA 5.10. $M' \cap' N' \subseteq \pi_1(M') \cap \pi_1(N')$ (where π_1 denotes projection on the first component).

PROOF. Suppose $x \in M' \cap' N'$. Then there are s, t such that $(x, s) \in M'$ and $(x, t) \in N'$ and $s \neq t$. Hence, $x \in \pi_1(M') \cap \pi_1(N')$. □

The reverse inclusion does not hold in general: if $M' = N' = \{(x, 1)\}$, then $M' \cap' N' = \emptyset$, but $\pi_1(M') \cap \pi_1(N') = \{x\}$.

The predictions of the new thread-indexed cross-thread construction fit in between the standard construction and the cross-thread construction. The corresponding formal statements follow from the definitions.

LEMMA 5.11.

- (1) For all events $e \in T$, $\pi_1(LH_{CT}^T(e)) = LH_C^T(e)$.
- (2) For all events $e \in T$, $LH_S^T(e) = \{x \mid (x, t) \in LH_{CT}^T(e), t = thread(e)\}$.
- (3) $P_{DR}^T(LH_C(\cdot)) \subseteq P_{DR}^T(LH_{CT}(\cdot))$ (old predictor on the left and new one on the right).
- (4) $P_{DR}^T(LH_{CT}(\cdot)) \subseteq P_{DR}^T(LH_S(\cdot))$ (new predictor on the left and old one on the right).

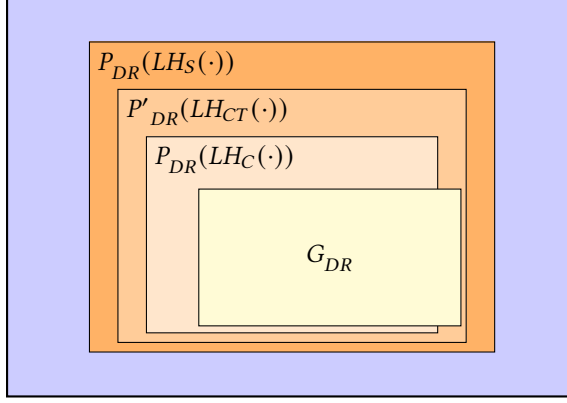


Fig. 8. Predictions for different data race predictors relative to ground truth

PROOF. (1) Immediate from the definition.

(2) Follows from axiom **CS-SAME-THREAD**: the locks in the standard lock set are acquired by the event's thread.

(3) Suppose that $(e, f) \in P_{DR}^T(LH_C(\cdot))$. That is, $e \asymp f, LH_C(e) \cap LH_C(f) = \emptyset$. By item (1), $\pi_1(LH_{CT}(e)) \cap \pi_1(LH_{CT}(f)) = \emptyset$. By lemma 5.10, $LH_{CT}(e) \cap' LH_{CT}(f) = \emptyset$. Conclude $(e, f) \in P_{DR}^T(LH_{CT}(\cdot))$.

(4) Suppose that $(e, f) \in P_{DR}^T(LH_{CT}(\cdot))$ with $s = \text{thread}(e)$ and $t = \text{thread}(f)$. That is, $e \asymp f, LH_{CT}(e) \cap' LH_{CT}(f) = \emptyset$. Suppose now for a contradiction that there exists some $x \in LH_S(e) \cap LH_S(f)$. From item (2), we see that $(x, s) \in LH_{CT}(e)$ and $(x, t) \in LH_{CT}(f)$ and from $e \asymp f$ we know that $s \neq t$. We obtain $x \in LH_{CT}(e) \cap' LH_{CT}(f) = \emptyset$, which is a contradiction. Hence, $LH_S(e) \cap LH_S(f) = \emptyset$ and $(e, f) \in P_{DR}^T(LH_S(\cdot))$. \square

Given the inclusions between the different datarace predictors, the inclusions for false positives and false negatives from Corollaries 5.6 and 5.5 extend accordingly. Moreover, the thread-indexed cross-thread construction has no false negatives.

COROLLARY 5.12.

- $FN(LH_S(\cdot)) \subseteq FN(LH_{CT}(\cdot)) \subseteq FN(LH_C(\cdot))$.
- $FP(LH_C(\cdot)) \subseteq FP(LH_{CT}(\cdot)) \subseteq FP(LH_S(\cdot))$.

COROLLARY 5.13. $FN(LH_{CT}(\cdot)) = \emptyset$.

PROOF. The proof of absence of false negatives in lemma 5.7 extends to $P_{DR}^T(LH_{CT}(\cdot))$. \square

Figure 8 gives an overview of the relative power of all variations of datarace predictors considered in this section. It visualizes the Corollaries 5.4, 5.5, and 5.6 (extended with Corollaries 5.12 and 5.13), as well as lemma 5.7.

5.2 On False Positives

There are examples where the inclusion in Corollary 5.5 is proper.

Example 5.14. The standard predictor yields a false positive for the trace in figure 2, which is captured by the cross-thread predictor: $LH_S(e_4) = \emptyset$ and $LH_S(e_8) = \{x\}$, but $LH_C(e_4) = LH_C(e_8) =$

$\{x\}$. This false positive is also captured by the thread-indexed cross-thread predictor because the locks for e_4 and e_8 are acquired in different threads.

6 PWR AND CROSS-THREAD CRITICAL SECTIONS

In this section, we describe an algorithm for data race detection that takes advantage of cross-thread critical sections to calculate lock sets. It relies on the PWR relation to efficiently compute an underapproximation of the must happen-before relation, which in turn results in an underapproximation (smaller sets) of the cross-thread lock sets.

6.1 Program, Last-Write and Release Order Relation

We first recall the original definition of PWR, which relies on the standard lock set construction.

Definition 6.1 (Program, Last Write, Release Order (PWR) [Sulzmann and Stadtmüller 2020]). For a well-formed trace T , the *program-order, last write-order, release-order relation* $<_{pwr}^T$ is the smallest strict partial order that satisfies the following rules:

(PWR-1): $e <_{pwr}^T f$ if $e <_{tr}^T f$ and $thread(e) = thread(f)$.

(PWR-2): $f <_{pwr}^T e$ if $e = (t, r(a))$ and f is the last write for e w.r.t. T .

(PWR-3): $r_1 <_{pwr}^T f$ if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) and for some lock x where $a_1 <_{tr}^T a_2$ there is some event e such that $e \in CS_S^T(x)^{(a_1, r_1)}$ and $f \in CS_S^T(x)^{(a_2, r_2)}$.

(PWR-4) $e <_{pwr}^T f$ if $e = (t, fork(s))$ and $s = thread(f)$,

(PWR-5) $e <_{pwr}^T f$ if $f = (t, join(s))$ and $s = thread(e)$.

Conflicting events $e \approx f$ are in a *PWR-race* if $e \parallel_{pwr}^T f$ and $LH_S(e) \cap LH_S(f) = \emptyset$.

Rule (PWR-1) imposes program order and rule (PWR-2) guarantees that each read sees the same write. Rule (PWR-3) imposes an order among critical sections.

PWR is a hybrid method as a race warning is only issued for conflicting events that are concurrent and have disjoint lock sets.

PWR underapproximates the must happen-before relation in the following sense.

LEMMA 6.2. (cf. [Sulzmann and Stadtmüller 2020, Proposition 3.5]) $<_{pwr}^T \subseteq <_{mhb}^T$.

The example in figure 6 demonstrates that the reverse inclusion does not hold: We have $e_5 <_{mhb}^T e_{10}$, but PWR does not order these events.

From Lemma 5.7 and Lemma 6.2 we obtain that PWR is a complete data race prediction method (no false negatives). However, we may encounter false positives. Consider the example in figure 2. Conflicting events e_4 and e_8 are not ordered under PWR and their standard lock set is disjoint.

Next, we show how to make use of the PWR relation to compute an approximation of cross-thread lock sets. The resulting construction retains completeness and eliminates some false positives (like the one discussed in the previous paragraph).

6.2 Approximating Cross-Thread Lock Sets via PWR

We define a new lock set function $LH_{pwr}(\cdot)$ as a variant of $LH_{CT}(\cdot)$ which replaces the relation $\cdot <_{mhb} \cdot$ in definition 4.3 with the relation $\cdot <_{pwr} \cdot$ and then calculates a thread-indexed lock set analogous to definition 5.9. This new construction lies properly between the standard and cross-thread lock set construction.

LEMMA 6.3. (1) For all $e \in T$, $LH_{pwr}(e) \subseteq LH_{CT}(e)$.

(2) For all $e \in T$, $LH_S(e) = \{x \mid (x, t) \in LH_{pwr}(e), t = thread(e)\}$.

	t_1	t_2	t_3	t_4
e_1	$fork(t_2)$			
e_2	$fork(t_3)$			
e_3	$acq(x)$			
e_4	$w(a)$			
e_5		$acq(y)$		
e_6		$w(b)$		
e_7	$join(t_2)$			
e_8	$rel(x)$			
e_9			$acq(x)$	
e_{10}			$fork(t_4)$	
e_{11}				$w(b)$
e_{12}			$r(a)$	
e_{13}			$rel(x)$	
e_{14}		$join(t_4)$		
e_{15}		$rel(y)$		

Fig. 9. $LH_{pwr}(\cdot)$ underapproximates $LH_C(\cdot)$: $(y, t_2) \in LH_{CT}(e_{11})$ but $(y, t_2) \notin LH_{pwr}(e_{11})$

- (3) There exists a trace T and $e \in T$, such that $LH_{pwr}(e) \subsetneq LH_{CT}(e)$.
(4) There exists a trace T and $e \in T$, such that $LH_S(e) \subsetneq \pi_1(LH_{pwr}(e))$.

PROOF. (1) The inclusion $LH_{pwr}(\cdot) \subseteq LH_{CT}(\cdot)$ follows from lemma 6.2.

(2) Suppose that $x \in LH_S(e)$, that is $a(x) <_{mhb} e <_{mhb} r(x)$ and **CS-SAME-THREAD** and **CS-MATCH**. Hence, $a(x) <_{po} e <_{po} r(x)$ in the program order and **CS-MATCH**. By (PWR-1), $a(x) <_{pwr} e <_{pwr} r(x)$ and **CS-MATCH**, so that $(x, thread(e)) \in LH_{pwr}(\cdot)(e)$.

(3) Figure 9 contains a trace where $e_6 <_{mhb}^T e_{11}$ via similar reasoning as in figure 6. Due to the join event e_{14} , event e_{11} is protected by lock y . That is, $(y, t_2) \in LH_C(e_{11})$. However, $(y, t_2) \notin LH_{pwr}(e_{11})$.

(4) In figure 2, $LH_S(e_4) = \emptyset$, but $LH_{CT}(e_4) = \{(x, t_1)\}$. □

Together with Lemma 5.11, we see that the difference between $LH_{CT}(e)$ and $LH_{pwr}(e)$ lies only in threads other than $t = thread(e)$, as the projection on thread t yields $LH_S(e)$ in both cases. Applying corollary 5.13 to lemma 6.3 we obtain completeness for data race prediction with PWR lock sets:

COROLLARY 6.4. $FN(LH_{pwr}(\cdot)) = \emptyset$.

The implementation of the enhanced PWR algorithm only caches the most recent reads and writes for efficiency reasons. For example, conflicting events e_2 and e_7 in figure 10 are in a race as shown by the reordering on the right. However, the subsequent event e_4 will evict e_2 and we will miss the race. This strategy (re)introduces some incompleteness, but it is also applied by other implementations [Flanagan and Freund 2010].

6.3 PWR Data Race Prediction Enhanced with Approximated Cross-Thread Lock Sets

This section explains how to integrate the computation of $LH_{pwr}(\cdot)$ into the PWR data race predictor [Sulzmann and Stadtmüller 2020]. We do apply the thread-indexed construction covered in

	t_1	t_2
e_1	$fork(t_2)$	
e_2	$w(a)$	
e_3	$acq(x)$	
e_4	$w(a)$	
e_5	$rel(x)$	
e_6		$acq(x)$
e_7		$w(a)$
e_8		$rel(x)$

	t_1	t_2
e_1	$fork(t_2)$	
e_6		$acq(x)$
e_7		$w(a)$
e_2	$w(a)$	

Fig. 10. Incompleteness due to tracking most recent reads/writes only

Algorithm 1 PWR Data Race Prediction Enhanced with Cross-Thread Lock Sets

<p>V ::= $[V_1, \dots, V_n]$ Vector clock</p> <p>$V < V'$ if $\forall k. V_k \leq V'_k \wedge \exists k. V_k < V'_k$</p> <p>$PWR(e)$ PWR vector clock for event e</p> <p>$Th(t)$ Thread t's vector clock</p> <p>$\mathcal{L}_S(t)$ Thread t's lock set</p> <p>\mathcal{L}_{all} Global lock set</p> <p>$Acq(x)$ Vector clock of most recent $acq(x)$</p> <p>$RC(a)$ Race candidates for variable a</p> <p>1: procedure $e@ACQUIRE(t, x)$</p> <p>2: $Th(t) = PWR(e)$</p> <p>3: $\mathcal{L}_S(t) = \mathcal{L}_S(t) \cup \{x\}$</p> <p>4: $\mathcal{L}_{all} = \mathcal{L}_{all} \cup \{x\}$</p> <p>5: $Acq(x) = Th(t)$</p> <p>6: end procedure</p> <p>1: procedure $e@READ(t, a)$</p> <p>2: $Th(t) = PWR(e)$</p> <p>3: $gs = \{z? \mid z \in \mathcal{L}_{all} \setminus \mathcal{L}_S(t) \wedge Acq(z) < Th(t)\}$</p> <p>5: $RC(a) = RC(a) \cup \{(e, Th(t), \mathcal{L}_S(t), gs)\}$</p> <p>6: end procedure</p> <p>1: procedure $e@WRITE(t, a)$</p> <p>2: $Th(t) = PWR(e)$</p> <p>3: $gs = \{z? \mid z \in \mathcal{L}_{all} \setminus \mathcal{L}_S(t) \wedge Acq(z) < Th(t)\}$</p> <p>5: $RC(a) = RC(a) \cup \{(e, Th(t), \mathcal{L}_S(t), gs)\}$</p> <p>6: end procedure</p>	<p>1: procedure $RACECHECK(e, f, a)$</p> <p style="padding-left: 20px;">$(e, V_e, ls_e, gs_e) \in RC(a) \wedge \nexists z? \in gs_e \wedge (f, V_f, ls_f, gs_f) \in RC(a) \wedge \nexists z? \in gs_f \wedge V_e \not\prec V_f \wedge V_f \not\prec V_e \wedge (ls_e \cup gs_e) \cap (ls_f \cup gs_f) = \emptyset$</p> <p>2: if</p> <p style="padding-left: 20px;">then Race found</p> <p>3: end if</p> <p>4: end procedure</p> <p>1: procedure $e@RELEASE(t, z)$</p> <p>2: $Th(t) = PWR(e)$</p> <p>3: $\mathcal{L}_S(t) = \mathcal{L}_S(t) \setminus \{z\}$</p> <p>4: $\mathcal{L}_{all} = \mathcal{L}_{all} \setminus \{z\}$</p> <p>5: for $a \in A$ do</p> <p style="padding-left: 20px;">6: for $(e, V, ls, gs) \in RC(a)$ do</p> <p style="padding-left: 40px;">7: if $z? \in gs \wedge V < Th(t)$ then</p> <p style="padding-left: 60px;">8: $gs' = (gs \setminus \{z?\}) \cup \{z\}$</p> <p style="padding-left: 40px;">9: else</p> <p style="padding-left: 60px;">10: $gs' = gs \setminus \{z?\}$</p> <p style="padding-left: 40px;">11: end if</p> <p style="padding-left: 20px;">12: $RC(a)' = RC(a) \setminus \{(e, V, ls, gs)\}$</p> <p style="padding-left: 20px;">13: $RC(a) = RC(a)' \cup \{(e, V, ls, gs')\}$</p> <p style="padding-left: 20px;">14: end for</p> <p>15: end for</p> <p>16: end procedure</p>
---	---

section 5.1, but omit the details for brevity. The original PWR data race predictor efficiently implements the PWR relation using vector clocks. For readability, we abstract these details in a function $PWR(e)$ that computes the vector clock that captures the PWR relation. That is, $e <_{pwr} f$ iff

$PWR(e) < PWR(f)$. Details on computing $PWR(e)$ may be found elsewhere [Sulzmann and Stadtmüller 2020].

The enhanced PWR algorithm 1 makes use of several state variables. Each thread maintains its own vector clock $Th(t)$ and (standard) lock set $\mathcal{L}_S(t)$. We also maintain a global lock set \mathcal{L}_{all} . In $Acq(x)$, we record the vector clock of the most recent acquire operation on lock x . Race candidates for shared variable a are collected in the set $RC(a)$.

Events are processed in the customary stream-based fashion. Each event starts a respective procedure, which takes as an argument a thread id t and either a variable a or lock x . We use the notation $e@operation$ to uniquely identify the event e associated with the operation. For brevity, we ignore fork/join events as their treatment is standard.

Consider processing an acquire operation on x in thread t . We first carry out $PWR(e)$ to compute the PWR vector clock of e . Then, we add x to the thread-local lock set $\mathcal{L}_S(t)$ and the global lock set \mathcal{L}_{all} . Finally, we record the vector clock of the acquire operation.

Processing a read/write event adds a race candidate to the set $RC(a)$. Each race candidate is represented as a quadruple (e, V, ls, gs) where V is the vector clock of event e , ls is e 's standard lock set and gs is the set of potential guard locks acquired in threads different from $thread(e)$.

A potential guard lock is an acquired lock that is not part of the standard lock set and the acquire operation on this lock took place before the read/write. See the conditions in line 3 and 4 of READ and WRITE procedures. We mark such potential guard locks with $z?$. We verify if $z?$ is an actual guard lock when processing the corresponding release event.

Consider processing a release operation on z in thread t . We deliberately use z so the naming is consistent with the potential guard locks $z?$ identified in the ACQUIRE procedure. We consider all race candidates associated with $z?$. If the race candidate happens before the release (cf. line 7), then z is an actual guard lock and part of the set $LH_{pwr}(e)$. Otherwise, we remove $z?$.

Our actual implementation does not iterate over all variables $a \in A$ over all race candidates. Rather, we register race candidates with guard locks $z?$ that need to be checked. Once the potential guard locks of a race candidate have been checked, we check if there is an actual race in procedure RACECHECK.

At least one of the race candidates must be a write. Candidates are removed aggressively to conserve space. For example, we maintain at most one write per variable, a read that takes place later evicts an earlier read etc. For brevity, such details are ignored in the description of the algorithm.

Difference to original PWR algorithm. The original PWR algorithm can be obtained from algorithm 1 as follows. The global lock set \mathcal{L}_{all} can be omitted. Race candidates are represented as a triple (e, V, ls) . In procedure ACQUIRE, remove lines 3-5. In procedure READ, remove lines 3-4. In procedure WRITE, remove lines 3-4. In procedure RELEASE, remove lines 4-15.

7 EXPERIMENTS

We implemented the original PWR data race predictor as well as the enhanced version as discussed in section 1 in C++. In this section, we use the implementations to answer the research questions posed in the overview:

RQ1 Can we compute cross-thread critical sections and the associated lock sets efficiently?

RQ2 What is the effect on the analysis results of incorporating cross-thread critical section?

Test candidates. PWR is our port of the original Go implementation of PWR [Stadtmüller 2021b] to C++. PWR^{cs} is our enhancement of PWR described in algorithm 1. All test candidates are available in a GitHub repository.⁵

⁵GitHub URL withheld to maintain anonymity.

Benchmark	\mathcal{E}	\mathcal{T}	\mathcal{M}	\mathcal{L}	parsing	PWR	PWR ^{CS}
account	134	7	41	3	2ms	2ms	1ms
airlinetickets	140	14	44	0	1ms	1ms	0ms
array	51	6	30	2	0ms	0ms	0ms
batik	157.9M	8	4.9M	1.9K	7.4m	12.2m	13.2m
boundedbuffer	332	7	63	2	1ms	1ms	1ms
bubblesort	4.6K	30	3	168	3ms	37ms	27ms
bufwriter	22.2K	9	471	1	51ms	95ms	104ms
clean	1.3K	12	26	2	3ms	6ms	7ms
critical	59	7	30	0	0ms	0ms	0ms
cryptorsa	58.5M	19	1.7M	8.0K	2.3m	3.9m	4.5m
derby	1.4M	7	185.6K	1.1K	3.4s	6.1s	8.2s
ftpserver	49.6K	14	5.5K	301	119ms	232ms	276ms
jigsaw	3.1M	15	103.5K	275	7.5s	12.9s	15.7s
lang	6.3K	10	1.5K	0	16ms	27ms	29ms
linkedlist	1.0M	15	3.1K	1.0K	2.3s	4.5s	4.8s
lufact	134.1M	5	252.1K	1	4.6m	9.2m	10.0m
luindex	397.8M	4	2.5M	65	26.1m	35.7m	38.5m
lusearch	217.5M	10	5.2M	118	8.6m	15.1m	16.3m
mergesort	3.0K	8	621	3	8ms	13ms	14ms
moddyn	200.3K	6	1.2K	2	457ms	754ms	807ms
pingpong	151	21	51	0	1ms	0ms	1ms
producerconsumer	658	11	67	3	1ms	3ms	3ms
raytracer	15.8K	6	3.9K	8	37ms	65ms	70ms
readerswriters	11.3K	8	18	1	26ms	54ms	60ms
sor	606.9M	5	1.0M	2	23.1m	37.1m	40.4m
sunflow	11.7M	17	1.3M	9	27.5s	55.2s	59.7s
tsp	307.3M	10	181.1K	2	13.6m	23.6m	25.5m
twostage	193	15	21	2	0ms	1ms	1ms
wronglock	246	25	26	2	0ms	1ms	1ms
xalan	122.5M	9	4.4M	2.5K	5.1m	8.9m	24.4m
biojava	221.0M	6	121.0K	78	31.5m	14.4m	15.5m
cassandra	259.1M	178	9.9M	60.5K	11.0m	22.6m	25.0m
graphchi	215.8M	20	24.9M	60	9.1m	15.7m	17.0m
hsqldb	18.8M	46	945.0K	401	47.6s	1.3m	1.5m
tradebeans	39.1M	236	2.8M	6.1K	1.6m	3.5m	3.9m
tradesoap	39.1M	236	2.8M	6.1K	1.6m	3.4m	3.9m
zxing	546.4M	15	37.8M	1.5K	24.0m	46.6m	49.2m

Fig. 11. **Running times.** Columns \mathcal{E} , \mathcal{T} , \mathcal{M} and \mathcal{L} contain the number of events, total number of threads, total number of memory locations and total number of locks. Column “parsing” contains the running time to process all events. Columns PWR and PWR^{CS} contain the running times of our two test candidates.

Benchmarks and system setup. Our experiments cover all traces of the zero-reversal-logs and misc collection of traces that are provided by Mathur et al. [[n.d.]]. These traces are obtained from standard benchmark suites such as Java Grande [Smith et al. 2001], Da Capo [Blackburn et al. 2006], and IBM Contest [Farchi et al. 2003]. It is unknown how many “real” data races are hidden

Benchmark	races	cs guarded	cs guard locks
account	1	0	0
airlinetickets	2	0	0
array	1	0	0
batik	1	0	0
boundedbuffer	1	0	0
bubblesort	3	0	0
bufwriter	2	0	0
clean	3	0	0
critical	3	0	0
cryptorsa	4	0	0
derby	10	2	109.0K
ftpserver	22	2	1.3K
jigsaw	6	0	0
lang	1	0	0
linkedlist	4	0	0
lufact	2	0	0
luindex	10	0	0
lusearch	42	0	0
mergesort	1	0	0
modyn	2	0	0
pingpong	2	0	0
producerconsumer	1	0	0
raytracer	3	0	0
readerswriters	4	0	0
sor	0	0	0
sunflow	5	0	0
tsp	5	0	0
twostage	1	0	0
wronglock	2	0	0
xalan	11	0	25.1M
biojava	1	0	0
cassandra	48	1	767.2K
graphchi	4	0	633.2K
hsqldb	180	0	0
tradebeans	29	1	1.0K
tradesoap	28	0	991
zxing	61	0	0

Fig. 12. **Comparison data races.** Column “races” contains the number of distinct source code locations where PWR predicted a race. Column “cs guarded” contains the number of source code locations for which PWR^{CS} finds a guard lock that is not in the standard lock set but arises from a cross-thread lock set. Column “cs guard locks” contains the overall number of times PWR^{CS} encountered a cross-thread (guard) lock

in these trace logs. We share this issue with prior work that uses these trace logs for evaluation. We conducted our experiments on an Apple M1 max CPU with 32GB of RAM running macOS Monterey (Version 12.1).

Performance. Figure 11 shows the detailed results of our performance measurements. The overall overhead to compute cross-thread lock sets for the purpose of data race prediction is manageable in all cases. When comparing PWR^{cs} against PWR the worst case slowdown is 2.7x in case of xalan, but in most cases the slowdown is between 10-20%. Hence, we can answer **RQ1** affirmatively.

Data races and guard locks. Figure 12 shows the impact of cross-thread lock sets on data race prediction.

For ftpserver, PWR finds 22 distinct source code locations that triggered a race. Recall that PWR uses the standard lock set to reduce the number of race candidates. Out of the 22 source code locations there are two locations that are additionally guarded by cross-thread locks predicted by PWR^{cs} . Hence, the programmer should focus first on the 20 racy source code locations that are not guarded by cross-thread locks. For the cases shown in Figure 12, we can thus eliminate up to 20% (derby) of the race candidates that need to be inspected by the user. This positively answers **RQ2**.

For xalan, we find 11 race locations but none is guarded by a cross-thread lock. However, PWR^{cs} encounters a guard lock 25 million times, which is the number of times condition $V < Th(t)$ on line 7 in procedure `RELEASE` in algorithm 1 is satisfied. Such huge numbers likely arise because of the high number of locks and memory locations (variables) in the xalan trace.

Overall, there are 37 trace logs for which we report 500 racy source code locations out of which 6 false positives can be eliminated by PWR^{cs} . The improvement is not drastic but it shows that we can further advance the state of the art when it comes to efficient, near complete but often sound dynamic race prediction. Similar observations apply to other state of the art data race prediction tools. To quote the WCP paper:

“Note that, our WCP based race detection algorithm does not report drastically more races than the simpler HB based algorithm.”

Importantly, we can show that cross-thread critical sections arise in practical programs.

Comparison of PWR against WCP, FastTrack and others. We measure here only the relative improvements for PWR by taking into account cross-thread critical sections. A detailed comparison of PWR against WCP, FastTrack and others is given in [Stadtmüller 2021a; Sulzmann and Stadtmüller 2020].

8 RELATED WORK

We started sections 1 and 2 with a review of selected work on dynamic data race prediction. Here we comment on some further work divided in four categories. Remember, when we speak of lock set here, we mean the standard version. Trace analysis with lock sets and partial orders is also applicable to deadlock detection, but we concentrate on the analysis of data races in this work.

Lock set-based methods. Dinning and Schonberg [1991] introduce the idea of a lock set for the purpose of dynamic data race analysis as described in section 2. Subsequent work [Elmas et al. 2010; Savage et al. 1997] refines this approach, as the pure lock set method is fast and complete, but inherently prone to false positives. These false positives are often addressed using partial-order-based methods.

Combinatorial methods. These methods are sound *and* complete, as they attempt to cover all correct reorderings exhaustively. They often employ SAT/SMT solvers to derive alternative schedules from the constraints extracted from the trace. Their run time can be exponential in the worst case.

Sen et al. [2005] define a framework for predictive runtime analysis which enables one to systematically explore properties in all equivalence classes of reorderings of a trace. As an example, they encode datarace analysis in their framework. An implementation is reported, but no quantitative data about it is available.

Chen and Roşu [2007] offer a parametric framework for causality to prove properties of a range of happen-before relations. There is an implemented instance of the framework for a particular algorithm based on vector clocks. They find additional dataraces in small applications.

Said et al. [2011] design a symbolic analysis based on SMT solving to search for alternative traces witnessing a data race. Their analysis encodes the sequential consistency semantics and is said to improve over the maximal causal model. They present preliminary statistics of an implementation on small benchmarks. Their algorithm reduces the number of false positives significantly.

Serbanuta et al. [2012] investigate maximal causal models, which determine all alternative traces that all programs exhibiting a given trace might execute. They conduct a semantic investigation, but there is no implementation.

Huang et al. [2014] encode control flow into constraints and formulate race detection as a constraint problem. They prove an optimality result and claim scalability to realistic applications.

Luo et al. [2015] propose a constraint-based approach to generate a sufficient number of alternative schedules to cover the maximal causal space. Their goal is to discover concurrency bugs, which are not further specified.

Partial-order-based methods. These methods are efficient as they infer a partial order via a linear pass through the trace. We already discussed WCP [Kini et al. 2017a], SDP and WDP [Genç et al. 2019], DC [Roemer et al. 2018], and DC_{tp} [Ogles et al. 2019] in section 2. There is a separate section 6 with details on PWR.

SHB [Mathur et al. 2018] strengthens HB [Lamport 1978] by guaranteeing that all detected races have viable schedules (HB only guarantees that for the first detected race). Like HB, SHB maintains the textual order of critical sections. As each acquire synchronizes with the prior release, HB and SHB are not affected by cross-thread critical sections.

The Goldilocks algorithm [Elmas et al. 2006]. computes the HB relation based on a combination of lock sets and thread ids. The textual order of critical sections is maintained in this construction. Hence, Goldilocks is not affected by cross-thread critical sections.

Many of these methods have efficient implementations. For example, consider FastTrack [Flanagan and Freu 2010] which implements HB and SmartTrack [Roemer et al. 2020] which further optimizes DC.

SyncP [Mathur et al. 2021] maintains the textual order among critical sections (like HB) but allows to skip certain parts of a trace. For example, SyncP is able to predict the race in figure 10. Such races are referred to as sync-preserving races. Strictly speaking, SyncP is not a partial-order method but we place it here because of its connection to HB. Like HB, SyncP is not affected by cross-thread critical sections.

We already discussed TSan [Serebryany and Iskhodzhanov 2009] in the introduction. The newer TSan version, ThreadSanitizer v2 (TSanV2) [ThreadSanitizer 2020], keeps a limited history of write/read events to improve the performance with respect to FastTrack, which leads to a higher number of false negatives.

Many algorithms combine partial orders with lock sets. Acculock [Xie et al. 2013] optimizes the original TSan algorithm by employing a single lockset per variable. Acculock can be faster, but is less precise compared to TSan if a thread uses multiple locks at once.

SimpleLock [Yu and Bae 2016] simplifies the lockset algorithm. A data race is only reported if at least one of the accesses is not protected by any lock. SimpleLock is faster compared to Acculock but misses more data races since it ignores data races for events with different locks.

O’Callahan and Choi [2003] compute a weak form of happens-before relation in addition to lock sets. With such a hybrid method, conflicting events with disjoint lock sets are ignored if they can be ordered with their happens-before relation. Thus, some false positives can be eliminated. Similar ideas can be found in the work of Genç et al. [2019] as well as Sulzmann and Stadtmüller [2020].

Multi-phase methods. The Vindicator algorithm [Roemer et al. 2018] improves the WCP algorithm and is sound for all reported data races. It can predict more data races compared to WCP, but requires three phases to do so. The first phase of Vindicator is selecting races based on the DC relation (a weakened WCP relation that removes the happens-before closure). For the second phase, it constructs a graph that contains all events from the processed trace. This phase is unsound and incomplete which is why a third phase is required. The third phase makes a single attempt to reconstruct a witness trace for the potential data race and reports a data race if successful.

The M2 algorithm [Pavlogiannis 2020] can be seen as a further improvement of the Vindicator idea. Like Vindicator, multiple phases are required. M2 requires two phases. M2 has $O(n^4)$ run-time (where n is the size of the trace). M2 is sound and complete for two threads.

Vindicator and M2 rely on a trace reordering phase. Because this phase obeys the laws of being a well-formed, cross-thread critical sections have no impact.

9 CONCLUSION

Starting from our observation “in the wild” that not all critical sections are confined to a single thread, we developed a theoretical framework of critical sections that may extend across more than one thread and the accompanying lock set constructions. Using the framework, we showed how the lock set construction directly impacts false positives and false negatives. Subsequently, we use the framework to analyse an approximate lock set construction, which is based on the partial order PWR.

From this basis, we considered the state-of-the-art, efficient partial order-based methods for data race detection and studied the impact of cross-thread critical sections on them. WCP and SDP are agnostic about cross-thread critical sections. For WCP we can show that the WCP soundness proof extends to the case of cross-thread critical sections. For SDP the details have yet to be worked out. We diagnosed serious soundness problems for DC_{tp} , which we leave to fix in future work. The complete relations WDP and PWR were fixable and we studied the efficiency and the effectiveness of an implementation that takes cross-thread critical sections into account. This implementation is based on PWR.

To reiterate again: if any of the related works in section 8 makes use of lock sets, they employ the standard notion, where the lock set of an event only contains locks acquired in the same thread as the event. The technical results in the references we studied in detail depend in various degrees on this assumption on the events in a lock set. It seems wise to scrutinize other results with cross-thread lock sets in mind, too. We also expect some impact on algorithms for deadlock detection, but leave that investigation to future work.

ACKNOWLEDGMENTS

We thank some POPL’24 referees for their comments on a previous version of this paper.

REFERENCES

- Sarita V. Adve and Kourosh Gharachorloo. 1996. Shared Memory Consistency Models: A Tutorial. *Computer* 29, 12 (Dec. 1996), 66–76. <https://doi.org/10.1109/2.546611>
- Stephen M. Blackburn, Robin Garner, Chris Hoffmann, Asjad M. Khang, Kathryn S. McKinley, Rotem Bentzur, Amer Diwan, Daniel Feinberg, Daniel Frampton, Samuel Z. Guyer, Martin Hirzel, Antony Hosking, Maria Jump, Han Lee, J. Eliot B. Moss, Aashish Phansalkar, Darko Stefanović, Thomas VanDrunen, Daniel von Dincklage, and Ben Wiedermann. 2006.

- The DaCapo Benchmarks: Java Benchmarking Development and Analysis. In *Proc. of OOPSLA '06*. ACM, Portland, OR, USA, 169–190. <https://doi.org/10.1145/1167515.1167488>
- Feng Chen and Grigore Roşu. 2007. Parametric and Sliced Causality. In *Proc. of CAV'07*. Springer, Berlin, Germany, 240–253. <http://dl.acm.org/citation.cfm?id=1770351.1770387>
- Edsger W. Dijkstra. 1965. Solution of a problem in concurrent programming control. *Commun. ACM* 8, 9 (1965), 569. <https://doi.org/10.1145/365559.365617>
- Anne Dinning and Edith Schonberg. 1991. Detecting Access Anomalies in Programs with Critical Sections. *SIGPLAN Not.* 26, 12 (Dec. 1991), 85–96. <https://doi.org/10.1145/127695.122767>
- Tayfun Elmas, Shaz Qadeer, and Serdar Tasiran. 2006. Goldilocks: Efficiently Computing the Happens-before Relation Using Locksets. In *Proceedings of the First Combined International Conference on Formal Approaches to Software Testing and Runtime Verification* (Seattle, WA) (*FATES'06/RV'06*). Springer-Verlag, Berlin, Heidelberg, 193–208. https://doi.org/10.1007/11940197_13
- Tayfun Elmas, Shaz Qadeer, and Serdar Tasiran. 2010. Goldilocks: a race-aware Java runtime. *Commun. ACM* 53, 11 (2010), 85–92.
- Eitan Farchi, Yarden Nir, and Shmuel Ur. 2003. Concurrent Bug Patterns and How to Test Them. In *Proceedings International Parallel and Distributed Processing Symposium*. IEEE, 7–pp. <https://doi.org/10.1109/IPDPS.2003.1213511>
- Cormac Flanagan and Stephen N. Freund. 2010. FastTrack: Efficient and Precise Dynamic Race Detection. *Commun. ACM* 53, 11 (2010), 93–101. <https://doi.org/10.1145/1543135.1542490>
- Kaan Genç, Jake Roemer, Yufan Xu, and Michael D. Bond. 2019. Dependence-Aware, Unbounded Sound Predictive Race Detection. *Proc. ACM Program. Lang.* 3, OOPSLA, Article 179 (Oct. 2019), 30 pages. <https://doi.org/10.1145/3360605>
- Jeff Huang, Patrick O'Neil Meredith, and Grigore Roşu. 2014. Maximal Sound Predictive Race Detection With Control Flow Abstraction. In *PLDI '14*, Michael F. P. O'Boyle and Keshav Pingali (Eds.). ACM, Edinburgh, United Kingdom, 337–348. <https://doi.org/10.1145/2594291.2594315>
- Dileep Kini, Umang Mathur, and Mahesh Viswanathan. 2017a. Dynamic Race Prediction in Linear Time. *SIGPLAN Not.* 52, 6 (June 2017), 157–170. <https://doi.org/10.1145/3062341.3062374>
- Dileep Kini, Umang Mathur, and Mahesh Viswanathan. 2017b. Dynamic Race Prediction in Linear Time. *CoRR* abs/1704.02432 (2017), 22. arXiv:1704.02432 <http://arxiv.org/abs/1704.02432>
- Leslie Lamport. 1978. Time, Clocks, and the Ordering of Events in a Distributed System. *Commun. ACM* 21, 7 (1978), 558–565. <https://doi.org/10.1145/359545.359563>
- Qingzhou Luo, Jeff Huang, and Grigore Roşu. 2015. *Systematic Concurrency Testing with Maximal Causality*. Technical Report.
- Umang Mathur, Dileep Kini, and Mahesh Viswanathan. 2018. What Happens-after the First Race? Enhancing the Predictive Power of Happens-before Based Dynamic Race Detection. *Proc. ACM Program. Lang.* 2, OOPSLA, Article 145 (Oct. 2018), 29 pages. <https://doi.org/10.1145/3276515>
- Umang Mathur, Andreas Pavlogiannis, Hünkar Can Tunç, and Mahesh Viswanathan. [n.d.]. Trace Logs. https://uillinoisedu-my.sharepoint.com/:f:/g/personal/umathur3_illinois_edu/EskC1fg2xhNHnim2ZYjDD9gBJqme8hBTgWShHUMOf
- Umang Mathur, Andreas Pavlogiannis, and Mahesh Viswanathan. 2021. Optimal Prediction of Synchronization-Preserving Races. *Proc. ACM Program. Lang.* 5, POPL, Article 36 (jan 2021), 29 pages. <https://doi.org/10.1145/3434317>
- Umang Mathur and Hünkar Can Tunç. 2020. RAPID : Dynamic Analysis for Concurrent Programs. <https://github.com/umangm/rapid>.
- Robert O'Callahan and Jong-Deok Choi. 2003. Hybrid Dynamic Data Race Detection. In *Proceedings of the Ninth ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming (PPoPP '03)*. Association for Computing Machinery, San Diego, California, USA, 167–178. <https://doi.org/10.1145/781498.781528>
- Benjamin Ogles, Peter Aldous, and Eric Mercer. 2019. Proving Data Race Freedom in Task Parallel Programs Using a Weaker Partial Order. In *2019 Formal Methods in Computer Aided Design, FMCAD 2019, San Jose, CA, USA, October 22-25, 2019*, Clark W. Barrett and Jin Yang (Eds.). IEEE, San Jose, CA, USA, 55–63. <https://doi.org/10.23919/FMCAD.2019.8894270>
- Andreas Pavlogiannis. 2020. Fast, sound, and effectively complete dynamic race prediction. *Proc. ACM Program. Lang.* 4, POPL (2020), 17:1–17:29. <https://doi.org/10.1145/3371085>
- Jake Roemer, Kaan Genç, and Michael D. Bond. 2018. High-coverage, unbounded sound predictive race detection. In *Proceedings of the 39th ACM SIGPLAN Conference on Programming Language Design and Implementation, PLDI 2018, Philadelphia, PA, USA, June 18-22, 2018*, Jeffrey S. Foster and Dan Grossman (Eds.). ACM, 374–389. <https://doi.org/10.1145/3192366.3192385>
- Jake Roemer, Kaan Genç, and Michael D. Bond. 2020. SmartTrack: Efficient Predictive Race Detection. In *Proceedings of the 41st ACM SIGPLAN Conference on Programming Language Design and Implementation* (London, UK) (*PLDI 2020*). Association for Computing Machinery, New York, NY, USA, 747–762. <https://doi.org/10.1145/3385412.3385993>
- Mahmoud Said, Chao Wang, Zijiang Yang, and Karem Sakallah. 2011. Generating Data Race Witnesses by an SMT-based Analysis. In *Proc. of NFM'11*. Springer, 313–327.

- Stefan Savage, Michael Burrows, Greg Nelson, Patrick Sobalvarro, and Thomas Anderson. 1997. Eraser: A Dynamic Data Race Detector for Multithreaded Programs. *ACM Trans. Comput. Syst.* 15, 4 (Nov. 1997), 391–411. <https://doi.org/10.1145/265924.265927>
- Koushik Sen, Grigore Roşu, and Gul Agha. 2005. Detecting Errors in Multithreaded Programs by Generalized Predictive Analysis of Executions. In *International Conference on Formal Methods for Open Object-Based Distributed Systems*. Springer, 211–226.
- Traian-Florin Serbanuta, Feng Chen, and Grigore Roşu. 2012. Maximal Causal Models for Sequentially Consistent Systems. In *Poc. of RV'12 (LNCS)*, Vol. 7687. Springer, 136–150. https://doi.org/10.1007/978-3-642-35632-2_16
- Konstantin Serebryany and Timur Iskhodzhanov. 2009. ThreadSanitizer: Data Race Detection in Practice. In *Proc. of WBLA '09*. ACM, New York, NY, USA, 62–71. <https://doi.org/10.1145/1791194.1791203>
- Yannis Smaragdakis, Jacob Evans, Caitlin Sadowski, Jaeheon Yi, and Cormac Flanagan. 2012. Sound Predictive Race Detection in Polynomial Time. *SIGPLAN Not.* 47, 1 (Jan. 2012), 387–400. <https://doi.org/10.1145/2103656.2103702>
- Lorna A Smith, J Mark Bull, and J Obdrizalek. 2001. A Parallel Java Grande Benchmark Suite. In *Proc. of SC'01*. IEEE, 8–8. <https://doi.org/10.1145/582034.582042>
- Kai Stadtmüller. 2021a. *Efficient, near complete and often sound data race prediction*. Ph.D. Dissertation. University of Freiburg, Freiburg im Breisgau, Germany. <https://freidok.uni-freiburg.de/data/222723>
- Kai Stadtmüller. 2021b. SpeedyGo. <https://github.com/KaiSta/SpeedyGo>.
- Martin Sulzmann and Kai Stadtmüller. 2020. Efficient, near Complete, and Often Sound Hybrid Dynamic Data Race Prediction. In *Proceedings of the 17th International Conference on Managed Programming Languages and Runtimes (MPLR 2020)*. Association for Computing Machinery, Virtual, UK, 30–51. <https://doi.org/10.1145/3426182.3426185>
- ThreadSanitizer 2020. ThreadSanitizer. <https://github.com/google/sanitizers>.
- Xinwei Xie, Jingling Xue, and Jie Zhang. 2013. Acculock: Accurate and Efficient Detection of Data Races. *Software: Practice and Experience* 43, 5 (2013), 543–576. <https://doi.org/10.1109/CGO.2011.5764688>
- Misun Yu and Doo-Hwan Bae. 2016. SimpleLock+: fast and accurate hybrid data race detection. *Comput. J.* 59, 6 (2016), 793–809. <https://doi.org/10.1109/PDCAT.2013.15>

A WEAK CAUSAL PRECEDENCE (WCP)

We repeat the definition of the weak-causally precedes (WCP) relation for a well-formed trace T . We point a weak point of the WCP soundness property in case of cross-thread critical sections.

Definition A.1 (Thread Order). The *thread-order relation* $<_{to}^T$ is defined for $e, f \in T$ by $e <_{to}^T f$ if $thread(e) = thread(f)$ and $e <_{tr}^T f$.

Definition A.2 (Critical Sections Happens-Before). The *critical sections happens-before relation* $<_{hb-cs}^T$ is the smallest strict partial order on T that satisfies the following two rules:

$$(HB-1) \quad <_{to}^T \subseteq <_{hb-cs}^T.$$

$$(HB-2) \quad r <_{hb-cs}^T a \text{ if } r = (t, rel(x)) \in T \text{ and } a = (s, acq(x)) \in T \text{ and } r <_{tr}^T a.$$

The (critical sections) happens-before relation does not consider fork-join dependencies. Such dependencies imply WCP relations as stated by the following definition.

Definition A.3 (Weak-Causally Precedes (WCP) [Kini et al. 2017a]). The *weak-causally precedes relation* $<_{wcp}^T$ is the smallest binary relation on events in T that satisfies the following rules:

(WCP-1) $r_1 <_{wcp}^T f$ if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) for some lock x where $a_1 <_{tr}^T a_2$, there is an event e such that $e \asymp f$, $e \in CS_S^T(x)^{\langle a_1, r_1 \rangle}$, and $f \in CS_S^T(x)^{\langle a_2, r_2 \rangle}$.

(WCP-2) $r_1 <_{wcp}^T r_2$ if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) for some lock x , we have that $a_1 <_{wcp}^T r_2$.

(WCP-3) $e <_{wcp}^T g$ if for some event f we either have that $e <_{wcp}^T f <_{hb-cs}^T g$, or $e <_{hb-cs}^T f <_{wcp}^T g$, then

(WCP-4) $e <_{wcp}^T f$ if $e = (t, fork(s))$ and $s = thread(f)$.

(WCP-5) $e <_{wcp}^T f$ if $f = (t, join(s))$ and $s = thread(e)$.

We define $\leq_{wcp}^T = (<_{wcp}^T \cup <_{to}^T)$.

Two conflicting events $e \asymp f$ are in a *WCP-race* if neither $e \leq_{wcp}^T f$, nor $f \leq_{wcp}^T e$.

Our formulation of WCP differs from the one in the literature [Kini et al. 2017a]:

- Rule (WCP-2) is formulated differently from rule (b) in definition 3 in [Kini et al. 2017a]. Both formulations are equivalent as shown in appendix B.
- Fork and join events are not covered in [Kini et al. 2017a]. They are supported by the WCP implementation [Mathur and Tunç 2020]⁶ and behave like write-read dependencies protected by a common lock. As we use fork/join in examples, we explicitly add the corresponding rules (WCP-4) and (WCP-5).

Besides these differences, the above faithfully captures WCP.

Before restating the WCP soundness property, we repeat the definition of a predictable deadlock that is commonly used in the literature.

Definition A.4. We say that a trace T exhibits a *predictable deadlock* if there exists a correctly re-ordered prefix T' of T , distinct threads t_1, \dots, t_n , distinct locks x_1, \dots, x_n , acquire events $a_1, \dots, a_n \in T$ and events $e_1, \dots, e_n \in T$ where $n > 1$, $thread(e_i) = t_i$ and $a_i = (t_i, rel(x_i))$ such the following condition hold:

PD-1: For each $i \in \{1, \dots, n\}$ we have that $proj(t_i, T') = [\dots, e_i]$ and $proj(t_i, T) = proj(t_i, T') ++ [a_i, \dots]$.

⁶Personal communication with one of the implementors.

PD-2: For each $i \in \{i, \dots, n\}$ we have that $x_i \in LH_S^T(e_j)$ for some $j \neq i$.

The above says that for each thread t_i , the trace T' cannot be extended to include a_i because the associated lock x_i is held by another thread.

The WCP soundness result assumes that traces are well-nested.

Definition A.5. A well-formed trace T is *well-nested* if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) and lock x we do not have that $r_2 \in CS_S^T(x)^{\langle a_1, r_1 \rangle}$.

The definition states that if a thread acquires lock y followed by acquiring lock x , the matching release of y cannot appear before the matching release of x .

THEOREM A.6 (SOUNDNESS OF WCP, THEOREM 1 IN [KINI ET AL. 2017A]). *WCP is weakly sound, i.e., given any well-formed and well-nested trace T , if T exhibits a WCP-race then T exhibits a predictable race or a predictable deadlock.*

WCP and the prior CP relation are major accomplishments. Initially, the WCP authors tried to fix the soundness proof for CP [Smaragdakis et al. 2012]. This turned out to be unsuccessful which then led to WCP, a *weaker* CP version. Multiple years of effort went into CP as well as WCP. The soundness proof of WCP owes much to the efforts put into CP and its soundness proof. Common to both is that the WCP and CP relation are agnostic about cross-thread critical sections.

A.1 WCP Soundness Proof Structure

The first part of the WCP soundness proof is along the lines of the CP soundness proof. We can show that the reasoning in the proof can be extended to include cross-thread critical sections. See appendix C.

The second part of the WCP soundness proof goes beyond the CP proof by reasoning about deadlock patterns and chains. This shall lead to a predictable deadlock. It is this part where we see an issue as illustrated by the example in figure 5.

We examine both parts and stay close to the naming conventions in the CP/WCP soundness proof.

Proof outline. Given some well-formed trace T that exhibits a WCP-race. Pick the first WCP-race (e_1, e_2) . To goal is to show that there is either a predictable race or a predictable deadlock.

There is a predictable race. If e_1 and e_2 are unordered under the standard happens-before relation, then there must be a reordering where e_1 and e_2 appear right next to each other. So, there is a predictable race and we are done for this case.

There is no predictable race. Otherwise, $e_1 <_{hb} e_2$ where we assume that e_1 appears before e_2 in the trace. The goal for this case is to show that no predictable race exists. The proof for this part relies on picking an appropriate reordering T' of T . By exploiting the assumption that (e_1, e_2) are in a WCP-race but $e_1 <_{hb} e_2$ this then leads to a contradiction. Parts of this reasoning only consider the case of standard critical sections. In appendix C we show that the reasoning can be extended to include the case of cross-thread critical sections as well.

There is a predictable deadlock. The rest of WCP soundness proof establishes properties about deadlock patterns and chains.

"What remains to be done is to prove that deadlock chains result in predictable deadlocks. In order to do so we introduce intermediate structures called deadlock patterns."

Based on our understanding, the definitions of deadlock patterns/chains only take into account the deadlocked threads. As shown by the example in figure 5, this might be insufficient.

Initially, we tried to disprove the WCP soundness property via some cross-thread critical section example where there is a WCP-race that is not predictable and there is a “deadlocking” situation that goes beyond the standard notion of a predictable deadlock. We failed many times.

It seems that whenever there is a “deadlocking” situation that goes beyond the standard notion of a predictable deadlock there cannot be WCP-race. For an example, see figure 5. The exact details of this claim, yet need to be worked out.

B COMPARISON TO ORIGINAL WCP DEFINITION

The original formulatin of WCP-2 reads as follows.

(WCP-2') $r_1 <_{wcp}^T r_2$ if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) for some lock x , we have that for some events $e \in CS_S^T(x)^{\langle a_1, r_1 \rangle}$ or $e = a_1$, and $f \in CS_S^T(x)^{\langle a_2, r_2 \rangle}$ or $f = r_2$ we have that $e <_{wcp}^T f$.

Formulations WCP-2 and WCP-2' are equivalent. That WCP-2' subsumes WCP-2 follows immediately. For the other direction. Consider the case that $e \in CS_S^T(x)^{\langle a_1, r_1 \rangle}$, $f \in CS_S^T(x)^{\langle a_2, r_2 \rangle}$ and $e <_{wcp}^T f$.

- (1) Because we consider standard critical sections, we find that $a_1 <_{hb}^T e$ and $f <_{hb}^T r_2$.
- (2) Via left and right composition with WCP, we find that $a_1 <_{wcp}^T r_2$.
- (3) Via rule (WCP-2), we can establish $r_1 <_{wcp}^T r_2$ and we are done.

C WCP SOUNDNESS REVISTED

We consider parts of the WCP soundness proof.

The general assumption is as follows: Let T be a well-formed trace with a WCP race (e_1, e_2) where e_1 appears before e_2 in the trace. Let T' be a correct reordering such that (a) the distance between e_1 and e_2 is minimal, and (b) the distance from e_2 to every acquire that encloses e_1 is minimal (from innermost to outermost acquires).

We repeat two essential lemmas.

LEMMA C.1 (LEMMA A.1 IN WCP TECHNICAL REPORT [KINI ET AL. 2017B]). *For all events e such that $e_1 <_{tr}^{T'} e <_{tr}^{T'} e_2$ we have that*

- (1) $e_1 <_{hb}^{T'} e <_{hb}^{T'} e_2$.
- (2) $e_1 \not<_{wcp}^{T'} e$ and $e \not<_{wcp}^{T'} e_2$.

LEMMA C.2 (LEMMA A.2 IN WCP TECHNICAL REPORT [KINI ET AL. 2017B]). *Let a_1 be an acquire event such that $e_1 \in CS_{T'}(a_1)$. For all events e such that $pos_{T'}(a_1) < pos_{T'}(e) < pos_{T'}(e_1)$ we have that $a_1 <_{hb}^{T'} e$ and $e <_{hb}^{T'} e_2$.*

The above corresponds to lemma 2 in [Smaragdakis et al. 2012]. There is no proof for lemma A.1 and lemma A.2 in the WCP technical report version because they are analogous to lemma 1 and 2 in [Smaragdakis et al. 2012].

The proof of lemma 2 in [Smaragdakis et al. 2012] assumes standard critical section. We show that considering standard critical sections only is valid as we otherwise reach a contradiction to the assumption that e_1 and e_2 are in a WCP race. Here are the details.

To verify $a_1 <_{hb}^{T'} e$, the proof of lemma 2 in [Smaragdakis et al. 2012] assumes the contrary. That is, $a_1 \not<_{hb}^{T'} e$.

- (1) Consider $E = \{e' \mid e' <_{hb}^{T'} e \wedge a_1 <_{tr}^{T'} e' <_{tr}^{T'} e\}$. This is the set of all events that occur between (and inclusive of) a_1 and e are in a happens-before relation with e .

- (2) The argument is now that the set E cannot contain any events from thread t_1 where $t_1 = \text{thread}(e_1)$, or else $a_1 <_{hb}^{T'} e$.
- (3) This reasoning can only go through in case of standard critical sections. In this case, a_1 is in thread t_1 as well.
- (4) Suppose, there is some e' where $t_1 = \text{thread}(e')$ and $e' <_{hb}^{T'} e$ and $a_1 <_{tr}^{T'} e'$.
- (5) Due to thread-order, we find that $a_1 <_{hb}^{T'} e'$ and thus $a_1 <_{hb}^{T'} e$ which contradicts the assumption.

In general, a_1 could belong to a cross-thread critical section. We show that it is safe to eliminate such cases here.

Case $e_1 \in CS_C^T(x)^{\langle a_1, r_1 \rangle}$ where r_1 is the matching release for a_1 and x is the name of the lock. We assume that a_1, r_1 are not in the same thread as e_1 .

- (1) We have that r_1 *must* happen after e_1 .
- (2) This implies that there must write-read dependency in between e_1 and r_1 such that $e_1 <_{mhb}^{T'} r_1$.
- (3) Hence, we must find a write e_w and a read e_r such that $e_1 <_{tr}^{T'} e_w <_{tr}^{T'} e_r <_{tr}^{T'} r_1$ where e_w is the last write for e_r .
- (4) This write-read dependency must be protected by a common lock y . Otherwise, we obtain a contradiction to the assumption that e_1 and e_2 are the first race.
- (5) We can further assume that (1) $t_1 = \text{thread}(e_w)$ and r_1 and e_r are in some thread $t \neq t_1$, and (2) $e_w \in CS_{T'}(y)$ and $e_r \in CS_{T'}(y)$. That is, e_w and e_r are part of a standard critical section.
- (6) In general, there could be a sequence of write-read dependencies where some of them are protected by cross-thread critical sections. However, we must find a write-read dependency that is only protected by standard critical sections.
- (7) Via the above and WCP rule (WCP-1) we conclude that $e_w <_{wcp}^{T'} e_r$.
- (8) Via lemma A.1 we can conclude that $e_1 <_{hb}^{T'} e_w$ and $e_r <_{hb}^{T'} e_2$.
- (9) Via WCP rule (WCP-3) we can conclude that $e_1 <_{wcp}^{T'} e_2$.
- (10) This contradicts the assumption that e_1 and e_2 are in a WCP race.

Hence, it is safe to assume that e_1 is part of a standard critical section.

D FULL ENHANCEMENT OF PWR

We consider the full enhancement of PWR with cross-thread critical sections.

Definition D.1 (PWR-E). For a well-formed trace T , $<_{pwr-e}^T$ is the smallest strict partial order that satisfies the following rules:

(PWRE-1): $e <_{pwr-e}^T f$ if $e <_{tr}^T f$ and $\text{thread}(e) = \text{thread}(f)$.

(PWRE-2): $f <_{pwr-e}^T e$ if $e = (t, r(a))$ and f is the last write for e w.r.t. T .

(PWRE-3): $r_1 <_{pwr}^T f$ if for any two matching acquire-release pairs (a_1, r_1) and (a_2, r_2) and for some lock x where $a_1 <_{tr}^T a_2$ there is some event e such that $e \in CS_C^T(x)^{\langle a_1, r_1 \rangle}$ and $f \in CS_C^T(x)^{\langle a_2, r_2 \rangle}$.

(PWRE-4) $e <_{pwr-e}^T f$ if $e = (t, \text{fork}(s))$ and $s = \text{thread}(f)$,

(PWRE-5) $e <_{pwr-e}^T f$ if $f = (t, \text{join}(s))$ and $s = \text{thread}(e)$.

Two conflicting events $e \times f$ are in a *PWR-E-race* if neither $e <_{pwr-e}^T f$, nor $f <_{pwr-e}^T g$, and $LH_{CT}(e) \cap LH_{CT}(f) = \emptyset$.

The enhancements compared to PWR are as follows: (E1) In rule (PWRE-3) we employ cross-thread critical sections and (E2) the PWR-E-race checks employs thread indexed cross-thread lock sets.

	t_1	t_2	t_3	t_4
e_1	$fork(t_3)$			
e_2	$acq(x)$			
e_3	$fork(t_2)$			
e_4		$w(a)$		
e_5	$w(b)$			
e_6	$join(t_2)$			
e_7	$rel(x)$			
e_8			$acq(x)$	
e_9			$fork(t_4)$	
e_{10}				$r(a)$
e_{11}			$join(t_4)$	
e_{12}			$rel(x)$	
e_{13}			$w(b)$	

Fig. 13. Enhancement (E1) by example

How to integrate (E2) into PWR is described in algorithm 1. (E1) we effectively get for free. Consider the example in figure 13. There is no race here for the following reasoning.

- (1) $e_4 <_{pwr-e} e_{10}$ via rule (PWRE-2).
- (2) From this we derive $e_6 <_{pwr-e} e_{11}$.
- (3) Via rule (PWRE-3) we find that $e_7 <_{pwr-e} e_{11}$.
- (4) Therefore, $e_5 <_{pwr-e} e_{13}$.

In our implementation, we keep track of critical sections (but limiting their number for efficiency reasons). When processing the release event e_{12} , we check for any prior critical section. Here, we find (V_{e_2}, V_{e_7}) , the critical section in thread t_1 represented as pair of vector clocks where V_{e_2} corresponds to the acquire and V_{e_7} corresponds to the release. Due to the fork/join and write-read dependencies, we find that $V_{e_2} < V_{e_{12}}$ and therefore thread t_3 synchronizes with V_{e_7} . Thus, we find that $V_{e_5} < V_{e_{13}}$.

As discussed, our implementation underapproximates both enhancements.

- The implementation may not recognize a cross-thread critical section and fails to apply rule (PWRE-3).
- The implementation may not recognize that a lock is in the set $LH_{CT}()$.