



An Overview Of Temporal Commonsense Reasoning and Acquisition

Georg Wenzel ^{1*} and Adam Jatowt ¹

¹Department of Computer Science, University of Innsbruck,
Technikerstraße 21a, Innsbruck, 6020, Tyrol, Austria.

*Corresponding author(s). E-mail(s): georg.wenzel@student.uibk.ac.at;
Contributing authors: adam.jatowt@uibk.ac.at;

Abstract

Temporal commonsense reasoning refers to the ability to understand the typical temporal context of phrases, actions, and events, and use it to reason over problems requiring such knowledge. This trait is essential in temporal natural language processing tasks, with possible applications such as timeline summarization, temporal question answering, and temporal natural language inference. Recent research on the performance of large language models suggests that, although they are adept at generating syntactically correct sentences and solving classification tasks, they often take shortcuts in their reasoning and fall prey to simple linguistic traps. This article provides an overview of research in the domain of temporal commonsense reasoning, particularly focusing on enhancing language model performance through a variety of augmentations and their evaluation across a growing number of datasets. However, these augmented models still struggle to approach human performance on reasoning tasks over temporal common sense properties, such as the typical occurrence times, orderings, or durations of events. We further emphasize the need for careful interpretation of research to guard against overpromising evaluation results in light of the shallow reasoning present in transformers. This can be achieved by appropriately preparing datasets and suitable evaluation metrics.

Keywords: Commonsense Reasoning, Temporal Common Sense, Temporal Reasoning, Transformer Architecture, Temporal Natural Language Processing

MSC Classification: 68T50

ACM Classification: I.2.7

1 Introduction

Humans generally perform well in interpreting implicit information in text and speech by leveraging *commonsense reasoning*. This ability is reflected in the way we communicate. For example, when we read the phrase “I couldn’t get out of bed this morning.”, we generally assume that this refers to a state of mind and not a physical inability to get out of bed. When we read “He had butterflies in his stomach.”, we understand this as a figure of speech for an anxious or nervous feeling. Rather than specifying the literal meaning, we rely on the recipient’s implicit prior understanding of certain concepts and expressions in our language.

Commonsense reasoning can manifest in different forms. Datasets such as CIDER (Ghosal et al, 2021a), COSMOS QA (Huang et al, 2019), GLUCOSE (Mostafazadeh et al, 2020), and COM2SENSE (Singh et al, 2021) aim to serve as benchmarks to better understand the commonsense reasoning capabilities of current state-of-the-art machine learning models. In the process, these capabilities are often grouped into taxonomies, composed of categories such as physical common sense, social common sense, motivations, reactions, causality, and several others. Furthermore, collecting commonsense knowledge can be a primary goal for some knowledge bases, such as the CONCEPTNET (Speer et al, 2017) and ATOMIC₂₀ (Hwang et al, 2021) *knowledge graphs* (KGs), which have the goal of both bolstering the general reasoning capabilities of language models and training them to be able to express their implicit knowledge directly for evaluation purposes.

Historically, building machine learning systems with commonsense reasoning was a problem that was relatively difficult to tackle. One of the reasons for the first AI winter, a period of reduced funding and interest in artificial intelligence, was the lack of algorithmic problem-solving approaches, with many developers instead attempting to build systems that “think humanly” (Toosi et al, 2021). However, due to advances in computing power and neural models, these approaches have seemingly become possible in many *natural language processing* (NLP) tasks (Radford et al, 2019). A driving force behind this change is the use of transformer models (Vaswani et al, 2017) and the *large language models* (LLMs) they enable, such as BERT (Kenton and Toutanova, 2019) and GPT (Radford et al, 2018).

This article focuses on *temporal commonsense* (TCS) reasoning. TCS encompasses a variety of traits. For example, given the pair of sentences “Mary went to the hospital. She broke her leg.”, the likely sequence of events is that Mary first broke her leg and then went to the hospital, despite this not being explicitly expressed in the text. Understanding event durations is another such property. We intuitively know that going on a walk takes less time than going on vacation, even though the structure of both phrases is very similar.

Although the specific notion of TCS is relatively new, many of its applications are not. In this survey, we first provide some background on the field of temporal reasoning, where some tasks, such as event relation extraction, which directly relate to proposed TCS dimensions, have already been explored since the early 2000s (Pustejovsky et al, 2003; Pustejovsky, 2003; Verhagen et al, 2007).

In addition to the apparent benefit of incorporating TCS reasoning into such tasks, time-aware LLMs for downstream NLP tasks are also becoming increasingly popular.

Recently, models such as TEMPOBERT (Rosin et al, 2022) and BITIMEBERT (Wang et al, 2022) have been proposed, which aim to temporalize the embeddings provided by LLMs such as BERT via the document creation time or explicit temporal expressions in the training corpus. Another approach is to temporalize the attention mechanism of the transformer itself (Rosin and Radinsky, 2022). Generally, these approaches are evaluated in domains such as semantic change detection or document dating, where the use of explicit timestamps may not only be encouraged by the available datasets, but may even be required to perform the task in the first place. These models often outperform previous non-transformer-based state-of-the-art solutions in their respective domains.

Similarly, LLMs with TCS may achieve higher performance in domains where explicit temporal expressions or document dates are not as widely available. Ghosal et al (2021b) utilize the COMET transformer model (Hwang et al, 2021), which was trained on the ATOMIC₂₀ KG, to incorporate commonsense knowledge such as “I called 911 to report the accident.” occurring before “The police soon arrived.” into a sentence ordering task, achieving state-of-the-art results on several datasets. Zhang et al (2021) use temporal knowledge embedded in the ASER (Zhang et al, 2020a) KG to enrich an audio tagging ontology. LLMs with more precise world models, including an understanding of TCS properties such as typical event orderings or durations, could also be helpful in tasks such as timeline summarization (Pasquali et al, 2021), sequencing (Agrawal et al, 2016) or question answering (Wang et al, 2020). Tasks such as timeline summarization and question answering, while currently often based on and evaluated against document collections with explicit document creation times, can also rely heavily on the contextual understanding of a user’s query and the temporal interaction between documents.

In the remainder of this survey, we mainly focus on recently proposed benchmark datasets and LLMs incorporating TCS. From this research, we can draw various conclusions for future work, analyse the currently best-performing methods, and identify research gaps. The rest of this article is structured as follows. Section 2 describes our method to collect relevant literature for this survey and lists related work. Section 3 provides background knowledge regarding the field of temporal reasoning. Section 4 illustrates the shift from syntactic to semantic reasoning on several NLP tasks, the different types of TCS knowledge, and pre-transformer approaches. Section 5 lists recent benchmark datasets and examines proposed ways to improve them. Section 6 gives an overview of how researchers have been attempting to improve performance on TCS tasks in recent years. In Section 7, we propose possible avenues for future work and discuss the current state of the art. Finally, Section 8 summarizes the content of the article and provides an outlook for future research.

2 Survey Scope and Related Work

In this section, we illustrate the scope of this literature review by placing the field of TCS reasoning in its surrounding context within the NLP landscape. This allows us to clearly define which type of research will be included in the survey. Notable differences from recent related literature are also highlighted.

2.1 Survey Scope

The field of TCS reasoning is semantically embedded within both commonsense and temporal reasoning. Figure 1 shows some example tasks from both domains. In this survey, we focus specifically on datasets and models for TCS reasoning, in contrast to related fields, which we will discuss in this section.

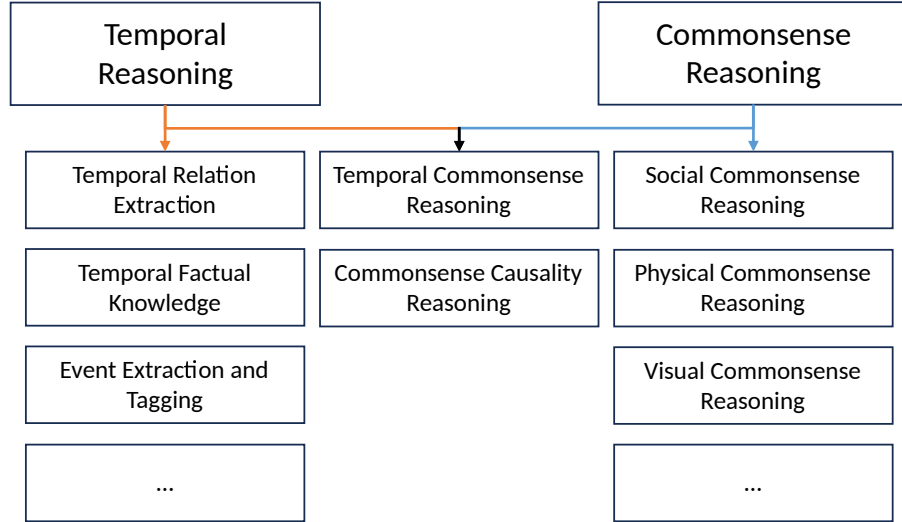


Fig. 1 Temporal reasoning and commonsense reasoning both encapsulate TCS reasoning, but also contain many other tasks

2.1.1 Commonsense Reasoning

As noted in Section 1, many datasets exist already to benchmark different types of common sense. Typically, such datasets focus on several dimensions of common sense. Consequently, TCS was considered just one of several categories or even completely overlooked. We choose not to survey such datasets, as more recent research provides several datasets specifically to benchmark TCS reasoning. Additionally, it is likely that many models specifically developed to reason over temporal properties would not perform well on other types of commonsense reasoning.

2.1.2 Temporal Reasoning

This category encompasses a wide range of research. In this survey, we do not focus on purely algorithmic approaches for temporal reasoning, such as dependency tree parsing or logical propositions. We also differentiate between *temporal factual knowledge*, where a language model is evaluated on its knowledge of the temporal scope of certain facts (Dhingra et al, 2022), and *TCS knowledge*, which is centred around an implicit understanding of common temporal attributes. For example, knowing that a presidential term has a duration of years rather than minutes is TCS. However, knowledge of

the identity of the President of the United States in 2009 is temporal factual knowledge. One possible ambiguity emerges when temporal factual knowledge tasks, such as temporal slot filling, are tackled using common sense that is not inherently temporal, such as knowledge of certain “world invariants” (Wang and Jiang, 2020; Zhou et al, 2020b). However, to keep the scope of the survey reasonable, we do not explore such approaches, as they technically do not leverage TCS reasoning.

2.1.3 Commonsense Causality Reasoning

Commonsense causality reasoning is perhaps the most closely related field to TCS reasoning. Like TCS reasoning, it finds its roots in both temporal and commonsense reasoning. Naturally, temporal awareness is almost certainly required to reason about causality (Zhang et al, 2022). Conversely, causality can greatly inform certain TCS dimensions, such as event ordering. However, causality and the properties proposed in TCS reasoning are ultimately different. In line with our goal of keeping the scope of the survey reasonable, we thus do not study such approaches.

2.2 Research Goals

In this survey, we aim to provide a broad overview of the field of TCS reasoning. This includes scoping TCS, as well as identifying and collecting relevant datasets, language model structures, evaluation metrics, and state-of-the-art results.

Our first major objective is to provide a full overview of datasets specifically developed to evaluate certain dimensions of TCS, as well as survey said datasets for common evaluation metrics, findings, and possible identified methods to improve the robustness of both the collection process for new datasets and the reporting process for existing ones.

We find that current research into LLMs with TCS mainly revolves around data engineering of input- and output structures of the transformer architecture. Consequently, our second major goal is to summarize and categorize the attempted augmentations as well as their perceived effectiveness, and to locate possible avenues for future work.

2.3 Literature Collection

The literature collection for this survey was conducted as follows. For the primary collection of state-of-the-art TCS models and datasets, *Google Scholar*, *Semantic Scholar*, and *dblp* were queried using the search string “temporal commonsense”. Additionally, we restricted the field of study to “computer science” on the Semantic Scholar platform.

The transformer architecture and subsequent models significantly improved the state-of-the-art performance in many NLP tasks (Radford et al, 2019). This survey will show that transformers form the basis of nearly all state-of-the-art models in TCS reasoning. Therefore, we only considered research from 2018 onward, in line with the 2017 release of the “Attention is all you need” paper (Vaswani et al, 2017) and the subsequent 2018 release of the BERT and GPT models.

We evaluated 21 papers from dblp (the full set of results) and the top 50 results from Google Scholar and Semantic Scholar, discarding research that was not written in English or did not mention TCS in the abstract. We then performed one iteration of backward snowballing from the result set to identify previous work. However, except for the ROCSTORIES dataset, most previous work could not clearly be described as aiming to acquire or measure TCS understanding.

We survey modern benchmark datasets for TCS reasoning and proposed models evaluated on said datasets. From the previously mentioned related domains (such as temporal reasoning and commonsense reasoning), we also cite important work to highlight findings that can be applied to TCS reasoning research in the future. Finally, we provide a brief background on temporal reasoning to ground the origin of tasks and dimensions proposed within TCS reasoning.

2.4 Related Work

Several recent surveys are studying commonsense knowledge embedded in LLMs and how it could be improved (Storks et al, 2019; Bhargava and Ng, 2022; Lymperaiou and Stamou, 2022; Yin et al, 2022). However, such surveys tend to only consider TCS as one of several possible domains of common sense, if at all, and do not provide a full spectrum of recent research.

Davis (2023) provides a comprehensive survey of benchmark datasets for different categories of commonsense reasoning, including temporal. However, their survey aimed to qualitatively analyse a large variety of common sense benchmark datasets to detect potential flaws and propose improvements. As there is no categorization by the type of common sense required and no further in-depth comparative discussion of results within the domain of TCS research, this survey does not provide a clear overview of the current state of the art.

Helwe et al (2021) showcase shallow reasoning behaviours in transformer models on different tasks. While not all proposed behaviours are related to commonsense reasoning, some examples from the TCS domain, also discussed in this survey, are mentioned. Furthermore, some general behaviours found in LLMs, such as the possibility of mispriming and a lack of understanding for negated phrases, have substantial implications for tasks posed in the TCS domain and should be considered when training models on temporal data (Qin et al, 2021).

Ji et al (2021) survey KGs, specifically mentioning them as a possible way to empower commonsense reasoning in knowledge-aware models. However, many alternative approaches can be chosen to encode additional temporal information in language models, which are not discussed in this survey.

Of course, surveys can also be found on downstream tasks related to time, such as temporal information retrieval (Campos et al, 2014) and temporal information extraction (Sousa et al, 2023). As mentioned in Section 1, it stands to reason that models incorporating TCS could help solve such tasks. However, because of the relative novelty of the topic, they are not often discussed.

Compared to previous work, our survey focuses specifically on the growing field of TCS reasoning. We draw parallels to long-standing temporal reasoning tasks and highlight the technologies that enabled the current state-of-the-art performance. We then

survey datasets explicitly created to benchmark the TCS understanding of machine learning models, as well as models evaluated on those datasets. Finally, from both types of surveyed research and related work, we categorize the current state-of-the-art solution space and propose improvements for both datasets and models in future work.

3 Temporal Reasoning

We first briefly summarize the topic of *temporal reasoning*. Temporal reasoning consists of “formalizing the notion of time and providing means to represent and reason about the temporal aspects of knowledge” (Vila, 1994). Much early temporal reasoning research in NLP can be linked back to Allen (1983) documenting an algebra for storing and updating temporal relations between events in the form of intervals, which were connected using a set of 13 different relations such as *during*, *before*, *after* or *overlaps*. This algebra stood out from previous work in that it did not require precise timestamps or orderings to be known and could be used to express facts such as “event A happens before or after event B”, similar to how temporal facts can be expressed in natural language, without explicit timestamps and without the strict requirement of an ordered notion of time between events.

The 2002 TERQAS workshop led to the creation of the specification language *TimeML* (Pustejovsky et al, 2003) for tagging temporal expressions and events in natural language. TimeML effectively converted many of the constraints previously defined by Allen into tags for natural language. In addition, they defined four fundamental problems in event-temporal identification.

1. Timestamping of events.
2. Ordering events with respect to one another.
3. Reasoning with underspecified temporal expressions (such as “last week”).
4. Reasoning about the persistence of events.

This annotation language used tags such as temporal links between events and definitions for intensional temporal expressions, embeddings, and signal words. Therefore, it was suitable for annotating events and their temporal dimensions in textual content. The TERQAS workshop also led to the creation of *TimeBank* (Pustejovsky, 2003), a 300 large text corpus of documents from various news-related sources, manually annotated using TimeML tags. Over the following years, TimeBank was further refined to ensure that it could be used as a gold standard for temporal relation extraction (Pustejovsky et al, 2006).

TimeML and TimeBank proved to be crucial resources for benchmarking temporal reasoning in the following years. A notable resource that promoted the development of TimeML as an annotation language was the *TempEval* tasks proposed in several SemEval workshops between 2007 and 2013 (Verhagen et al, 2007, 2010; UzZaman et al, 2013). These tasks gradually required an increasing amount of agency of the corresponding models in recognizing, extracting, and tagging temporal expressions and events from free-form text. In this sense, the development of these challenges and the corresponding solution space highlight a potential origin of the idea of “temporal common sense”.

In 2007’s TempEval challenge (Verhagen et al, 2007), participants were required to extract and provide simplified TimeML annotations for already supplied events and temporal links. Rule-based systems and syntactic analysis (such as dependency tree parsing or syntactic tree generation) were used to solve the task.

In contrast, 2010’s TempEval-2 tasks (Verhagen et al, 2010) extended the initial TempEval task set with the automatic recognition of events and time expressions. In contrast to previous tasks regarding the extraction of temporal expressions, where rule-based information extraction systems such as the Edinburgh IE system (Grover et al, 2010) and HeidelTime (Strötgen and Gertz, 2010) dominated, a conditional random field (CRF) model provided the best F1 score on event extraction (Llorens et al, 2010). This CRF model used semantic information that could be learned from the annotated data and semantic role labelling. The success of this approach already showed a movement towards data-driven methods and the use of latent semantic information for classification purposes rather than purely syntactic parsing.

This trend continued in 2013, where the TempEval-3 task set (UzZaman et al, 2013) included an end-to-end task requiring the systems to fully extract events and their temporal links from scratch and tag all extracted data with appropriate properties. The dataset used for the previous challenges was expanded with a new manually verified platinum set and an automatically annotated silver set, using an ensemble of best-performing methods from the previous TempEval challenge. This extended dataset effectively allowed teams to leverage precomputed weak supervision. Again, while rule-based systems dominated on pure normalization of time expressions, machine-learning-based systems performed much better on the event extraction task, with all high-performing systems using some form of machine learning, usually in the form of probability classifiers such as MaxEntropy, CRF, or support vector machines (SVM). The automatically annotated silver data and semantic features, such as WordNet synsets and semantic role labels, also proved very helpful in solving this challenge.

This difference in best-performing solutions raises the question of what distinguishes a task like temporal expression normalization from one such as event extraction. The following example of events in text from the TimeML specification (Pustejovsky et al, 2003) and the annotation guide (Sauréi et al, 2005), with events highlighted in bold, illustrates why it may be difficult for a rule-based system to perform event extraction.

He **kicked** the ball, and it **rose** into the air.
The **rains caused** the **flooding**.
John **caused** the **fire**.
All 75 people **on board** the Aeroflot Airbus **died**.

According to the TimeML annotation guidelines, events “cover situations that happen or occur. [...] We also consider as events those predicates describing states or circumstances in which something obtains or holds true”. Compared to the limited number of possible explicit temporal expressions, it is quite hard to formalize such a proposition in an algorithm. Even prepositional phrases such as “on board” could be

considered an event. Thus, given enough data and computational power, solving such tasks via data-driven models appears to be more feasible.

Notably, the subsequent definition of new TCS tasks does not subsume research into other aspects of temporal reasoning using LLMs. For example, [Tan et al \(2023\)](#) recently evaluate the temporal reasoning capabilities of LLMs in closed book QA, open book QA, and reasoning QA formats, finding that such models are often incapable of extrapolating their reasoning capabilities to settings outside the contemporary training period and proposing methods, such as time-sensitive reinforcement learning, to mitigate this issue.

4 Pre-Transformer Temporal Common Sense

Before providing an overview of modern TCS reasoning models and datasets, we first introduce commonly cited dimensions of TCS reasoning and connect them to previously proposed temporal reasoning tasks. In addition, we showcase some of the main technologies that enabled models to reason over TCS.

4.1 Defining Temporal Common Sense

The eventual objective of fully automating temporal reasoning is not new. The TimeML authors note the surge in research regarding the automatic recognition of temporal and event expressions in natural language text ([Pustejovsky et al, 2003](#)), posing potential benefits in domains such as question answering. For example, the question “Did the Enron merger with Dynegy take place?” requires a model to understand whether an event mentioned in a news article has actually occurred, rather than simply finding any mention of the event.

The TimeBank authors mention that “from a practical computational perspective, it will become possible to consider training and evaluating algorithms which determine event ordering and timestamping, and to explore their utility in question answering” ([Pustejovsky, 2003](#)).

The authors of the TempEval-3 tasks state that the ultimate aim of their research is the “automatic identification of temporal expressions, events, and temporal relations within a text as specified in TimeML annotation” ([UzZaman et al, 2013](#)).

However, as introduced in Section 1, such a fully automatic end-to-end pipeline requires models to be able to reason over temporal contexts even when information is only provided implicitly or must be inferred via common sense. Hence, simple data-driven reasoning over explicit contexts is not sufficient to fulfil these visions.

To connect these previous ambitions with current work, we refer to the relatively novel dimensions of TCS as proposed by [Zhou et al \(2019\)](#). These five dimensions are as follows:

- *Event typical time*: At what time do we expect certain events to happen?
- *Event duration*: How long does an event typically take?
- *Event ordering*: What happens before or after a specific event?
- *Event frequency*: How frequently does a recurring event typically occur?
- *Stationarity*: Does a state hold for a long time or indefinitely?

Similar to previous temporal reasoning tasks, these dimensions are also very event-centric. However, they are already inherently more probabilistic. We ask ourselves when an event typically happens or how long it typically takes, but this does not always have to be the case. For example, we may expect most people to shower in the morning, but others may shower in the evening, in the afternoon, or at night. When we talk about TCS, we talk about the average person’s expectations for certain temporal properties. It is difficult to explicitly model such concepts, which is why the increased performance of data-driven methods in NLP due to new technologies has been so beneficial to this field.

Notably, the proposed TCS dimensions quite heavily correspond to annotations within TimeML. For example, a temporal link between an event and a timestamp can denote the time at which an event occurs. A temporal link between two events can denote the order of these two events. Certain temporal expressions (e.g., “on Mondays”) can also signify the frequency of recurring events. Event duration tags for TimeML were also proposed (Pan et al, 2006). The difference in TCS reasoning is that we do not seek the explicit answer for a specific temporal property in a source text, but rather use pre-existing knowledge to find a likely generalization that applies to an incomplete context.

Systems that possess TCS could thus be expected to understand one or more of these dimensions to reason over downstream tasks. For example, estimating event durations naturally requires systems to know the typical duration of events. Temporal relation extraction mainly requires systems to have knowledge of typical event orderings. Other properties, such as temporal validity (Almquist and Jatowt, 2019; Hosokawa et al, 2023), may require knowledge of a combination of dimensions, such as stationarity and typical event duration.

4.2 Early Temporal Common Sense Systems

In the last decade, due to increases in computing power and the evolution of neural models, a focus on semantics helped push the field of TCS reasoning forward. Embedding methods such as *Word2Vec* (Mikolov et al, 2013) and *GloVe* (Pennington et al, 2014) were introduced to generate semantic word embeddings. Although these methods were prone to issues such as a lack of inherent word sense disambiguation, they were used frequently in newer temporal reasoning challenge tasks such as Clinical TempEval (Bethard et al, 2016). Although the best performing methods still used CRFs and SVMs based primarily on lexical features, neural network structures and static word embeddings were used by many groups, including a proposal for a possible improvement to an RNN-based solution by using the long short-term memory architecture (Fries, 2016).

In the scope of TCS, ROCSTORIES (Mostafazadeh et al, 2016a) was one of the first noteworthy datasets to specifically benchmark the understanding of implicit causal and temporal relationships between events in machine learning systems. Although prior work on story comprehension and text understanding existed, for example, in the form of MCTEST (Richardson et al, 2013), these datasets did not specifically focus on a temporal or causal aspect nor commonsense reasoning. ROCSTORIES, on the other

hand, focused on rich causal and temporal context that was not trivial to resolve, for example, via the sentence order.

Further, CATERS (Mostafazadeh et al, 2016b) was devised as a new annotation scheme for causal and temporal relations, replacing some TimeML links with causal links based on a previous causal model (Wolff and Song, 2003). This paper also affirmed the story quality of ROCSTORIES and its temporal properties. ROCSTORIES thus remains an important benchmark dataset in temporal- and causal commonsense reasoning to date.

5 Modern Temporal Common Sense Benchmarking

Since 2017, there has been a steady increase in benchmarking datasets for TCS, as well as models aiming to solve the corresponding tasks. In this section, we first briefly describe how the transformer architecture made commonsense reasoning more approachable. We then discuss emerging datasets measuring TCS understanding in language models and summarize how such datasets may be improved in the future.

5.1 Transformer Architecture in Natural Language Processing

In 2017, the well-known paper “Attention is all you need” was published (Vaswani et al, 2017), which first introduced the transformer architecture. Over the following years, many LLMs based on this architecture would emerge, such as the previously mentioned GPT and BERT, as well as newer models, such as GPT-3 (Brown et al, 2020) and T5 (Raffel et al, 2020). The trend with these models is an ever-increasing parameter size and massive amounts of raw text as unsupervised training data, to the point where training their parameters from scratch is often no longer feasible for smaller datasets. Researchers and developers thus often use these models in their pre-trained form, only adding classification layers or extracting the generated word embeddings for downstream tasks and -processing. Another option is to use smaller model sizes, which are less likely to overfit, but may not be able to provide the same reasoning capabilities.

In 2019, a BERT-based model already outperformed existing state-of-the-art systems on temporal relation extraction simply by adding a classification layer on top of the pre-trained model (Han et al, 2019). Furthermore, the largest out-of-the-box GPT-2 model outperformed state-of-the-art solutions in 7 of 8 evaluated language modelling tasks in a zero-shot setting (Radford et al, 2019). LLMs have become so powerful that the largest models do not even have to be fine-tuned to perform specific tasks. For example, T5 determines and solves various tasks through a natural language prefix attached to the input, whereas GPT-3 can often reason over both the task and corresponding few-shot samples in the input itself. Recently, CHATGPT has shown how prompts, rather than fine-tuning, can be used to solve certain tasks in NLP. However, it is still outperformed by fine-tuned task-specific models on certain tasks, such as sequence tagging (Qin et al, 2023). Naturally, this raises the question of how these models reason over TCS.

5.2 Temporal Common Sense Benchmark Datasets

Table 1 lists TCS benchmark datasets. Except for ROCSTORIES, datasets for TCS benchmarking only began to emerge after the surge in popularity of transformer models. Notably, while the listed datasets are explicitly concerned with TCS reasoning, other temporal reasoning datasets, such as TIMEQA (Chen et al, 2021), MATRES (Ning et al, 2018b), or RED (O’Gorman et al, 2016) are sometimes used for benchmarking TCS models as well, although they are not surveyed in this article. We briefly describe the surveyed datasets in the following.

Table 1 Temporal common sense benchmark datasets

Year	Dataset	Task	Focus	Size	Context Source	Data Collection
2016	ROCSTORIES	Classification	No Focus	50k	Crowdsourcing	Crowdsourcing
2019	McTACO	Classification	No Focus	13k	MULTIRC	Crowdsourcing
2020	TORQUE	Extraction	Ordering	65k	TEMPEVAL3	Crowdsourcing
2020	VASHISHTHA2020	Classification	Duration, Ordering	1m	TE3, TB-D, RED, UDS-T	Recasting
2020	WIKIHOW	Classification	Ordering	839k	WIKIHOW	Crowdsourcing ^a
2021	TIMEDIAL	Classification	No Focus	1.1k	DAILYDIALOG	Crowdsourcing
2021	TRACIE	Classification	Ordering	5.4k	ROCSTORIES	Crowdsourcing
2023	TNLI	Classification	Duration	10.7k	FLICKR30K	Crowdsourcing

^aCrowdsourcing is only used to train a model to filter articles, not for annotating data instances.

ROCStories: ROCSTORIES (Mostafazadeh et al, 2016a) is formulated as a “story cloze test”, where a model reads the first four sentences of a story and has to choose the correct ending out of two possible options. A rigid crowdsourcing process aims to ensure that stories have sufficient causal and temporal context for a model to choose the correct ending.

McTaco: McTACO (Zhou et al, 2019) is a multiple-choice question answering dataset that specifically probes all proposed TCS dimensions. Each item contains a short context, such as “Ratners’ chairman, Gerald Ratner, said the deal remains of substantial benefit to Ratners.”, followed by a commonsense question, such as “How long did the chairman speak?” A model then has to reason over four possible answer candidates in a binary classification format.

TORQUE: TORQUE (Ning et al, 2020b) is a reading comprehension dataset focused on temporal ordering. For each text passage, a model must determine which events in the text occur before or after some target event. They focus on a very robust evaluation process to ensure models do not end up scoring high on the dataset through trivial answers.

Vashishtha2020: Vashishtha et al (2020) recast several event duration and event ordering datasets into a *natural language inference* (NLI) format, in which a given duration of an event or an ordering of a pair of events forms the hypothesis.

WikiHow: WIKIHOW (Zhang et al, 2020b) is a dataset containing steps of WikiHow articles. Among others, they propose a step ordering task. For example, in an

article titled “Clean Silver”, a model would have to determine whether “dry the silver” occurs before or after “handwash the silver”.

TIMEDIAL: Items in TIMEDIAL (Qin et al, 2021), similar to MCTACO, consist of a context and several answer candidates. In contrast to MCTACO, TIMEDIAL answer candidates are cloze-style options for a missing temporal quantifier. The contexts themselves are dialogues. An example dialogue is shown below. Models have to evaluate each option in a binary classification format.

A: May we see the wine list, please.

B: Sure. Our special wine today is a 1989 Chardonnay.

A: I’d like a bottle, please.

B: I’ll need to see your ID, please.

A: Here you go.

B: Sorry about the inconvenience, you look so young. I had to make sure you are over

-
- a) 21 years old b) 30 years old
c) 4 years old d) 18 years old

TRACIE: TRACIE (Zhou et al, 2021), similar to VASHISHTHA2020, poses event ordering as a textual entailment task. However, their entailment instances are formulated over intervals rather than discrete points in time, for example: “event a *starts* before event b *ends*”.

TNLI: Hosokawa et al (2023) formulate the *temporal natural language inference* (TNLI) task, in which a model has to determine whether a follow-up sentence supports, invalidates, or is neutral with respect to the temporal validity of actions in the target sentence. For example, the temporal validity of the sentence “A musician sings into a microphone while playing a guitar.” is invalidated by the follow-up sentence “The musician eats at his favourite restaurant.”, as the former action cannot still be ongoing when the latter is observed.

5.3 Categorization of Benchmarked Datasets

We group the proposed tasks into the three categories of *classification*, *extraction*, and *generation*. We denote a task as a *classification* task if a model is expected to reason over the likelihood of a set of provided answer candidates. This is the case in most proposed datasets. The actual specific task varies, as seen in Section 5.2. Of the proposed datasets, only the questions in TORQUE are more open-ended in the form of an extractive question answering task. However, this task can also be resolved by a binary classification of each token in the text passage. Notably, there are no *generative* approaches, in which a model would autonomously provide a reasoning for giving a certain answer or provide its best effort guess for downstream evaluation.

As for the TCS focus dimension being benchmarked, it is usually event ordering or event durations. In other cases, there may be no specific categorization of dimensions, and TCS is presumed to be measured in its entirety. Given the discussed history of temporal reasoning and how it ties into newer TCS research, the focus on event ordering

and -durations is unsurprising, as these dimensions most closely model previous temporal reasoning tasks. The three datasets MCTACO, TIMEDIAL, and ROCSTORIES mainly focus on contextual understanding of the temporal properties of a given background story without considering the specific commonsense dimensions too closely. However, the authors of MCTACO, as their paper defines the dimensions discussed earlier, categorize each question into one of the five dimensions.

The size of the proposed datasets also varies significantly, and the average dataset size is relatively small. However, the authors of TORQUE show that this may not always be an issue, as the performance of their baseline approach converges before much of the available training data is ingested into the model (Ning et al, 2020b). As most datasets only aim to benchmark performance rather than teaching new reasoning capabilities to a model, the model only has to be post-trained enough to understand the given task format.

There are two significant outliers with respect to size. Vashishtha et al (2020) create a considerable number of NLI pairs by recasting existing temporal relation extraction datasets into an NLI format. For example, for the phrase “We waited until 2:25 PM and then left”, we can formulate a hypothesis such as “The waiting started before the leaving started”, for which the answer is known from existing annotations. However, it should be considered that, in this case, not all samples are guaranteed to measure TCS understanding, as the answer may already be provided explicitly by the statements in question. Similarly, Zhang et al (2020b) infer the step ordering from the WikiHow articles directly, after first using a BERT-model trained on crowdsourced data to determine whether the article contains ordered steps.

Also of note is that the proposed datasets rely heavily on crowdsourcing. Except for VASHISHTHA2020, all datasets use crowdsourcing during dataset construction. As mentioned previously, authors of the WIKIHOW dataset use crowdsourcing to train a BERT-model to predict whether the steps in articles are ordered for downstream processing, but not for determining the common sense properties of the texts themselves. All remaining authors create their dataset at least partially via crowdsourced annotations. Several authors also source contexts from existing datasets, which in turn may also have been created by crowdsourcing. It is relatively logical to rely on crowdsourcing to create datasets for commonsense reasoning purposes, but it can be prone to errors or fraudulent activity by workers, which potentially requires manual intervention to ensure that the dataset quality remains high (Hosokawa et al, 2023). Platforms such as CROWDAQ (Ning et al, 2020a) can potentially help to properly train and vet crowdworkers for specific tasks. However, it has been shown that items in common sense datasets often do not stand up to expert vetting regardless (Davis, 2023), which can be an issue when those datasets are used to benchmark model performance.

5.4 Lessons from Existing Benchmarking Datasets

For the remainder of this section, the goal is to summarize the dataset authors’ reflections and draw parallels with work in related fields. We list important findings and proposed methods to improve the robustness of future work.

5.4.1 Evaluation Metrics

When reporting on classification tasks, commonly reported quantitative metrics, such as accuracy and F1 score, are generally the most generous interpretations of model performance. A model can achieve high accuracy or F1 score simply by exploiting patterns in the data. The most straightforward example is, of course, a model that simply predicts the majority class. In binary classification settings (such as multiple choice question answering, where every question-answer pair resolves to either true or false), such a system is guaranteed to obtain an accuracy score of at least 0.5. Although the F1 score is somewhat more robust (assuming that the problem has a reasonable class distribution), a model can still achieve a high F1 score by finding simple patterns in the dataset without actually understanding the problem statement.

Thus, using a context-level *exact match* (EM) metric may be preferable, where applicable. The rationale is that a system that can genuinely reason over a specific property (such as TCS) should be evaluated on the number of contexts it can reason over flawlessly (e.g., the number of questions for which a system can correctly classify all possible answers as true or false). On the other hand, a metric like accuracy measures performance on a case-by-case basis and disregards consistency within the model.

For example, suppose that a system can identify “1.5 months” as a correct answer to a given question but not “6 weeks”. In that case, likely, the system is not using TCS to arrive at this conclusion, but is instead taking a shortcut in the reasoning, such as pattern matching one of the proposed answer candidates. The datasets MCTACO and TRACIE provide EM scoring at the context level in their baseline performance reporting. TIMEDIAL is evaluated on *2-best accuracy*, in which both correct answer candidates must be ranked as more likely than both incorrect answer candidates, which provides somewhat of a middle ground between accuracy and context-level EM.

5.4.2 Contrast Sets

To even further decrease the likelihood of overvaluing incidental correct responses, [Gardner et al \(2020\)](#) propose creating contrast sets. These datasets contain data points that are as similar as possible to data points within the dataset, while leading to a different classification result. They show that while humans succeed on such contrast sets, models often do not, specifically mentioning MCTACO as an example, which drops from 0.38 EM to 0.14 EM on such a contrast set. In the example below ([Gardner et al, 2020](#)), the contrast instance differs only in a few words from the original context, but drastically changes the expected likelihood of the candidate answer.

Context: She renews in Ranchipur an acquaintance with a former lover, Tom Ransome, *now a dissolute alcoholic*.

Contrast: She renews in Ranchipur an acquaintance with a former lover, Tom Ransome, *who keeps very healthy habits*.

Question: How frequently does Tom drink?

Candidate Answer: Every other night.

The authors of TORQUE try to implement this measure by specifically negating their temporal ordering questions to maximize the difference in the desired output. For example, if a question in the dataset is “What happened after he ate his breakfast?”, the contrast questions “What happened when he was eating his breakfast?” and “What happened before he was eating his breakfast?” should also be posed. In total, the answer to these questions should cover all possible events in the context, and each event should resolve only to the correct question. They then report EM consistency, the percentage of contrast question sets for which a model’s predictions match exactly.

To highlight the impact of reporting more robust metrics, we list some evaluation metrics reported from the baseline models for McTACO and TORQUE in Table 2. Here, the previously discussed EM consistency is denoted as C for TORQUE. These results strongly highlight that model performance decreases much more than human performance on such metrics.

Table 2 A list of reported evaluation metrics in McTACO and TORQUE, sorted by performance difference between humans and the best-performing model presented in the paper (Δ)

Dataset	Metric	Model	Human	Δ
McTACO	F1	.699	.871	.172
TORQUE	F1	.752	.953	.201
McTACO	EM	.427	.758	.331
TORQUE	EM	.511	.845	.334
TORQUE	C	.345	.825	.480

5.4.3 Measuring Model Understanding

Although humans tend to succeed more than TCS models when evaluation metrics are stricter, dataset authors should take care to report metrics that aim to measure the model’s understanding of the problem as accurately as possible. In extractive question answering, token-level F1 and EM score are two metrics that are typically used for evaluation. However, unlike classification problems, where answers are unambiguously correct or incorrect, there is often some ambiguity when it comes to extracted text spans.

The authors of TORQUE provide token-level F1 and EM score, rather than context-level. In their dataset, this appears not to pose a problem, as their questions are effectively a natural-language recasting of known temporal relations between events. However, this does not apply to every problem. [Bulian et al \(2022\)](#) note that both token-level F1 and EM fail to recognize cases in which a model may remove incorrect information or add further relevant information to its response due to the symmetry of the metrics. They propose an asymmetric *answer equivalence* metric, as well as a BERT-based estimator for said metric. Although they concede that their approach does not address a potential temporal dimension of answer candidates (e.g.,

“4 months ago” and “February 2022” is only equivalent in June 2022), this asymmetric type of answer scoring may provide a better solution for extractive tasks and may pave the way for eventual generative approaches, where a generated answer candidate could be reasonably compared against the reference answer.

In summary, dataset authors should take care in their baseline reporting to identify and propose appropriate evaluation metrics. Where possible, these metrics should discourage models from obtaining high scores simply by finding a reasoning shortcut for a subset of the data. They should be as strict as reasonably possible while still allowing the model to be expressive in its responses, should the task format allow for it. Although classification tasks, which form the basis of many currently existing datasets, inherently do not pose a risk of restricting the expressiveness of the model, they also do not always align closely with downstream tasks, since answer candidates are not always available. For more autonomous models that do not rely on answer candidates, different metrics will thus need to be used.

5.4.4 Linguistic Traps

The authors of TIMEQA showcase “shallow pattern matching” performed by transformer models through their split of *easy* and *hard* questions. For example, if an athlete was on a team between 1973 and 1975, an easy question might be, “What team did [player] play for between 1973 and 1975?” A hard question might instead be “What team did [player] play for in June 1974?” or “What team did [player] play for between April 1974 and December 1974?”, since the exact temporal spans are not reused. While human annotation only incurs a performance decline of 2 percent in the EM metric from such questions, it is roughly 13.7 percent for the best-performing transformer system.

This dependence on simple pattern matching can also be seen in the TIMEDIAL dataset. Here, crowdworkers were explicitly instructed during dataset creation to try to reuse explicit temporal quantifiers from the question in incorrect answer candidates wherever possible. They show that a simple BERT model picks such incorrect options 52 percent of the time over the correct answers. For example, when the context mentions a meeting starting at “three o’clock” for which the speaker does not want to be late, models were more likely to estimate “half past three” as a possibility for the current time than “quarter to two”.

Although more powerful transformer models, such as T5, are more robust to pattern matching, it remained the most common error type. It can also be linked to previously reported issues such as mispriming. For example, a BERT model may fill the mask in “Samsung. The iPhone is produced by [MASK]” with “Samsung” due to the previous mention of the in-domain phrase. Similarly, other pitfalls, such as ignoring negation and word order, have also been reported in transformer-based LLMs (Helwe et al, 2021).

5.4.5 Debiasing

While not TCS research, the WinoGrande (Sakaguchi et al, 2021) paper highlights the importance of debiasing in NLP. They create a crowdsourced dataset for commonsense pronoun disambiguation and evaluate fine-tuned models on the well-known Winograd

Schema Challenge dataset (Levesque et al, 2012). Although their own WinoGrande dataset was crowdsourced, they achieved better performance on the original expert-crafted dataset, citing their debiasing strategy as a critical reason for this success.

Debiasing generally comes in the form of some adversarial learning, which ensures that solving the instances in the dataset is not trivial for the model. In the case of WinoGrande, this is done by using linear classifiers based on ROBERTA (Liu et al, 2019) embeddings to remove the easiest instances to classify from the dataset repeatedly.

The authors of the CIDER common sense dataset, which also has some temporal dimensions, apply adversarial filtering to remove stylistic patterns from their confounding-option candidates.

6 Improving Temporal Commonsense Reasoning

In the previous section, we show how TCS datasets can be constructed, as well as some techniques that can make their evaluation more robust to typical strategies exploited by modern LLMs. In this section, we discuss proposed methods to improve the current state of the art in TCS reasoning.

6.1 Baseline Models and Human Performance

First, we examine the results that the dataset authors provide as baselines. Table 3 shows the performance of baseline models. Note that the provided results in Table 3 are not necessarily the best result reported in the paper, as we will examine the impact of augmentations in a later section, but that the results do showcase the performance of the best model structure in its base form.

These baseline models were created through regular pretraining and potential auxiliary training objectives derived from the dataset. ROCSTORIES is an outlier, since the transformer architecture was not popularized yet at the time of its publication. As such, the authors report performance by another neural network architecture called DSSM (deep semantic similarity model). TNLI’s SELFEXPLAIN baseline uses the model by Sun et al (2020), whose embeddings are also based on RoBERTa. However, SELFEXPLAIN adds some additional layers which greatly improve performance on TNLI.

In the TRACIE dataset, human performance is only reported for a “no-story” set, in which only the hypothesis of a story is known, but not its context. On the other hand, the reported model performance is based on the dataset that contains complete information. Hence, humans had to solve a more difficult task, as they had much less available information. Nevertheless, they still outperformed the best-performing baseline model.

6.2 Proposed Augmentations

Notably, none of the baseline models proposed in Section 6.1 appear to understand temporal attributes well enough to match human performance. Consequently, their out-of-the-box reasoning over TCS dimensions can still be improved. In the remainder

Table 3 Performance of baseline models reported by dataset authors

Dataset	Base Model	Metric	Performance	Human
ROCSTORIES	DSSM	Acc	.585	None ^b
McTACO	BERT	F1	.699	.871
TORQUE	ROBERTA-LARGE	F1	.752	.953
VASHISHTHA2020	ROBERTA-LARGE	Acc	.809 ^c	None
WIKIHOW	ROBERTA	Acc	.835	.975
TRACIE	ROBERTA-LARGE	Acc	.784	.825 ^d
TIMEDIAL	T5-LARGE	2-best Acc	.748	.978
TNLI	SELFEXPLAIN	Acc	.873	None

^bAuthors report a human performance of 1.0 due to double-verified crowd-sourced instances, but no further human evaluation was performed.

^cMacro-average performance across all evaluated datasets by the overall best-performing model.

^dReported on a *more difficult* (compared to model performance) “no-story” set.

of this section, we explore proposed techniques to improve the TCS understanding of these models.

6.2.1 External Knowledge

It is likely that a significant reason for the lack of commonsense understanding in transformer models is reporting bias. Due to the nature of language, using the frequency of event occurrences in text as a baseline for commonsense knowledge is generally not ideal (Gordon and Van Durme, 2013). Also known as the “black sheep problem”, we intuitively understand that one is much more likely to mention a “black sheep” than to specify the colour of a regular sheep, which may confuse statistical models. These artefacts can be seen in the event likelihood estimate of transformer models. For example, BERT, which was trained on Wikipedia, may overestimate the likelihood of death. Similarly, ROBERTA, which was trained on the web, overestimates the probability of newsworthy events such as being murdered (Shwartz and Choi, 2020).

Several recent papers have attempted to mitigate this bias by using KGs with LLMs. Specifically, the two previously mentioned KGs CONCEPTNET and ATOMIC₂₀ have frequently been proposed for such methods due to their specific temporal relations (e.g., “X causes Y”, or “After doing X, person Y will want to...”). KGs can be used in TCS models to provide “knowledge embeddings” of phrases (Hosokawa et al, 2023), or to directly post-train the language model on KG triples converted to natural language (Guan et al, 2020).

The CoCoLM model (Yu et al, 2022) uses the ASER KG for pre-training. Unlike the KGs mentioned above, ASER triples are automatically constructed from raw text, which means that the KG contains more instances, but may contain noise. CoCoLM shows significant gains on ROCSTORIES using a base BERT model and random walk over ASER to generate multi-hop reasoning phrases as training instances.

6.2.2 Weak Supervision

Weak supervision in TCS reasoning is often based on event co-occurrences with temporal expressions, which can be used to train a language model. [Almquist and Jatowt \(2019\)](#) propose using the co-occurrence of temporal expression with subjects, verbs, objects, and their combinations as a feature in an SVM-based classifier. A similar approach was proposed in the form of TEMP_{PROB}, a statistical knowledge base showing common relations between events extracted from 20 years worth of NYT articles ([Ning et al, 2018a](#)).

More recently, TACO_{LM} ([Zhou et al, 2020a](#)) has been proposed and shows promising results for estimating event durations. They use syntactic rules to extract large quantities of event durations from text. Further, they try to find temporal upper bounds and event hierarchies to estimate the duration of events that generally do not co-occur with explicit time quantifiers to mitigate the reporting bias issue. The collected instances are then used as weak supervision for a BERT model, where the hierarchy and estimated upper-bound information are used as auxiliary tasks. The resulting model can predict the duration and frequency of events much better than a standard BERT model and has considerably more TCS knowledge.

The previously discussed CoCo_{LM} model also uses weak supervision, as instances in ASER are automatically extracted in such a manner. Weak supervision can be powerful, as there is plenty of raw text from which large datasets can be created. However, only high-precision patterns should be used to automatically extract information from raw text, as any noise can significantly hinder the training objective. For example, the automatically generated ASER KG only outperforms ATOMIC₂₀²⁰ as a knowledge source in CoCo_{LM} when multi-hop reasoning is used to generate training phrases, but not when the model is trained directly on its triples ([Yu et al, 2022](#)).

6.2.3 Symbolic and Logical Reasoning

Another approach is the introduction of symbolic or logical reasoning into common-sense models. The SYM_{TIME} model ([Zhou et al, 2021](#)) is an example of symbolic reasoning. An encoder-decoder model estimates the duration of an event and the distance between two events into a set of classes. The softmax distribution of the duration and distance estimates is then used to symbolically reason over the feature vectors to determine whether the estimated duration of event A is longer than the estimated distance between event A and event B. This information is then used to solve the event ordering task. Here, the relationship between duration and distance is explicitly modelled, rather than relying on a language model to learn it implicitly.

Another example is the SLEER model ([Cai et al, 2022](#)), which also explicitly models the relationship between temporal dimensions in the form of logical propositions. An example of such a proposition is as follows:

$$\text{DUR}(e1, \textit{year}) \Rightarrow \text{FREQ}(e1, \textit{decade}) \vee \text{FREQ}(e1, \textit{century})$$

This proposition states that an event with a duration span of year(s) cannot occur more than yearly, and thus must have a frequency of either decades or centuries. The SLEER model uses probabilistic soft logic to express the truths of such propositions on a continuous scale. The distance between expected true statements and the prediction

of the model can then be used as a parameter in the loss function to train the language model.

The recently proposed LECTER model similarly uses a combination of temporal expression defuzzifying together with probabilistic logic programming to greatly improve the performance on TIMEDIAL. After normalizing and embedding temporal expressions, a logic induction layer generates the probability distribution of relationships between said expressions, and DeepProbLog is used to apply logical entailment to the loss function of the model. With the symbolic temporal logic induction module, LECTER may also be more explainable than common language model-based methods.

In general, explicitly leveraging such logical relationships seems to improve the results of the corresponding LLMs. This may indicate that explicitly coding our understanding of relationships between temporal dimensions into reasoning models may outperform implicitly encoding them in LLMs using auxiliary tasks.

6.2.4 Information Encoding

Going beyond the standard token-level text encoding that transformers usually leverage may also be helpful in some instances. For example, Zhou et al (2022) propose an approach to modelling text on an event level rather than a token level. Additionally, they propose *event optimal transport* (EOT) as a loss function to better align texts where a regular token-level similarity may lead to poor results. For example, “Investors bought stocks” may be considered a better approximation of “Investors sold stocks” on a token level than “British investors sold stocks”, but event-based encoding and event optimal transport help identify similar events and event orders even when they are not aligned. They show that this approach performs well on event ordering and event infilling tasks.

In temporal reasoning, researchers also commonly consider how time can be embedded in a language model. Methods such as prepending a time-specific token to the input (Cao and Wang, 2022), altering the transformer architecture directly to temporalize the attention mechanism (Rosin and Radinsky, 2022), or masking and predicting temporal expressions or the document timestamp (Rosin et al, 2022; Wang et al, 2022) have been proposed.

In general, the ideal encoding of a model also somewhat depends on the downstream task and the available information. For example, online content such as news articles or blog posts may contain more readily available document creation date information. On the contrary, such a model may fail on the narratives proposed in ROCSSTORIES, which do not contain explicit timestamps.

6.2.5 Adversarial Learning

The adversarial augmentation proposed in Section 5.4 can also occur at the model level, as shown by the ALICE (Pereira et al, 2020) and ALICE++ (Pereira et al, 2021) models. In these models, the inputs are minimally perturbed during training to maximize the predicted change in the output. In ALICE++, this perturbation additionally occurs on layers besides the input, up to some top layer of the model. Through these engineered samples, the robustness of the model to small changes increases. In

practice, this learning method appears to be very effective. For example, ALICE++ outperforms the previously mentioned SYMTIME model, which is based on T5, on the MATRES dataset, despite using ROBERTA for its training, which is a much smaller language model. It also outperforms models such as TACOLM in datasets like MCTACO. Overall, similar to adversarial samples in the dataset, this type of learning can enhance performance on the model level as well.

6.2.6 Ensembling

Finally, using a combination of multiple classifiers can also enhance model performance. In the TCS domain, the performance on MCTACO was improved by constructing an ensemble of multiple BERT models, each fine-tuned on different datasets, using a majority vote to determine the final class (Kimura et al, 2021).

This ensemble approach is intriguing, not just because of the growing number of benchmarking datasets for TCS, but also for its potential to evaluate combinations of the augmentations proposed in the rest of this section. Rather than performing an ablation study of the different augmentation types on a single model, evaluating ideal weights for an ensemble classifier of different models, each enhanced with a specific augmentation type, is another option to provide further insight into the value of each model type and possibly improve performance on TCS tasks.

7 Discussion

In this section, our goal is to highlight the results of our survey and propose possible future research opportunities.

7.1 Defining and Benchmarking Temporal Common Sense

In this survey, we have highlighted several similarities between early temporal algebras, temporal reasoning tasks such as temporal relation extraction and event ordering, and proposed TCS reasoning dimensions. We pose that the main difference between TCS reasoning and other temporal knowledge which a model may have (such as temporal factual knowledge or reasoning capabilities over an explicit temporal context) is the inherently probabilistic nature of common sense. While we can make assumptions about the likely order, duration, or time of occurrence of individual actions, common sense does not make any guarantees. By design, the context in a TCS task does not give us a concrete answer, but we should use our prior understanding of the world to derive a likely one. We can consider TCS reasoning to be a probabilistic recasting of existing temporal reasoning tasks.

Based on our survey, we propose the following future work for training and benchmarking TCS.

- Datasets focusing specifically on *typical event times*, *stationarity*, and *event frequency* would help improve the general TCS understanding of models. While training data for typical event order and duration can often be derived from text or existing temporal reasoning datasets, this has not been attempted as frequently for the three remaining dimensions.

- Regardless of the focus dimension, where possible, explicitly stating which type of TCS is expected (e.g., event ordering or event duration) can help other researchers better identify tasks or benchmarks that a specific model should be able to solve. While the general question of how much TCS understanding transformer models possess is interesting, many downstream tasks may not require a model to be able to reason over all proposed dimensions. For example, for a sentence ordering task, the typical order of events is much more important than the typical frequency of an event.
- Most TCS reasoning datasets pose a closed-ended QA or NLI task, which is almost always solved via binary classification (either the candidate answer fits or it does not fit). However, for downstream tasks, different task formats, such as ordinal classification, extractive question answering, regression, or text generation, could be beneficial in providing more detailed training and evaluation data. Additionally, a model can better learn different temporal properties, like how long an action is actually expected to take, rather than simply understanding if certain predetermined answer candidates apply.
- When creating new datasets or evaluating a model on existing ones, care should be taken that relatively simple metrics (such as accuracy) do not skew the perceived capabilities of the model. Contrast sets and exact match metrics can help ensure that a machine learning model can genuinely reason over a set of items, rather than relying on a shortcut that the model may have found to distinguish between the target classes. On the other hand, extractive and generative models should have the freedom to deviate from reference answers, as long as the provided answer still solves the problem.

7.2 Improving Temporal Commonsense Reasoning

We have discussed proposed augmentations for the transformer architecture to improve TCS reasoning. Table 4 shows some discussed approaches, together with the improvement in performance over their respective base models.

Within the surveyed approaches, several trends can be observed. Often, the difference in performance between the different transformer architectures (especially BERT and ROBERTA in their varying sizes) is more noticeable than the impact of the proposed augmentations. The actual task being used for benchmarking and the reported performance metrics can also significantly impact how a model’s performance may be perceived. This is noticeable in the substantial difference in reported values in Table 4 depending on whether accuracy, F1, or exact match score is used for evaluation.

In addition, ablation studies based on the same base model are not always part of the proposed approaches, making it more difficult to assess the impact of the augmentation itself.

It is also often apparent that the proposed augmentations’ performance gains shrink as the base model’s performance increases. For example, CoCOLM’s implementation provides a 19.3 percent increase in performance over a base BERT model on debiased ROCSTORIES. However, it improves only 1.3 percent over a ROBERTA-large model. These results indicate that larger models may already possess most of the reasoning capabilities that some of the proposed enhancements can offer.

Table 4 Different augmentations to transformer models and their performance impact

Dataset	Base Model	Augmentation	Metric	Base	Augmented	Ref.
TRACIE	RoBERTA-large	Symbolic Reasoning	F1	.784	.806	Zhou et al (2021)
McTACO	BERT	Weak Supervision	EM	.421	.427	Zhou et al (2020a)
TNLI	SELFEXPLAIN	KGs - Knowledge Embedding	Acc	.873	.878	Hosokawa et al (2023)
ROCSTORIES	RoBERTA-large	KGs - Post-Training	Acc	.881	.894	Yu et al (2022)
McTACO	RoBERTA-large	Adversarial Augmentation	EM	.511	.599	Pereira et al (2021)
McTACO	BERT	Ensembling	EM	.396	.465	Kimura et al (2021)
McTACO	BART-large	EOT & Event Semantics	F1	N/A	.623	Zhou et al (2022)
TIMEDIAL	RoBERTA-BASE	Logical Reasoning	2-best Acc	.593	.715	Cai et al (2023)

The prevalence of MCTACO compared to other benchmarking datasets is also notable and may be due to their more detailed taxonomy. Approaches that focus on different TCS dimensions can use a subset of MCTACO to test performance in the corresponding dimension (e.g., Zhou et al (2022); Cai et al (2022)).

We propose the following future work to enhance TCS reasoning.

- Models are generally fine-tuned and tested on only one of the proposed benchmark datasets. Transfer learning could be explored further in several ways, including whether models trained on one dataset perform better on others in a few-shot setting or whether ensembling similar models trained on different TCS reasoning datasets improves overall reasoning capabilities.
- A more thorough investigation of the performance of commonsense LLMs in downstream tasks would be interesting. For example, Wang et al (2022) apply their BERT-based model for document dating as a component in a temporal question answering system, improving overall performance on the downstream task. Possible application areas for the proposed models could be timeline summarization or question answering.
- In general, despite increased efforts, the models proposed so far do not reach human performance. Dimensions such as *event typical time*, *stationarity*, and *event frequency* are especially underexplored. New models aiming to reason over these properties could add a new perspective to the overall understanding of TCS and provide new possibilities for downstream applications (such as user status tracking or recommender systems).

7.3 Foundation Models and Trade-offs

Foundation models, such as GPT-4, have become increasingly influential in recent years. With larger and more rigorously trained models such as ROBERTA outperforming BERT, a logical conclusion might be that the trend towards large foundation models would render much of the previous research obsolete. For several reasons, we do not believe this to be the case.

- Current consumer hardware quickly reaches its limits when training and prompting state-of-the-art LLMs. Even if the GPT-4 weights were publicly known, it is unlikely that most people could run the model locally at a reasonable speed. For privacy reasons, among others, it is therefore unreasonable to expect individuals and businesses to rely fully on API-based prompting.
- While foundation models are trained in general language understanding, locally trained models have weights that are specifically fine-tuned on a certain task, making them more of a “master of one” than a “jack of all trades”. For downstream task applications, this is likely preferable.
- When training a task-specific machine learning model, we can reliably force the output to be of a certain shape and represent certain task-specific properties. While it is possible to prompt systems like GPT-4 to provide a certain output format, they are not constrained to this shape and can deviate, potentially leading to errors.

In addition to the arguments provided, recent research shows that ChatGPT seemingly does not fully comprehend TCS. For example, [Bian et al \(2023\)](#) measure ChatGPT with an accuracy of 52 percent on McTACO, far below previous state-of-the-art work. This creates a strong argument that TCS will remain a valuable research field in the near future.

8 Summary and Outlook

In this survey, the history of temporal reasoning and the shift to LLMs for common-sense reasoning has been explored. Temporal reasoning mainly started as a purely logical proposition over specific data structures, such as Allen’s interval algebra. However, as computers became more powerful, syntactic approaches started to emerge. These approaches first centred on manual annotation of events and temporal quantifiers in free-form text, and then gradually moved to how these annotations could be automated using syntactic features such as parse trees and the meaning of specific signal words.

However, this syntactic analysis lacks the TCS understanding that can be vital in reasoning over free-form text, as time is often only implicitly described in language. This first led to the implementation of semantic features such as semantic role labels and later to a shift to data-driven approaches to solve specific tasks, such as event extraction. The introduction of word embeddings and the subsequent rise of deep neural networks such as LSTMs and transformers allowed for better performance on new tasks and ones derived from previous temporal reasoning propositions. Models trained on these new tasks no longer wholly rely on explicit temporal context, making them useful in domains where such context may not usually be available.

In light of this, it is easy to say that transformers are a plug-and-play solution to TCS tasks, as they outperform previous state-of-the-art methods by a wide margin even when not fine-tuned. However, on closer inspection, it is clear that while the semantic reasoning performed by transformer models is powerful, they are prone to linguistic traps, are not always reliable in their answers, and do not reason over temporal properties as well as we would like. Specifically, mispriming and reporting bias are still significant problems in transformer models when using them for common sense purposes. In addition, they can behave somewhat erratic when the input slightly changes or, conversely, they can ignore critical negations or contrasting data instances.

Several methods have been proposed to overcome this problem. For example, more training data specific to temporal properties can be created via crowdsourcing, rule-based extraction from the web (leading to weak supervision), or from KGs, which themselves can be either manually created (such as ATOMIC₂₀²⁰) or constructed automatically (such as ASER). Ensembling of several neural models has also been shown to somewhat increase performance, which is particularly interesting due to the variety of TCS datasets which are now available.

Another intriguing trend is infusing hard-coded symbolic or logical reasoning back into transformer models through methods such as probabilistic soft logic or using the neural model’s output as symbolic information to explicitly reason over with traditional methods. This augmentation is especially beneficial in leveraging our

innate understanding of language and how temporal traits such as duration, distance, and frequency of events interact. This explicit knowledge often seemingly outperforms attempts to implicitly infuse this understanding into models through auxiliary objectives during training.

Additionally, the transformer landscape is still evolving, and the importance of aspects such as training objectives, training data, encoding, and hyperparameters such as masking probability cannot be overstated. This can easily be observed by inspecting the difference in accuracy between base BERT and ROBERTA on many tasks. [Raffel et al \(2020\)](#) provide further insight on the importance of such properties. On the other hand, the architecture surrounding the transformer model also impacts performance. With models reaching sizes that make training a state-of-the-art transformer model from scratch difficult or even infeasible for the average person, it is currently much easier to try to improve the architecture surrounding the transformer model rather than the structure of the model itself.

Ultimately, the goal would be to achieve human performance on the currently proposed and future TCS tasks, allowing for more downstream task applications. To that end, the research community should strive to make transformer-based models more resilient to mispriming and linguistic traps and teach them to better recognize the temporal properties of events and their meaning. To achieve human performance, a model's understanding of explicit and implicit temporal signals must go beyond the semantic meaning of the word and co-occurrence statistics learned during pre-training. The significant performance gap between model- and human performance when using more robust metrics signals that models often end up with the correct answer more by clever guesswork, pattern recognition, and biases, but cannot truly reason over words in the same way humans can. Novel methods for infusing logical traits of language and symbolic knowledge into transformer models would likely go a long way to improving this situation.

Overall, the field of TCS reasoning is all but solved, and many avenues for improvement are unexplored so far. Despite preliminary results on GPT-4 indicating unprecedented performance on many reasoning tasks, its size and the lack of reporting on the model structure and weights render it unreasonable for local deployment and usage. Additionally, TCS reasoning capabilities may be somewhat limited even in models like GPT-4. Therefore, it is unlikely that foundation models will subsume research into smaller and more portable transformer models.

Declarations

Funding

The authors did not receive support from any organization for the submitted work.
No funding was received to assist with the preparation of this manuscript.
No funding was received for conducting this study.
No funds, grants, or other support was received.

Competing Interests

The authors have no relevant financial or non-financial interests to disclose.

The authors have no conflicts of interest to declare that are relevant to the content of this article.

All authors certify that they have no affiliations with or involvement in any organization or entity with any financial interest or non-financial interest in the subject matter or materials discussed in this manuscript.

The authors have no financial or proprietary interests in any material discussed in this article.

Author Contributions

CRedit author statement:

Georg Wenzel: Conceptualization, Methodology, Validation, Investigation, Data Curation, Writing - Original Draft **Adam Jatowt**: Writing - Review & Editing, Supervision

References

- Agrawal H, Chandrasekaran A, Batra D, et al (2016) Sort story: Sorting jumbled images and captions into stories. Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing, 925–931
- Allen JF (1983) Maintaining knowledge about temporal intervals. Communications of the ACM 26(11):832–843. <https://doi.org/10.1016/b978-1-4832-1447-4.50033-x>
- Almqvist A, Jatowt A (2019) Towards content expiry date determination: predicting validity periods of sentences. Advances in Information Retrieval: 41st European Conference on IR Research, ECIR 2019, Cologne, Germany, April 14–18, 2019, Proceedings, Part I 41, 86–101
- Bethard S, Savova G, Chen WT, et al (2016) Semeval-2016 task 12: Clinical tempeval. Proceedings of the 10th international workshop on semantic evaluation (SemEval-2016), 1052–1062
- Bhargava P, Ng V (2022) Commonsense knowledge reasoning and generation with pre-trained language models: A survey. Proceedings of the AAAI Conference on Artificial Intelligence, 12317–12325
- Bian N, Han X, Sun L, et al (2023) Chatgpt is a knowledgeable but inexperienced solver: An investigation of commonsense problem in large language models. Preprint at <https://arxiv.org/abs/2303.16421>
- Brown T, Mann B, Ryder N, et al (2020) Language models are few-shot learners. Advances in neural information processing systems 33:1877–1901

- Bulian J, Buck C, Gajewski W, et al (2022) Tomayto, tomahto. beyond token-level answer equivalence for question answering evaluation. Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing, 291–305
- Cai B, Ding X, Chen B, et al (2022) Mitigating reporting bias in semi-supervised temporal commonsense inference with probabilistic soft logic. Proceedings of the AAAI Conference on Artificial Intelligence, 10454–10462
- Cai B, Ding X, Sun Z, et al (2023) Self-supervised logic induction for explainable fuzzy temporal commonsense reasoning. Proceedings of the AAAI Conference on Artificial Intelligence, 12580–12588
- Campos R, Dias G, Jorge AM, et al (2014) Survey of temporal information retrieval and related applications. ACM Computing Surveys (CSUR) 47(2):1–41. <https://doi.org/10.1145/2619088>
- Cao S, Wang L (2022) Time-aware prompting for text generation. Findings of the Association for Computational Linguistics: EMNLP 2022, 7231–7246
- Chen W, Wang X, Wang WY (2021) A dataset for answering time-sensitive questions. Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)
- Davis E (2023) Benchmarks for automated commonsense reasoning: A survey. Preprint at <https://arxiv.org/abs/2302.04752>
- Dhingra B, Cole JR, Eisenschlos JM, et al (2022) Time-aware language models as temporal knowledge bases. Transactions of the Association for Computational Linguistics 10:257–273. <https://doi.org/10.1162/tacl.a.00459>
- Fries J (2016) Recurrent neural networks vs. joint inference for clinical temporal information extraction. Proceedings of the 10th International Workshop on Semantic Evaluation (SemEval-2016), 1274–9
- Gardner M, Artzi Y, Basmov V, et al (2020) Evaluating models’ local decision boundaries via contrast sets. Findings of the Association for Computational Linguistics: EMNLP 2020, 1307–1323
- Ghosal D, Hong P, Shen S, et al (2021a) Cider: Commonsense inference for dialogue explanation and reasoning. Proceedings of the 22nd Annual Meeting of the Special Interest Group on Discourse and Dialogue, 301–313
- Ghosal D, Majumder N, Mihalcea R, et al (2021b) Stack: Sentence ordering with temporal commonsense knowledge. Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, 8676–8686

- Gordon J, Van Durme B (2013) Reporting bias and knowledge extraction. Preprint at <https://openreview.net/pdf?id=AzxEzvpdE3Wcy>
- Grover C, Tobin R, Alex B, et al (2010) Edinburgh-ltg: Tempeval-2 system description. Proceedings of the 5th International Workshop on Semantic Evaluation, 333–336
- Guan J, Huang F, Zhao Z, et al (2020) A knowledge-enhanced pretraining model for commonsense story generation. Transactions of the Association for Computational Linguistics 8:93–108. <https://doi.org/10.1162/tacl.00302>
- Han R, Liang M, Alhafni B, et al (2019) Contextualized word embeddings enhanced event temporal relation extraction for story understanding. ArXiv preprint arXiv:1904.11942
- Helwe C, Clavel C, Suchanek FM (2021) Reasoning with transformer-based models: Deep learning, but shallow reasoning. 3rd conference on automated knowledge base construction
- Hosokawa T, Jatowt A, Sugiyama K (2023) Temporal natural language inference: Evidence-based evaluation of temporal text validity. European Conference on Information Retrieval, 441–458
- Huang L, Le Bras R, Bhagavatula C, et al (2019) Cosmos qa: Machine reading comprehension with contextual commonsense reasoning. Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), 2391–2401
- Hwang JD, Bhagavatula C, Le Bras R, et al (2021) (comet-) atomic 2020: on symbolic and neural commonsense knowledge graphs. Proceedings of the AAAI Conference on Artificial Intelligence, 6384–6392
- Ji S, Pan S, Cambria E, et al (2021) A survey on knowledge graphs: Representation, acquisition, and applications. IEEE transactions on neural networks and learning systems 33(2):494–514. <https://doi.org/10.1109/tnnls.2021.3070843>
- Kenton JDMWC, Toutanova LK (2019) Bert: Pre-training of deep bidirectional transformers for language understanding. Proceedings of NAACL-HLT, 4171–4186
- Kimura M, Pereira LK, Kobayashi I (2021) Towards a language model for temporal commonsense reasoning. Proceedings of the Student Research Workshop Associated with RANLP 2021, 78–84
- Levesque H, Davis E, Morgenstern L (2012) The winograd schema challenge. Thirteenth international conference on the principles of knowledge representation and reasoning

- Liu Y, Ott M, Goyal N, et al (2019) Roberta: A robustly optimized bert pretraining approach. Preprint at <https://arxiv.org/abs/1907.11692>
- Llorens H, Saquete E, Navarro B (2010) Tipsem (english and spanish): Evaluating crfs and semantic roles in tempeval-2. Proceedings of the 5th International Workshop on Semantic Evaluation, 284–291
- Lymperaiou M, Stamou G (2022) A survey on knowledge-enhanced multimodal learning. Preprint at <https://arxiv.org/abs/2211.12328>
- Mikolov T, Chen K, Corrado G, et al (2013) Efficient estimation of word representations in vector space. Preprint at <https://arxiv.org/abs/1301.3781>
- Mostafazadeh N, Chambers N, He X, et al (2016a) A corpus and cloze evaluation for deeper understanding of commonsense stories. Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, 839–849
- Mostafazadeh N, Grealish A, Chambers N, et al (2016b) Caters: Causal and temporal relation scheme for semantic annotation of event structures. Proceedings of the Fourth Workshop on Events, 51–61
- Mostafazadeh N, Kalyanpur A, Moon L, et al (2020) Glucose: Generalized and contextualized story explanations. Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), 4569–4586
- Ning Q, Wu H, Peng H, et al (2018a) Improving temporal relation extraction with a globally acquired statistical resource. Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers), 841–851
- Ning Q, Wu H, Roth D (2018b) A multi-axis annotation scheme for event temporal relations. Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), 1318–1328
- Ning Q, Wu H, Dasigi P, et al (2020a) Easy, reproducible and quality-controlled data collection with crowdqa. Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations, 127–134
- Ning Q, Wu H, Han R, et al (2020b) Torque: A reading comprehension dataset of temporal ordering questions. Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), 1158–1172
- O’Gorman T, Wright-Bettner K, Palmer M (2016) Richer event description: Integrating event coreference with temporal, causal and bridging annotation. Proceedings of the 2nd workshop on computing news storylines (CNS 2016), 47–56

- Pan F, Mulkar-Mehta R, Hobbs JR (2006) Extending timeml with typical durations of events. Proceedings of the Workshop on Annotating and Reasoning about Time and Events, 38–45
- Pasquali A, Campos R, Ribeiro A, et al (2021) Tls-covid19: A new annotated corpus for timeline summarization. European Conference on Information Retrieval, 497–512
- Pennington J, Socher R, Manning CD (2014) Glove: Global vectors for word representation. Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP), 1532–1543
- Pereira L, Liu X, Cheng F, et al (2020) Adversarial training for commonsense inference. Proceedings of the 5th Workshop on Representation Learning for NLP (RepL4NLP-2020), 55–60
- Pereira L, Cheng F, Asahara M, et al (2021) Alice++: Adversarial training for robust and effective temporal reasoning. Proceedings of the 35th Pacific Asia Conference on Language, Information and Computation, 373–382
- Pustejovsky J (2003) The timebank corpus. Proceedings of Corpus Linguistics 2003, 647–656
- Pustejovsky J, Castano JM, Ingria R, et al (2003) Timeml: Robust specification of event and temporal expressions in text. New directions in question answering 3:28–34
- Pustejovsky J, Littman J, Saurí R, et al (2006) Timebank 1.2 documentation. Event London, no. April, 6–11
- Qin C, Zhang A, Zhang Z, et al (2023) Is chatgpt a general-purpose natural language processing task solver? Preprint at <https://arxiv.org/abs/2302.06476>
- Qin L, Gupta A, Upadhyay S, et al (2021) Timedial: Temporal commonsense reasoning in dialog. Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), 7066–7076
- Radford A, Narasimhan K, Salimans T, et al (2018) Improving language understanding by generative pre-training
- Radford A, Wu J, Child R, et al (2019) Language models are unsupervised multitask learners. OpenAI blog
- Raffel C, Shazeer N, Roberts A, et al (2020) Exploring the limits of transfer learning with a unified text-to-text transformer. The Journal of Machine Learning Research 21(1):5485–5551. <https://doi.org/10.21437/interspeech.2021-546>

- Richardson M, Burges CJ, Renshaw E (2013) Mctest: A challenge dataset for the open-domain machine comprehension of text. Proceedings of the 2013 conference on empirical methods in natural language processing, 193–203
- Rosin G, Radinsky K (2022) Temporal attention for language models. Findings of the Association for Computational Linguistics: NAACL 2022, 1498–1508
- Rosin GD, Guy I, Radinsky K (2022) Time masking for temporal language models. Proceedings of the Fifteenth ACM International Conference on Web Search and Data Mining, 833–841
- Sakaguchi K, Bras RL, Bhagavatula C, et al (2021) Winogrande: An adversarial winograd schema challenge at scale. Communications of the ACM 64(9):99–106. <https://doi.org/10.1145/3474381>
- Sauréi R, Littman J, Knippen B, et al (2005) Timeml annotation guidelines. <https://timeml.github.io/site/publications/timeMLdocs/anguide.1.2.pdf>
- Shwartz V, Choi Y (2020) Do neural language models overcome reporting bias? Proceedings of the 28th International Conference on Computational Linguistics, 6863–6870
- Singh S, Wen N, Hou Y, et al (2021) Com2sense: A commonsense reasoning benchmark with complementary sentences. Findings of the Association for Computational Linguistics: ACL-IJCNLP 2021, 883–898
- Sousa H, Jorge A, Campos R (2023) tieval: An evaluation framework for temporal information extraction systems. Preprint at <https://arxiv.org/abs/230104643>
- Speer R, Chin J, Havasi C (2017) Conceptnet 5.5: An open multilingual graph of general knowledge. Proceedings of the AAAI conference on artificial intelligence
- Storks S, Gao Q, Chai JY (2019) Commonsense reasoning for natural language understanding: A survey of benchmarks, resources, and approaches. Preprint at <https://arxiv.org/abs/1904.01172>
- Strötgen J, Gertz M (2010) HeideTime: High quality rule-based extraction and normalization of temporal expressions. Proceedings of the 5th international workshop on semantic evaluation, 321–324
- Sun Z, Fan C, Han Q, et al (2020) Self-explaining structures improve nlp models. Preprint at <https://arxiv.org/abs/2012.01786>
- Tan Q, Ng HT, Bing L (2023) Towards benchmarking and improving the temporal reasoning capability of large language models
- Toosi A, Bottino AG, Saboury B, et al (2021) A brief history of ai: how to prevent another winter (a critical review). PET clinics 16(4):449–469. <https://doi.org/10.>

- UzZaman N, Llorens H, Derczynski L, et al (2013) Semeval-2013 task 1: Tempeval-3: Evaluating time expressions, events, and temporal relations. Second Joint Conference on Lexical and Computational Semantics (* SEM), Volume 2: Proceedings of the Seventh International Workshop on Semantic Evaluation (SemEval 2013), 1–9
- Vashishtha S, Poliak A, Lal YK, et al (2020) Temporal reasoning in natural language inference. Findings of the Association for Computational Linguistics: EMNLP 2020, 4070–4078
- Vaswani A, Shazeer N, Parmar N, et al (2017) Attention is all you need. *Advances in neural information processing systems* 30
- Verhagen M, Gaizauskas R, Schilder F, et al (2007) Semeval-2007 task 15: Tempeval temporal relation identification. Proceedings of the fourth international workshop on semantic evaluations (SemEval-2007), 75–80
- Verhagen M, Sauri R, Caselli T, et al (2010) Semeval-2010 task 13: Tempeval-2. Proceedings of the 5th international workshop on semantic evaluation, 57–62
- Vila L (1994) A survey on temporal reasoning in artificial intelligence. *Ai Communications* 7(1):4–28. <https://doi.org/10.3233/aic-1994-7102>
- Wang J, Jatowt A, Färber M, et al (2020) Answering event-related questions over long-term news article archives. *Advances in Information Retrieval: 42nd European Conference on IR Research, ECIR 2020, Lisbon, Portugal, April 14–17, 2020, Proceedings, Part I* 42, 774–789
- Wang J, Jatowt A, Yoshikawa M (2022) Bitimebert: Extending pre-trained language representations with bi-temporal information. Preprint at <https://arxiv.org/abs/2204.13032>
- Wang X, Jiang M (2020) Precise temporal slot filling via truth finding with data-driven commonsense. *Knowledge and Information Systems* 62(10):4113–4139. <https://doi.org/10.1007/s10115-020-01493-w>
- Wolff P, Song G (2003) Models of causation and the semantics of causal verbs. *Cognitive psychology* 47(3):276–332. [https://doi.org/10.1016/s0010-0285\(03\)00036-7](https://doi.org/10.1016/s0010-0285(03)00036-7)
- Yin D, Dong L, Cheng H, et al (2022) A survey of knowledge-intensive nlp with pre-trained language models. Preprint at <https://arxiv.org/abs/2202.08772>
- Yu C, Zhang H, Song Y, et al (2022) Cocolm: Complex commonsense enhanced language model with discourse relations. Findings of the Association for Computational Linguistics: ACL 2022, 1175–1187

- Zhang H, Liu X, Pan H, et al (2020a) Aser: A large-scale eventuality knowledge graph. Proceedings of the web conference 2020, 201–211
- Zhang J, Zhang H, Su W, et al (2022) Rock: Causal inference principles for reasoning about commonsense causality. International Conference on Machine Learning, 26750–26771
- Zhang L, Lyu Q, Callison-Burch C (2020b) Reasoning about goals, steps, and temporal ordering with wikihow. Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP), 4630–4639
- Zhang Z, Zhou Z, Tang H, et al (2021) Enriching ontology with temporal commonsense for low-resource audio tagging. Proceedings of the 30th ACM International Conference on Information & Knowledge Management, 3652–3656
- Zhou B, Khashabi D, Ning Q, et al (2019) “going on a vacation” takes longer than “going for a walk”: A study of temporal commonsense understanding. Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)
- Zhou B, Ning Q, Khashabi D, et al (2020a) Temporal common sense acquisition with minimal supervision. Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, 7579–7589
- Zhou B, Richardson K, Ning Q, et al (2021) Temporal reasoning on implicit events from distant supervision. Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, 1361–1371
- Zhou B, Chen Y, Liu K, et al (2022) Generating temporally-ordered event sequences via event optimal transport. Proceedings of the 29th International Conference on Computational Linguistics, 1875–1884
- Zhou Y, Zhao T, Jiang M (2020b) A probabilistic model with commonsense constraints for pattern-based temporal fact extraction. Proceedings of the Third Workshop on Fact Extraction and VERification (FEVER), 18–25