

# SHARK: A Lightweight Model Compression Approach for Large-scale Recommender Systems

Beichuan Zhang, Chenggen Sun, Jianchao Tan,  
Xinjun Cai, Jun Zhao, Mengqi Miao, Kang Yin, Chengru Song, Na Mou, Yang Song  
Kuaishou Technology  
Beijing, China  
{zhangbeichuan,sunchenggen,jianchaotan}@kuaishou.com  
{caixinjun03,zhaojun09,miaomengqi,yinkang,songchengru,mouna,yangsong}@kuaishou.com

## ABSTRACT

Increasing the size of embedding layers has shown to be effective in improving the performance of recommendation models, yet gradually causing their sizes to exceed terabytes in industrial recommender systems, and hence the increase of computing and storage costs. To save resources while maintaining model performances, we propose SHARK, the model compression practice we have summarized in the recommender system of industrial scenarios. SHARK consists of two main components. First, we use the novel first-order component of Taylor expansion as importance scores to prune the number of embedding tables (feature fields). Second, we introduce a new row-wise quantization method to apply different quantization strategies to each embedding. We conduct extensive experiments on both public and industrial datasets, demonstrating that each component of our proposed SHARK framework outperforms previous approaches. We conduct A/B tests in multiple models on Kuaishou, such as short video, e-commerce, and advertising recommendation models. The results of the online A/B test showed SHARK can effectively reduce the memory footprint of the embedded layer. For the short-video scenarios, the compressed model without any performance drop significantly saves 70% storage and thousands of machines, improves 30% queries per second (QPS), and has been deployed to serve hundreds of millions of users and process tens of billions of requests every day.

## CCS CONCEPTS

• **Information systems** → **Learning to rank**; • **Computing methodologies** → **Feature selection**.

## KEYWORDS


Recommendation System, Low Precision, Feature selection

## ACM Reference Format:

Beichuan Zhang, Chenggen Sun, Jianchao Tan,, Xinjun Cai, Jun Zhao, Mengqi Miao, Kang Yin, Chengru Song, Na Mou, Yang Song. 2023. SHARK: A Lightweight Model Compression Approach for Large-scale Recommender

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](https://permissions.acm.org).  
CIKM, October 21–25, 2023, Birmingham, UK

© 2023 Association for Computing Machinery.  
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00  
<https://doi.org/XXXXXXX.XXXXXXX>

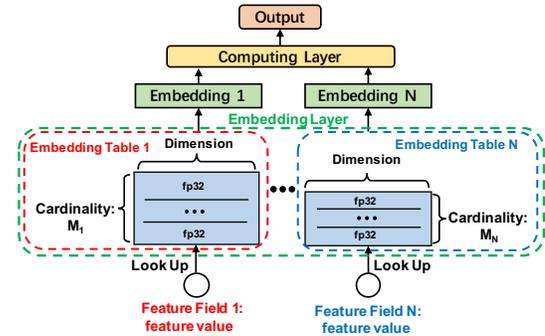

**Figure 1: A common structural paradigm of recommendation models, consisting of computing layers and embedding layers. An embedding table in the embedding layers corresponds to a feature field, such as age, gender, etc. The number of embeddings in an embedding table is its cardinality. Best viewed in color.**

Systems. In *Proceedings of Conference on Information and Knowledge Management (CIKM)*. ACM, New York, NY, USA, 8 pages. <https://doi.org/XXXXXXX.XXXXXXX>

## 1 INTRODUCTION

Building an effective recommender system to recommend accurate and personalized information to users has become a main topic recently thanks to the prevalence of online services such as e-commerce and short-video platforms [1, 18, 37]. Numerous recommendation products across various domains have allocated substantial resources toward enhancing their recommendation models. Model optimization strategies, including feature expansion, embedding dimensionality expansion, feature crossing [1, 26], and long-term interest modeling [22, 23], have been extensively pursued. However, these approaches often lead to the creation of terabyte-scale embedding layers, which impose a significant burden on the system and hinder the efficiency of model optimization [17, 28].

To mitigate these problems, it is imperative to employ measures aimed at minimizing the computing and storage resources required by recommendation models, while simultaneously ensuring optimal performance. The compression techniques commonly applied to recommender systems predominantly concentrate on compressing the embedding layers, as evidenced by prior research [3, 8, 12, 13, 17, 35, 36], which represent a substantial proportion of the overall system. The compression methodologies aim to reduce the memory footprint of the embedding layers through four

key dimensions: (1) the quantity of embedding tables [3, 17, 28]; (2) the cardinalities of embedding tables [15, 29, 30, 33]; (3) the dimensions of embeddings [8, 14, 35]; and (4) the numerical precision [2, 32, 34], as illustrated in Figure 1. In this paper, we focus on the *number* of embedding tables and *numerical precision*:

- **Number:** Feature selection methods offer a twofold benefit by reducing the model size and providing insights into the importance-ranking of features in base models. In practical applications, analyzing the significance of feature importance in base models proves valuable for understanding and optimizing the business model. While previous methods have demonstrated efficient feature evaluation capabilities [12, 17, 28], they often introduce new structures or parameters into the base model, leading to additional costs and unintended interference. To circumvent these limitations and preserve the structure of existing base models or systems, the industry commonly employs Permutation [3] as a feature evaluation method. However, it is important to note that the computational complexity of Permutation is  $O(|DATA| \cdot N \cdot T)$ , where  $|DATA|$  denotes the number of data samples,  $N$  represents the number of feature fields, and  $T$  represents the number of shuffles. This method exhibits inefficiency due to enormous the number of feature fields and the size of the datasets in large-scale recommender systems.
- **Numerical Precision:** In the context of low-precision applications, our investigation reveals that frequently accessed rows (embeddings) are prone to higher errors following quantization. While previous methods [2, 9, 31, 34] primarily focus on addressing rounding bias and quantization resolution, they often overlook this phenomenon. Another prior approach [32] approach [32] makes a similar observation and employs caching techniques to store high-priority embeddings as floating-point precision. However, the priority values in [32] fail to consider the greater importance of positive samples in the training process. Moreover, previous approaches [9, 31, 32] ignore the potential advantages of implementing multiple low-precision strategies, such as utilizing both fp16 and int8 simultaneously in the embedding table, as opposed to relying on a single low-precision strategy. This oversight could lead to diminished performance benefits.

To address these challenges, we present SHARK, a comprehensive compression methodology that encapsulates the practices derived from industrial recommender systems. SHARK comprises two key components: (1) **Feature Selection with Fast Permutation (F-Permutation):** F-Permutation is proposed to reduce the number of embedding tables. It leverages the first-order component of the Taylor expansion (Equation 4) as a score for each embedding table, providing an efficient approximation of the original Permutation method [3]. F-Permutation significantly reduces the computational complexity from  $O(|DATA| \cdot N \cdot T)$  to  $O(|DATA|)$ , enabling the inclusion of a larger number of samples for improved feature selection performance. (2) **Numerical Precision Reduction with Frequency-based Quantization (F-Quantization):** F-Quantization introduces a novel row-wise quantization method. It involves scoring each row in all embedding tables, with different coefficients assigned to positive and negative weights during

score updating. F-Quantization enables the embedding layer to operate more efficiently by applying distinct low-precision strategies, such as int8 and fp16, to different embeddings based on their priority values. We conduct extensive experiments to demonstrate that each component of SHARK surpasses previous approaches on both public and industrial datasets. Specifically, this paper makes the following contributions:

- (1) Within the framework of SHARK, we introduce F-Permutation, a technique that offers a *significant reduction* in computational cost compared to Permutation [3]. Additionally, we propose F-Quantization, which employs a more efficient priority function and a streamlined framework for applying different low-precision strategies to diverse embeddings. Both methods are well-compatible in industrial recommender system scenarios.
- (2) We conduct extensive experiments utilizing both public and industrial datasets to demonstrate that each component of SHARK surpasses previous approaches. In our industrial environment, the compressed model has already served 100% of users on our application with over 300 million daily active users, resulting in remarkable savings of 70% in storage capacity and thousands of machines.

## 2 RELATED WORK

Based on the memory composition, the compression techniques for the embedding layer can be categorized into four primary aspects: the quantity of embedding tables [3, 17, 28], the cardinalities of embedding tables [15, 29, 30, 33], the dimensions of embeddings [8, 14, 35], and the numerical precision of embeddings [2, 9, 31, 32, 34]. In our research, we focus on reducing the number of embedding tables and decreasing the numerical precision of embeddings.

### 2.1 Feature Selection

One common approach to feature selection involves generating a ranking of feature importance and subsequently removing tables with low scores. Previous research has introduced various types of feature selection methods. In the context of traditional recommendation models [6, 24], feature selection methods typically assign scores to each feature using predefined metrics, such as correlation coefficients between features and labels. On the other hand, feature selection methods for deep learning-based models have garnered increasing attention from both academia and industry [5, 10, 11, 19]. These methods often incorporate sparsity-related constraint losses into the existing model’s training procedure to learn the importance scores of feature fields. COLD [28] employs the squeeze and excitation block [7] for feature group selection. AutoField and FSCD [17] utilize the Gumbel-softmax technique for feature selection. Group LASSO [12], on the other hand, is a prevalent feature selection method that employs the proximal SGD algorithm [20] to encourage weight parameters to approach zero. AutoFAS [11] adopts a binarization process for real-valued mask parameters to select significant features. While these methods introduce new structures and parameters into the base model, incurring additional training costs, it is essential in the industry to swiftly provide researchers with feature importance analysis for the original base models.

In addition to these training-based methods, the Permutation [3] technique is widely employed in industry, specifically during the

model inference stage. Permutation determines the importance score of feature fields by evaluating performance degradation following the permutation of embeddings within a batch. However, the Permutation-based method exhibits high time complexity when dealing with billions of data samples.

## 2.2 Embedding Table Quantization

Quantization is a highly effective technique for reducing the memory footprint of models. In the context of recommendation models, quantization methods primarily focus on the compression of embedding layers [2, 9, 31, 32, 34]. The quantization methods applied to embedding tables in recommender systems can be categorized into two main types: post-training quantization and training-aware quantization. In this study, our emphasis lies on the latter.

One approach for post-training quantization involves row-wise quantization using greedy search and codebook-based techniques, as proposed in [4]. On the other hand, various quantization algorithms aim to compress embedding tables during the training process. Deng et al. tailor their low-precision strategy to adapt the recommendation model to low-precision hardware [2]. Zhang et al. introduce stochastic floating-point rounding to achieve more effective quantization [34]. ALPT [9] proposes an adaptive low-precision training framework to learn quantization scales. However, these approaches fail to address the phenomenon we have discovered, wherein frequently accessed rows (embeddings) experience higher errors after quantization.

Yang et al. [32] also observe a similar phenomenon and propose the use of Least Frequently Used (LFU) or Least Recently Used (LRU) policies to determine which embeddings are stored in a full-precision cache [32]. Nevertheless, the priority values derived from LFU or LRU overlook the importance of positive samples in the training process. Moreover, the cache architecture presents challenges in terms of scalability when multiple low-precision strategies (such as fp16, int8, etc.) need to be simultaneously applied, thereby impeding the optimization of embedding tables' efficiency.

## 3 METHOD

### 3.1 F-Permutation

**3.1.1 Table-wise Scores Calculating.** In the process of model convergence, it becomes evident that different feature fields contribute to accuracy to varying degrees. Consequently, it becomes imperative to identify unimportant feature fields and eliminate the corresponding embedding tables to minimize any loss in accuracy. Permutation [3] introduces a method to assess the performance degradation of a sample  $x$  by replacing the original candidates with candidates from other samples while keeping the remaining feature fields unchanged. If replacing the values of a feature field significantly increases the model error, it is considered important. Conversely, if shuffling the values of a feature field leaves the model error unchanged, it is deemed unimportant. Formally, we define the prediction error of the  $i_{th}$  feature field in the sample  $x$  after shuffling as:

$$error(i, x) = \sum_{v'_i \in set_i} loss(v_1^*, \dots, v'_i, \dots, v_N^*) p(v'_i) - loss(v_1^*, \dots, v_i^*, \dots, v_N^*) \quad (1)$$

where  $N$  represents the total number of feature fields,  $v'_i$  represents arbitrarily candidates in  $set_i$ ,  $set_i$  contains all feature value in the  $i_{th}$  feature field,  $v_n^*$  represents the original value of  $n_{th}$  feature field in sample  $x$ , and  $p(v'_i)$  represents probability of the value  $v'_i$  in whole dataset. The prediction error corresponding to the  $i_{th}$  feature field in the whole dataset after shuffling is defined as:

$$error(i) = \frac{1}{|DATA|} \sum_{x \in DATA} error(i, x) \quad (2)$$

where  $|DATA|$  represents the number of samples in the dataset  $DATA$ . The larger the value of  $error(i)$ , the more important the  $i_{th}$  feature field is. The above equation described the evaluation method for one feature field. Furthermore, the list of table-wise scores for all feature fields  $W_t$  is defined:

$$W_t = \{w_t^1 = error(1), \dots, w_t^N = error(N)\} \quad (3)$$

Consequently, the time complexity involved in calculating  $W_t$  becomes  $O(|DATA| \cdot N \cdot |c|)$ , where  $|c|$  denotes the average cardinality of all feature fields. This computation becomes prohibitively expensive due to the enormous average cardinality of feature fields and the size of the datasets. In industrial settings, the Permutation method relies on shuffling operations performed  $T$  times to approximate  $W_t$ , which still incurs a high time complexity. To address this issue, we propose the utilization of Taylor expansion to approximate  $W_t$ . Specifically, we employ the first-order Taylor expansion of Equation 1, as demonstrated in Equation 4.

$$error(i, x) = \frac{\partial loss(v_1^*, \dots, v_i^*, \dots, v_N^*)}{\partial v_i^*} \sum_{v'_i \in set_i} p(v'_i) (v'_i - v_i^*) = \frac{\partial loss(v_1^*, \dots, v_i^*, \dots, v_N^*)}{\partial v_i^*} (E(v_i) - v_i^*) \quad (4)$$

where  $E(v_i)$  stands for expectations of the  $i_{th}$  feature field. Following the approximation, the time complexity for calculating  $W_t$  becomes  $O(3 \cdot |DATA|)$ . The time complexity for computing the average value of all features in advance is  $O(|DATA|)$ , while the time complexity for forward and backward propagation is  $O(2 \cdot |DATA|)$ . We have tried using the second-order Taylor expansion of Equation 1. The experimental results show the performance of the first-order variant is similar to that of the second-order variant. To reduce computational complexity, we use the first-order variant.

**3.1.2 Model Pruning and Fine-tuning.** As the information provided by feature fields can be interconnected, the importance of existing feature fields may change after deleting certain feature fields [3]. To mitigate the impact of information coupling, F-Permutation adopts an iterative approach to remove unimportant embedding tables. Specifically, after calculating the table-wise scores  $W_t$ , F-Permutation selectively eliminates a predetermined number of  $f$  embedding tables with the lowest scores (with a default value of 1). However, this removal of embedding tables disrupts the convergence of the model. Rebuilding a model from random initialization is a time-consuming process. Due to the minor changes made, we can utilize a small subset of data to retrain the model and achieve convergence once again.

**3.1.3 Pruned Model Evaluation.** We evaluate the pruned model on a test dataset using machine learning frameworks. To determine the termination criterion for the compression process, we introduce two

thresholds denoted as  $rate_c$  and  $T_{accuracy}$ . The compression process halts when either the memory cost falls below the  $rate_c$  threshold or the performance of the pruned model falls below the  $T_{accuracy}$ . In our production environment, we consider an accuracy drop exceeding 0.15% to be significant. Therefore, we set  $T_{accuracy}$  as 99.25% the accuracy of the base model to monitor the performance degradation during compression.

**3.1.4 Whole Pipeline.** We summarize the aforementioned steps in algorithm 1.

---

#### Algorithm 1: Fast Permutation

---

**Input:** Convergent Model,  $M$ ; Target Compression Ratio,  $rate_c$ ;  
**Data:** Training Dataset,  $DATA_{train}$ ; Test Dataset,  $DATA_{test}$ ;

- 1  $|DATA_{test}| \leftarrow$  The number of samples in  $DATA_{test}$ ;
- //  $Lookup(DATA_{test})$  can select the embeddings according to  $|DATA_{test}|$
- 2  $expectation \leftarrow Lookup(DATA_{test})/|DATA_{test}|$ ;
- //  $rate_t$  is current compression rate
- 3  $rate_t \leftarrow 0$ ;
- 4  $performance, gradients \leftarrow$  Evaluation( $M, DATA_{test}$ );
- 5 **while**  $rate_t \leq rate_c$  and  $T_{accuracy} \leq performance$  **do**
- 6   TableWiseScores  $\leftarrow$  Equation 4 ( $gradients, expectation$ );
- // delete tables with lowest scores
- 7   PrunedModel,  $rate_t \leftarrow$  DeleteTables (TableWiseScores);
- // FinetuneModel represents models that are trained on a small amount of data.
- 8    $DATA_{support} \leftarrow$  sample ( $DATA_{train}$ );
- 9    $M \leftarrow$  FinetuneModel (PrunedModel,  $DATA_{support}$ );
- 10   $performance, gradients \leftarrow$  Evaluation ( $M, DATA_{test}$ );

**Output:**  $M$

---

## 3.2 F-Quantization

In this section, we present our low-precision strategy for embedding during training. The quantization and dequantization equations for embedding  $e$  are as follows:

$$\begin{aligned} e_q &= \text{Quantization}(e) = \text{round}\left(\frac{e}{\text{scale}}\right) \\ e_{dq} &= \text{Dequantization}(e_q) = \text{scale} \cdot e_q \end{aligned} \quad (5)$$

Large-scale recommendation models typically comprise billions of parameters, with parameter values exhibiting a wide distribution. Applying a single scale to all embedding tables or assigning a scale to each individual embedding table can result in unacceptable quantization errors [2]. To mitigate this issue, we employ row-wise quantization, whereby a distinct scale is assigned to each row within the embedding tables.

$$\text{scale} = \frac{e_{max}^{abs}}{I_{max} - I_{min}}, \quad (6)$$

where the value  $e_{max}^{abs}$  represents the maximum absolute value found in the embedding vector  $e$ . For the target  $b$ -bit integer type, the range  $[I_{min}, I_{max}]$  is defined as  $[-2^{(b-1)}, 2^{(b-1)} - 1]$ . However, in our recommender system, we observed significant quantization errors when employing row-wise quantization with fp16 precision. Through analysis, we discovered that frequently accessed rows tend to exhibit higher quantization errors, as reported in [32]. To address this issue, firstly, we define the frequency-based priority value  $w_r$  of row  $r$  at time  $t$  as follows:

$$w_r^{(t+1)} = (1 - \beta)w_r^{(t)} + \beta(c^+ \alpha + c^-) \quad (7)$$

**Table 1: Byte layout of extra words.**

Name	Precision	Dimension	Scale
Byte	8bit	16bit	32bit

where  $\beta$  is the time decay rate,  $\alpha$  is the importance weight,  $c^+$  and  $c^-$  are the number of positive and negative examples containing row  $r$  in a batch, respectively. Since positive samples are more important in the training process, we assign different coefficients to positive and negative weights. The score  $w_r$  of the embedding  $r$  will be updated per batch. In our method, the rows with the highest, middle, and lowest scores can be trained in full precision, fp16 precision, and int8 precision, as the following equation:

$$r_q = Q(r) = \begin{cases} \text{rnd}_8\left(\frac{r}{\text{scale}_{\text{int8}}}\right) & \text{if } w_r < t_8 \\ \text{rnd}_{16}\left(\frac{r}{\text{scale}_{\text{fp16}}}\right) & \text{if } t_8 \leq w_r < t_{16} \\ r & \text{if } t_{16} \leq w_r \end{cases} \quad (8)$$

$$r_{dq} = D(r_q) = \begin{cases} r_q \cdot \text{scale}_{\text{int8}} & \text{if } w_r < t_8 \\ r_q \cdot \text{scale}_{\text{fp16}} & \text{if } t_8 \leq w_r < t_{16} \\ r_q & \text{if } t_{16} \leq w_r \end{cases}$$


The symbol  $\text{rnd}_8$  denotes a low-precision strategy using int8 quantization, while  $\text{rnd}_{16}$  represents a low-precision strategy using fp16 quantization. The vector  $w_r$  corresponds to the row-wise scores of the embedding  $e$ . The hyperparameters  $t_{16}$  and  $t_8$  are used in the quantization process, and their suitable values are determined by evaluating the prediction error of compressed models after applying the respective quantization strategy to the embedding tables. The search for appropriate values of  $t_{16}$  and  $t_8$  is performed independently, taking into consideration the specific requirements of each quantization strategy. Extra words in each embedding have been applied to handle the conflict of the universal description for different precisions as shown in Table 1.

## 4 EXPERIMENTS

### 4.1 Experimental Settings

**4.1.1 Dataset.** To validate the efficacy of our method, we conducted experiments on the Criteo dataset<sup>1</sup>, and the industrial dataset from Kuaishou. The Criteo dataset consists of 26 categorical feature fields and 13 continuous feature fields, encompassing approximately 4.4 billion click samples recorded over a span of 24 days. Following the setting of DLRM [18], we randomly selected 12.5% of the samples per day to serve as negative samples. For the Criteo dataset, we divided the data into two parts: data from days 0 to 17 and data from days 18 to 22. The former was used for pre-training and compression of the model described in Section 4.1.2. Subsequently, after compression, we employed data from days 0 to 22 for model retraining and evaluation. We conducted an A/B test wherein both the baseline model and the compressed model were subjected to 10% of the online traffic. The A/B test was conducted over a period of 7 days. We need to save more than 40% of the memory footprint while the accuracy drop is less than 0.15%, according to practical experience in the industry.

<sup>1</sup><https://labs.criteo.com/2013/12/download-terabyte-click-logs>

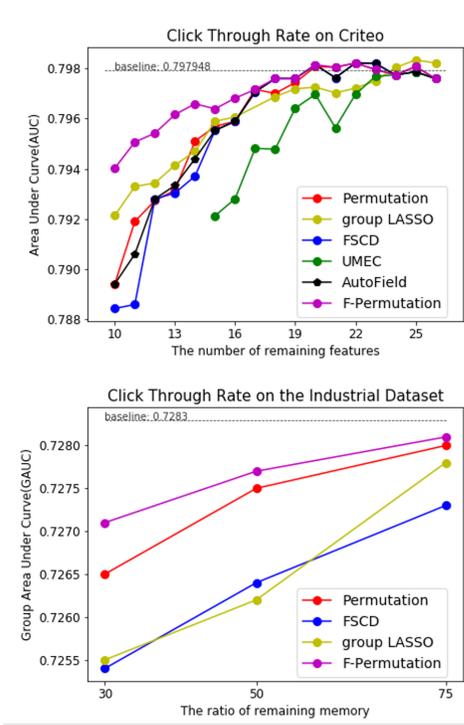

**Figure 2: Performance comparison from the Criteo dataset and industrial dataset. The line named "baseline" represents the performance of the model without any pruning.**

**4.1.2 Model Settings.** In our experiments, we utilized the DLRM [18] model as the baseline for the Criteo dataset. The dataset consists of 13 continuous features, which were transformed into embeddings, along with 26 discrete feature fields, resulting in a total of 27 feature fields. Following the approach employed in UMEC [25], we set the hidden dimensions of the three-layer MLP prediction model to 256 and 128. For the industrial dataset, we employed the master ranking model specifically designed for our short-video recommendation scenario. This model comprises 180 features and tens of billions of parameters. It is a multi-task model, catering to various objectives such as clicks, likes, follows, and more, based on the approach described in MMOE [16].

In the case of the Criteo dataset, we used a batch size of 512 and a learning rate of 0.01. As for the industrial dataset, the batch size was set to 8192, with a learning rate of 0.01. In the case of competitor methods, we determined the optimal learning rate from  $\{0.01, 0.005, 0.001, 0.0005, 0.0001\}$ , and the coefficient  $\lambda$  for L2 regularization was selected from  $\{10^{-4}, 10^{-5}, 10^{-6}, 10^{-7}, 10^{-8}\}$ .  $\alpha$  and  $\beta$  were set to 2 and 0.99. We conducted a comparative evaluation of our proposed methods and other approaches using an online learning methodology on all the datasets.

#### 4.1.3 Baselines.

- **FSCD** [17]: FSCD learns the importance scores of feature fields by the Gumbel-softmax technique and then sets a threshold to remove unimportant fields.
- **AutoField** [27]: AutoField uses the Gumbel-softmax technique and a bi-level optimization for feature selection.

**Table 2: Time analysis of all methods on the industrial dataset. "Model pruning" refers to the total time of the pruning process. "Scores Producing" refers to the time of table-wise score producing in the model pruning process.**

Method	FSCD [17]	LASSO [12]	Permutation [3]	F-P
Scores Producing	3 days	3 days	6 hours	<b>1 hour</b>
Model Pruning	3 days	3 days	2 days	<b>1 day</b>

- **group LASSO** [12]: With the proximal SGD[21], LASSO can push a portion of parameters to be exact zeros. We regularize the weights which directly connect with the output of the embedding layer and train them by proximal-SGD.
- **UMEC** [25]: UMEC uses an alternating direction method of multipliers optimization to select features.
- **Permutation** [3]: This method shuffles the values of a feature field in a batch and keeps other fields unchanged. To reduce the computational complexity, we only randomly shuffle once.
- **Mixed-Precision Embedding (MPE)** [32]: This method uses a floating point precision cache with LFU or LRU to achieve low-precision.
- **ALPT** [9]: ALPT proposes an adaptive low-precision training framework to learn quantization scale.
- **PEP** [14]: PEP proposes to use learnable threshold(s) to determine the dimensions of embeddings. We use the feature-dimension variant of PEP, the finest granularity [14], to search the dimension of each embedding.


## 4.2 Performance of F-Permutation

Figure 2 shows the performance of all methods on Criteo and industrial datasets. Table 2 shows the time analysis of all methods on the industrial dataset. Our main observations are as follows:

- (1) F-Permutation achieves the best results in all datasets, with the exception when the number of remaining features reaches 22-26 in the Criteo dataset. Our method does not introduce additional hyper-parameters or learnable parameters, thus being more robust to compress the existing models with minimal performance drop, especially in large-scale industrial models.
- (2) Compared with the original Permutation-based method, ours achieves better results. The complexity of the original Permutation-based method can only support random shuffling in a mini-batch and is not efficient when data samples are billions-scale, thus ignoring the overall properties of whole data and falling into local optimum.
- (3) As shown in Figure 2, when only a few features are removed (i.e. the remaining feature domains are more than 19), the accuracy loss is almost zero. One explanation is that the information from different feature fields is highly coupled before compression, therefore, evicting some features is lossless.
- (4) Table 2 shows that compared with other methods, our method has a significant time promotion, because it does not involve training new model parameters, changing model structure, etc.

**Table 3: Performance comparison of our F-Quantization(F-Q) with other methods on the industrial dataset. we set  $t_8$  as  $1e3$  and  $t_{16}$  as  $1e5$ . Bold scores are the best. Accuracy Drops greater than 0.15% are significant in our production.**

	FP32	F-Q	MPE [32]	ALPT [9]
Click	0.7283	<b>0.7293</b> ( <b>0.13%</b> )	0.7255 (-0.38%)	0.7244 (-0.54%)
Like	0.7496	<b>0.7509</b> ( <b>0.17%</b> )	0.7457 (-0.52%)	0.7433 (-0.84%)
Follow	0.7938	<b>0.7928</b> ( <b>-0.12%</b> )	0.791 (-0.35%)	0.7886 (-0.65%)
Memory	100%	<b>50%</b>	55%	55%

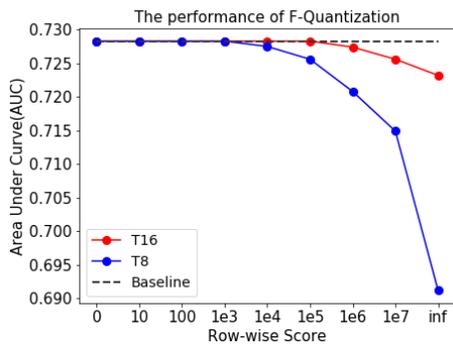

**Figure 3: Performance of F-Quantization w.r.t different  $t_{16}$  and  $t_8$ . In the figure, "T8" and "T16" represents  $t_8$  and  $t_{16}$ . "Baseline" represents the performance of the model with fp32. Best viewed in color.**

### 4.3 Performance of F-Quantization

Table 3 shows the performance of F-Quantization and related methods in our asynchronous training frameworks on the industrial dataset. We perform ablation studies on F-Quantization to show how the  $t_{16}$  and  $t_8$  affect performance in Figure 3. When we show the results of F-Quantization about different  $t_8$ , we set  $t_{16}$  to the same value as  $t_8$ . When we show the results of F-Quantization about different  $t_{16}$ , we set  $t_8$  to zero.

- (1) Compared with fp32, our method reduces total memory usage by 50% and achieves the same performance. Compared with fp16 with stochastic rounding, at 55% memory footprint, our method achieves better performance about AUC on all prediction tasks (such as Like, Click, and Follow), which may demonstrate the effectiveness of F-Quantization.
- (2) Training with int8 stochastic rounding decreases more than 2% AUCs on all tasks, which is a significant drop in our industrial productions.
- (3) Figure 3 shows when  $t_{16}$  is less than  $1e5$ , the model compressed by F-Quantization can maintain the performance achieved by the model with fp32. When  $t_8$  is less than  $1e3$ , the model compressed by F-Quantization can maintain the performance achieved by the model with fp32. In conclusion, the best  $t_8$  is  $1e3$ , and the best  $t_{16}$  is  $1e5$ .

**Table 4: Performance of combinations of F-Permutation and F-Quantization on the industrial dataset. F-Q and F-P are short for F-Quantization and F-Permutation.**

	Baseline	PEP [14]	F-Q	F-P	PEP [14]	F-Q+F-P
Click	0.7283	0.7255 -0.39%	0.7292 +0.13%	0.7277 -0.08%	0.7236 -0.64%	0.7279 -0.05%
Like	0.7496	0.7468 -0.38%	0.7509 +0.17%	0.7493 -0.04%	0.7433 -0.84%	0.7493 -0.04%
Follow	0.7938	0.7912 -0.33%	0.7928 -0.12%	0.7928 -0.12%	0.7886 -0.65%	0.7941 +0.04%
Memory	100%	60%	50%	60%	30%	30%

### 4.4 Combined Performance of F-Permutation & F-Quantization

Table 4 illustrates the combined performance of two methods, compared with individual ones. We observe that:

- (1) F-Quantization and F-Permutation can reduce the memory footprint to 50% and 60%, respectively, with a negligible performance drop compared to the baseline. Our methods achieve notable improvements while maintaining the same memory usage as PEP.
- (2) We directly merge the compression results of F-Quantization and F-Permutation to show their compatibility. The combination of them ( F-Q + F-P ) successfully reduces the memory footprint to 30 (50 × 60)% of the baseline methods, while maintaining competitive performance as its components. This result suggests that F-P and F-Quantization are highly compatible with each other.

## 5 CONCLUSION

In this paper, we proposed SHARK, a lightweight compressing method for embedding layers. We addressed two aspects of redundancies in the embedding layers, namely the number of embedding tables and the numerical precision of embeddings, by introducing two novel methods. Our extensive experiments conducted on various benchmarks and datasets demonstrated the superiority of these methods over previous approaches. In industrial applications, SHARK was successfully deployed in the short video, e-commerce, and advertising recommendation models on our platform.

Regarding the short video ranking model, the results of the online A/B test showed that compressing 70% of the storage used by the industrial model did not lead to a decrease in average watch time. Additionally, there was a 30% improvement in queries per second (QPS), resulting in substantial savings in terms of computational resources. Thousands of machines were saved as a result of these efficiency gains.

We acknowledge that while SHARK effectively reduced the memory size of the industrial-scale recommendation model using a total compression ratio, determining the optimal partial compression ratio for each component remains labor intensive: we assigned multiple compression ratios to each part and exhaustively explored all combinations to find the optimal solution. Our experience indicated that an even distribution of compression ratios yielded the best outcomes. Automating this above step remains our future work.

## REFERENCES

- [1] Weijie Bian, Kailun Wu, Lejian Ren, Qi Pi, Yujing Zhang, Can Xiao, Xiang-Rong Sheng, Yong-Nan Zhu, Zhangming Chan, Na Mou, Xinchun Luo, Shiming Xiang, Guorui Zhou, Xiaoqiang Zhu, and Hongbo Deng. 2022. CAN: Feature Co-Action Network for Click-Through Rate Prediction. In *WSDM '22: The Fifteenth ACM International Conference on Web Search and Data Mining, Virtual Event / Tempe, AZ, USA, February 21 - 25, 2022*, K. Selcuk Candan, Huan Liu, Leman Akoglu, Xin Luna Dong, and Jiliang Tang (Eds.). ACM, 57–65. <https://doi.org/10.1145/3488560.3498435>
- [2] Zhaoxia Deng, Jongsoo Park, Ping Tak Peter Tang, Haixin Liu, Jie Yang, Hector Yuen, Jianyu Huang, Daya Khudia, Xiaohan Wei, Ellie Wen, et al. 2021. Low-precision hardware architectures meet recommendation model inference at scale. *IEEE Micro* 41, 5 (2021), 93–100.
- [3] Aaron Fisher, Cynthia Rudin, and Francesca Dominici. 2019. All Models are Wrong, but Many are Useful: Learning a Variable's Importance by Studying an Entire Class of Prediction Models Simultaneously. *J. Mach. Learn. Res.* 20, 177 (2019), 1–81.
- [4] Hui Guan, Andrey Malevich, Jiyang Yang, Jongsoo Park, and Hector Yuen. 2019. Post-Training 4-bit Quantization on Embedding Tables. *CoRR abs/1911.02079* (2019). [arXiv:1911.02079](https://arxiv.org/abs/1911.02079) <https://arxiv.org/abs/1911.02079>
- [5] Xiaofei He, Deng Cai, and Partha Niyogi. 2005. Laplacian Score for Feature Selection. In *Advances in Neural Information Processing Systems 18 [Neural Information Processing Systems, NIPS 2005, December 5-8, 2005, Vancouver, British Columbia, Canada]*, 507–514. <https://proceedings.neurips.cc/paper/2005/hash/b5b03f06271f8917685d14cea7c6c50a-Abstract.html>
- [6] Xinran He, Junfeng Pan, Ou Jin, Tianbing Xu, Bo Liu, Tao Xu, Yanxin Shi, Antoine Atallah, Ralf Herbrich, Stuart Bowers, and Joaquin Quiñero Candela. 2014. Practical Lessons from Predicting Clicks on Ads at Facebook. In *Proceedings of the Eighth International Workshop on Data Mining for Online Advertising, ADKDD 2014, August 24, 2014, New York City, New York, USA*, Esin Saka, Dou Shen, Kuang-chih Lee, and Ying Li (Eds.). ACM, 5:1–5:9. <https://doi.org/10.1145/2648584.2648589>
- [7] Jie Hu, Li Shen, and Gang Sun. 2018. Squeeze-and-excitation networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*. 7132–7141.
- [8] Manas R Joglekar, Cong Li, Jay K Adams, Pranav Khaitan, and Quoc V Le. 2019. Neural input search for large scale recommendation models. *arXiv preprint arXiv:1907.04471* (2019).
- [9] Shiwei Li, Huifeng Guo, Lu Hou, Wei Zhang, Xing Tang, Ruiming Tang, Rui Zhang, and Ruixuan Li. 2022. Adaptive Low-Precision Training for Embeddings in Click-Through Rate Prediction. *CoRR abs/2212.05735* (2022). <https://doi.org/10.48550/arXiv.2212.05735> [arXiv:2212.05735](https://doi.org/10.48550/arXiv.2212.05735)
- [10] Xiaoyun Li, Chengxi Wu, and Ping Li. 2020. IVFS: Simple and Efficient Feature Selection for High Dimensional Topology Preservation. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*. AAAI Press, 4747–4754. <https://ojs.aaai.org/index.php/AAAI/article/view/5908>
- [11] Xiang Li, Xiaojiang Zhou, Yao Xiao, Peihao Huang, Dayao Chen, Sheng Chen, and Yunsen Xian. 2022. AutoFAS: Automatic Feature and Architecture Selection for Pre-Ranking System. In *KDD '22: The 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining, Washington, DC, USA, August 14 - 18, 2022*, Aidong Zhang and Huzefa Rangwala (Eds.). ACM, 3241–3249. <https://doi.org/10.1145/3534678.3539083>
- [12] Yifeng Li, Chih-Yu Chen, and Wyeth W. Wasserman. 2016. Deep Feature Selection: Theory and Application to Identify Enhancers and Promoters. *J. Comput. Biol.* 23, 5 (2016), 322–336. <https://doi.org/10.1089/cmb.2015.0189>
- [13] Haochen Liu, Xiangyu Zhao, Chong Wang, Xiaobing Liu, and Jiliang Tang. 2020. Automated Embedding Size Search in Deep Recommender Systems. *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval* (2020).
- [14] Siyi Liu, Chen Gao, Yihong Chen, Depeng Jin, and Yong Li. 2021. Learnable Embedding sizes for Recommender Systems. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net. <https://openreview.net/forum?id=vQzcqQWIS0q>
- [15] Zhuoran Liu, Leqi Zou, Xuan Zou, Caihua Wang, Biao Zhang, Da Tang, Bolin Zhu, Yijie Zhu, Peng Wu, Ke Wang, and Youlong Cheng. 2022. Monolith: Real Time Recommendation System With Collisionless Embedding Table. *CoRR abs/2209.07663* (2022). <https://doi.org/10.48550/arXiv.2209.07663> [arXiv:2209.07663](https://doi.org/10.48550/arXiv.2209.07663)
- [16] Jiaqi Ma, Zhe Zhao, Xinyang Yi, Jilin Chen, Lichan Hong, and Ed H Chi. 2018. Modeling task relationships in multi-task learning with multi-gate mixture-of-experts. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 1930–1939.
- [17] Xu Ma, Pengjie Wang, Hui Zhao, Shaoguo Liu, Chuhan Zhao, Wei Lin, Kuang-Chih Lee, Jian Xu, and Bo Zheng. 2021. Towards a Better Tradeoff between Effectiveness and Efficiency in Pre-Ranking: A Learnable Feature Selection based Approach. In *SIGIR '21: The 44th International ACM SIGIR Conference on Research and Development in Information Retrieval, Virtual Event, Canada, July 11-15, 2021*, Fernando Diaz, Chirag Shah, Torsten Suel, Pablo Castells, Rosie Jones, and Tetsuya Sakai (Eds.). ACM, 2036–2040. <https://doi.org/10.1145/3404835.3462979>
- [18] Maxim Naumov, Dheevatsa Mudigere, Hao-Jun Michael Shi, Jianyu Huang, Narayanan Sundaraman, Jongsoo Park, Xiaodong Wang, Udit Gupta, Carole-Jean Wu, Alisson G Azzolini, et al. 2019. Deep learning recommendation model for personalization and recommendation systems. *arXiv preprint arXiv:1906.00091* (2019).
- [19] Feiping Nie, Heng Huang, Xiao Cai, and Chris H. Q. Ding. 2010. Efficient and Robust Feature Selection via Joint  $\ell_2$ , 1-Norms Minimization. In *Advances in Neural Information Processing Systems 23: 24th Annual Conference on Neural Information Processing Systems 2010. Proceedings of a meeting held 6-9 December 2010, Vancouver, British Columbia, Canada*, John D. Lafferty, Christopher K. I. Williams, John Shawe-Taylor, Richard S. Zemel, and Aron Culotta (Eds.). Curran Associates, Inc., 1813–1821. <https://proceedings.neurips.cc/paper/2010/hash/09c6c3783b4a70054da74f2538ed47c6-Abstract.html>
- [20] Atsushi Nitanda. 2014. Stochastic proximal gradient descent with acceleration techniques. *Advances in Neural Information Processing Systems* 27 (2014).
- [21] Atsushi Nitanda. 2014. Stochastic proximal gradient descent with acceleration techniques. *Advances in Neural Information Processing Systems* 27 (2014).
- [22] Qi Pi, Weijie Bian, Guorui Zhou, Xiaoqiang Zhu, and Kun Gai. 2019. Practice on long sequential user behavior modeling for click-through rate prediction. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*. 2671–2679.
- [23] Pi Qi, Xiaoqiang Zhu, Guorui Zhou, Yujing Zhang, Zhe Wang, Lejian Ren, Ying Fan, and Kun Gai. 2020. Search-based User Interest Modeling with Lifelong Sequential Behavior Data for Click-Through Rate Prediction. *arXiv preprint arXiv:2006.05639* (2020).
- [24] Steffen Rendle. 2010. Factorization machines. In *2010 IEEE International Conference on Data Mining*. IEEE, 995–1000.
- [25] Jiayi Shen, Haotao Wang, Shupeng Gui, Jianchao Tan, Zhangyang Wang, and Ji Liu. 2021. UMEC: Unified model and embedding compression for efficient recommendation systems. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net. [https://openreview.net/forum?id=BM--bH\\_RSh](https://openreview.net/forum?id=BM--bH_RSh)
- [26] Ruoxi Wang, Bin Fu, Gang Fu, and Mingliang Wang. 2017. Deep & Cross Network for Ad Click Predictions. In *Proceedings of the ADKDD '17, Halifax, NS, Canada, August 13 - 17, 2017*. ACM, 12:1–12:7. <https://doi.org/10.1145/3124749.3124754>
- [27] Yejing Wang, Xiangyu Zhao, Tong Xu, and Xian Wu. 2022. AutoField: Automating Feature Selection in Deep Recommender Systems. In *WWW '22: The ACM Web Conference 2022, Virtual Event, Lyon, France, April 25 - 29, 2022*, Frédérique Laforest, Raphaël Troncy, Elena Simperl, Deepak Agarwal, Aristides Gionis, Ivan Herman, and Lionel Médini (Eds.). ACM, 1977–1986. <https://doi.org/10.1145/3485447.3512071>
- [28] Zhe Wang, Liqin Zhao, Biye Jiang, Guorui Zhou, Xiaoqiang Zhu, and Kun Gai. 2020. COLD: Towards the Next Generation of Pre-Ranking System. *CoRR abs/2007.16122* (2020). [arXiv:2007.16122](https://arxiv.org/abs/2007.16122) <https://arxiv.org/abs/2007.16122>
- [29] Kilian Q. Weinberger, Anirban Dasgupta, John Langford, Alexander J. Smola, and Josh Attenberg. 2009. Feature hashing for large scale multitask learning. In *Proceedings of the 26th Annual International Conference on Machine Learning, ICML 2009, Montreal, Quebec, Canada, June 14-18, 2009 (ACM International Conference Proceeding Series, Vol. 382)*, Andrea Pohorecký Danyluk, Léon Bottou, and Michael L. Littman (Eds.). ACM, 1113–1120. <https://doi.org/10.1145/1553374.1553516>
- [30] Minhui Xie, Kai Ren, Youyou Lu, Guangxu Yang, Qingxing Xu, Bihai Wu, Jiazhen Lin, Hongbo Ao, Wanhong Xu, and Jiwu Shu. 2020. Kraken: memory-efficient continual learning for large-scale real-time recommendations. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*. IEEE, 1–17.
- [31] Zhiqiang Xu, Dong Li, Weijie Zhao, Xing Shen, Tianbo Huang, Xiaoyun Li, and Ping Li. 2021. Agile and Accurate CTR Prediction Model Training for Massive-Scale Online Advertising Systems. In *SIGMOD '21: International Conference on Management of Data, Virtual Event, China, June 20-25, 2021*, Guoliang Li, Zhanhuai Li, Stratos Idreos, and Divesh Srivastava (Eds.). ACM, 2404–2409. <https://doi.org/10.1145/3448016.3457236>
- [32] Jie Amy Yang, Jianyu Huang, Jongsoo Park, Ping Tak Peter Tang, and Andrew Tulloch. 2020. Mixed-Precision Embedding Using a Cache. *CoRR abs/2010.11305* (2020). [arXiv:2010.11305](https://arxiv.org/abs/2010.11305) <https://arxiv.org/abs/2010.11305>
- [33] Caojin Zhang, Yicun Liu, Yuanpu Xie, Sofia Ira Ktena, Alykhan Tejani, Akshay Gupta, Pranay Kumar Myana, Deepak Dilipkumar, Suvadip Paul, Ikuhiro Ihara, Prasang Upadhyaya, Ferenc Huszar, and Wenzhe Shi. 2020. Model Size Reduction Using Frequency Based Double Hashing for Recommender Systems. In *RecSys 2020: Fourteenth ACM Conference on Recommender Systems, Virtual Event, Brazil, September 22-26, 2020*, Rodrygo L. T. Santos, Leandro Balby Marinho, Elizabeth M. Daly, Li Chen, Kim Falk, Noam Koenigstein, and Edleno Silva de Moura (Eds.). ACM, 521–526. <https://doi.org/10.1145/3383313.3412227>
- [34] Jian Zhang, Jiyang Yang, and Hector Yuen. 2018. Training with low-precision embedding tables. In *Systems for Machine Learning Workshop at NeurIPS*, Vol. 2018.

- [35] Xiangyu Zhao, Haochen Liu, Hui Liu, Jiliang Tang, Weiwei Guo, Jun Shi, Sida Wang, Huiji Gao, and Bo Long. 2021. AutoDim: Field-Aware Embedding Dimension Search in Recommender Systems. In *Proceedings of the Web Conference 2021*. Association for Computing Machinery, New York, NY, USA. <https://doi.org/10.1145/3442381.3450124>
- [36] Xiangyu Zhao, Chong Wang, Ming Chen, Xudong Zheng, Xiaobing Liu, and Jiliang Tang. 2020. AutoEmb: Automated Embedding Dimensionality Search in Streaming Recommendations. *ArXiv abs/2002.11252* (2020).
- [37] Guorui Zhou, Na Mou, Ying Fan, Qi Pi, Weijie Bian, Chang Zhou, Xiaoqiang Zhu, and Kun Gai. 2019. Deep interest evolution network for click-through rate prediction. In *Proceedings of the AAAI conference on artificial intelligence*, Vol. 33. 5941–5948.