

TimeLighting: Guidance-enhanced Exploration of 2D Projections of Temporal Graphs

Velitchko Filipov¹[0000-0001-9592-2179], Davide Ceneda¹[0000-0003-1198-567X],
Daniel Archambault²[0000-0003-4978-8479], and Alessio
Arleo¹[0000-0003-2008-3651]

¹ TU Wien, Vienna, Austria

{firstname.lastname}@tuwien.ac.at

² Newcastle University, Newcastle, United Kingdom

daniel.archambault@newcastle.ac.uk

Abstract. In temporal (or *event-based*) networks, time is a continuous axis, with real-valued time coordinates for each node and edge. Computing a layout for such graphs means embedding the node trajectories and edge surfaces over time in a $2D + t$ space, known as the space-time cube. Currently, these space-time cube layouts are visualized through animation or by slicing the cube at regular intervals. However, both techniques present problems ranging from sub-par performance on some tasks to loss of precision. In this paper, we present **TimeLighting**, a novel visual analytics approach to visualize and explore temporal graphs embedded in the space-time cube. Our interactive approach highlights the node trajectories and their mobility over time, visualizes node “aging”, and provides guidance to support users during exploration. We evaluate our approach through two case studies, showing the system’s efficacy in identifying temporal patterns and the role of the guidance features in the exploration process.

Keywords: Temporal Graphs · Space-time cube · Dynamic Network Visualization · Visual Analytics.

1 Introduction

Temporal (or *event-based*) networks [23] are dynamic graphs where the temporal dynamics, such as node/edge additions and removals, have real-time coordinates. These have been characterized and studied extensively [21], as they are used in many applications to model phenomena of commercial and academic interest, such as interactions in social media [23], communication networks [16], and contact tracing [30], to name a few. In “traditional” dynamic graph drawing [11,21], where time is discretized (or *timesliced*), creating a visualization for such networks poses different challenges. Juxtaposition (or small multiples) would require first identifying suitable timeslices, which inevitably leads to quantization errors that, in turn, obscure the fine temporal details that might be crucial in some domains (e.g., the exact order of personal contacts in contact tracing networks).

On the other hand, animation would not suffer from such artifacts, and it has been used in previous work on event-based graph drawing as a visualization metaphor to display the computed layouts [7,29]. Animation is a more natural way to encode time; however, it is not perceptually effective for many tasks involving dynamic networks [19,3]. Moreover, the vast majority of research on animation has been done with timesliced graphs (see, e.g., [3,6,11,18]), and its application to temporal networks is still in its infancy.

Temporal networks can also be drawn in a 3D space, namely, the “space-time cube” ($2D + t$). In this case, a drawing algorithm computes the node trajectories over time and space. Existing research [7,28,29] provides evidence that this drawing approach yields better quality drawings of temporal graphs, compared to their timesliced counterparts (e.g., Visone [10]), and for discrete time graphs when many changes occur between timeslices. Despite this, research on visually depicting these trajectories and, in turn, obtaining insights from their behavior (i.e., exploring the network in time) is still a largely under-investigated topic - a gap that we intend to address in this paper.

On these premises, we present **TimeLighting**, a guidance-enhanced Visual Analytics (VA) solution for exploring node trajectories in the space-time cube keeping the *full* temporal resolution of the network. **TimeLighting** supports understanding temporal patterns and behaviors and, in general, extracting insights from datasets with complex temporal dynamics.

The design of **TimeLighting** is inspired by the “time-coloring” operation [8], whereby time is mapped to color to visualize the evolution of nodes and edges through the space-time cube; and is loosely motivated by *transfer functions* used in direct volume rendering [26] to emphasize features of interest in the data. Conceptually, in our approach, we “shine” light through the space-time cube down along its time axis (hence the system’s name – **TimeLighting**) in a manner that resembles the behavior of transfer functions for volume rendering. As the light interacts with the node trajectories, they are visualized and colored differently according to the age and persistence of the nodes (i.e., applying the time-coloring operation), generating a 2D visualization of the 3D embedding (see also Figure 1). The resulting visualization is an explorable 2D map of the nodes’ densities, with visible individual node movement and “aging” over time. We complement this visualization with several interactive controls to explore the data and introduce a simple mobility metric, based on the length of each node’s trajectory, to rank and identify the more and less stable parts of the graph. We designed **TimeLighting** introducing multiple elements of visual guidance [14] to enhance (and possibly ease) the network exploration process. Finally, we describe two case studies demonstrating how our guidance-enhanced approach supports users in achieving the system design tasks.

2 Related Work

We now illustrate related literature on which we ground our research.

Visualization of Dynamic Networks. Visualizing temporal networks differs significantly from how typically we draw and visualize dynamic graphs in the graph drawing and visualization community where the time axis is a discrete series of timeslices. Each individual time point is called a timeslice, a snapshot that represents the state of the graph over a time interval. This simple yet powerful simplification is used as the basis of visualization [11,9], for layout algorithm design [17,12], and in user studies [6,4,18,20]. The problem with time slicing is that many networks of scientific interest do not have natural timeslices. Therefore, choosing the right time sampling and duration for each can be a complex task, which eventually results in some loss of temporal information. In this regard, visualization techniques have been presented to suggest interesting timeslice selection. Wang et al. [31] present a technique for non-uniform time slicing (that is, selecting slices of different duration) based on histogram equalization to produce timeslices with the same number of events and, in turn, similar visual complexity. Lee et al. [25] experimented with a visualization tool, called “Dynamic Network Plaid” for interactive time slicing on large displays. Users can select interesting time intervals based on the event distribution over time and visualize the corresponding status of the network in those intervals. Recently, a number of algorithms have been proposed to draw temporal networks directly in the space-time cube [29,7]. These approaches do not divide the data into a series of timeslices to draw the graph but directly embed the network in the space-time cube. However, the only way to visualize such $2D + t$ drawings on a 2D plane was to select timeslices or present an animation of the data over time.

Guidance for Graph Exploration Due to the challenge of analyzing complex events such as those modeled by temporal networks, researchers also investigated approaches to provide support and ease the analysis for users. The resulting approaches fall under the definition of “guidance” [14]. Guidance is characterized as *active* support in response to a *knowledge gap* which hinders the completion of an interactive visual data analysis session. Over the years, several approaches have been devised, providing different types of guidance in different phases of the analysis [15,13]. For instance, May et al. [27] describe a method to enhance the exploration of large graphs using glyphs. While the user explores a given area of interest (the focus), the system automatically highlights the path to other possibly off-screen interesting nodes (the context). Gladisch et al. [22] provide support during the navigation through large hierarchical graphs by suggesting what to explore next. Thanks to a user-customizable degree-of-interest function, the system can suggest how to navigate the graphs, both horizontally and vertically, adjusting the level of abstraction of the hierarchy. Despite the work in this area, applying guidance to temporal networks is uncharted territory. Given a temporal network modeled in a space-time cube, our goal is to provide guidance to support the identification of interesting time intervals and nodes requiring further attention and analysis from the user.

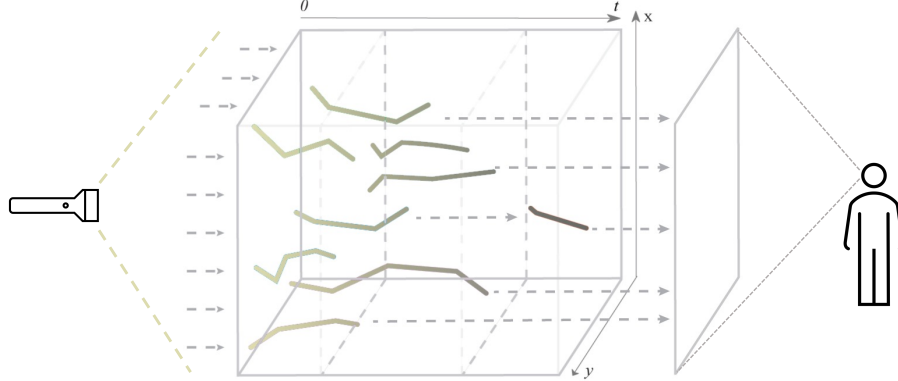


Fig. 1: Exemplification of the **TimeLighting** metaphor. Rays of light (depicted as dashed lines), coming from $t = 0$ travel through the space-time cube and reach the observer at t_{max} . The rays interact with the node trajectories and will carry this information to the projection plane.

3 Design Considerations

In this section, we discuss the most relevant aspects that influenced the design of **TimeLighting**, namely, the data characteristics, the user’s tasks, and the time-coloring paradigm used to provide guidance.

Data, Tasks. The data we aim to visualize and explore with **TimeLighting** represents a temporal network [29,7]. In a temporal network $D = (V, E, T)$, with V the set of nodes, E the set of edges, and $T \in \mathfrak{R}$ represents the time-dependant *attributes*. These take the form of functions in the $V \times T$ and $E \times T$ domains for nodes and edges, respectively. For simplicity, and in accordance with existing literature, we consider all attribute functions as piece-wise linear functions. The *appearance* A_x attribute, for example, models the intervals in time in which nodes and edges exist:

$$A_v : V \times T \rightarrow [true, false]$$

$$A_e : E \times T \rightarrow [true, false]$$

A_v and A_e map to the node and edge insertion and deletion *events*, respectively. For this reason, these graphs are also called *event-based* networks, and the terms, temporal and event-based, will be used interchangeably in the remainder of this paper. The *position* $P_v : V \times T \rightarrow \mathfrak{R}^2$ attribute describes the nodes’ position over time. The following is an example of how each node’s ($v \in V$) position

is computed by an event-based layout algorithm describing the movement over time and space:

$$P_v(t) = \begin{cases} (5, 6) \rightarrow (12, 11) & \text{for } t \in [0, 1] \\ (8, 3) \rightarrow (1, 7) & \text{for } t \in [5, 7] \\ \dots & \\ (0, 0) & \text{otherwise} \end{cases}$$

In this paper, we use the `MultiDynNoS` [7] event-based layout algorithm to generate the drawings of the graphs. `TimeLighting` is designed for a number of user tasks, which we characterize using the task taxonomy for network evolution analysis by Ahn et al. [2] and the taxonomy of operations on the space-time cube by Bach et al. [8], and are described in the following.

T1: Overview. `TimeLighting` should provide an overview of the temporal information at a glance. Providing an overview is typically the first necessary step in any VA process.

T2: Tracking Events. Understanding the temporal dynamics and the events’ frequency helps the user isolate interesting occurrences in time. Events also cause the nodes’ trajectories to bend, i.e., make the node change direction. Understanding the *shape* [2] of changes in node movement over time (e.g., speed, repetition, etc.) would provide further insights during the exploration of the data.

T3: Investigate relationships. Each edge event occurrence perturbs the trajectories. Identifying which relationships have the most impact or how often they occur might help the user explain the formation of clusters, or, in general, the phenomenon at hand.

Time-coloring. To highlight interesting nodes and trajectories and more generally to visualize the network’s dynamics, we took inspiration from the time-coloring operation described by Bach et al. [8] in their survey. Time-coloring is a content transformation operation applied to the space-time cube. Given a timesliced graph, the procedure consists in coloring each timeslice based on a uniform linear color scale so that it would be possible to identify the “age” of the data points easily. To apply this technique to temporal graphs, we had to find a way to visually represent two features of each node: their *persistence* (i.e., its behavior during its appearance intervals) and their *aging*, that is how their movements are distributed in time from the point of view of the observer, in a continuous time axis scenario. Such network features can be visualized as if we projected light through the cube along the time axis: the interaction with light will be visible from the observer, watching from the other side of the cube (at t_{max} , see Figure 1).

Guidance. In addition to visualizing the temporal network, we designed guidance to support its exploration and analysis. In general, the degree of support provided to the user may vary significantly, and at least three guidance degrees can be identified [14]: *Orienting* helps users keep an overview of the problem

and the alternative analytical paths they can choose to move forward. *Directing* guidance provides users with a set of options and orders them according to their importance for solving current tasks, and *prescribing* guidance (as the name suggests) prescribes a series of actions to take to conclude the task. Given the similarities between our problem and the transfer functions used in volume rendering (although we apply them to a 2D visualization), the general idea at the base of our guidance-enhanced approach is to support and ease the identification of time intervals and nodes with specific desirable characteristics, as well as, investigate their relationships and how they interact (i.e., analyzing the moment of the trajectories), making them stand out from the rest for the user’s convenience. Considering our set of design tasks, we highlight the nodes that have the longest trajectories. Long trajectories, in fact, represent nodes that are associated with many events and with high persistence in the currently selected temporal interval (to support **T2**). This type of guidance can be classified as directing, as trajectories are ranked based on their length, and, is necessary to ease or solve the system design tasks. In addition, we highlight temporal intervals in which nodes defined by the user interact with each other, thus providing guidance to **T3**.

4 TimeLighting

In this section, we describe our system in detail and how we implemented it considering the design requirements described in the previous section. **TimeLighting** is a guidance-enhanced VA system comprised of two linked views and a focus+context approach. An overview of the prototype is shown in Figure 2.

4.1 Main View

In the main view of **TimeLighting** (see Figure 2-B), we show a 2D projection of the complete temporal graph (i.e., an overview—**T1**). We discuss the details of our approach in the following. We employ a number of different encodings to highlight features of nodes and edges.

Node Positions are represented as trajectories encoded as a trail of circles (see Figure 3). First, we place each interval’s start and end position within every node’s P_v attribute (see Section 3). These come directly from the computed drawing and have an orange stroke in order to make these distinguishable from the sampled nodes. To ease the comprehension of the movement flow (**T2**), between the start and end positions of each interval, we place a number of sampled nodes, where the coordinates are interpolated. The user can fine-tune the number of interpolated positions by choosing an appropriate “sampling frequency”. The resulting sampled nodes are positioned along the node trajectory but are encoded as smaller circles with no stroke to differentiate them from non-sampled nodes. We calculate and visualize the node *aging* as follows: for each node visualized on screen (nodes both in P_v and interpolated are considered), its age is computed as the difference between its time coordinate and the time of the

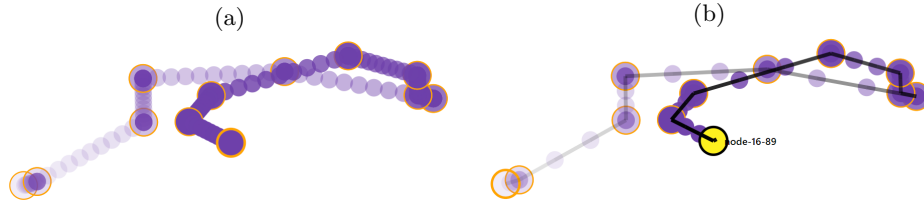


Fig. 3: Examples of trajectory visualizations. In (a) a higher sampling frequency is selected, and aging is clearly visible thanks to the change in opacity. In (b) sampling is lowered to a third (3 points per movement segment), and the trajectory is shown superimposed as the mouse is hovering over one of the nodes, indicated as a yellow node. The orange stroke and size difference indicates coordinates coming from the data compared to interpolated nodes.

to a trajectory, will make all edges incident to those nodes appear. Edge aging is encoded similarly to node aging. In the following Figure 6-B, an example of how edges connect the sampled nodes within the current temporal selection is depicted for the currently hovered node (Munster Rugby).

Movement is visualized using a polyline connecting each position in the nodes’ P_v attribute. It represents how the node’s movement changes over time due to the bends in the trajectories computed by the layout process. We add this encoding as the nodes’ opacity alone might not be sufficient in showing how trajectories evolve over time (**T2/T3**). We calculate the age of each trajectory segment and apply a similar linear opacity scale as with the nodes and edges. The trajectory’s age is calculated as the mean of the ages of each pair of nodes in that given polyline segment. This information is also shown on-demand by hovering over a trajectory, and, either the edges or the movement of a node can be shown (depending on the selection in the top bar—see Figure 2-A).

Density is represented as a contour map (see the dark-blue areas in the center of Figure 2), providing a quick visual indicator that emphasizes locations where a larger number of nodes have existed (**T2**). This kind of encoding also provides a first glance at the trajectories’ “shape”, which eases keeping an overview of the events (**T1**). To calculate the density map, we translate the original set of nodes for each point in time into a series of objects with x, y coordinates and relative age. The x, y coordinates determine the contours of the density map. The age acts as a weighing function such that older nodes would contribute less to the density map compared to more recent nodes. The “bandwidth” sets the standard deviation of the Gaussian kernel, with lower values showing a sharper picture and higher values more distributed, but also more blurred, representation.

Interactions are also supported in the main view of **TimeLighting**. Common interactions such as using the mouse scroll wheel to *zoom* and rescale the main view, and *panning* or *dragging* to reposition it.

4.2 Other Views and Guidance

Side Panel shows a list of nodes ordered according to their mobility (as a form of guidance, see Section 3). Each node in this list is also accompanied by a small bar chart visualizing the differences in the mobility scores of the nodes. From here, the user can select and “lock” trajectories in the main view. A locked trajectory is always shown regardless of the current temporal interval selection in the timeline (see next paragraph). Locked nodes are colored in bright red if they are in the current temporal selection, while nodes that are out of the current temporal selection are colored in a less saturated hue (see Figure 4). The encoding and ordering of node trajectories in the side panel serve as visual guidance to support the tracking of specific events (i.e., guidance to ease **T2**). Additionally, when loading a new graph, the three nodes with the highest mobility are locked by default (this can later be refined or changed).




Fig. 4: Example of a locked trajectory. The circles in red are fully within the temporal selection of the users, whereas the less saturated ones are outside of the selected interval.

Timeline, shown in (Figure 2-C), allows to select and explore specific temporal intervals as well as keep an overview (**T1**) of the number of nodes and edges that are visible over time. This is obtained by considering the net number of node/edge additions and removals and representing this information as two overlapping area charts (in red—the nodes and in blue—the edges). The timeline serves two purposes: first, the user can brush to select a specific interval within the available data. As a result, only the subgraph existing during the newly selected time interval will be shown in the main view (temporal filtering). This also affects movement coloring, relative age, and density calculation, as well as, limits the edges shown on-screen to those existing in the current selection (these do not apply to locked trajectories). Second, **TimeLighting** uses the timeline to provide guidance and suggest specific time intervals for further inspection. Specifically, the system highlights intervals in time when all the currently locked trajectories interact with each other. These intervals are represented as orange rectangles drawn on top of the timeline (see Figure 2-C). Clicking one of these intervals will snap onto that temporal selection, helping the user to keep track of and investigate relationships (i.e., guidance to ease **T3**).

5 Case Studies

In this section, we discuss two case studies on a real temporal network. We show how insights can be extracted from the data using `TimeLighting` and how the design tasks are achieved and supported with guidance.

We build our case studies on the *Rugby* dataset, which is a collection of 3151 tweets posted during the Pro12 rugby competition of the 2014-2015 season [1], specifically from September 2014 to October 2015. The network has a node for each team participating in the competition (12 teams in total), and an edge exists between two teams when a tweet from one mentions another. While nodes will stay visible from the moment they appear until the end, edges appear at the exact moment the tweet was posted. To improve the visibility of the edges during the layout process (as tweets do not have a “duration”), edges are given a 24-hour duration. For example, if an edge \bar{e} has a timestamp t , then $A_{\bar{e}} = [t-12h, t+12h]$. Multiple edges between the same teams are merged together if their appearances overlap by a duration of less than one day. This simplification has already been applied in previous work using this dataset [29], and discretization of this dataset with similar resolution would require 417 timeslices. This dataset is particularly interesting as we have ground truth data to validate our findings.

Case Study 1: The First and Second Half of the Season: Examining Trajectories. We begin our use case with an *Overview* task (**T1**), examining the trajectories in the first (see Figure 5-A) and the second half of the 2014-2015 season (see Figure 5-B). We can immediately observe from the timeline the trend of the events. There is a steady increase in the number of tweets from the beginning of the season that peaks around the beginning of the second round of the league. This peak remains until the season’s final and significantly impacts the nodes’ mobility. We can also see that nodes move less in the second half of the season compared to the first half. Specifically, in Figure 5-B the majority of the nodes are within the purple to orange range of the scale—lower mobility—whereas in Figure 5-A they are in the yellow to green range—encoding higher mobility. In the first half, instead, tweets are sparser, meaning that the influence of an edge on the movement of nodes is kept (as there is no inertia) until another one changes its trajectory. Continuing the analysis of the network, tweets happen at a much higher rate in the second half of the season, and, since this network is a clique (all teams eventually play against one another), they tend to be “locked” in place by the attractive forces exerted by the other nodes. It must be considered that the layout algorithm attempts to optimize (and reduce) node movement, placing the nodes in an area of the plane where they will likely remain. This behavior can be seen in the density map too, where hot spots are larger and more numerous (i.e., nodes tend to linger more in the same areas) in the second half compared to the first half. Nonetheless, the amount of attractive force will depend on the public interest (i.e., the number of tweets) about individual matches.

Case Study 2: Tracking the Two Least Winning Teams. In this second case study, we *track* (**T2**) the trajectories and *investigate* (**T3**) the relationships

between the two least winning teams of the season (according to the historical information available), namely the “Zebre” (Z) and “Benetton” (B) teams. We begin by selecting them in the sidebar so that the whole trajectory is locked permanently on screen. Guidance shows us the different moments in time when the two teams interact, and we focus on the period of time when the two teams play against each other around the midpoint of the season. The teams played two matches (during the first and second leg of the tournament) in adjacent rounds (12 and 13). The status of the interface is reported in Figure 6-A. It is possible to see how the Z trajectory bends significantly towards B at this point in time, and a similar effect is visible the other way around. This attraction strength can be interpreted as the “hype” of the matches building up, as Z and B are the only two teams coming from Italy in the competition. Finally, we compare the relationships between the last two teams in the ranking and the first two, “Glasgow Warriors” (G), the winners, and “Munster Rugby” (M), referring to the time around the tournament finals (see Figure 6-B). If we focus on M, it is easy to identify the time the final was played, with mostly all teams connected to it. The B trajectory is strongly influenced by M, as it was one of the final matches before the final; Z, instead, is not largely influenced and drifts away.

6 Conclusion and Future Work

In this paper, we presented and described **TimeLighting**, a guidance-enhanced VA approach to support the analysis and exploration of temporal networks embedded in a space-time cube. We augmented the visualization approach with guidance to better support users in the visual analysis of the data. We demonstrated the effectiveness of our approach with two use cases, depicting a scenario where the aim is to explore and extract insights from a temporal network describing the events of a rugby season and the relationships between teams. The potential of visualization in exploring temporal graphs in the space-time cube is an opportunity for the entire graph drawing and visualization communities. Future work should primarily be oriented on conducting a formal evaluation of the method, both from a visual quality perspective, i.e., through a selection of metrics that capture the readability, scalability, and expressiveness of the visualization, and from a user perspective, also assessing the impact of the guidance features included in the system, extending experimentation on other real datasets (e.g., [5,16]). Further work includes investigating how **TimeLighting** supports users when sampling and identifying temporal network features and patterns.

Acknowledgements

For the purpose of open access, the author has applied a Creative Commons Attribution (CC-BY) license to any Author Accepted Manuscript version arising from this submission. This work was conducted within the projects WWTF grant [10.47379/ICT19047], FFG grant DoRIAH [#880883], and FWF grant ArtVis [P35767].

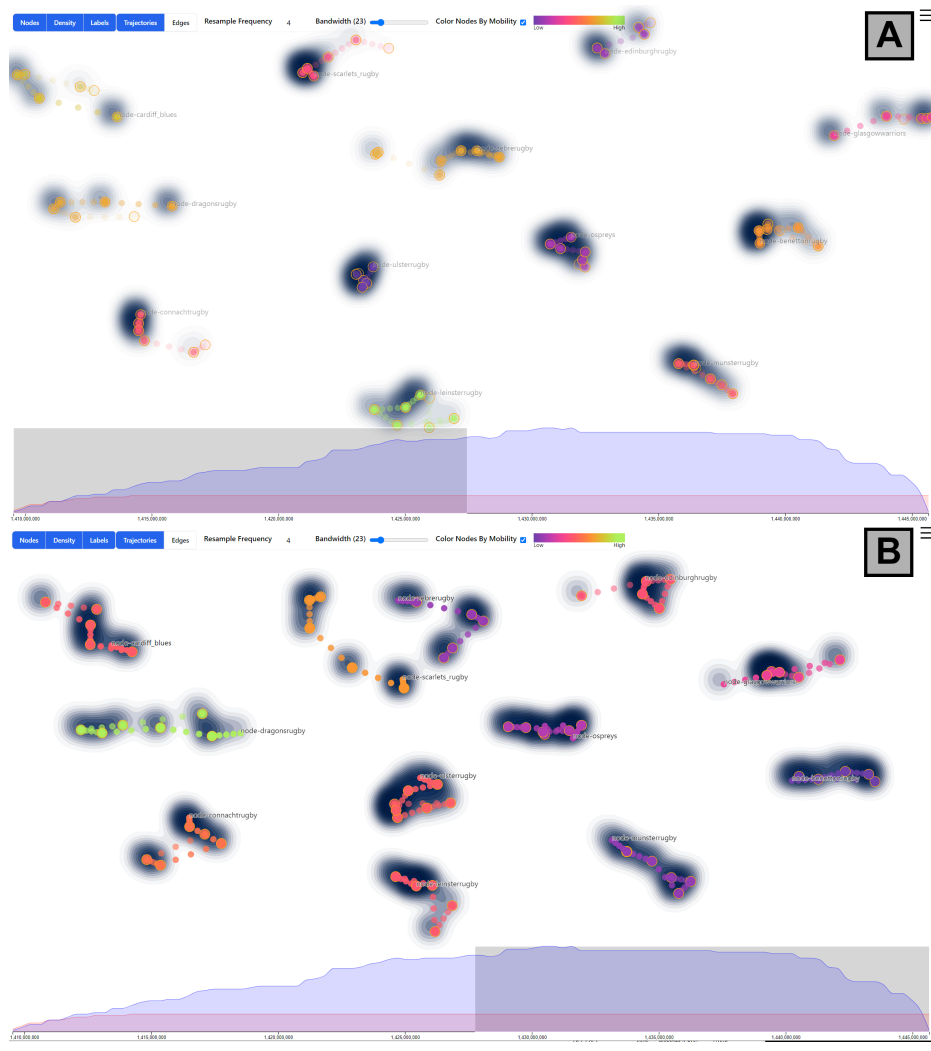


Fig. 5: Illustrations from Case Study 1. It is possible to see how the mobility of nodes changes in the two halves of the season. **(A)** The first half of the season; **(B)** The second half of the season. Timeline brushing is used to filter out events. Trajectory sampling is set at 4 points.

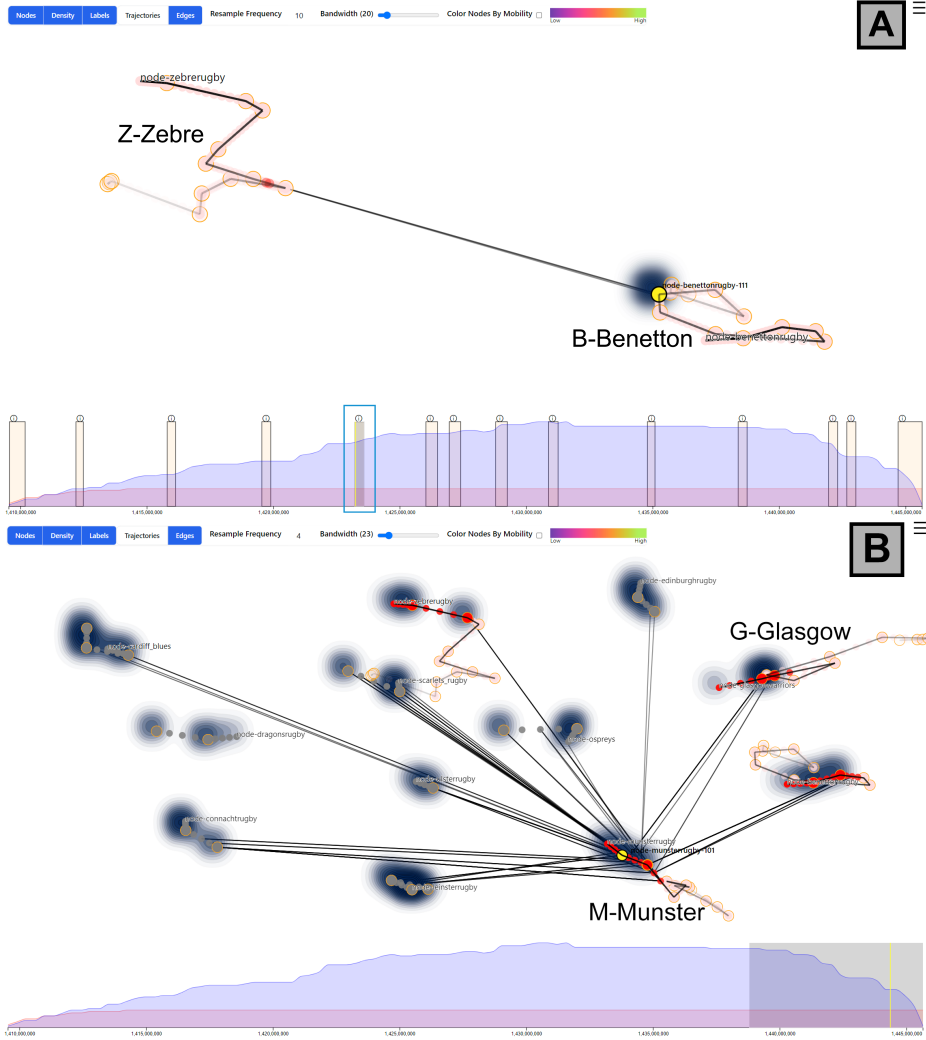


Fig. 6: Illustrations from Case Study 2. **(A)** The two trajectories of the teams in guidance intervals are visible in the timeline, and the one selected (see blue rectangle) relates to the matchup between the two teams in the first round of the competition. **(B)** it is possible to identify the final match and the connections between the 2nd best team and the other teams of interest in the case study.

References

1. PRO-12 Rugby Competition 2014-2015 Season Standings. <http://rd.pro12rugby.com/matchcentre/table.php?includeref=11189&season=2014-2015>, online, Accessed: 2023-06-03
2. Ahn, J.w., Plaisant, C., Shneiderman, B.: A Task Taxonomy for Network Evolution Analysis. *IEEE Transactions on Visualization and Computer Graphics* **20**(3), 365–376 (2014). <https://doi.org/10.1109/TVCG.2013.238>
3. Archambault, D., Purchase, H., Pinaud, B.: Animation, Small Multiples, and the Effect of Mental Map Preservation in Dynamic Graphs. *IEEE Transactions on Visualization and Computer Graphics* (2011). <https://doi.org/10.1109/TVCG.2010.78>
4. Archambault, D., Purchase, H.C.: Mental Map Preservation Helps User Orientation in Dynamic Graphs. In: *Graph Drawing & Network Visualization*. pp. 475–486. Springer (2013). https://doi.org/10.1007/978-3-642-36763-2_42
5. Archambault, D., Purchase, H.C.: The “map” in the mental map: Experimental results in dynamic graph drawing. *International Journal of Human-Computer Studies* **71**(11), 1044–1055 (2013)
6. Archambault, D., Purchase, H.C.: Can Animation Support the Visualisation of Dynamic Graphs? *Information Sciences* p. 495–509 (2016). <https://doi.org/10.1016/j.ins.2015.04.017>
7. Arleo, A., Miksch, S., Archambault, D.: Event-based Dynamic Graph Drawing without the Agonizing Pain. *Computer Graphics Forum* **41**(6), 226–244 (2022). <https://doi.org/10.1111/cgf.14615>
8. Bach, B., Dragicevic, P., Archambault, D., Hurter, C., Carpendale, S.: A descriptive framework for temporal data visualizations based on generalized space-time cubes. *Computer Graphics Forum* **36**(6), 36–61 (2017). <https://doi.org/10.1111/cgf.12804>
9. Bach, B., Pietriga, E., Fekete, J.D.: GraphDiaries: Animated Transitions and Temporal Navigation for Dynamic Networks. *IEEE Transactions on Visualization and Computer Graphics* **20**(5), 740–754 (2014). <https://doi.org/10.1109/TVCG.2013.254>
10. Baur, M., Benkert, M., Brandes, U., Cornelsen, S., Gaertler, M., Köpf, B., Lerner, J., Wagner, D.: Visone software for visual social network analysis. In: *International Symposium on Graph Drawing*. pp. 463–464. Springer (2001). https://doi.org/10.1007/3-540-45848-4_47
11. Beck, F., Burch, M., Diehl, S., Weiskopf, D.: A Taxonomy and Survey of Dynamic Graph Visualization. *Computer Graphics Forum* **36**(1), 133–159 (2017). <https://doi.org/10.1111/cgf.12791>
12. Brandes, U., Mader, M.: A quantitative comparison of stress-minimization approaches for offline dynamic graph drawing. In: *International Symposium on Graph Drawing*. pp. 99–110. Springer (2011). https://doi.org/10.1007/978-3-642-25878-7_11
13. Ceneda, D., Arleo, A., Gschwandtner, T., Miksch, S.: Show me your face: Towards an automated method to provide timely guidance in visual analytics. *IEEE Transactions on Visualization and Computer Graphics* **28**(12), 4570–4581 (2022). <https://doi.org/10.1109/TVCG.2021.3094870>
14. Ceneda, D., Gschwandtner, T., May, T., Miksch, S., Schulz, H.J., Streit, M., Tominski, C.: Characterizing guidance in visual analytics. *IEEE transactions on visualization and computer graphics* **23**(1), 111–120 (2016). <https://doi.org/10.1109/TVCG.2016.2598468>

15. Ceneda, D., Gschwandtner, T., Miksch, S.: A review of guidance approaches in visual data analysis: A multifocal perspective. *Computer Graphics Forum* **38**(3), 861–879 (2019). <https://doi.org/10.1111/cgf.13730>
16. Eagle, N., Pentland, A.S.: Reality mining: sensing complex social systems. *Personal and ubiquitous computing* **10**(4), 255–268 (2006)
17. Erten, C., Harding, P.J., Kobourov, S.G., Wampler, K., Yee, G.: GraphAEL: Graph animations with evolving layouts. In: *International Symposium on Graph Drawing*. pp. 98–110. Springer (2003). https://doi.org/10.1007/978-3-540-24595-7_9
18. Farrugia, M., Quigley, A.: Effective Temporal Graph Layout: A Comparative Study of Animation versus Static Display Methods. *Journal of Information Visualization* **10**(1), 47–64 (2011). <https://doi.org/10.1057/ivs.2010.10>
19. Farrugia, M., Hurley, N., Quigley, A.: Exploring temporal ego networks using small multiples and tree-ring layouts. In: *Proceedings of the International Conference on Advances in Computer-Human Interactions* (2011)
20. Filipov, V., Arleo, A., Bögl, M., Miksch, S.: On Network Structural and Temporal Encodings: A Space and Time Odyssey. *IEEE transactions on visualization and computer graphics* (2023). <https://doi.org/10.1109/TVCG.2023.3310019>
21. Filipov, V., Arleo, A., Miksch, S.: Are We There Yet? A Roadmap of Network Visualization from Surveys to Task Taxonomies. In: *Computer Graphics Forum*. Wiley Online Library (2023). <https://doi.org/10.1111/cgf.14794>
22. Gladisch, S., Schumann, H., Tominski, C.: Navigation recommendations for exploring hierarchical graphs. In: *Advances in Visual Computing: 9th International Symposium, ISVC 2013, Rethymnon, Crete, Greece, July 29-31, 2013. Proceedings, Part II 9*. pp. 36–47. Springer (2013). https://doi.org/10.1007/978-3-642-41939-3_4
23. Holme, P., Saramäki, J.: Temporal networks. *Physics Reports* **519**(3), 97–125 (2012). <https://doi.org/10.1007/978-3-642-36461-7>
24. Isenberg, P., Heimerl, F., Koch, S., Isenberg, T., Xu, P., Stolper, C., Sedlmair, M., Chen, J., Möller, T., Stasko, J.: vispubdata.org: A Metadata Collection about IEEE Visualization (VIS) Publications . *IEEE Transactions on Visualization and Computer Graphics* **23** (2017). <https://doi.org/https://doi.org/10.1109/TVCG.2016.2615308>
25. Lee, A., Archambault, D., Nacenta, M.: Dynamic Network Plaid: A Tool for the Analysis of Dynamic Networks. In: *Proceedings of the 2019 CHI Conference on Human Factors in Computing Systems*. pp. 1–14 (2019). <https://doi.org/10.1145/3290605.3300360>
26. Ljung, P., Krüger, J., Groller, E., Hadwiger, M., Hansen, C.D., Ynnerman, A.: State of the art in transfer functions for direct volume rendering. *Computer Graphics Forum* **35**(3), 669–691 (2016). <https://doi.org/10.1111/cgf.12934>
27. May, T., Steiger, M., Davey, J., Kohlhammer, J.: Using signposts for navigation in large graphs. *Computer Graphics Forum* **31**(3pt2), 985–994 (2012). <https://doi.org/10.1111/j.1467-8659.2012.03091.x>
28. Simonetto, P., Archambault, D., Kobourov, S.: Drawing dynamic graphs without timeslices. In: *International Symposium on Graph Drawing and Network Visualization*. pp. 394–409. Springer (2017). https://doi.org/10.1007/978-3-319-73915-1_31
29. Simonetto, P., Archambault, D., Kobourov, S.: Event-based dynamic graph visualisation. *IEEE Transactions on Visualization and Computer Graphics* **26**(7), 2373–2386 (2018). <https://doi.org/10.1109/TVCG.2018.2886901>
30. Sondag, M., Turkay, C., Xu, K., Matthews, L., Mohr, S., Archambault, D.: Visual Analytics of Contact Tracing Policy Simulations During an Emergency Response. *Computer Graphics Forum* **41**(3), 29–41 (2022). <https://doi.org/https://doi.org/10.1111/cgf.14520>

31. Wang, Y., Archambault, D., Haleem, H., Moeller, T., Wu, Y., Qu, H.: Nonuniform Timeslicing of Dynamic Graphs Based on Visual Complexity. In: 2019 IEEE Visualization Conference (VIS). pp. 1–5. IEEE (2019). <https://doi.org/10.1109/VISUAL.2019.8933748>

Appendix

Video demonstration of TimeLighting

An online version of the video is available on youtube here: <https://www.youtube.com/watch?v=Yb4GB6kGp5o>

Code and Repository

The code as well as a readme detailing how to install the necessary dependencies and get the project running is available on GitLab here: <https://gitlab.cvast.tuwien.ac.at/vfilipov/temporal-graphs>

Further Case Studies:

In order to provide more evidence for the adaptability and flexibility of our proposed approach, in this section, we describe a brief case study using the InfoVis [24] dataset. This dataset represents the co-authorship network of the IEEE VIS conference from 1995 to 2015. We choose this dataset as it represents a curious example of a timesliced graph (there is a slice for every year of the conference). However, it behaves similarly to a temporal network as nodes often disappear and re-appear, significantly changing their neighborhood at every timeslice - in fact, when drawn, temporal layout algorithms provide higher quality drawings [7]. Moreover, as we used a temporal network in the case studies described in the paper (see Section 5), we show a possible workflow of our approach on a different (and more popular) type of network.

For this example, we pruned the dataset to include 32 random authors who published papers between 2006 and 2012 (around a third of the total). The status of the system after loading the dataset, adjusting the bandwidth, and color-coding the node trajectories by mobility is shown in Figure 1. We focus on the brightest nodes in the center of the picture, which represent the authors with the highest mobility (see also Section 4), and in turn, the ones that change their neighborhood the most.

We single out the node “Lee B.”: we remove the density map visualization and color-coding, persistently highlight that trajectory (see Figure 2), and focus on the time interval with increasing activity (visible in the timeline of Figure 2a). At the beginning of the interval, author Lee B. is connected with researchers such as Robertson and Smith. With the help of the timeline, it is possible to follow the trajectory of the node over time, identifying that between 2009 and 2010 Lee B. co-authored papers with Karlson and Riche (see Figure 2b). It is possible to see that there are two edges between Karlson and Lee, and their different transparency suggests that these collaborations happened at different moments in time. Moreover, by hovering over the other nodes of that neighborhood, it is possible to see how these and other relationships contributed to shaping the trajectories and therefore the representation of these collaborations.


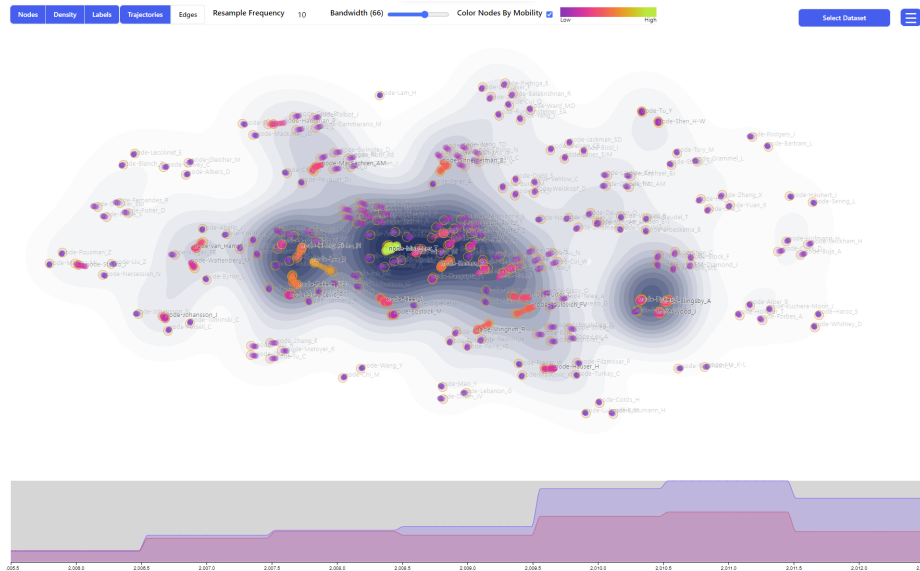



Fig. 1: Initial view after loading the dataset.

A different behavior is visible with the author “Munzner T.”; in this example, we re-activated the mobility color encoding and removed the labels to improve readability. Despite the higher mobility value, compared to “Lee B.”, the node exerts a strong attraction effect on the direct neighbors of Munzner, as visible in Figure 3, which stay nearby rather than move from one community to another. The only exception is a pink node (“Pfister H.” - on the right) that moves away from Munzner as they likely did not co-author a paper together over a year or two but still published extensively in the conference. By looking at how the Pfister node’s transparency changes along its trajectory, it is possible to see how it drifts away from Munzner’s community to the clique of purple nodes on the right. It is possible to see that Pfister gets close to the other clique rapidly (hence the higher mobility value): this is also visible by looking at the interpolated nodes in its trajectory, as they are more clearly separated from one another than in other neighboring trajectories.

Overall, with our approach, we show how it can provide easy access to the full temporal information in a single 2D representation, and the interaction techniques and guidance enable users to extract relevant insights.

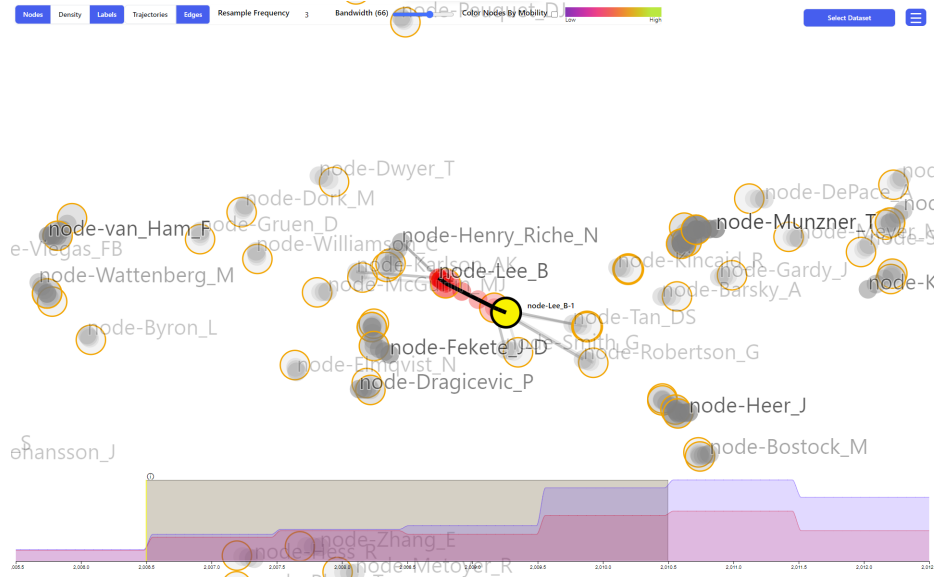

(a) The neighborhood of the author Lee B. at its first appearance.

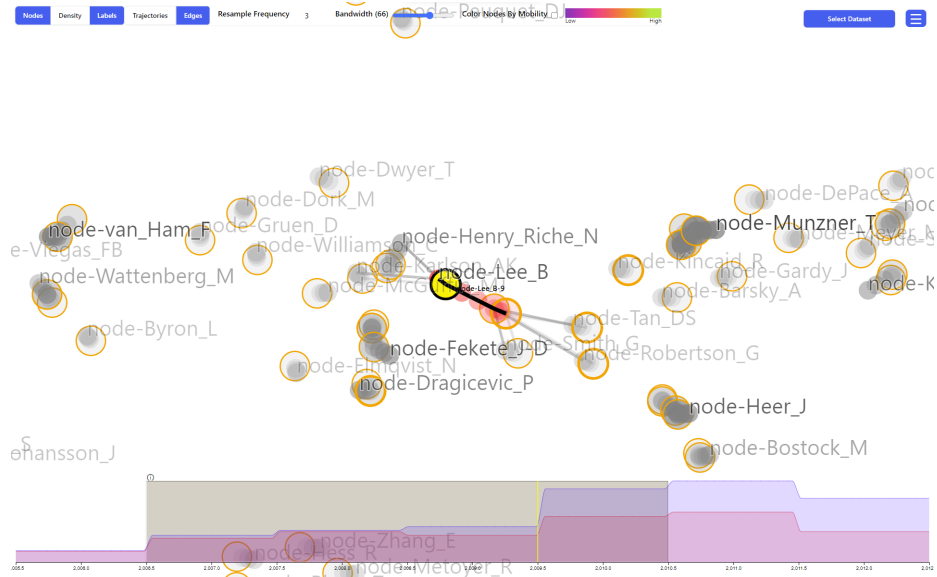

(b) The neighborhood of author Lee B. close to its last appearance.

Fig. 2: Investigating the temporal behavior of a single node (the author Lee B.) at it first appearance (a) and close to its last appearance (b).



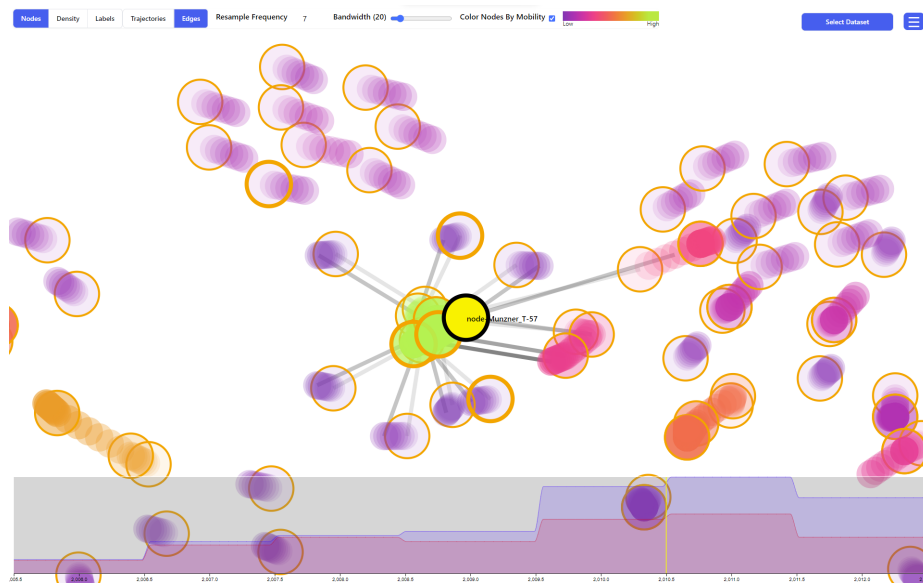


Fig. 3: The trajectory and relationships of author Munzner T..

Supplemental Figures to Section 4

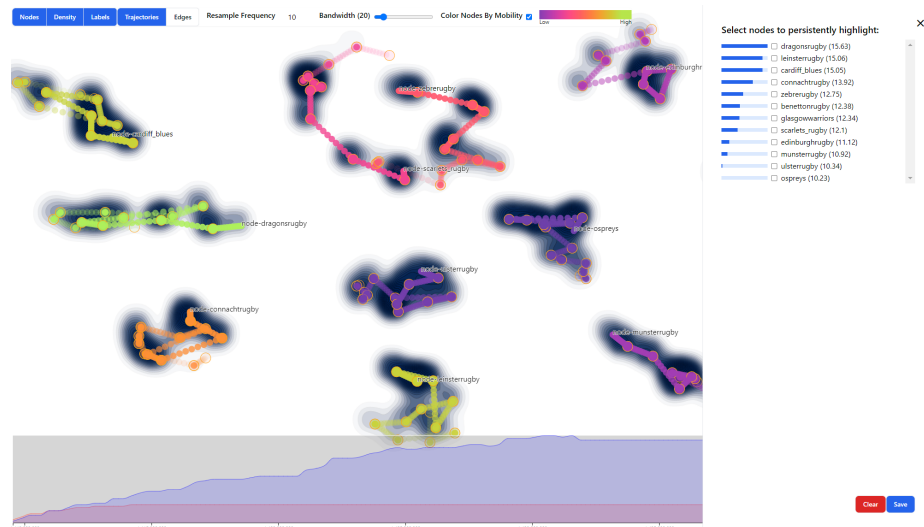

(a) Full view of the system with the sidebar open. It is possible to see nodes ranked by mobility.

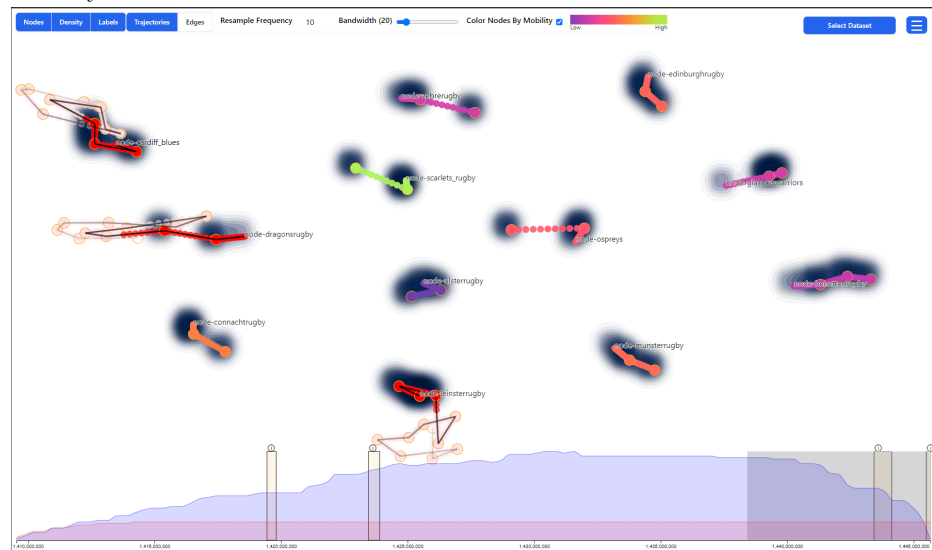

(b) Locked trajectories. Nodes within the currently selected interval are colored in bright red and the ones outside of it are colored in a lighter red.