

Price-Discrimination Game for Distributed Resource Management in Federated Learning

Han Zhang, Halvin Yang and Guopeng Zhang

Abstract—In federated learning (FL) such as FedAvg, the parameter server (PS) and clients form a *buyer’s market*, where the number of PS/buyers of FL services is far less than the number of clients/sellers. To improve the performance of FL and reduce the cost to incentive the clients, this paper proposes to differentiate the pricing for services provided by different clients rather than simply providing the same service pricing for them. The price is differentiated based on the performance improvements brought to FL by clients and their heterogeneity in computing and communication capabilities. To this end, a *price-discrimination game* (PDG) is formulated to comprehensively address the *distributed resource management* (DRM) problems in FL, including *multi-objective trade-off*, *client selection*, and *incentive mechanism*. As the PDG is a mixed-integer nonlinear programming (MINLP) problem, a distributed semi-heuristic algorithm with low computational complexity and low communication overhead is designed. The simulation result verifies that the PDG achieves a good tradeoff between the training loss, training time, and the cost of motivating clients to participate in FL.

Index Terms—Federated learning, distributed resource management, price-discrimination game, Nash equilibrium.

I. INTRODUCTION

FEDERATED learning is a paradigm of distributed machine learning that allows a PS to communicate with multiple clients to train AI models that adapt to client data without directly accessing the data [1]. In addition to privacy protection, FL also needs to address DRM issues, including 1) *Multi-objective trade-off*: How can a PS achieve a good compromise between *performance* (such as the test accuracy) and *efficiency* (such as the training time)? 2) *Client selection*: How can a PS select suitable clients from potential candidates to achieve its goals? 3) *Incentive mechanism*: Participating in FL requires the contribution of data, computing and communication resources. How can a PS motivate clients to participate in FL, and how can a selected client allocate its resources to achieve the goal of the PS?

The above issues have been partially addressed in existing work, such as the *client selection* problem studied in [2] [3] [4], the *multi-objective trade-off* problem considered in [4], and the *incentive mechanisms* designed in [2] [5] [7]. Specially, ref. [3] optimizes the allocation of computing resources and amount of training data of clients to improve the testing accuracy. However, this work does not consider the issues of incentive mechanisms. Ref. [2] proposes an auction

mechanism to incentivize clients to participate in FL. However, this work does not consider other constraints of FL, such as reducing training time. Ref. [5] uses a Stackelberg game to motivate clients to allocate more computing resources for FL, thereby reducing the training time. However, this work does not consider the issue of client selection.

Furthermore, if the PS and clients are considered as buyers and sellers of FL services respectively, existing methods do not fully utilize the buyer market characteristics of FL systems, as the number of PS/buyers is much smaller than the number of clients/sellers. Most existing works, such as [6], provide the same service pricing for different clients. According to [8], if the PS can differentiate the pricing for services provided by different clients, it can improve the performance of FL and reduce the cost of motivating clients to participate in FL. The price can be differentiated based on the performance improvements brought to FL by clients, and their heterogeneity in computing and communication capabilities. However, this requires a comprehensive solution to the DRM problems in FL. Due to the interconnected and tightly coupled nature of these issues, there are significant challenges ahead.

In this paper, we propose PGD, a non-cooperative game with differential pricing scheme, to address the above difficulties. In the PDG, the PS prices clients based on the improved *test accuracy* and reduced *training latency* brought by the clients, and the clients are compensated based on their inherent heterogeneity (For example, clients with different communication and computing capabilities will consume different amounts of resources to achieve the same learning objectives). In this way, the conflict of interest between the PS and clients in the buyer’s market can be effectively coordinated, the DRM problem in FL can be comprehensively solved, and the resource utilization efficiency of the FL system can be significantly improved.

The main contributions of this paper are as follows: 1) A PDG is proposed to cover all the DRM issues in FL, with the aim of improving the performance of FL and reducing the cost of motivating clients to participate in FL; 2) As the PDG is an MINLP problem, a distributed iterative algorithm with low computational complexity and low communication overhead is designed to solve it.

II. SYSTEM MODEL

The considered FL system consists of a PS and a set \mathcal{M} of $|\mathcal{M}|$ clients. The PS is located in an edge server and has direct wireless links with the clients. Each client m ($\forall m \in \mathcal{M}$) stores a dataset \mathcal{D}_m with $|\mathcal{D}_m|$ data-tuples. A data-tuple

Han Zhang and Guopeng Zhang are with the School of Computer Science and Technology, China University of Mining and Technology, Xuzhou 221116, China (e-mail: hanzhangl@cumt.edu.cn; gpzhang@cumt.edu.cn).

Halvin Yang is with the Department of Electronic and Electrical Engineering, University College London, WC1E 7JE London, U.K. (e-mail: uceehy@ucl.ac.uk).

$\{x_i, y_i\} \in \mathcal{D}_m, \forall i \in \{1, \dots, |\mathcal{D}_m|\}$, consists of a data sample x_i and its ground-truth label y_i . Let ω denote the parameter of an AI-model to be trained by the PS. Privacy protection makes the PS unable to directly share the client data. The FedAvg algorithm [1] can help the PS part solve this problem.

Firstly, the PS selects a subset \mathcal{N} ($\mathcal{N} \subseteq \mathcal{M}$) of N clients from the candidate set \mathcal{M} and broadcasts the global model ω to the clients. Each selected client m ($\forall m \in \mathcal{N}$) can independently train the localized ω , expressed as ω_m , using dataset \mathcal{D}_m . Let $f(x_i, y_i; \omega_m)$ represent the loss function of the gap between the predicted value \tilde{y}_i and the truth label y_i . The training direction of client m is to minimize the following average prediction loss on the local dataset \mathcal{D}_m

$$F_m(\omega_m) = \frac{1}{|\mathcal{D}_m|} \sum_{\forall \{x_i, y_i\} \in \mathcal{D}_m} f(x_i, y_i; \omega_m), \quad \forall m \in \mathcal{N}. \quad (1)$$

The training can be implemented by iteratively performing stochastic gradient descent (SGD) on the local dataset for I_m times. After that, client m should upload the trained ω_m to the PS for aggregation. This ends a round of *local training*.

Upon receiving all the local models uploaded by the clients in set \mathcal{N} , the PS can update the global model as

$$\omega = \sum_{\forall m \in \mathcal{N}} \frac{|\mathcal{D}_m|}{|\mathcal{D}|} \omega_m, \quad (2)$$

where $|\mathcal{D}| = \sum_{\forall m \in \mathcal{N}} |\mathcal{D}_m|$. This ends a round of *global training*. Such *global training* will be performed iteratively for I_g rounds upon completion of an FL task.

A. Energy consumption for training ω_m

Let c_m be the number of CPU cycles required to train ω_m with one tuple $\{x_i, y_i\}$. Let f_m^{\max} be the maximum frequency of the CPU of client m . We use f_m , where $0 \leq f_m \leq f_m^{\max}$, to represent the CPU frequency allocated by client m to train ω_m . Then, in each round of local training, the time spent by client m performing I_m times SGD on \mathcal{D}_m is given by

$$T_m^{\text{trn}} = \frac{c_m |\mathcal{D}_m| I_m}{f_m}, \quad \forall m \in \mathcal{N}. \quad (3)$$

Let v_m denote the effective capacitance coefficient of the CPU of client m [4]. The energy consumed by client m to execute the I_m times SGD is obtained as

$$E_m^{\text{trn}} = \frac{v_m (c_m I_m |\mathcal{D}_m|)^3}{(T_m^{\text{trn}})^2} = v_m f_m^2 c_m I_m |\mathcal{D}_m|. \quad (4)$$

B. Energy consumption for uploading ω_m

Let p_m and g_m be the transmit power of client m and the channel gain from client m to the PS during FL, respectively. The data rate for client m to upload ω_m to the PS is given by $r_m = B \log_2(1 + \frac{p_m g_m}{\sigma^2})$, where B is the bandwidth and σ^2 is the noise power. The time spent by client m to upload ω_m to the PS once is given by

$$T_m^{\text{com}} = |\omega_m| / r_m, \quad \forall m \in \mathcal{N}, \quad (5)$$

where $|\omega_m|$ is the size of ω_m . Therefore, the energy consumed by client m to upload ω_m to the PS once is given as

$$E_m^{\text{com}} = p_m T_m^{\text{com}} = p_m |\omega_m| / r_m, \quad \forall m \in \mathcal{N}. \quad (6)$$

III. PROBLEM FORMULATION

Before addressing the DRM issues, the following metrics are provided to measure the performance of FL.

Test accuracy: Let ω^* denote the model that minimizes the training loss. Let ω_{I_g} denote the model after I_g rounds of global training. Then we use $F(\omega^*)$ and $F(\omega_{I_g})$ to represent the losses caused by ω^* and ω_{I_g} , respectively. The *expected difference* between $F(\omega^*)$ and $F(\omega_{I_g})$ is bounded by [9]

$$\Gamma = \left(I_g \sum_{\forall m \in \mathcal{N}} |\mathcal{D}_m| \right)^{-\frac{1}{2}} + (I_g)^{-1}. \quad (7)$$

The above expression indicates that Γ , i.e., the upper bound of the difference between $F(\omega_{I_g})$ and $F(\omega^*)$ is negatively correlated with the global iteration number I_g of FL and the amount of data used by all clients in the I_g global iterations.

Training latency: The global model ω is updated in a synchronization manner. This means the latency in completing a round of global training, expressed as T , depending on the time taken by the last client in set \mathcal{N} to complete a round of local training. The time used by any client m to complete a round of local training is given by

$$T_m = T_m^{\text{com}} + T_m^{\text{trn}}, \quad \forall m \in \mathcal{M}. \quad (8)$$

Then, the expression of T is obtained as

$$T = \max(T_m | \forall m \in \mathcal{N}). \quad (9)$$

To ensure training efficiency, the PS sets a threshold T_0 for $T_m, \forall m \in \mathcal{M}$. This means that the following condition

$$T_m \leq T_0, \quad \forall m \in \mathcal{N}. \quad (10)$$

should be satisfied by any participating client m . Otherwise, the PS will not make payment to the client.

A. The objective of clients

The aim of a client is to earn compensation from the PS to offset its resource consumption while making as much extra profit as possible. Therefore, the *client utility* is defined as

$$U_m = \alpha_m (T_0 - T_m) - \beta_m (E_m^{\text{trn}} + E_m^{\text{com}}), \quad \forall m \in \mathcal{M}. \quad (11)$$

where α_m is the price provided by the PS to client m , and β_m is the cost per unit of energy consumption of client m .

The *first* term of U_m represents the gross profit earned by client m from the PS. The shorter the time T_m it takes for client m to complete a round of local training, the larger $(T_0 - T_m)$, and the more revenue the client can earn from the PS. The *second* term of U_m represents client's resource endowment, i.e., the cost of resources consumed by client m to complete a round of local training using time T_m . The smaller T_m , the more energy client m consumes, and the larger β_m , the more concerned the client is about energy consumption.

The seller's problem for client m is formulated as

$$\max_{f_m} U_m, \quad \forall m \in \mathcal{M}, \quad (12)$$

$$\text{s. t. } U_m = 0, \quad \forall m \in \mathcal{M} - \mathcal{N}, \quad (12.1)$$

$$U_m > 0, \quad \forall m \in \mathcal{N}, \quad (12.2)$$

$$0 \leq f_m \leq f_m^{\max}, \quad \forall m \in \mathcal{M}. \quad (12.3)$$

Constraint (12.1) states that if client m is **not** selected, $U_m = 0, \forall m \in \mathcal{M} - \mathcal{N}$. Constraint (12.2) states that a selected client cannot be given negative utility. This orders that the PS should set a minimum α_m for client m , denoted by α_m^{\min} ($\alpha_m^{\min} > 0$) to ensure $U_m > 0$ when $f_m > 0, \forall m \in \mathcal{N}$. The solution of α_m^{\min} will be discussed in Sec. IV-A.

B. The objective of the PS

As the buyer of FL services, the PS aims to reduce the expected difference in training loss Γ after I_g rounds of global training, reduce the overall training time $I_g T$, and at the same time reduce the cost of motivating clients to participate in FL. The utility of the PS is defined as

$$Q = \kappa\Gamma + \mu I_g T + I_g \sum_{\forall m \in \mathcal{M}} \alpha_m (T_0 - T_m), \quad (13)$$

where $\kappa > 0$ and $\mu > 0$ are the weighting factors to adjust the importance between the two objectives Γ and $I_g T$.

Let $\mathcal{A} = \{\alpha_1, \dots, \alpha_{|\mathcal{M}|}\}$. We define that $\alpha_m = 0, \forall m \in \mathcal{M} - \mathcal{N}$, and $\alpha_m \geq \alpha_m^{\min}, \forall m \in \mathcal{N}$. The buyer's problem for the PS is formulated as

$$\min_{\mathcal{A}, \mathcal{N}} Q \quad (14)$$

$$\text{s. t. } \mathcal{N} \subseteq \mathcal{M}, \quad (14.1)$$

$$\alpha_m = 0, \forall m \in \mathcal{M} - \mathcal{N}, \quad (14.2)$$

$$\alpha_m \geq \alpha_m^{\min}, \forall m \in \mathcal{N}. \quad (14.3)$$

IV. SOLVING THE GAME

A. Optimal strategies for the clients

For any client m who does not participate in FL, i.e., $\forall m \in \mathcal{M} - \mathcal{N}$, we have $f_m = 0$, and according to constraint (14.2), we also know $\alpha_m = 0$. By substituting $f_m = 0$ and $\alpha_m = 0$ into eq. (11), we have $U_m = 0, \forall m \in \mathcal{M} - \mathcal{N}$. This means that constraint (12.1) is always satisfied.

For each selected client $m, \forall m \in \mathcal{N}$, it is easy to prove that U_m is concave w.r.t $f_m, \forall f_m > 0$. Therefore, U_m satisfies the property of diminishing marginal utility, and there exists a unique solution to problem (12), $\forall f_m > 0$, which is given by

$$\tilde{f}_m = \left(\frac{\alpha_m}{2\beta_m v_m} \right)^{1/3}, \quad \forall m \in \mathcal{N}. \quad (15)$$

Due to constraint (12.3), the optimal solution to problem (12) is finally obtained as

$$f_m^* = \min \left(\tilde{f}_m, f_m^{\max} \right), \quad \forall m \in \mathcal{N}. \quad (16)$$

However, f_m^* cannot guarantee $U_m > 0, \forall m \in \mathcal{N}$. In order to meet constraint (12.2), the condition $\alpha_m > \alpha_m^{\min}$ ($\forall m \in \mathcal{N}$) should be satisfied, where $\alpha_m^{\min} > 0$ is lowest price that the PS can offer to client m . Due to the convexity of U_m , we can solve the function $U_m = 0$ and obtain

$$\alpha_m^{\min} = \frac{\beta_m (E_m^{\text{trn}} + E_m^{\text{com}})}{T_0 - T_m}, \quad \forall m \in \mathcal{N}. \quad (17)$$

B. Optimal strategy for the PS

Problem (14) is an MINLP problem and is difficult to solve due to the client selection constraint (14.1) and the uncertain training latency T given in eq. (9). Because it cannot be solved by conventional methods, we propose a semi-heuristic approach to obtain a high-quality solution to the PDG. Before presenting the algorithm, the following *Lemma* is given.

Lemma 1. *Regardless of the maximum limit of f_m in constraint (12.3), the optimal time for client m ($\forall m \in \mathcal{N}$), to complete a session of local training satisfies*

$$T_m = T = \max (T_m | \forall m \in \mathcal{N}), \quad \forall m \in \mathcal{N}. \quad (18)$$

Proof. If $T_m < T$ ($\exists m \in \mathcal{N}$), the PS can decrease Q by reducing α_m to make $T_m = T$, without affecting the strategies and utilities of other clients. \square

The proposed algorithm for solving the PDG includes the following two steps:

Step 1: *Solve problems (12) and (14) without considering constraint (14.1), assuming that \mathcal{N} is known.*

By substituting eq. (15) into eq. (8), we can get

$$\tilde{\alpha}_m = \frac{2c_m^3 I_m^3 D_m^3 r_m^3 \beta_m v_m}{(T_m r_m - |\omega|)^3}, \quad \forall m \in \mathcal{N}, \quad (19)$$

which is the price offered by the PS to client m when client m uses strategy \tilde{f}_m . To ensure a positive utility for client m , the PS must guarantee $\tilde{\alpha}_m \geq \alpha_m^{\min}$. By solving the function $\tilde{\alpha}_m = \alpha_m^{\min}$, we can obtain the solution of T_m denoted by \tilde{T}_m .

Now, we consider constraint (12.3). Because T_m decreases monotonically w.r.t f_m , we can substitute $f_m = f_m^{\max}$ into eq. (8) and get the solution of T_m , denoted by T_m^{\min} . Note that T_m^{\min} is the shortest time required for client m to complete a round of local training.

If $f_m^{\max} < \tilde{f}_m$, then $T_m^{\min} > \tilde{T}_m$. It means that client m cannot obtain a positive U_m , even with $f_m = f_m^{\max}$. To ensure $U_m > 0$, the PS needs to increase α_m in the *first* term of eq. (11). Then, the value space of T_m is given by

$$T_m^{\min} \leq T_m \leq \max \left(\tilde{T}_m, T_m^{\min} \right), \quad \forall m \in \mathcal{N}. \quad (20)$$

Following **Lemma 1** and eq. (20), we know that

$$T_m = \begin{cases} T, & T_m^{\min} \leq T \leq \tilde{T}_m, \\ \max \left(\tilde{T}_m, T_m^{\min} \right), & T > \tilde{T}_m, \end{cases} \quad \forall m \in \mathcal{N}, \quad (21)$$

and the corresponding price provided by the PS to client m is

$$\alpha_m = \begin{cases} \tilde{\alpha}_m, & T_m^{\min} \leq T \leq \tilde{T}_m, \\ \alpha_m^{\min}, & T > \tilde{T}_m. \end{cases} \quad \forall m \in \mathcal{N}. \quad (22)$$

Based on eqs. (21) and (22), we can rewrite the utility of the PS in eq. (13) as

$$\hat{Q}(T) = \kappa\Gamma + \mu I_g T + I_g \sum_{\forall m \in \mathcal{N}} R_m(T), \quad (23)$$

where

$$R_m(T) = \begin{cases} \tilde{\alpha}_m (T_0 - T), & T_m^{\min} \leq T \leq \tilde{T}_m, \\ \alpha_m^{\min} \left(T_0 - \max \left(\tilde{T}_m, T_m^{\min} \right) \right), & T > \tilde{T}_m, \end{cases} \quad (24)$$

is the payment that client m can receive from the PS. $\hat{Q}(T)$ is continuous and has a finite number of non-derivable points w.r.t T . Furthermore, $\hat{Q}(T)$ also has the following property:

Lemma 2. When $\alpha_m > \alpha_m^{\min}$, $\forall m \in \mathcal{N}$, $\hat{Q}(T)$ is monotonic or decreases first and then increases w.r.t T .

Proof. When $\alpha_m > \alpha_m^{\min}$, the value space of T is given by $\max(T_m^{\min} | \forall m \in \mathcal{N}) \leq T \leq \max(\tilde{T}_m | \forall m \in \mathcal{N})$. The first derivative of \hat{Q} w.r.t T is obtained as

$$\frac{\partial \hat{Q}}{\partial T} = I^{\text{g}} \mu + I^{\text{g}} \sum_{m \in \mathcal{N}} \frac{\partial \hat{R}_m}{\partial T} \quad (25)$$

where

$$\frac{\partial \hat{R}_m}{\partial T} = \begin{cases} -\beta v_m \left(\frac{c_m I_m D_m}{T - T_m^{\text{com}}} \right)^3 \left(1 + \frac{3(T_0 - T)}{T - T_m^{\text{com}}} \right), & T_m^{\min} \leq T \leq \tilde{T}_m \\ 0, & T > \tilde{T}_m. \end{cases} \quad (26)$$

From eq. (26), one can derive that $\frac{\partial^2 \hat{R}_m}{\partial T^2} \geq 0$ and $\frac{\partial^2 \hat{Q}}{\partial T^2} \geq 0$ for $T_m^{\min} \leq T \leq \tilde{T}_m$. This means that $\frac{\partial \hat{Q}}{\partial T}$ is monotonically increasing w.r.t T for $T_m^{\min} \leq T \leq \tilde{T}_m$. Form eq. (26), it is also known that $\frac{\partial \hat{R}_m}{\partial T} \rightarrow -\infty$ as $T \rightarrow T_m^{\text{com}}$. Because $\frac{\partial^2 \hat{R}_m}{\partial T^2} \geq 0$, $\frac{\partial \hat{R}_m}{\partial T}$ is monotonically increasing w.r.t T as $T \rightarrow T_m^{\text{com}}$. From the above analysis, we know that $\frac{\partial \hat{Q}}{\partial T}$ is always negative or first negative and then positive w.r.t T . Therefore, \hat{Q} is monotonic or decreases first and then increase w.r.t T when $\alpha > \alpha_m^{\min}$. \square

From **Lemma 2**, we know that $\hat{Q}(T)$ has a unique minimum in the feasible domain. The solution can be obtained by continuously increasing α_m of client m with the largest T_m to motivating it to reduce T_m , until T and $\hat{Q}(T)$ cannot be further reduced. Then, the following algorithm is designed to solve problems (12) and (14) with a known \mathcal{N} .

Algorithm 1 Solve problems (12) and (14) with a known \mathcal{N} .

- 1: **for** each client m , $\forall m \in \mathcal{N}$ **do**
 - 2: Obtain T_m^{\min} by using eq. (8), obtain \tilde{T}_m and α_m corresponding to \tilde{T}_m by using eqs. (17) and (19), respectively, and upload α_m^{\min} and \tilde{T}_m to the PS.
 - 3: **end for**
 - 4: The PS initializes α_m and $T_m = \tilde{T}_m$, and obtains \tilde{Q} by using eq. (23).
 - 5: **repeat**
 - 6: The PS increases the payment α_m to client m with the largest T_m and feedback the updated α_m to client m .
 - 7: With the updated α_m , each client m updates f_m and T_m by using eqs. (16) and (8), respectively, and uploads T_m to the PS.
 - 8: The PS update \hat{Q} by using eq. (23).
 - 9: **until** \hat{Q} start to increase or $T = \max(T_m^{\min} | \forall m \in \mathcal{M})$.
-

Step 2: Apply client selection constraint (14.1) to the solution obtained in Step 1. We adopt the Greedy Algorithm (GA) to solve this problem. The main idea is to allow the PS to select all the candidates in set \mathcal{M} to participate in FL at the beginning. Then, the PS constantly removes client m that has the maximum marginal loss and causes high cost Q of the

PS, until Q cannot be further reduced by eliminating any client or the number of selected clients reaches a certain threshold $|\mathcal{N}| = N_0$. The overall algorithm to solve the proposed PDG is concluded in the following algorithm.

Algorithm 2 Overall algorithm to solve the proposed PDG.

- Input:** \mathcal{M} , the candidate client set for the PS.
Output: The selected client set \mathcal{N} , the optimal strategy f_m^* of client m , $\forall m \in \mathcal{N}$, and the optimal strategy $\mathcal{A}^* = \{\alpha_1^*, \dots, \alpha_{|\mathcal{M}|}^*\}$ of the PS.
- 1: **Initialize** $\mathcal{N} = \mathcal{M}$.
 - 2: Obtain $Q' = \hat{Q}$ by performing **Algorithm 1** on set \mathcal{N} .
 - 3: **repeat**
 - 4: **for** each client m , $\forall m \in \mathcal{N}$ **do**
 - 5: Let $\mathcal{N}_{-m} = \mathcal{N} \setminus m$.
 - 6: Obtain $Q_{-m} = \hat{Q}$ by performing **Algorithm 1** on set \mathcal{N}_{-m} .
 - 7: **end for**
 - 8: Let $m' = \text{argmin}_{\forall m \in \mathcal{N}} (Q_{-m} | \forall m \in \mathcal{N})$.
 - 9: Update $\mathcal{N} = \mathcal{N}_{-m'}$, and $Q' = Q_{-m'}$.
 - 10: **until** Q' starts to increase or the number of the selected clients satisfies $|\mathcal{N}| \leq N_0$.
-

The computational complexity of **Algorithm 2** is analyzed as follows. In line 6 of **Algorithm 2**, **Algorithm 1** is executed repeatedly to update the utility Q of the PS. The convergence of **Algorithm 1** mainly depends on strategy interaction between the PS and clients in lines 5-9 of **Algorithm 1**. Considering that the clients can use convex optimizer to obtain T_m^{\min} and \tilde{T}_m , the time complexity of **Algorithm 1** is $\mathcal{O}(l|\mathcal{M}|)$, where $\mathcal{O}(l)$ is the complexity of the convex optimizer. Therefore, the time complexity of **Algorithm 2** is $\mathcal{O}(l|\mathcal{M}|^2)$. Since the algorithm is mainly performed at the PS and the strategies of the clients are solved in closed form, the proposed algorithm satisfies the constraint of FL on the low computing power of clients. In addition, the information that needs to be transferred between the PS and clients is the service price α_m and the training latency T_m , which brings small communication overhead to the system. As the algorithm is executed before the start of the training, so it is fully compatible with existing FL framework. The main challenge of the proposed algorithm comes from the price update steps 3)-10) of **Algorithm 2**, as they need to be iteratively executed to find the optimum of utilities of the PS and clients. Since the algorithm is mainly performed at the PS and the strategies of the clients are solved in closed form, the proposed algorithm satisfies the constraint of FL on the low computing power of clients. In addition, the information that needs to be transferred between the PS and clients is the service price α_m and the training latency T_m , which brings small communication overhead to the system.

V. SIMULATION RESULTS

In the simulation, the PS trained the convolutional neural network (CNN) AlexNet using the CIFAR-10 dataset, which consists of 60000 32x32 color images, divided into 10 classes. The size of AlexNet is $|\omega| = 0.6$ Mb. In the independent

identical distributed (IID) setting, the data-tuples of each class are evenly distributed across $|\mathcal{M}| = 40$ clients, and $|\mathcal{D}_m| \sim \mathcal{U}(100, 2000)$, where $\mathcal{U}(\cdot)$ represents uniform distribution. In the Non-IID setting, the number of classes selected by each client follows a uniform distribution $\mathcal{U}(1, 10)$, and the number of data-tuples in each selected class also follows a uniform distribution $\mathcal{U}(10, 400)$. The weighting factors in eq. (13) are set to $\kappa = 10^6$ and $\mu = 1$, and the latency threshold is set to $T_0 = 10$ s. For the clients, the switch capacitance coefficient is set to $v_m = 10^{-28}$ [4], the number of CPU cycles required to train one data-tuple $c_m = 5 \times 10^5$, the maximum CPU frequency $f_m^{\max} \sim \mathcal{U}(2, 4)$ GHz, the cost per unit of energy consumption $\beta_m = 1$, the bandwidth $B = 1$ MHz, and the maximum transmit power $p_m \sim \mathcal{U}(0.02, 0.1)$ W. The channel power gain is set to $g_m = 0.001/d_m^3$, where $d_m \sim \mathcal{U}(10, 100)$ (in meters) is the distance between client m and the PS, and the noise power at the PS is $\sigma^2 = 10^{-9}$.

To verify the performance of the proposed PDG, the following algorithms have also been implemented. Given the threshold $|\mathcal{N}| = N_0$ for the number of clients that the PS can select from set \mathcal{M} , the vanilla FedAvg randomly selects N_0 clients from \mathcal{M} to participate in FL. The optimized FedAvg with client selection [10] can choose N_0 clients with the maximum number of data-tuples to achieve the highest test accuracy (referred to as the Accuracy First Client Selection Algorithm (ACA)) or choose N_0 clients with the shortest T_m to minimize the overall training time (referred to as the Time First Client Selection Algorithm (TCA)).

Setting $N_0 = 10$, Fig. 1 shows the convergence of *test accuracy* for Lenet-5 trained using different algorithms under IID and Non-IID settings, respectively. From Fig. 1, we see that as the number of global training increases, the *test accuracy* achieved by the PDG is very close to that achieved by the AFA, and is significantly superior to the other algorithms under both the IID and Non-IID settings.

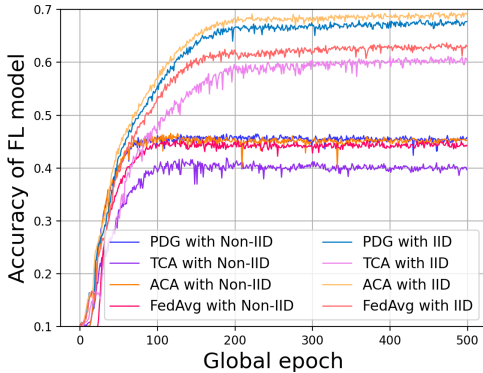


Fig. 1. The convergence of accuracy.

Next, we set N_0 to 10, 15 and 20, respectively. Figs. 2(a) and 2(b) compare the *training time* and *utility* obtained by the PS using different algorithms under IID and Non-IID settings, respectively. From Fig. 2(a), we see that the PDG consumes slightly more time than the TCA under both IID and Non-IID settings, but is much lower than the other algorithms.

Due to the ACA achieving the highest *test accuracy*, while the TCA minimizing the overall training time, it is verified that the proposed PDG can achieve a good tradeoff between *performance* and *efficiency*. This conclusion was also validated in the results shown in Fig. 2(b), as in all cases, the PDG brings the PS the lowest utility. Note that the utility of the PS is a multi-objective composite function composed of training loss, training time, and the cost of motivating clients to participate in FL. The smaller the Q , the better the performance.

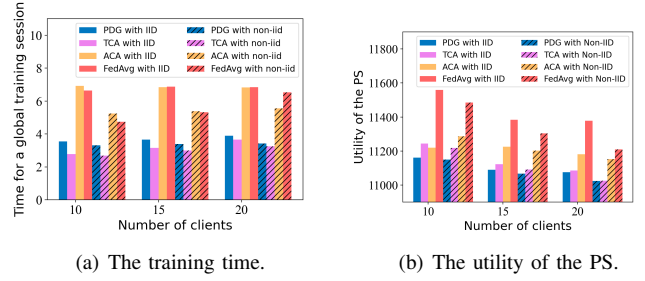


Fig. 2. Performance of client selection algorithm.

Finally, we validate the benefits of the proposed *price discrimination strategy* on FL. To this end, we implemented the algorithm based on the *identical pricing strategy* [6], which is referred to as the *identical pricing game* (IPG). The IPG only prices the services provided by different clients based on the performance improvements they bring to FL, without considering the heterogeneity of their resource endowments. Under the IID settings, we designate 10 clients to participate in FL and continuously increase the time T (see eq. (9)) required for the clients to complete a round of global training. As T increases, Fig. 3 compares the utilities achieved by the PS in the PDG and IPG.

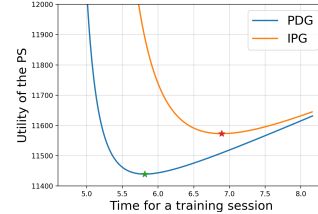


Fig. 3. The utility of the PS with different pricing strategy.

From Fig. 3, we can see that for any T , the PDG is superior to the IPG because it always achieves lower utility than the IPG. As shown by the asterisk in Fig. 3, the minimum utility (i.e. the best performance of the PS) that the PDG can achieve is better than what the IPG can achieve. This is because the PS knows the resource endowment of the client through the PDG, thereby gaining a bargaining advantage in the buyer's market and achieving lower utility than using the IPG.

VI. CONCLUSIONS

This paper has proposed a price-discrimination game to address the issues of distributed resource management in FL. The solution of the game has been obtained by a distributed

iterative algorithm. Simulation results have verified the effectiveness of the proposed approaches.

REFERENCES

- [1] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *Proc. Artif. Intell. Statist.*, 2017, pp. 1273–1282.
- [2] T. H. Thi Le, N. H. Tran, Y. K. Tun, M. N. H. Nguyen, S. R. Pandey, Z. Han, and C. S. Hong, "An incentive mechanism for federated learning in wireless cellular networks: An auction approach," *IEEE Transactions on Wireless Communications*, vol. 20, no. 8, pp. 4874–4887, 2021.
- [3] S. AbdulRahman, H. Ould-Slimane, R. Chowdhury, A. Mourad, C. Talhi, and M. Guizani, "Adaptive upgrade of client resources for improving the quality of federated learning model," *IEEE Internet Things J.*, vol. 10, no. 5, pp. 4677–4687, 2022.
- [4] L. Yu, R. Albelaihi, X. Sun, N. Ansari, and M. Devetsikiotis, "Jointly optimizing client selection and resource management in wireless federated learning for internet of things," *IEEE Internet Things J.*, vol. 9, no. 6, pp. 4385–4395, 2021.
- [5] Y. Sarikaya and O. Ercetin, "Motivating workers in federated learning: A stackelberg game perspective," *IEEE Networking Lett.*, vol. 2, no. 1, pp. 23–27, 2019.
- [6] S. R. Pandey, N. H. Tran, M. Bennis, Y. K. Tun, A. Manzoor, and C. S. Hong, "A crowdsourcing framework for on-device federated learning," *IEEE Trans. Wireless Commun.*, vol. 19, no. 5, pp. 3241–3256, 2020.
- [7] J. Liu, G. Zhang, K. Wang, and K. Yang, "Task-load-aware game-theoretic framework for wireless federated learning," *IEEE Communications Letters*, vol. 27, no. 1, pp. 268–272, 2023.
- [8] Y. Zhang and M. Guizani, *Game theory for wireless communications and networking*. CRC press, 2011.
- [9] O. Dekel, R. Gilad-Bachrach, O. Shamir, and L. Xiao, "Optimal distributed online prediction using mini-batches," *J. Mach. Learn. Res.*, vol. 13, no. 1, 2012.
- [10] N. Yoshida, T. Nishio, M. Morikura, K. Yamamoto, and R. Yonetani, "Hybrid-fl for wireless networks: Cooperative learning mechanism using non-iid data," in *ICC 2020 - 2020 IEEE International Conference on Communications (ICC)*, 2020, pp. 1–7.