
STEC: SEE-THROUGH TRANSFORMER-BASED ENCODER FOR CTR PREDICTION

Serdarcan Dilbaz
AI Enablement
Huawei Türkiye R&D Center
Istanbul, Turkey
serdarcan.dilbaz@huawei.com

Hasan Saribas
AI Enablement
Huawei Türkiye R&D Center
Istanbul, Turkey
hasan.saribas1@huawei.com

ABSTRACT

Click-Through Rate (CTR) prediction holds a pivotal place in online advertising and recommender systems since CTR prediction performance directly influences the overall satisfaction of the users and the revenue generated by companies. Even so, CTR prediction is still an active area of research since it involves accurately modelling the preferences of users based on sparse and high-dimensional features where the higher-order interactions of multiple features can lead to different outcomes.

Most CTR prediction models have relied on a single fusion and interaction learning strategy. The few CTR prediction models that have utilized multiple interaction modelling strategies have treated each interaction to be self-contained. In this paper, we propose a novel model named STEC that reaps the benefits of multiple interaction learning approaches in a single unified architecture. Additionally, our model introduces residual connections from different orders of interactions which boosts the performance by allowing lower level interactions to directly affect the predictions. Through extensive experiments on four real-world datasets, we demonstrate that STEC outperforms existing state-of-the-art approaches for CTR prediction thanks to its greater expressive capabilities.

1 Introduction

Click-through rate (CTR) prediction is a crucial task in the fields of online advertising and recommender systems, as it aims to forecast the probability that users will engage with displayed ads or content on online platforms [1, 2]. Despite its extensive application across a variety of domains, including web search, recommendation systems, and online advertising, CTR prediction remains a challenging task. This is due to numerous factors such as sparse and high-dimensional feature spaces, the need to capture complex higher-order feature interactions, imbalanced data distributions, temporal dynamics, and shifts in user behavior. Accurate CTR prediction is of significant importance not only for advertisers but also for online platforms seeking to optimize user engagement and revenue generation [3]. By accurately measuring the likelihood of user engagement with displayed ads, CTR prediction models enable advertisers to effectively allocate resources and adapt their campaigns to target specific user segments. Simultaneously, by serving ads that take individual preferences into account, platforms can improve user experiences and increase the value of the overall ecosystem [4, 5].

Historically, traditional methodologies for click-through rate (CTR) prediction have relied on statistical techniques and manually designed features. Despite the complex, non-linear interactions present in user behavior and contextual variables, these methods have achieved some measure of success [6, 7]. One such technique is Factorization Machines (FM), which have demonstrated effectiveness in capturing second-order feature interactions by computing the inner product of feature embeddings within each interaction [6]. This approach has proven successful in addressing the challenges posed by CTR prediction.

Recent advancements in deep learning models have led to significant achievements in various domains, including computer vision (CV) [8, 9, 10] and natural language processing (NLP) [11, 12]. Methods developed specifically for these domains have also contributed to solving problems in other fields. In the area of recommendation, numerous deep learning-based methods have primarily focused on more effectively capturing higher-order feature interactions

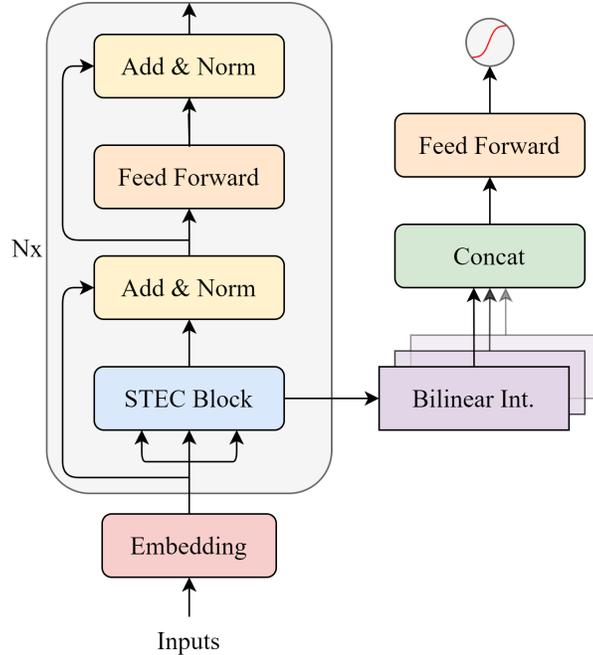


Figure 1: The overall STEC architecture uses N stacked STEC blocks and fuses $N + 1$ group bilinear interactions from different levels to form a single CTR prediction.

[13, 14, 2, 15]. After achieving notable results using these methods, approaches such as FiBiNET [16] and MaskNet [17] have attempted to better determine the significance of embeddings using attention mechanisms such as the Squeeze-Excitation network (SENET) [18]. Following the successful application of attentional mechanisms in computer vision and natural language processing, attention-based methods such as AFM, AutoInt, and DESTINE have been developed for CTR prediction with promising results. However, methods like AutoInt and DESTINE have a high parameter count, which has made their applicability challenging.

One of the primary challenges in click-through rate (CTR) prediction is the effective modeling of feature interactions [13, 17, 2]. FM [6] has proposed a successful method for capturing second-order feature interactions through the use of inner product calculations. DeepFM [13] combines an FM module with a deep neural network to achieve improved performance in the CTR domain. To model high-order feature interactions, xDeepFM [15] introduced the Compressed Interaction Network (CIN) layer, which utilizes outer-product calculations. Other models, such as HOFM [19] and AFN [20], have also been used to extract high-order feature interactions. However, these models are not efficient in terms of time complexity. To address this issue, DeepIM [2] proposed the use of an IM layer instead of an FM layer to compute higher-order interactions using Newton’s identities for increased efficiency.

In this paper, we present a rigorous proof demonstrating that bilinear interactions can be derived from the commonly used scaled dot-product attention. Building on this insight, we introduce a novel model, STEC, that integrates multiple interaction learning approaches into a single, unified architecture by leveraging the bilinear interactions present in attention computations. Furthermore, our model incorporates residual connections among various orders of interactions, enhancing performance by enabling lower-level interactions to directly impact predictions. Extensive experiments on four real-world datasets demonstrate that STEC surpasses existing state-of-the-art methods for CTR prediction due to its superior expressive capabilities. An ablation study on the STEC architecture confirms the effectiveness of the novel concepts introduced. Our main contributions can be listed as follows:

- To the best of our knowledge, we are the first to expose and leverage the bilinear interaction hidden inside the scaled dot-product attention calculations to model higher-order feature interactions.
- Based on the proposed modified attention mechanism, we proposed the STEC architecture and conducted extensive experiments on 4 different public datasets; the proposed model achieved state-of-the-art scores on all of them except for the Criteo dataset, where it achieved comparable results.

- As opposed to the existing approaches, STEC also introduces direct connections between different interaction levels and the output which increases the performance compared to the traditional architecture where lower order interactions affect the prediction by only influencing higher order interactions.

2 Related Works

2.1 Bilinear Interaction

As previously discussed, a variety of interaction learning approaches have been used for CTR. Nevertheless, for the purposes of this paper, bilinear interaction is of particular importance. Models utilizing bilinear interaction have achieved notable results on numerous real-world datasets owing to the effectiveness of bilinear interaction layer at learning feature importance and fine-grained feature interactions [16, 21].

2.2 Attention Networks

The attention mechanism, first introduced in deep learning as an enhancement to encoder-decoder-based neural machine translation systems in NLP [22], has since been applied to a wide range of applications. Initially, attention mechanisms were applied to recurrent systems, but models that rely solely on attention have become more popular due to their parallelizability and faster training times [23]. Attention mechanisms and their variants have also been used in other fields, including computer vision and speech processing [24].

In the field of sequential recommendation, where the goal is to predict a user’s next action based on their sequence of interactions, attention mechanisms have also been successfully applied since this task is already sequential in nature. Models such as DIN [25], DIEN [26], BST [27], DMIN [28] have introduced novel attention mechanisms to achieve significant improvements in CTR performance.

Numerous studies have explored the use of attention as an interaction learning approach on user and item embeddings. For example, the AFM [29] model introduces attention to the FM mechanism to improve its performance. The AutoInt [3] model utilizes the multi-head self-attention mechanism with residual connections to explicitly model feature interactions. The DESTINE [30] model employs a similar structure to AutoInt but uses disentangled attention through whitening. The InterHAt [31] model employs the Transformer architecture with multi-head attention and a hierarchical structure for learning feature interactions.

3 Our Proposed Model

3.1 Feature Embedding

In CTR prediction, input instances typically comprise three types of features: user, item, and context. These features may be either sparse categorical or numerical, and input instances are represented as the sparse vector x where f is the number of feature fields:

$$x = [x_1, x_2, \dots, x_f] \tag{1}$$

Due to the large number of unique values in the categorical features for CTR prediction, one-hot vectors are not a practical representation for input features. Instead, these features are embedded into a lower-dimensional space to enable CTR models to learn dense representations. For a categorical feature $x_i \in \mathbb{R}^{k \times 1}$, the corresponding embedding is calculated as:

$$E_i = W_e x_i \tag{2}$$

where $W_e \in \mathbb{R}^{d \times k}$ is the embedding matrix for k unique feature values in the d dimensional embedding space. Unlike the shared embedding layer used in NLP tasks, a separate embedding layer is employed for each categorical feature. Although numerical features are more amenable to being utilized in deep learning structures, these features still need to be embedded into the same dimensional space as the categorical features to allow for straightforward calculation of feature interactions. For a numerical feature $x_j \in \mathbb{R}^{1 \times 1}$, the corresponding embedding is calculated as:

$$E_j = v_j x_j \tag{3}$$

where $v_j \in \mathbb{R}^{d \times 1}$ is scaled by the normalized numerical feature values. For a given instance, when both categorical and numerical features undergo feature embedding, $x \in \mathbb{R}^{d \times k}$ is formed by stacking of embedding $E \in \mathbb{R}^{d \times 1}$ from different feature fields.

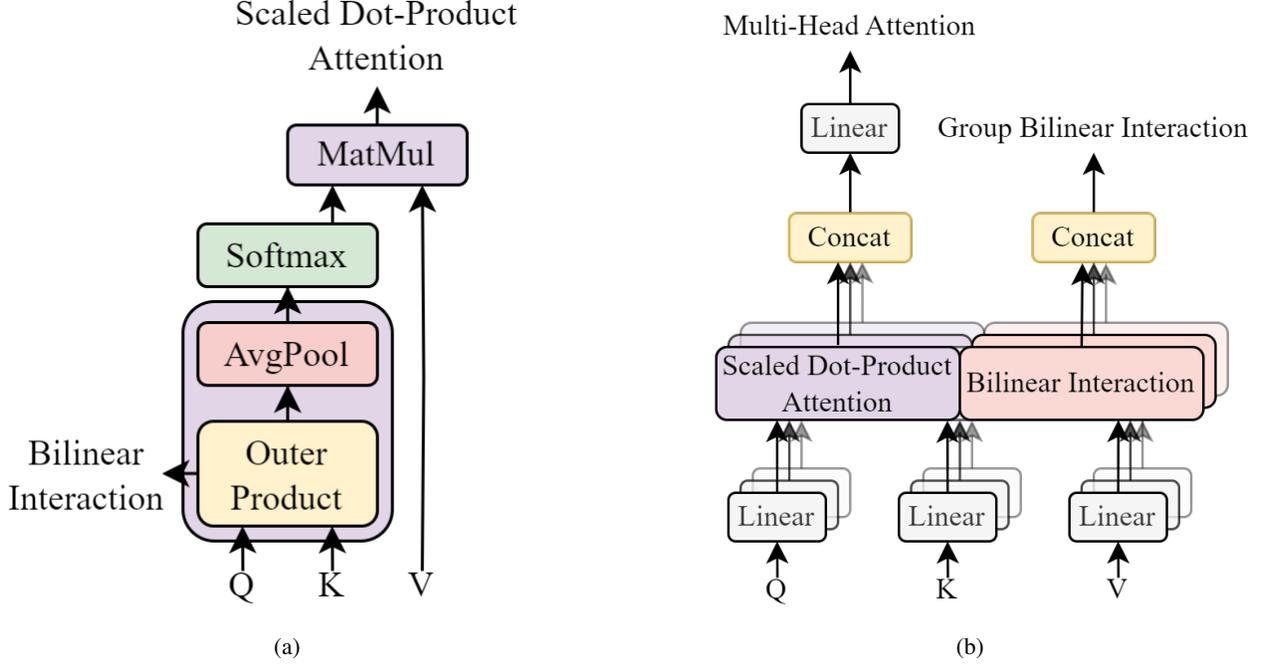


Figure 2: (a) The STEC block builds on the Scaled Dot-Product Attention to accommodate concurrent bilinear interaction learning. The Hadamard Product and AvgPool in conjunction are equivalent to matrix multiplication. (b) The STEC Block is able to run multiple attention layers and learn bilinear interactions in parallel.

3.2 STEC Block

The core component of the STEC architecture is the STEC block, which is designed to simultaneously extract bilinear interactions by modifying the existing scaled dot-product attention formulation. For an input $x \in \mathbb{R}^{d \times k}$, following the scaled dot-product attention formulation, the corresponding query and key matrices are given as:

$$Q_h = W_{h,q}^T x_j \quad (4) \quad K_h = W_{h,k}^T x_i \quad (5)$$

where the learned projection matrices for the query and key are denoted as $W_{h,q}^T, W_{h,k}^T \in \mathbb{R}^{d \times k}$ respectively. The scaled dot-product attention is given by:

$$\alpha_h = \text{softmax} \left(\frac{K_h^T Q_h}{\sqrt{k}} \right) \quad (6)$$

The learnable projection matrices for the query and the key can be reduced to a single learnable parameter.

$$K_h^T Q_h = x_i^T W_{h,k} W_{h,q}^T x_j = x_i^T W_h x_j \quad (7)$$

The first matrix multiplication in the equation above can be converted into an inner product:

$$x_i^T W_h x_j = x_i \cdot W_h x_j \quad (8)$$

The remaining matrix multiplication can be expressed as a summation of a hadamard product over the model dimension d :

$$x_i \cdot W_h x_j = \sum_d p_{i,j} \quad (9)$$

where

$$p_{i,j} = v_i \cdot W \circ v_j \in \mathbb{R}^{k \times d} \quad (10)$$

The above equation for $p_{i,j}$ is the identical formulation for the bilinear interaction used by the FiBiNet and FiBiNet++ models [16, 21]. Consequently, the STEC block alters the scaled dot-product attention structure to also learn the bilinear interaction between the query and key as seen in Figure 2a.

Motivated by the success of multi-head attention, we also leverage the multi-head mechanism for the attention as well as the bilinear interactions as seen in Figure 2b. Grouping the bilinear interactions allows the model to jointly learn the different interaction subspaces at different positions.

3.3 STEC Architecture

The STEC architecture is inspired by the Transformer architecture where self-attention and position-wise feed-forward networks (FFN) are alternately stacked. Similarly, the STEC architecture interlaces multiple layers of STEC blocks and FFNs to perform CTR prediction, shown in Figure 1. In contrast to the self-attention layer of the Transformer, the STEC layer produces two outputs simultaneously. The first output is mathematically identical to the self-attention described in the Transformer, while the second output corresponds to the bilinear interaction of the input. Bilinear interactions from STEC blocks at different levels are fused together and processed by a multilayer perceptron (MLP) to produce a final prediction.

3.3.1 Position-wise Feed-Forward Networks

The Transformer architecture employs FFNs between attention layers [23]. An FFN takes the hidden attention representation x_h at layer h and applies a two-layer MLP, typically using a rectified-linear activation function on the hidden layer. The FFN can be formally described as:

$$\text{FFN}(x, W_1, W_2, b_1, b_2) = \max(0, xW_1 + b_1) W_2 + b_2 \quad (11)$$

3.3.2 Final Bilinear Interaction Layer

As seen in Figure 2a, The STEC blocks produce two outputs: an attention output and a bilinear interaction. Due to the stacked design of the architecture, the attention output from layer k is connected to the STEC block from layer $k + 1$ via a FFN layer. To utilize the attention output from the final STEC block, a standalone bilinear interaction layer is used, although it has been omitted from Figure 1 for brevity. As a result, N stacked layers produce $N + 1$ bilinear interactions.

3.3.3 Concatenation Layer

The STEC architecture combines learned interactions from multiple orders of interaction through the concatenation operation. Since the distributions of the interactions can be vary greatly, batch normalization is applied to interactions at each level before they are fused.

$$H = [\text{BN}(p_0); \text{BN}(p_1); \dots; \text{BN}(p_{N+1})] \quad (12)$$

4 Experimental Results

In this section, we move forward to evaluate the effectiveness of our proposed approach by addressing the following research questions:

- RQ1** How does our proposed STEC architecture compared to the existing approaches in terms of performance?
- RQ2** Does the the STEC architecture compare to approaches that rely on attention in terms of performance as well as computational cost?
- RQ3** How does the design choices affect the performance of the proposed model?

Table 1: Summary Statistics of the four public CTR datasets

Dataset	#Instance	#Fields	#Features (Sparse)
Criteo	46M	39	2.1M
Avazu	40M	23	1.5M
MovieLens	2M	7	90k
Frappe	289k	10	5.4k

4.1 Experiment Setup

4.1.1 Datasets

We evaluate our approach on four widely used public datasets for CTR prediction: Criteo¹, Avazu², MovieLens³, and Frappe⁴. To eliminate any advantages that could be gained through random splits and preprocessing steps, we applied the same splits and preprocessing steps for all models based on [20].

4.1.2 Training Objective

The training objective for both our proposed approach and the baseline models was binary cross-entropy loss, as defined by Equation 13 where N , y_i , \hat{y}_i represent the number of samples, the ground truth label, and the predicted label, respectively.

$$L = -\frac{1}{N} \sum_{i=1}^N y_i \log(\hat{y}_i) + (1 - y_i) \log(1 - \hat{y}_i) \quad (13)$$

4.1.3 Evaluation Metric

In accordance with established CTR prediction conventions, we primarily evaluated the performance of our proposed approach and the baseline models using the Area Under the ROC Curve (AUC) metric. We reported our AUC results to four significant digits, as it is well established that even small increases in AUC can lead to significant improvements in CTR prediction and revenue [14].

Logloss is also widely used in binary classification to measure how closely the predicted probabilities match the corresponding ground truth values. We report this metric as well, as a smaller logloss indicates that the model was better able to model the probabilities.

4.1.4 Baseline Models

For baseline comparisons, we consider any model that has achieved competitive results on any of the four datasets. We grouped attention-based models separately to assess the effectiveness of our attention mechanism compared to existing models. Abbreviations for the models listed below were used whenever possible for brevity.

- **IPNN**: Product-based Neural Networks [32]
- **Wide&Deep**: Wide&Deep Learning [14]
- **DCN**: Deep&Cross Network [33]
- **DeepFM**: Deep Factorization Machine [13]
- **xDeepFM**: eXtreme Deep Factorization Machine [15]
- **FiBiNET**: Feature Importance and Bilinear feature Interaction NETwork [16]
- **AFN+**: Adaptive Factorization Network [20]
- **DeepIM**: Deep Interaction Machine [34]
- **AOANet**: Architecture and Operation Adaptive Network [35]
- **DCNV2**: Improved Deep&Cross Network [36]
- **EDCN**: Enhanced Deep&Cross Network [37]
- **MaskNet**: MaskNet [17]
- **FinalMLP**: Enhanced Two-Stream MLP Model [38]
- **AFM**: Attentional Factorization Machines [29]
- **InterHAT**: Interpretable Click-Through Rate Prediction through Hierarchical Attention [31]
- **AutoInt+**: Automatic Feature Interaction Learning via Self-Attentive Neural Network [3]
- **DESTINE**: Disentangled Self-Attentive Neural Network [30]

¹<http://labs.criteo.com/2013/12/download-terabyte-click-logs>

²<https://www.kaggle.com/c/avazu-ctr-prediction/data>

³<https://grouplens.org/datasets/movielens/1m/>

⁴<https://www.baltrunas.info/context-aware>

Table 2: Performance comparisons on Avazu and Criteo datasets w.r.t. AUC and Logloss. The best results are in **bold** and the second best results are reported in *italics*.

Type	Model	Avazu			Criteo		
		AUC	Impr.	LogLoss	AUC	Impr.	LogLoss
Base Models	IPNN	76.30	0.45%	0.3676	81.37	0.07%	0.4383
	Wide&Deep	76.49	0.20%	0.3665	81.39	0.05%	0.4380
	DCN	76.52	0.16%	0.3664	81.38	0.06%	0.4378
	DeepFM	76.48	0.21%	0.3667	81.37	0.07%	0.4381
	xDeepFM	76.47	0.22%	0.3671	81.39	0.05%	0.4380
	FiBiNET	76.45	0.25%	0.3670	81.30	0.16%	0.4388
	AFN+	76.40	0.35%	0.3672	81.43	0.00%	0.4377
	DeepIM	76.45	0.25%	0.3670	81.39	0.05%	0.4380
	AOANet	76.54	0.13%	0.3664	81.41	0.02%	0.4378
	DCNV2	76.56	0.10%	0.3664	81.42	0.01%	0.4378
	EDCN	76.52	0.16%	0.3670	<i>81.47</i>	0.00%	<i>0.4373</i>
	MaskNet	76.43	0.27%	0.3674	81.39	0.05%	0.4380
	FinalMLP	76.63	0.01%	<i>0.3658</i>	81.48	-0.06%	0.4370
Attention Based Models	AFM	75.74	1.19%	0.3705	80.44	1.23%	0.4470
	InterHAt	75.45	1.58%	0.3721	80.74	0.85%	0.4441
	AutoInt+	75.45	0.25%	0.3668	81.39	0.05%	0.4379
	DESTINE	76.61	0.04%	0.3661	81.39	0.05%	0.4380
	STEC (Ours)	76.64	Base	0.3658	81.43	Base	0.4379

4.1.5 Implementation Details

The implementation of our models is in PyTorch and compatible with the open-source CTR prediction library FuxiCTR [39]. We use Adam optimizer with a learning rate of 0.001 where the learning rate is reduced by a factor of 10 whenever the validation logloss stops improving. The mini-batch size for all experiment is 4096. We tune the hyper-parameters such as the number of layers, dimension size, and the number of heads model for each setting with grid search. We conduct our experiments on 2 NVIDIA A40 GPUs.

4.2 Quantitative Results (RQ1)

We obtained results for CTR models from the open-source CTR prediction library FuxiCTR whenever possible. Additional experiments for baseline models were conducted only if no previously reported results were available on BarsCTR [39]. The performances reported here and on BarsCTR were selected from runs with the best performance. We observed that the performance of most models may vary depending on the initial random seed choice, so we reported the best measured performance to provide a fair comparison. In subsequent sections, we analyze the effects of hyperparameter choices and discuss the impact of random initialization conditions by performing multiple runs.

Based on the results presented in Tables 2 and 3, we observed that some CTR models perform competitively on a select few datasets. For example, the IPNN model performs exceptionally well on the MovieLens dataset but lags in performance on other datasets. Some CTR models have been specifically tuned to maximize performance on certain datasets, resulting in significant deterioration when tested on different datasets.

A select few models perform competitively across all datasets. The STEC model demonstrates its flexible expressive abilities by performing well on all four public datasets. Models such as FinalMLP leverage MLPs with up to three hidden layers to perform CTR predictions, but our STEC model achieves state-of-the-art performance even when using a single linear layer to make predictions based on bilinear interactions. Overall, the STEC model performs on par with or better than state-of-the-art models while following a single-stream structure, and its expressiveness can be adjusted based on the dataset by modifying hyperparameters such as the number of layers, hidden dimension, or MLP structure.

The proposed method achieves the best results on the Avazu and Frappe datasets in terms of AUC metric by 76.64% and 98.57%, respectively, on the MovieLens dataset, it obtains the second best results in terms of the AUC metric, while outperforming this method with better logloss values. In the case of the Criteo dataset, the proposed method

Table 3: Performance comparisons on Frappe and MovieLens datasets w.r.t. AUC and Logloss. The best results are in **bold** and the second best results are reported in *italics*.

Type	Model	Frappe			MovieLens		
		AUC	Impr.	LogLoss	AUC	Impr.	LogLoss
Base Models	IPNN	98.41	0.16%	0.1540	96.99	0.13%	0.2095
	Wide&Deep	98.41	0.16%	0.1490	96.88	0.24%	0.2161
	DCN	98.39	0.18%	0.1491	96.87	0.25%	0.2147
	DeepFM	98.45	0.12%	0.1482	96.85	0.27%	0.2130
	xDeepFM	98.45	0.12%	0.1466	96.97	0.15%	0.2409
	FiBiNET	98.32	0.25%	0.1941	95.76	1.42%	0.2518
	AFN+	98.26	0.32%	0.2139	96.42	0.72%	0.3030
	DeepIM	98.44	0.13%	0.1490	96.93	0.19%	0.2099
	AOANet	98.44	0.13%	0.1424	96.94	0.18%	0.2105
	DCNV2	98.45	0.12%	0.1491	96.91	0.21%	0.2147
	EDCN	98.50	0.07%	0.1547	96.71	0.42%	0.2122
	MaskNet	98.37	0.20%	0.1696	96.72	0.41%	0.2364
	FinalMLP	98.55	0.02%	0.1484	97.20	-0.09%	0.2246
Attention Based Models	AFM	96.97	1.65%	0.2264	94.72	2.53%	0.2653
	InterHAt	97.41	1.19%	0.1919	95.03	2.20%	0.2540
	AutoInt+	98.48	0.09%	0.1490	96.92	0.20%	0.2148
	DESTINE	98.56	0.01%	0.1434	96.94	0.18%	0.2125
	STEC (Ours)	98.57	Base	0.1477	<i>97.12</i>	Base	0.2016

obtains comparable results with FinalMLP, EDCN, AFN+ models. Furthermore, the FinalMLP method involves an additional step compared to the others, as the user and item features need to be specified beforehand. The proposed STEC architecture achieves equivalent results without any prior knowledge of the features.

4.3 Comparison to Attention-based Models (RQ2)

It is crucial to compare STEC with other attention-based models, as attention is central to the STEC architecture. The number of floating-point operations (FLOPs) serves as a proxy for the computational complexity of deep learning models. As shown in Figure 3, aside from the AFM model, the number of FLOPs for attention-based models is several orders of magnitude larger than that of the STEC model. This is due to the fact that the STEC model performs attention calculations in lower-dimensional spaces and leverages intermediate calculation steps to improve its performance.

In terms of performance, the STEC model outperforms all attention-based models across all four datasets. Our experiments show that extracting intermediate bilinear interactions improves the performance of models that rely solely on attention. The AutoInt model, which relies only on stacked multi-head attention layers, is unable to perform competitively despite its significantly higher computational cost compared to our proposed model. In the next section, we analyze the effect of using intermediate outputs instead of final outputs and discuss other novel aspects of our model.

4.4 Analysis (RQ3)

In this section, we conduct ablation studies on the design of the STEC architecture to investigate the impact of various design choices on its performance. We consider several variations of the STEC architecture:

- **STEC_{BL}** replaces the STEC block with a parallel multi-head attention and bilinear interaction blocks.
- **STEC_{NF}** removes the FFN from the STEC_{BL} to make the overall structure resemble the AutoInt model.
- **STEC_{LO}** only uses the bilinear interaction from the final STEC block by removing the bilinear interactions from intermediate layers.
- **STEC_F** replaces the concatenation of bilinear interactions with addition.

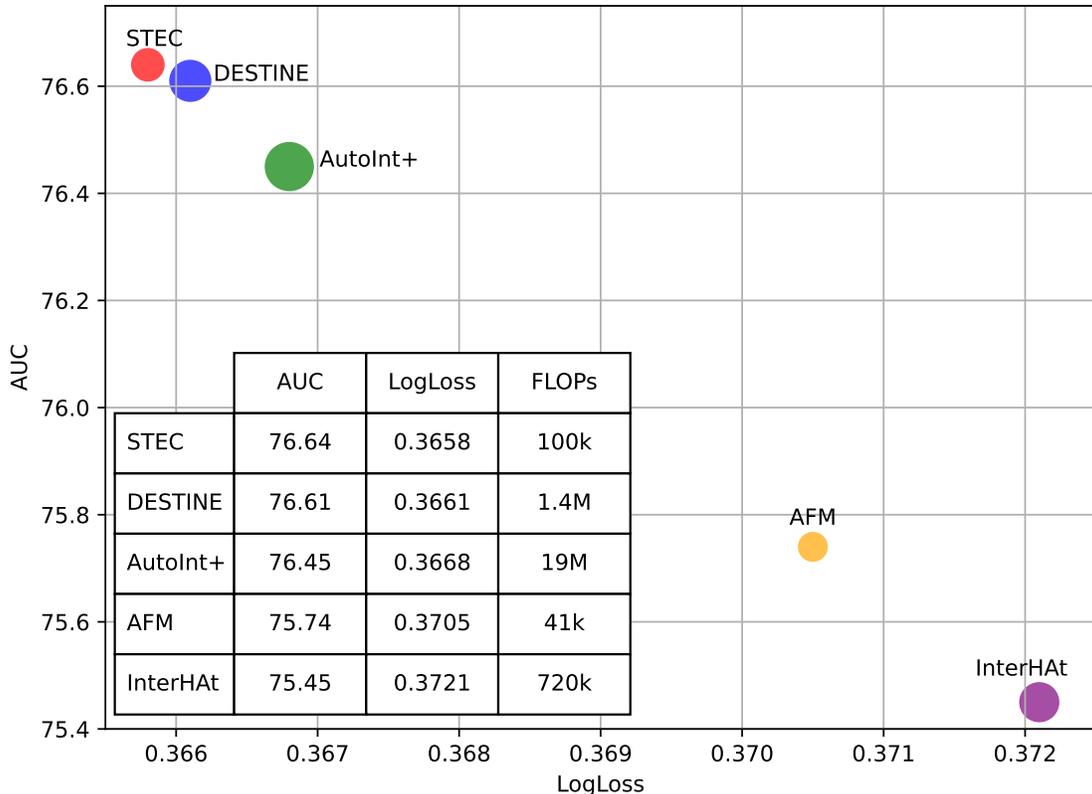


Figure 3: STEC outperforms other attention-based models in terms of AUC and logloss with lower FLOPs.

Table 4: Ablation studies on Avazu, Criteo, Frappe and MovieLens datasets in terms of AUC metric.

Model	Bilinear	Fusion	FFN	Avazu	Criteo	Frappe	MovieLens
STEC _{BL}	Exp	Concat	✓	76.22	81.22	98.44	97.03
STEC _{NF}	Exp	Concat	X	76.56	81.25	98.35	96.89
STEC _{LO}	Imp	Last Only	✓	75.83	81.39	98.42	97.03
STEC _F	Imp	Add	✓	76.08	81.34	98.43	97.08
STEC	Imp	Concat	✓	76.64	81.43	98.57	97.12

We use the STEC_{LO} model to assess the contribution of intermediate layers to overall performance. Unlike baseline click-through rate (CTR) models, which do not typically shorten the distance between intermediate representations and output, our approach allows lower-order interactions to directly affect prediction output without traversing through higher-order layers. Our results demonstrate that including intermediate bilinear interactions significantly improves performance across all settings.

We also compare various fusion strategies for bilinear interactions, including concatenation and addition. Our results show that concatenating information from varying complexities performs better than addition, although addition (STEC_F) still outperforms using only the final interaction output (STEC_{LO}). This further supports our argument for leveraging intermediate information sources.

Finally, we compare the performance of STEC_{NF} and STEC_{BL} to evaluate the impact of the FFN inside the attention block on performance. Our results show that for more challenging datasets such as Avazu and Criteo, the FFN can improve performance, while for smaller datasets such as Frappe and MovieLens, it may degrade performance by increasing model complexity.

5 Conclusion and Future Work

In conclusion, we propose a strong and versatile architecture called STEC, which extracts bilinear interaction from attention with minimal overhead to achieve state-of-the-art results. Our experiments demonstrate that our approach is not dataset-specific and performs well across a range of datasets. Furthermore, we show that introducing direct connections between different interaction levels and output improves performance by reducing the distance between lower-level interactions and output. Additionally, we demonstrate that reformulating existing blocks such as scaled dot-product attention can yield performance gains without incurring additional computational cost.

In future work, we plan to investigate whether current stacked architectures of CTR models can be modified to perform higher-order interaction calculations only when lower-order interactions are not sufficient for prediction. Our proposed architecture can potentially accommodate such a structure if the multilayer perceptron (MLP) on bilinear interactions is altered to contain the effect of each interaction within the same layer.

References

- [1] Shu Wu, Yuyuan Tang, Yanqiao Zhu, Liang Wang, Xing Xie, and Tieniu Tan. Session-based recommendation with graph neural networks. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 346–353, 2019.
- [2] Feng Yu, Yanqiao Zhu, Qiang Liu, Shu Wu, Liang Wang, and Tieniu Tan. Tagnn: Target attentive graph neural networks for session-based recommendation. In *Proceedings of the 43rd international ACM SIGIR conference on research and development in information retrieval*, pages 1921–1924, 2020.
- [3] Weiping Song, Chence Shi, Zhiping Xiao, Zhijian Duan, Yewen Xu, Ming Zhang, and Jian Tang. AutoInt. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*. ACM, nov 2019.
- [4] Zekun Li, Zeyu Cui, Shu Wu, Xiaoyu Zhang, and Liang Wang. Fi-GNN. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*. ACM, nov 2019.
- [5] Qiang Liu, Feng Yu, Shu Wu, and Liang Wang. A convolutional click prediction model. In *Proceedings of the 24th ACM international on conference on information and knowledge management*, pages 1743–1746, 2015.
- [6] Steffen Rendle. Factorization machines. In *2010 IEEE International conference on data mining*, pages 995–1000. IEEE, 2010.
- [7] H Brendan McMahan, Gary Holt, David Sculley, Michael Young, Dietmar Ebner, Julian Grady, Lan Nie, Todd Phillips, Eugene Davydov, Daniel Golovin, et al. Ad click prediction: a view from the trenches. In *Proceedings of the 19th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 1222–1230, 2013.
- [8] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25, 2012.
- [9] Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- [10] Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1–9, 2015.
- [11] Junyi Chai and Anming Li. Deep learning in natural language processing: A state-of-the-art survey. In *2019 International Conference on Machine Learning and Cybernetics (ICMLC)*, pages 1–6. IEEE, 2019.
- [12] Yoav Goldberg. *Neural network methods for natural language processing*. Springer Nature, 2022.
- [13] Huifeng Guo, Ruiming Tang, Yunming Ye, Zhenguo Li, and Xiuqiang He. Deepfm: a factorization-machine based neural network for ctr prediction. *arXiv preprint arXiv:1703.04247*, 2017.
- [14] Heng-Tze Cheng, Levent Koc, Jeremiah Harmsen, Tal Shaked, Tushar Chandra, Hrishi Aradhye, Glen Anderson, Greg Corrado, Wei Chai, Mustafa Ispir, et al. Wide & deep learning for recommender systems. In *Proceedings of the 1st workshop on deep learning for recommender systems*, pages 7–10, 2016.
- [15] Jianxun Lian, Xiaohuan Zhou, Fuzheng Zhang, Zhongxia Chen, Xing Xie, and Guangzhong Sun. xdeepfm: Combining explicit and implicit feature interactions for recommender systems. In *Proceedings of the 24th ACM SIGKDD international conference on knowledge discovery & data mining*, pages 1754–1763, 2018.

- [16] Tongwen Huang, Zhiqi Zhang, and Junlin Zhang. FiBiNET. In *Proceedings of the 13th ACM Conference on Recommender Systems*. ACM, sep 2019.
- [17] Zhiqiang Wang, Qingyun She, and Junlin Zhang. Masknet: Introducing feature-wise multiplication to ctr ranking models by instance-guided mask, 2021.
- [18] Jie Hu, Li Shen, and Gang Sun. Squeeze-and-excitation networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 7132–7141, 2018.
- [19] Mathieu Blondel, Akinori Fujino, Naonori Ueda, and Masakazu Ishihata. Higher-order factorization machines. *Advances in Neural Information Processing Systems*, 29, 2016.
- [20] Weiyu Cheng, Yanyan Shen, and Linpeng Huang. Adaptive factorization network: Learning adaptive-order feature interactions. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 3609–3616, 2020.
- [21] Pengtao Zhang and Junlin Zhang. Fibinet++:improving fibinet by greatly reducing model size for ctr prediction, 2022.
- [22] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate, 2016.
- [23] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2023.
- [24] Meng-Hao Guo, Tian-Xing Xu, Jiang-Jiang Liu, Zheng-Ning Liu, Peng-Tao Jiang, Tai-Jiang Mu, Song-Hai Zhang, Ralph R Martin, Ming-Ming Cheng, and Shi-Min Hu. Attention mechanisms in computer vision: A survey. *Computational visual media*, 8(3):331–368, 2022.
- [25] Guorui Zhou, Chengru Song, Xiaoqiang Zhu, Ying Fan, Han Zhu, Xiao Ma, Yanghui Yan, Junqi Jin, Han Li, and Kun Gai. Deep interest network for click-through rate prediction, 2018.
- [26] Guorui Zhou, Na Mou, Ying Fan, Qi Pi, Weijie Bian, Chang Zhou, Xiaoqiang Zhu, and Kun Gai. Deep interest evolution network for click-through rate prediction, 2018.
- [27] Qiwei Chen, Huan Zhao, Wei Li, Pipei Huang, and Wenwu Ou. Behavior sequence transformer for e-commerce recommendation in alibaba, 2019.
- [28] Zhibo Xiao, Luwei Yang, Wen Jiang, Yi Wei, Yi Hu, and Hao Wang. Deep multi-interest network for click-through rate prediction. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*, CIKM '20, page 2265–2268, New York, NY, USA, 2020. Association for Computing Machinery.
- [29] Jun Xiao, Hao Ye, Xiangnan He, Hanwang Zhang, Fei Wu, and Tat-Seng Chua. Attentional factorization machines: Learning the weight of feature interactions via attention networks, 2017.
- [30] Yichen Xu, Yanqiao Zhu, Feng Yu, Qiang Liu, and Shu Wu. Disentangled self-attentive neural networks for click-through rate prediction. In *Proceedings of the 30th ACM International Conference on Information & Knowledge Management*. ACM, oct 2021.
- [31] Zeyu Li, Wei Cheng, Yang Chen, Haifeng Chen, and Wei Wang. Interpretable click-through rate prediction through hierarchical attention. In *Proceedings of the 13th International Conference on Web Search and Data Mining*, pages 313–321, 2020.
- [32] Yanru Qu, Han Cai, Kan Ren, Weinan Zhang, Yong Yu, Ying Wen, and Jun Wang. Product-based neural networks for user response prediction, 2016.
- [33] Ruoxi Wang, Bin Fu, Gang Fu, and Mingliang Wang. Deep & cross network for ad click predictions, 2017.
- [34] Feng Yu, Zhaocheng Liu, Qiang Liu, Haoli Zhang, Shu Wu, and Liang Wang. Deep interaction machine: A simple but effective model for high-order feature interactions. In *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*, pages 2285–2288, 2020.
- [35] Weiyu Cheng, Yanyan Shen, and Linpeng Huang. Adaptive factorization network: Learning adaptive-order feature interactions. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(04):3609–3616, Apr. 2020.
- [36] Ruoxi Wang, Rakesh Shivanna, Derek Cheng, Sagar Jain, Dong Lin, Lichan Hong, and Ed Chi. DCN v2: Improved deep & cross network and practical lessons for web-scale learning to rank systems. In *Proceedings of the Web Conference 2021*. ACM, apr 2021.
- [37] Bo Chen, Yichao Wang, Zhirong Liu, Ruiming Tang, Wei Guo, Hongkun Zheng, Weiwei Yao, Muyu Zhang, and Xiuqiang He. Enhancing explicit and implicit feature interactions via information sharing for parallel deep ctr models. In *Proceedings of the 30th ACM international conference on information & knowledge management*, pages 3757–3766, 2021.

- [38] Kelong Mao, Jieming Zhu, Liangcai Su, Guohao Cai, Yuru Li, and Zhenhua Dong. Finalmlp: An enhanced two-stream mlp model for ctr prediction, 2023.
- [39] Jieming Zhu, Jinyang Liu, Shuai Yang, Qi Zhang, and Xiuqiang He. Barsctr: Open benchmarking for click-through rate prediction, 2022.