

From DDMs to DNNs: Using process data and models of decision-making to improve human-AI interactions

Mrugsen Nagsen Gopnarayan¹, Jaan Aru², and Sebastian Gluth¹

¹*Department of Psychology; University of Hamburg*

²*Institute of Computer Science; University of Tartu*

Abstract

Over the past decades, cognitive neuroscientists and behavioral economists have recognized the value of describing the process of decision making in detail and modeling the emergence of decisions over time. For example, the time it takes to decide can reveal more about an agent's true hidden preferences than only the decision itself. Similarly, data that track the ongoing decision process such as eye movements or neural recordings contain critical information that can be exploited, even if no decision is made. Here, we argue that artificial intelligence (AI) research would benefit from a stronger focus on insights about how decisions emerge over time and incorporate related process data to improve AI predictions in general and human-AI interactions in particular. First, we introduce a highly established computational framework that assumes decisions to emerge from the noisy accumulation of evidence, and we present related empirical work in psychology, neuroscience, and economics. Next, we discuss to what extent current approaches in multi-agent AI do or do not incorporate process data and models of decision making. Finally, we outline how a more principled inclusion of the evidence-accumulation framework into the training and use of AI can help to improve human-AI interactions in the future.

Keywords: Human-AI Interaction, Multi agent AI, Evidence Accumulation, Process models, Social Decision Making

A framework for modeling the emergence of individual and social decisions

Predicting human decisions has been a key topic of interest in psychology for over a century. Prospect theory has proven successful in doing so for economic choices by incorporating elements of risk tendencies, loss aversion, and probability weighting (Kahneman & Tversky, 1979). However, understanding how these choices come about requires process models of decision-making that describe how decisions emerge over time (from sensory input to motor output). In this regard, human decision-making has been modeled as the accumulation of information over time until a decision threshold is met. The drift-diffusion model (DDM) is a widely used mathematical model that represents the accumulation of evidence over time at a specific rate (the drift rate), with some added noise (diffusion) (Ratcliff, 1978; Ratcliff et al., 2016). Although being the dominant model in the field, the DDM is only one representative of the much larger class of evidence accumulation models (EAMs) (Busemeyer et al., 2019; Smith & Ratcliff, 2004). While all EAMs can predict choices and reaction times, some might perform better on specific tasks, or might be stronger grounded on neural principles such as the Leaky Competing Accumulator (LCA) (Usher & McClelland, 2001). Taking the DDM as an example, parameters of EAMs reflect latent psychological processes: A pre-existing bias for either option is modeled by the starting point parameter (z). The decision boundary threshold (a) represents the cautiousness of the decision maker, while the drift rate (v) models the rate of evidence accumulation. Non-decision time (ndt) is also considered. These parameters can be estimated using maximum likelihood estimation (MLE) or a Bayesian approach, providing psychological inferences to explain the data using these parameters. Unlike prospect theory, which only accounts for decision-making in the case of risky choices, EAMs offers a more general framework for decision-making that can be extended to perceptual tasks (Summerfield & Tsetsos, 2012).

In real life, people often need to make decisions for others (like buying a gift for Secret Santa) or with others (such as deciding on a location for a team retreat). Variations in others' preferences add complexity to the social decision-making process. By translating these different preferences into different payoffs, game theory can model social decision-making. A classic example of such a game, the prisoner's dilemma, involves two individuals who must decide whether to betray each other or not. Based on the different payoffs for betraying or cooperating, game theory can determine the rational strategy. However, game theory makes strong assumptions about how rationality is defined (e.g., the Nash equilibrium) (Nash, 1951) and further assumes that all players have the capacity to identify rational strategies. In reality, both assumptions often do not hold. Humans often rely on heuristics and approximations to make decisions, and they exhibit social preferences and beliefs that can drive them away from (equilibrium) predictions of game theory (Camerer, 2011). Consequently, models that account for social utility, including the warm-glow, inequity aversion, and envy aversion effects, have been developed to capture systematic deviations from standard equilibrium predictions (Andreoni, 1990; Fehr & Schmidt, 1999; (Kevin) et al., 2020).

Importantly, humans take into account each other's mental states, preferences, beliefs, intentions, and emotions when making decisions in social settings. This ability is known as Theory of Mind (ToM), and it appears to be unique to humans and some higher-order primates (Call & Tomasello, 2008; Lewis & Krupenye, 2021; Premack & Woodruff,

1978). Traditionally, two main approaches to ToM have been proposed. The first is 'theory theory', where it is assumed that each person is an 'intuitive psychologist', forming personal theories about how others behave or decide in different contexts and using these to predict their thoughts and actions (Gopnik & Wellman, 1994). The second approach is called simulation theory, which suggests that humans simulate others to understand them (Gallese, 1998; Gordon, 1986). Thus, person A could simulate another person B by replaying (or pre playing) the decision B has made (or is about to make), using A's own decision-making system. Notably, the discovery of mirror neurons that are active both when we perform an action and when we witness someone else perform the same action has been seen as supporting the simulation account of TOM (Gordon, 1986; Rizzolatti & Craighero, 2004).

Tracking physiological and neural processes for individual decisions

A variety of physiological and neural tools have been used to track the emergence of decisions. Ideally, these measures are compared with process models of decision-making such as the DDM. Using functional Magnetic Resonance Imaging (fMRI), the activation of and connectivity across different brain regions or networks when making decisions can be identified. Brain lesion studies or electrophysiology recordings from monkey or rodent brains have also contributed to the localization of such regions. The current understanding in decision neuroscience is that decision-making is a complex process involving a network of multiple brain regions, with certain areas predominantly associated with specific subtasks (Hunt & Hayden, 2017). In the frontal cortex, the orbitofrontal cortex (OFC) is responsible for outcome-value encoding (Padoa-Schioppa & Assad, 2006), and the ventromedial prefrontal cortex (vmPFC) performs value comparisons (Strait et al., 2014; Wunderlich et al., 2012). Reward learning or action-outcome learning is primarily associated with the striatum. The anterior cingulate cortex (ACC) and dorsomedial prefrontal cortex (dmPFC) have been linked to many decision-relevant computations, including valuation of actions (Kolling et al., 2012), conflict representation (Shenhav et al., 2016), evidence accumulation (Gluth et al., 2012; Wunderlich et al., 2009), and outcome evaluation (Jahn et al., 2014).

Although fMRI allows identifying brain regions that are relevant to decision-making, the much higher temporal resolution of Electroencephalography (EEG) and Magnetoencephalography (MEG) make them more promising candidate tools to track the dynamic emergence of decisions, including sub-processes such as perception, interpretation, evaluation, and response preparation (Proudfit, 2014). Contrary to prior belief that these processes happen sequentially (Posner, 1986; Sternberg, 1969), it is now well established that these sub-processes overlap in time and in different brain regions to a substantial degree (Gluth et al., 2012; Hare et al., 2011). There is a tight coupling between accumulated evidence, as modeled by SSMs and the activity in the pre-supplementary motor area (pre-SMA). The Readiness Potential (RP) is an event-related EEG potential that emerges in this region while we are deciding when to initiate an action (Kornhuber & der Deecke, 1965; Shibasaki & Hallett, 2006). The RP can be understood as a "tendency to respond", and an experimentally induced sense of urgency leads to an increase in the signal (Gluth et al., 2013). LRPs are another neural marker that can be used to investigate the dynamics of action selection. In a task where the choice has to be made using two different hands, LRPs can be calculated using a double subtraction process, as the difference in potentials for left responses and right responses for the left and right parts of the brain. Notably, the onset

of the LRP could be an indicator of different non-decision times in decisions with different cognitive demands (memory-based vs. regular decisions) (Kraemer & Gluth, 2023). In perceptual decision making, the centro-parietal positivity (CPP) has been proposed as a marker of evidence accumulation (O’Connell et al., 2012), but this claim has recently been challenged. (Frömer et al., 2022).

Besides neural mechanisms, there are also powerful tools to track peripheral and physiological signals that are intertwined with decision-making processes. Among these, eye-tracking is particularly relevant, since eye movements are intricately coupled with decision-making and serve as a window into a decision-maker’s attentional processes. Eye movements seem to both influence and reflect preference (Shimojo et al., 2003) and have been used to inform EAMs. The attentional Drift-Diffusion Model (aDDM) (Krajbich et al., 2010) assumes that the drift rate depends on which option is currently fixated, with the fixated option impacting the drift to a larger degree than non-fixated options. Importantly, many studies have shown that taking eye-movements into account via the aDDM (or similar models) improves predicting decisions substantially (Gluth et al., 2020; Gluth et al., 2018). In addition to eye movements, pupil responses are another critical physiological data source as pupil dilation appears to be a reliable measure of arousal (Joshi et al., 2016), and reveals how decisions evolve (de Gee et al., 2014). Relatedly, choices made contrary to (and thus overcoming) default responses lead to an increased pupil dilation. The starting point in DDM (z) which is representative of such a response bias is predictive of pupil dilation (Sheng et al., 2020). Mouse tracking can also reflect the decision process. When individuals encounter conflicting options or experience decision difficulty, their mouse can exhibit curvilinear or wavering trajectories, reflecting internal conflict or deliberation. Conversely, when individuals have a clear preference or make rapid decisions, their mouse movements follow more direct and straight paths (Spivey & Dale, 2006). Heart rate, skin conductance, and cortisol levels are other physiological methods for understanding the decision-making process. However, these measures are more indirect and have high latency, thus they are not widely used in process-tracing studies.

Tracking processes in social decision-making

Although seemingly distinct, social decisions significantly overlap with individual decisions with respect to involved brain regions. Relatedly, it has been argued and shown that the basic framework of conceptualizing value-based choiceness as emerging from evidence accumulation also applies to social decision-making (Gluth & Fontanesi, 2016; Hu et al., 2023; Hunt & Hayden, 2017) EA models can explain the choices and response times in social decision making tasks as well. Moreover, simultaneous EEG-fMRI recording has shown that the process of evidence accumulation for value inference in the pre-supplementary motor area (pSMA), also known as medial prefrontal cortex (mPFC), is similar for both social and non-social decision making (Arabadzhiyska et al., 2022)

However, compared to individual decision-making, social decision-making is arguably more complex, as it involves understanding and taking into account others’ preferences or biases, their mental states, and learning from others. As a consequence, additional brain regions appear to be critical to social decision making, which are said to belong to the ToM network. Among these, the temporoparietal junction (TPJ) is known to play a key role. TPJ is active when people are thinking about others’ thoughts (Saxe & Kan-

wisher, 2003), and it encodes the utility of an anonymous partner in an allocation task (Hu et al., 2023). Gray matter volume in TPJ is predictive of individual variations in altruistic preferences. TPJ activation is associated with the ability of taking others' perspective and empathizing with their suffering (Lamm et al., 2007). Another core ToM region, the anterior cingulate cortex (ACC), is more active during cooperative social interactions with human partners, as compared to non-social conditions (Rilling et al., 2002).

Obviously, humans do not have the capability to directly access the neurophysiological information of others when interacting with them. Instead, they need to infer others' thoughts and intentions by observing their behavior, body language, facial expressions, and gaze patterns. Eye-tracking studies have shown that displaying the gaze allocation of one participant to another in a coordination game improves understanding of each other's preferred choices and facilitates strategic decision-making for maximizing rewards (Hausfeld et al., 2020). Strikingly, a series of recent studies have shown that lay people seem to have an intuitive understanding of a fundamental prediction of EAMs, which is that the time it takes to make a decision usually indicates decision difficulty and thus also the difference in preference for the options (fast responses are associated with low difficulty and high difference in preference). In other words, humans take not only decisions but also decision speed into account when inferring others' hidden preferences and beliefs (Arabadzhiyska et al., 2022). By inverting the DDM and adopting a Bayesian approach, the process by which individuals infer others' preferences can be modeled (Gates et al., 2021). However, the neural mechanisms of this ability remain elusive.

Current advances in Multi-Agent AI

The review thus far points towards the significant advances made to comprehend the computational, physiological, and neural principles of decision-making processes in both individual and social contexts. EAMs have been instrumental in this journey, coupled with various tools such as fMRI, EEG/MEG, and eye-tracking. Recent studies focused on how people interpret the decisions of others have shed light on an intuitive understanding of decision processes that align with EAM principles. Despite these accomplishments in cognitive science, neuroscience, and behavioral economics, the development of Artificial Intelligence (AI) systems, particularly those intended for inferring knowledge from human behavior or interacting directly with humans, have evolved along a bit of disparate trajectories. In the following, we will first briefly discuss this existing research on multi-agent AI before delineating our ideas for a more intense and fruitful cross-talk between decision-making and AI research to improve human-AI interactions in the future in the next section.

From screening mammography for breast cancer tumors at an accuracy similar to the radiologists (McKinney et al., 2020) to providing more accurate and localized weather forecasts (Sobash et al., 2020), the AI revolution is positively impacting human lives. In many of these cases where AI systems do really well, for example, solving the protein structure problem (Jumper et al., 2021), handwriting recognition (Lecun et al., 1998), and drug discovery (Zhavoronkov et al., 2019), the AI system does not engage in social interaction with a human. In these use-cases, humans still set goals (by giving labels, setting loss or reward functions), but artificial systems are used as a tool to do an asocial task. Yet, there are many contexts such as geriatric care, psychotherapy, or personal assistance where social interactions are crucial for achieving favorable outcomes, and an effective human-AI

interaction becomes a prerequisite to address the issue. In such instances, AI systems are expected to simulate human roles, assisting or coordinating with the user. A competent artificial agent should, therefore, be capable of understanding human behavior, accounting for the likes, beliefs, intentions, desires, and emotions of the person they interact with. This unique human capacity is termed Theory of Mind (ToM). Recent advancements in neural networks, trained using multi-agent reinforcement learning, have laid a foundational framework for creating ToM-capable artificial agents.

When it comes to emulating human social and cooperative behaviors, the classic single agent ML approaches exhibit limitations. This is where multi-agent systems have shown tremendous potential. Multi-agent AI systems are designed to simulate interactive scenarios where multiple intelligent agents either cooperate or compete to accomplish certain objectives. Conventional single-agent RL approaches such as Q-Learning or policy gradient fail poorly as the environments become dynamic as agents change their behavior with training, leading to a moving goal post and the computational complexity increases after scaling to multi-agents (Gu et al., 2004; Wang et al., 2011).

However, inspired by social and behavioral sciences (Duffy et al., 1998), and powered by Deep Learning, successful multi-agent AI approaches have emerged. These approaches, often termed as Multi-Agent Deep Reinforcement Learning (MADRL), involve the use of interconnected deep neural networks as agents within a system, which are trained using reinforcement learning principles. Each of these agents interacts with both the environment and other agents in the system, to optimize a set of objectives or rewards. Capable of learning to represent complex functions, predicting future states, or estimating the value of different actions, these agents are vital tools in reinforcement learning (Mnih et al., 2015). These agents can master complex multi-agent video games with superhuman capacity using just simple visual information (Tampuu et al., 2017). Further, these approaches can be adapted to manage the traffic of autonomous vehicles (Zhao et al., 2021).

This level of advancement in MADRL permits the modeling of complex social and cooperative behaviors, akin to those observed in humans and animals (Lowe et al., 2017). MADRL has served as a basic framework to create ToM-capable artificial agents. Despite the success of these AI models, such as ChatGPT, which correctly solved 95% of text-based false belief tasks it was tested against (Kosinski, 2023), but see Ullman (2023), and ToMnet, a DNN that claims to model the agents it encounters solely from observations of their behavior (Rabinowitz et al., 2018), it is debatable whether these networks have truly attained ToM capabilities. For instance, instead of learning the difference between internal states and true states for other agents, an agent like ToMnet might exploit the combination of positions and distances between elements to navigate. This suggests that rather than developing genuine ToM, the deep neural networks may have learned shortcuts, solving a simpler problem than genuinely achieving Theory of Mind (Aru et al., 2023). Indeed, in humans, ToM is not merely task-based. For example, children do not repetitively learn to solve the Sally-Anne task to gain ToM. Therefore, instead of training deep learning agents on specific tasks that might require ToM, true ToM abilities would potentially emerge in more complex and open-ended environments (Aru et al., 2023).

Improving human-AI interactions with process models of decision-making.

While considerable progress has been made in decision-making and AI research, there's a clear need for a more intense and fruitful cross-talk between the two to enhance future human-AI interactions. One solution to the problem would be to learn from the experts i.e., humans, to acquire this ability. Humans can help agents to learn the policy or reward function, using imitation learning and inverse reinforcement learning, respectively. But as these methods are labor intensive, learning from human preferences (Christiano et al., 2017) or explanation-based learning could bias the agent towards using features with more generalization power and identifying the world's causal structure. For example, the AI model that powers ChatGPT has been significantly enhanced by human feedback loops during its training phase (Ouyang et al., 2022). In the initial pre-training phase, the model learned from a large corpus of internet text, and absorbed biases present in the data. In the second fine-tuning phase, human reviewers reviewed and rated potential model outputs for a range of example inputs. This iterative feedback process helped shape the model's responses over time, making it more aligned with human values and preferences. This approach can specifically be used to imitate human decision-making processes. AI can gain insights into human preferences, biases, and reasoning strategies, by observing and learning from human decision-making patterns.

Going beyond previous approaches, we claim that we should use process models of human decision-making to imitate the decision process in AI agents. There are two possible approaches to do this. One, By integrating Bayesian Neural Networks (BNNs) with an accumulation process. BNNs use weight distributions instead of specific weight (as in regular feed-forward networks). These models can be trained and parameters fine-tuned to mimic human decision accuracy (Rafiei & Rahnev, 2022). Two, by simulating data using EAMs and training an RNN to match the decision time and the final choice (Zhang et al., 2020). This imitation approach can help AI systems behave in a way that is more relatable and acceptable to humans. As discussed earlier, it is believed that we take the same approach during social decision-making: We figure out others' preferences by simulating others' decisions. By inverting the process of decision making we can figure out their hidden preference and mental states (Gates et al., 2021). For instance, a quicker choice is indicative of a stronger preference between the options, likewise, a slower choice is indicative of a weaker preference (1A). Incorporating the user response times into the model of AI can help them deduce the hidden preference of humans. Encoding this in a neural network would be a natural way of seeding ToM in AI (1B).

There are special advantages to creating such socially intelligent AIs. These include personalization, with AI adapting responses according to user preferences, improved decision-making through insightful big-data interpretations, and enhanced accessibility for individuals with disabilities. With the shortage of psychotherapists, and the growing mental health pandemic, providing emotional support through AI chatbots offers potential for mental health care. AI chatbots and virtual companions have been shown to help reduce feelings of loneliness and provide mental health support, making them especially useful in therapy and counseling scenarios (Dosovitsky & Bunge, 2021; Fulmer et al., 2018), where real-time learning fosters a dynamic, improving user experience. In education, AI-Teachers can foster interactive (Maghsudi et al., 2021), adaptive learning environments tailored to

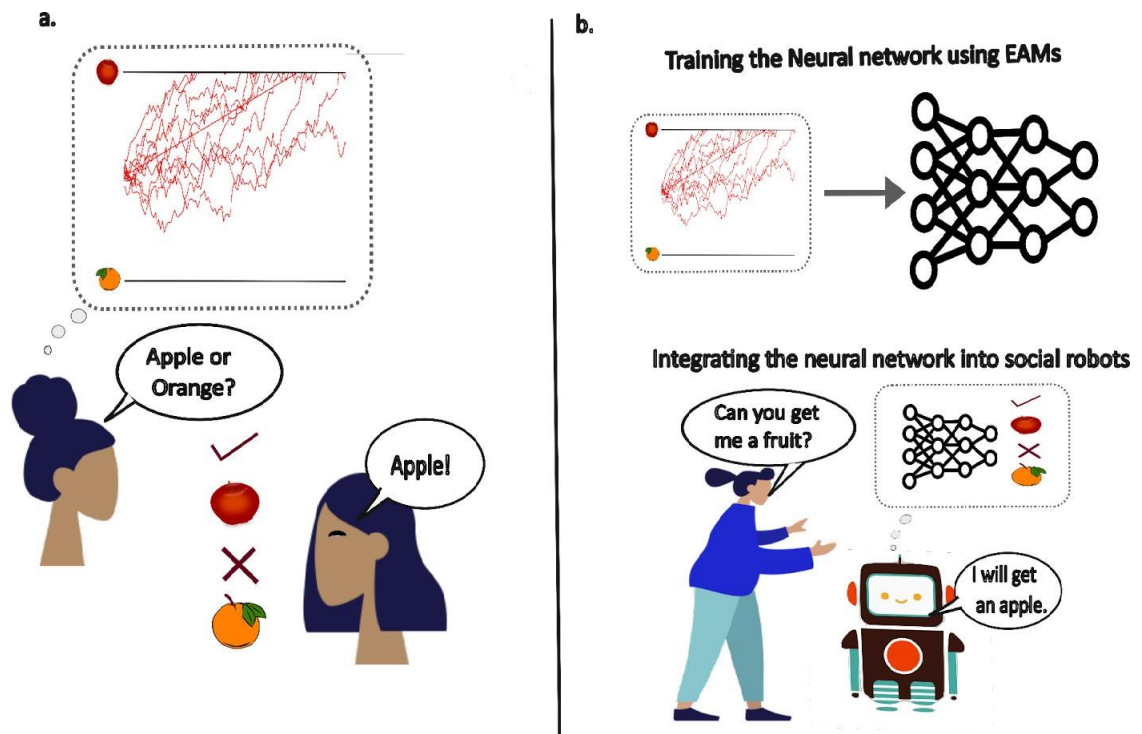


Figure 1. From DDMs to DNNs

Deep neural networks can be used to imitate the EAM's process of evidence accumulation in humans. A) Social decision making. One way that humans may use to learn others' preferences from their decisions is by simulating those decisions with their own mind. For example, if you offer someone a choice between an apple and an orange, and they pick the apple quickly, you will infer that they have a stronger preference for Apple. B) Training DNN using EAMs. Evidence accumulation models can be used to generate training data to train DNNs (above), doing this will align the decision process of DNNs to humans. These DNNs modules could be then used in socially interacting robots (below), which will facilitate human-AI interaction.

individual needs. In the era of increasing reliance on AI systems, it is essential to focus on improving human-AI interactions. By making AI systems more transparent and aligning their decision-making processes with ours, we can foster trust, acceptance, and effective collaboration between humans and AI, enhancing the Human-AI interaction. However, integrating AI systems also brings along several challenges, such as the lack of transparency and interpretability of AI systems. Human users often find it difficult to understand how an AI arrives at its decisions, this lack of transparency leads to a lack of trust and acceptance. While using Deep Neural networks it is especially difficult to explain the process of decision. Research in explainable AI has emphasized the importance of providing clear explanations of AI's decision-making process. Explainable AI techniques, such as generating understandable rules or highlighting influential factors, have shown promise in improving human understanding of AI decisions (Kraus et al., 2020). Transparent decision-making processes enhance trust and enable humans to make informed judgments about AI outputs. Using the process models of decision-making to create AI systems that decide for us, It would be easier for the developers to explain to the users how the AI arrived at that decision. This will increase the acceptability of AI outputs among human users.

In conclusion, an integration of decision-making research into multi-agent AI development holds promising potential for enhancing human-AI interaction. Leveraging process models of human decision-making within AI systems can create agents that more accurately reflect and predict human behavior, thus fostering better mutual understanding. These advances can enable the creation of AI systems that are not only more effective, but also more transparent and trustworthy. As we continue this exploration, our focus should be on ensuring AI systems that are not just intelligent, but also relatable and acceptable to their human users, thereby paving the way for a more symbiotic relationship between humans and AI.

References

- Andreoni, J. (1990). Impure altruism and donations to public goods: A theory of warm-glow giving. *The Economic Journal*, 100 (401), 464. <https://doi.org/10.2307/2234133>
- Arabadzhiyska, D. H., Garrod, O. G., Fouragnan, E., Luca, E. D., Schyns, P. G., & Philiastrides, M. G. (2022). A common neural account for social and nonsocial decisions. *The Journal of Neuroscience*, 42 (48), 9030–9044. <https://doi.org/10.1523/jneurosci.0375-22.2022>
- Aru, J., Labash, A., Corcoll, O., & Vicente, R. (2023). Mind the gap: Challenges of deep learning approaches to theory of mind. *Artificial Intelligence Review*, 56 (9), 9141– 9156. <https://doi.org/10.1007/s10462-023-10401-x>
- Busemeyer, J. R., Gluth, S., Rieskamp, J., & Turner, B. M. (2019). Cognitive and neural bases of multi-attribute, multi-alternative, value-based decisions. *Trends in Cognitive Sciences*, 23 (3), 251–263. <https://doi.org/10.1016/j.tics.2018.12.003>
- Call, J., & Tomasello, M. (2008). Does the chimpanzee have a theory of mind? 30 years later. *Trends in Cognitive Sciences*, 12 (5), 187–192. <https://doi.org/10.1016/j.tics.2008.02.010>
- Camerer, C. F. (2011). *Behavioral game theory - experiments in strategic interaction*. Princeton University Press.

- Christiano, P. F., Leike, J., Brown, T., Martic, M., Legg, S., & Amodei, D. (2017). Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30.
- de Gee, J. W., Knapen, T., & Donner, T. H. (2014). Decision-related pupil dilation reflects upcoming choice and individual bias. *Proceedings of the National Academy of Sciences*, 111(5). <https://doi.org/10.1073/pnas.1317557111>
- Dosovitsky, G., & Bunge, E. L. (2021). Bonding with bot: User feedback on a chatbot for social isolation. *Frontiers in digital health*, 3, 735053.
- Duffy, J., Epstein, J. M., & Axtell, R. (1998). Growing artificial societies: Social science from the bottom up. *Southern Economic Journal*, 64(3), 791. <https://doi.org/10.2307/1060800>
- Fehr, E., & Schmidt, K. M. (1999). A theory of fairness, competition, and cooperation. *The Quarterly Journal of Economics*, 114(3), 817–868. <https://doi.org/10.1162/003355399556151>
- Frömer, R., Nassar, M., Ehinger, B., & Shenhav, A. (2022). Common neural choice signals emerge artifactually amidst multiple distinct value signals. <https://doi.org/10.1101/2022.08.02.502393>
- Fulmer, R., Joerin, A., Gentile, B., Lakerink, L., Rauws, M., et al. (2018). Using psychological artificial intelligence (tess) to relieve symptoms of depression and anxiety: Randomized controlled trial. *JMIR mental health*, 5(4), e9782.
- Gallese, V. (1998). Mirror neurons and the simulation theory of mind-reading. *Trends in Cognitive Sciences*, 2(12), 493–501. [https://doi.org/10.1016/s1364-6613\(98\)01262-5](https://doi.org/10.1016/s1364-6613(98)01262-5)
- Gates, V., Callaway, F., Ho, M. K., & Griffiths, T. L. (2021). A rational model of people's inferences about others' preferences based on response times. *Cognition*, 217, 104885. <https://doi.org/10.1016/j.cognition.2021.104885>
- Gluth, S., Rieskamp, J., & Büchel, C. (2012). Deciding when to decide: Time-variant sequential sampling models explain the emergence of value-based decisions in the human brain. *Journal of Neuroscience*, 32(31), 10686–10698. <https://doi.org/10.1523/jneurosci.0727-12.2012>
- Gluth, S., & Fontanesi, L. (2016). Wiring the altruistic brain. *Science*, 351(6277), 1028–1029. <https://doi.org/10.1126/science.aaf4688>
- Gluth, S., Kern, N., Kortmann, M., & Vitali, C. L. (2020). Value-based attention but not divisive normalization influences decisions with multiple alternatives. *Nature Human Behaviour*, 4(6), 634–645. <https://doi.org/10.1038/s41562-020-0822-0>
- Gluth, S., Rieskamp, J., & Büchel, C. (2013). Deciding not to decide: Computational and neural evidence for hidden behavior in sequential choice (T. Behrens, Ed.). *PLoS Computational Biology*, 9(10), e1003309. <https://doi.org/10.1371/journal.pcbi.1003309>
- Gluth, S., Spektor, M. S., & Rieskamp, J. (2018). Value-based attentional capture affects multi-alternative decision making. *eLife*, 7. <https://doi.org/10.7554/elife.39659>
- Gopnik, A., & Wellman, H. M. (1994). The theory theory. In *Mapping the mind* (pp. 257–293). Cambridge University Press. <https://doi.org/10.1017/cbo9780511752902.011>
- Gordon, R. M. (1986). Folk psychology as simulation. *Mind and Language*, 1(2), 158–71. <https://doi.org/10.1111/j.1468-0017.1986.tb00324.x>

- Gu, J., Huh, Y. O., Jiang, F., Caraway, N. P., Romaguera, J. E., Zaidi, T. M., Fernandez, R. L., Zhang, H., Khouri, I. F., & Katz, R. L. (2004). Evaluation of peripheral blood involvement of mantle cell lymphoma by fluorescence in situ hybridization in comparison with immunophenotypic and morphologic findings. *Modern Pathology*, 17(5), 553–560. <https://doi.org/10.1038/modpathol.3800068>
- Hare, T. A., Malmaud, J., & Rangel, A. (2011). Focusing attention on the health aspects of foods changes value signals in vmPFC and improves dietary choice. *Journal of Neuroscience*, 31(30), 11077–11087. <https://doi.org/10.1523/jneurosci.6383-10.2011>
- Hausfeld, J., von Hesler, K., & Goldlücke, S. (2020). Strategic gaze: An interactive eye-tracking study. *Experimental Economics*, 24(1), 177–205. <https://doi.org/10.1007/s10683-020-09655-x>
- Hu, J., Konovalov, A., & Ruff, C. C. (2023). A unified neural account of contextual and individual differences in altruism. *eLife*, 12. <https://doi.org/10.7554/elife.80667>
- Hunt, L. T., & Hayden, B. Y. (2017). A distributed, hierarchical and recurrent framework for reward-based choice. *Nature Reviews Neuroscience*, 18(3), 172–182. <https://doi.org/10.1038/nrn.2017.7>
- Jahn, A., Nee, D. E., Alexander, W. H., & Brown, J. W. (2014). Distinct regions of anterior cingulate cortex signal prediction and outcome evaluation. *NeuroImage*, 95, 80–89. <https://doi.org/10.1016/j.neuroimage.2014.03.050>
- Joshi, S., Li, Y., Kalwani, R. M., & Gold, J. I. (2016). Relationships between pupil diameter and neuronal activity in the locus coeruleus, colliculi, and cingulate cortex. *Neuron*, 89(1), 221–234. <https://doi.org/10.1016/j.neuron.2015.11.028>
- Jumper, J., Evans, R., Pritzel, A., Green, T., Figurnov, M., Ronneberger, O., Tunyasuvunakool, K., Bates, R., Židek, A., Potapenko, A., Bridgland, A., Meyer, C., Kohl, S. A. A., Ballard, A. J., Cowie, A., Romera-Paredes, B., Nikolov, S., Jain, R., Adler, J., . . . Hassabis, D. (2021). Highly accurate protein structure prediction with AlphaFold. *Nature*, 596(7873), 583–589. <https://doi.org/10.1038/s41586-021-03819-2>
- Kahneman, D., & Tversky, A. (1979). Prospect theory: An analysis of decision under risk. *Econometrica*, 47(2), 263. <https://doi.org/10.2307/1914185>
- (Kevin), S., Li, Kokkoris, M. D., & Savani, K. (2020). Does everyone have the potential to achieve their ideal body weight? lay theories about body weight and support for price discrimination policies. *Organizational Behavior and Human Decision Processes*, 157(100), 129–142. <https://EconPapers.repec.org/RePEc:eee:jobhdp:v:157:y:2020:i:c:p:129-142>
- Kolling, N., Behrens, T. E. J., Mars, R. B., & Rushworth, M. F. S. (2012). Neural mechanisms of foraging. *Science*, 336(6077), 95–98. <https://doi.org/10.1126/science.1216930>
- Kornhuber, H. H., & der Deecke, L. (1965). Hirnpotential nderungen bei willk rbewegungen und passiven bewegungen des menschen: Bereitschaftspotential und reafferente potentiale. *Pfl gers Archiv fr die Gesamte Physiologie des Menschen und der Tiere*, 284(1), 1–17. <https://doi.org/10.1007/bf00412364>
- Kosinski, M. (2023). Theory of mind may have spontaneously emerged in large language models. *arXiv preprint arXiv:2302.02083*.

- Kraemer, P. M., & Gluth, S. (2023). Episodic memory retrieval affects the onset and dynamics of evidence accumulation during value-based decisions. *Journal of Cognitive Neuroscience*, 35(4), 692–714. https://doi.org/10.1162/jocn_a_01968
- Krajbich, I., Armel, C., & Rangel, A. (2010). Visual fixations and the computation and comparison of value in simple choice. *Nature Neuroscience*, 13(10), 1292–1298. <https://doi.org/10.1038/nn.2635>
- Kraus, S., Azaria, A., Fiosina, J., Greve, M., Hazon, N., Kolbe, L., Lembcke, T.-B., Muller, J. P., Schleibaum, S., & Vollrath, M. (2020). Ai for explaining decisions in multi-agent environments. *Proceedings of the AAAI conference on artificial intelligence*, 34(09), 13534–13538.
- Lamm, C., Batson, C. D., & Decety, J. (2007). The neural substrate of human empathy: Effects of perspective-taking and cognitive appraisal. *Journal of Cognitive Neuroscience*, 19(1), 42–58. <https://doi.org/10.1162/jocn.2007.19.1.42>
- Lecun, Y., Bottou, L., Bengio, Y., & Haffner, P. (1998). Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11), 2278–2324. <https://doi.org/10.1109/5.726791>
- Lewis, L., & Krupenye, C. (2021). Theory of mind in nonhuman primates. <https://doi.org/10.31234/osf.io/c568f>
- Lowe, R., Wu, Y. I., Tamar, A., Harb, J., Pieter Abbeel, O., & Mordatch, I. (2017). Multi-agent actor-critic for mixed cooperative-competitive environments. *Advances in neural information processing systems*, 30.
- Maghsudi, S., Lan, A., Xu, J., & van Der Schaar, M. (2021). Personalized education in the artificial intelligence era: What to expect next. *IEEE Signal Processing Magazine*, 38(3), 37–50.
- McKinney, S. M., Sieniek, M., Godbole, V., Godwin, J., Antropova, N., Ashrafian, H., Back, T., Chesus, M., Corrado, G. S., Darzi, A., Etemadi, M., Garcia-Vicente, F., Gilbert, F. J., Halling-Brown, M., Hassabis, D., Jansen, S., Karthikesalingam, A., Kelly, C. J., King, D., . . . Shetty, S. (2020). International evaluation of an AI system for breast cancer screening. *Nature*, 577(7788), 89–94. <https://doi.org/10.1038/s41586-019-1799-6>
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., Graves, A., Riedmiller, M., Fidjeland, A. K., Ostrovski, G., Petersen, S., Beattie, C., Sadik, A., Antonoglou, I., King, H., Kumaran, D., Wierstra, D., Legg, S., & Hassabis, D. (2015). Human-level control through deep reinforcement learning. *Nature*, 518(7540), 529–533. <https://doi.org/10.1038/nature14236>
- Nash, J. (1951). Non-cooperative games. *The Annals of Mathematics*, 54(2), 286. <https://doi.org/10.2307/1969529>
- O’Connell, R. G., Dockree, P. M., & Kelly, S. P. (2012). A supramodal accumulation-to-bound signal that determines perceptual decisions in humans. *Nature Neuroscience*, 15(12), 1729–1735. <https://doi.org/10.1038/nn.3248>
- Ouyang, L., Wu, J., Jiang, X., Almeida, D., Wainwright, C., Mishkin, P., Zhang, C., Agarwal, S., Slama, K., Ray, A., et al. (2022). Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35, 27730–27744.

- Padoa-Schioppa, C., & Assad, J. A. (2006). Neurons in the orbitofrontal cortex encode economic value. *Nature*, *441*(7090), 223–226. <https://doi.org/10.1038/nature04676>
- Posner, R. (1986). Zur systematik der beschreibung verbaler und nonverbaler kommunikation. In *Perspektiven auf sprache* (pp. 267–314). De Gruyter. <https://doi.org/10.1515/9783110886238-016>
- Premack, D., & Woodruff, G. (1978). Does the chimpanzee have a theory of mind? *Behavioral and Brain Sciences*, *1*(4), 515–526. <https://doi.org/10.1017/S0140525X00076512>
- Proudfit, G. H. (2014). The reward positivity: From basic research on reward to a biomarker for depression. *Psychophysiology*, *52*(4), 449–459. <https://doi.org/10.1111/psyp.12370>
- Rabinowitz, N., Perbet, F., Song, F., Zhang, C., Eslami, S. A., & Botvinick, M. (2018). Machine theory of mind. *International conference on machine learning*, 4218–4227.
- Rafiei, F., & Rahnev, D. (2022). Rtnet: A neural network that exhibits the signatures of human perceptual decision making. *bioRxiv*, 2022–08.
- Ratcliff, R. (1978). A theory of memory retrieval. *Psychological Review*, *85*(2), 59–108. <https://doi.org/10.1037/0033-295x.85.2.59>
- Ratcliff, R., Smith, P. L., Brown, S. D., & McKoon, G. (2016). Diffusion decision model: Current issues and history. *Trends in Cognitive Sciences*, *20*(4), 260–281. <https://doi.org/10.1016/j.tics.2016.01.007>
- Rilling, J. K., Gutman, D. A., Zeh, T. R., Pagnoni, G., Berns, G. S., & Kilts, C. D. (2002). A neural basis for social cooperation. *Neuron*, *35*(2), 395–405. [https://doi.org/10.1016/s0896-6273\(02\)00755-9](https://doi.org/10.1016/s0896-6273(02)00755-9)
- Rizzolatti, G., & Craighero, L. (2004). THE MIRROR-NEURON SYSTEM. *Annual Review of Neuroscience*, *27*(1), 169–192. <https://doi.org/10.1146/annurev.neuro.27.070203.144230>
- Saxe, R., & Kanwisher, N. (2003). People thinking about thinking people: The role of the temporo-parietal junction in “theory of mind”. *NeuroImage*, *19*(4), 1835–1842. [https://doi.org/10.1016/s1053-8119\(03\)00230-1](https://doi.org/10.1016/s1053-8119(03)00230-1)
- Sheng, F., Ramakrishnan, A., Seok, D., Zhao, W. J., Thelma, S., Cen, P., & Platt, M. L. (2020). Decomposing loss aversion from gaze allocation and pupil dilation. *Proceedings of the National Academy of Sciences*, *117*(21), 11356–11363. <https://doi.org/10.1073/pnas.1919670117>
- Shenhav, A., Cohen, J. D., & Botvinick, M. M. (2016). Dorsal anterior cingulate cortex and the value of control. *Nature Neuroscience*, *19*(10), 1286–1291. <https://doi.org/10.1038/nn.4384>
- Shibasaki, H., & Hallett, M. (2006). What is the Bereitschaftspotential? *Clinical Neurophysiology*, *117*(11), 2341–2356. <https://doi.org/10.1016/j.clinph.2006.04.025>
- Shimojo, S., Simion, C., Shimojo, E., & Scheier, C. (2003). Gaze bias both reflects and influences preference. *Nature Neuroscience*, *6*(12), 1317–1322. <https://doi.org/10.1038/nn1150>
- Smith, P. L., & Ratcliff, R. (2004). Psychology and neurobiology of simple decisions. *Trends in Neurosciences*, *27*(3), 161–168. <https://doi.org/10.1016/j.tins.2004.01.006>
- Sobash, R. A., Romine, G. S., & Schwartz, C. S. (2020). A comparison of neural-network and surrogate-severe probabilistic convective hazard guidance derived from a convection-

- allowing model. *Weather and Forecasting*, 35 (5), 1981–2000. <https://doi.org/10.1175/waf-d-20-0036.1>
- Spivey, M. J., & Dale, R. (2006). Continuous dynamics in real-time cognition. *Current Directions in Psychological Science*, 15 (5), 207–211. <https://doi.org/10.1111/j.1467-8721.2006.00437.x>
- Sternberg, S. (1969). The discovery of processing stages: Extensions of donders' method. *Acta Psychologica*, 30, 276–315. [https://doi.org/10.1016/0001-6918\(69\)90055-9](https://doi.org/10.1016/0001-6918(69)90055-9)
- Strait, C. E., Blanchard, T. C., & Hayden, B. Y. (2014). Reward value comparison via mutual inhibition in ventromedial prefrontal cortex. *Neuron*, 82 (6), 1357–1366. <https://doi.org/10.1016/j.neuron.2014.04.032>
- Summerfield, C., & Tsetsos, K. (2012). Building bridges between perceptual and economic decision-making: Neural and computational mechanisms. *Frontiers in Neuroscience*, 6. <https://doi.org/10.3389/fnins.2012.00070>
- Tampuu, A., Matiisen, T., Kodelja, D., Kuzovkin, I., Korjus, K., Aru, J., Aru, J., & Vicente, R. (2017). Multiagent cooperation and competition with deep reinforcement learning (C.-Y. Xia, Ed.). *PLOS ONE*, 12 (4), e0172395. <https://doi.org/10.1371/journal.pone.0172395>
- Ullman, T. (2023). Large language models fail on trivial alterations to theory-of-mind tasks. *arXiv preprint arXiv:2302.08399*.
- Usher, M., & McClelland, J. L. (2001). The time course of perceptual choice: The leaky, competing accumulator model. *Psychological Review*, 108 (3), 550–592. <https://doi.org/10.1037/0033-295x.108.3.550>
- Wang, L., Sun, S., & Xia, C. (2011). Finite-time stability of multi-agent system in disturbed environment. *Nonlinear Dynamics*, 67 (3), 2009–2016. <https://doi.org/10.1007/s11071-011-0125-0>
- Wunderlich, K., Dayan, P., & Dolan, R. J. (2012). Mapping value based planning and extensively trained choice in the human brain. *Nature Neuroscience*, 15 (5), 786–791. <https://doi.org/10.1038/nn.3068>
- Wunderlich, K., Rangel, A., & O'Doherty, J. P. (2009). Neural computations underlying action-based decision making in the human brain. *Proceedings of the National Academy of Sciences*, 106 (40), 17199–17204. <https://doi.org/10.1073/pnas.0901077106>
- Zhang, Z., Cheng, H., & Yang, T. (2020). A recurrent neural network framework for flexible and adaptive decision making based on sequence learning (A. Soltani, Ed.). *PLOS Computational Biology*, 16 (11), e1008342. <https://doi.org/10.1371/journal.pcbi.1008342>
- Zhao, C., Li, L., Pei, X., Li, Z., Wang, F.-Y., & Wu, X. (2021). A comparative study of state-of-the-art driving strategies for autonomous vehicles. *Accident Analysis & Prevention*, 150, 105937. <https://doi.org/10.1016/j.aap.2020.105937>
- Zhavoronkov, A., Ivanenkov, Y. A., Aliper, A., Veselov, M. S., Aladinskiy, V. A., Aladinskaya, A. V., Terentiev, V. A., Polykovskiy, D. A., Kuznetsov, M. D., Asadulaev, A., Volkov, Y., Zhodus, A., Shayakhmetov, R. R., Zhebrak, A., Minaeva, L. I., Zagribelnyy, B. A., Lee, L. H., Soll, R., Madge, D., ... Aspuru-Guzik, A. (2019). Deep learning enables rapid identification of potent DDR1 kinase inhibitors. *Nature Biotechnology*, 37 (9), 1038–1040. <https://doi.org/10.1038/s41587-019-0224-x>