

Subjectivity in Unsupervised Machine Learning Model Selection

Wanyi Chen¹, Mary Cummings²

¹Duke University

²George Mason University

wc151@duke.edu, cummings@gmu.edu

Abstract

Model selection is a necessary step in unsupervised machine learning. Despite numerous criteria and metrics, model selection remains subjective. A high degree of subjectivity may lead to questions about repeatability and reproducibility of various machine learning studies and doubts about the robustness of models deployed in the real world. Yet, the impact of modelers’ preferences on model selection outcomes remains largely unexplored. This study uses the Hidden Markov Model as an example to investigate the subjectivity involved in model selection. We asked 33 participants and three Large Language Models (LLMs) to make model selections in three scenarios. Results revealed variability and inconsistencies in both the participants’ and the LLMs’ choices, especially when different criteria and metrics disagree. Sources of subjectivity include varying opinions on the importance of different criteria and metrics, differing views on how parsimonious a model should be, and how the size of a dataset should influence model selection. The results underscore the importance of developing a more standardized way to document subjective choices made in model selection processes.

1 Introduction

In a world of abundant data, unsupervised machine learning (ML) is popular for discovering patterns and structures in data without needing labels. Selecting the best model is a necessary step, as even slightly different models can lead to different interpretations and decisions. For instance, psychologists can use unsupervised ML to uncover patterns in human learning behaviors (Visser, Raijmakers, and Moleenaar 2002). Different interpretations of such models would likely lead to different training designs, with some less optimal than others.

There are a few objectives in selecting the best model in unsupervised ML. On the one hand, a model should accurately describe the data. On the other, a parsimonious model is often more desirable because it is more interpretable and less likely to overfit. However, trade-offs exist between accuracy and parsimony. A model with more variables is likely more accurate but less parsimonious (Dziak et al. 2020).

Several criteria guide model selection, including information criteria (IC) such as the Akaike Information Criterion (AIC) (Akaike 1974) and Bayesian Information Criterion (BIC) (Schwarz 1978). Cross-validation metrics such as the

most consistent case, best worst case, and best average case may provide additional guidance.

Despite numerous seemingly objective criteria and metrics, model selection remains subjective. Different ICs place varying emphasis on parsimony versus predictive accuracy (Dziak et al. 2020). ML researchers and practitioners hold various beliefs about the importance of certain criteria or metrics, so the definition of the “best” model becomes subjective. While it is well known that biases in datasets cause biases in machine learning models (Buolamwini and Gebru 2018), little is known about how the modelers’ preferences influence model selection results. The subjective decisions made in the model selection process can be considered the modeler’s “degree of freedom.”

The modeler’s degree of freedom yields insights into the repeatability and reproducibility of results, essential in scientific research (Plesser 2018). If results are not repeatable or reproducible, the research community cannot critically assess the correctness of scientific claims made and conclusions drawn from the results (Plesser 2018). Consequently, we cannot have confidence in the robustness of various real-world ML models based on these research.

This study investigates the subjectivity involved in model selection using the Hidden Markov Model (HMM) as an example of unsupervised ML. In the following sections, we first review the background on HMM, information criterion, model selection, and researcher degrees of freedom. Then, we describe an experiment where 33 participants and three Large Language Models (LLMs) were asked to select models in three scenarios.

2 Background and related work

An HMM is a stochastic model with two layers: a lower layer of observations and a higher layer of hidden states that is not directly observable. Mathematically, an HMM consists of a transition matrix that represents the transition probabilities among n different hidden states, an emission matrix that represents the emission probabilities from n hidden states to m different observations, and a vector that represents the initial probability distributions among the n hidden states. An HMM’s number of free parameters, n_p , is calculated by counting the freely-estimated entries in the transition and emission matrices. HMMs with more hidden states are more complex and have larger n_p values.

The Baum-Welch algorithm is typically used to train HMMs (Rabiner 1989). The number of hidden states is unknown and must be chosen before training. Given the same dataset, an algorithm can train different models with different numbers of hidden states.

2.1 Information criterion

Information criteria, calculated for each candidate model, are often used in model selection. In theory, the candidate model with the minimum IC value should be selected. Different ICs have different theoretical and practical motivations, but they share a common form:

$$IC = -2(\log L) + \text{penalty term}$$

where $\log L$ stands for the log likelihood of the dataset given the model. It captures how well the model fits the data. The first term $-2(\log L)$ characterizes the model's accuracy: lower values indicate that the model has a higher likelihood. In HMM's case, a model's likelihood can be calculated by the forward algorithm (Rabiner 1989).

The model is likely to become more accurate with more parameters, so to keep the model parsimonious, the ICs add a penalty term based on n_p . The value of the penalty term increases as n_p increases. Some ICs' penalty terms also involve T , the dataset size. ICs with smaller penalty terms emphasize predictive accuracy, and ICs with larger penalty terms emphasize parsimony. Table 1 summarizes seven common ICs' penalty terms and emphases. Appendix A includes a more detailed review of the theoretical and practical motivation of these ICs.

Among these seven ICs, AIC, AIC3, AICc, and AICu have lighter penalty weights, making them more likely to choose more complex models and risk overfitting. CAIC and BIC have heavier penalty weights, making them more likely to choose simpler models and risk underfitting. ABIC's penalty weight is lighter than that of BIC's and may be lighter or heavier than that of AIC's depending on T (Dziak et al. 2020). ABIC's penalty weight becomes heavier with larger T . Because of the different penalty terms, these information criteria often suggest different best models when given the same set of candidate models.

2.2 Model selection

Recognizing that different ICs often lead to different models, some researchers have compared the performance of different ICs, with mixed results. Costa et al. (2010) performed a Monte Carlo experiment with HMMs and found that the dataset size, the conditional state-dependent probabilities, and the latent transition matrix are the main factors influencing the IC test results. Bacci et al. (2014) conducted another Monte Carlo simulation study with HMMs. They also found that the capability of the different ICs in detecting the true number of hidden states varies case by case. Particularly, lower values of persistence probabilities in the same state, and/or a greater uncertainty in the allocation of the observations to the latent states, may lead to worse performance of some ICs (Bacci, Pandolfi, and Pennoni 2014).

These Monte Carlo experiments assume some ground truth exists. However, in many real-world applications, it

is impossible to know the true latent transition matrix or many other salient factors. Therefore, it still remains uncertain whether choosing some ICs over others will yield better model selection results for a particular real-world scenario.

Other researchers propose abandoning the use of ICs altogether. Celeux et al. (2008) proposed to use cross-validation to instead assess the number of hidden states in HMMs, i.e., partitioning the dataset into different folds and iteratively assigning different folds as training and testing sets. The model that maximizes the cross-validated likelihood on testing sets is selected. This method selects models with the best predictive performances (Celeux and Durand 2008). However, this method is often computationally intensive (Pohle et al. 2017), and evidence shows that it tends not to outperform BIC (Costa and De Angelis 2010).

Some researchers have developed pragmatic guides for practitioners engaged in model selection. Dziak et al. (2020) advised practitioners to choose AIC if underfitting is a concern and choose the more parsimonious BIC if overfitting is more of a concern. Pohle et al. (2017) advised that in addition to using the ICs, practitioners should also use their expert knowledge to narrow the range of candidate models and use model validation methods to ensure models accurately represent the data. These pragmatic guides attempt to provide selection structure, but little is known about human preferences in this process.

Beyond HMMs, model selection occurs in many other fields and contexts. For example, statisticians are interested in analyzing data clusters by means of mixture distributions, and the ICs can help them select the best mixture models (Bozdogan 1994). The ICs are also used for determining the number of significant components in Principle Component Analyses, which has a wide range of applications (Bai, Choi, and Fujikoshi 2018). For the purposes of this study, we use HMM as an example of unsupervised ML to investigate how human preferences influence model selection.

2.3 Researcher degrees of freedom

Researchers' subjective choices in data collection, processing, and analysis cause studies to have different results and sometimes support opposite hypotheses (Simmons, Nelson, and Simonsohn 2011; Huntington-Klein et al. 2021). Simmons et al. (2011) first coined the term "researcher degrees of freedom" when they discovered that a seemingly small change in researchers' subjective choices could significantly increase the false-positive rate in psychology studies. Similarly, Huntington-Klein et al. (2021) found that unreported researcher variation could decrease the validity of study results.

ML researchers recognize that biases in datasets cause biases in resulting models (Buolamwini and Gebru 2018), yet practitioner-induced biases are less discussed. More recently, Cummings et al. (2021) demonstrated that subjective judgments made in the development and interpretation of ML models could lead to inconsistent results and errors of commission and omission. Still, none have explored the impact of researcher degrees of freedom in unsupervised learning model selection, which is the aim of this study.

IC	Penalty term	Emphasis
AIC	$2n_p$	Predictive accuracy
AIC3	$3n_p$	Predictive accuracy
AICc	$(2Tn_p)/(T - n_p - 1)$	Predictive accuracy
AICu	$(2Tn_p)/(T - n_p - 1) + T \log(T/(T - n_p - 1))$	Predictive accuracy
CAIC	$n_p(\log T + 1)$	Parsimony
BIC	$n_p \log T$	Parsimony
ABIC	$(n_p \log(T + 2))/24$	Depends on T

Table 1: Summary of ICs

IC	Scenario 1	Scenario 2	Scenario 3
AIC	model 9	model 19	<u>model 20</u>
AIC3	<i>model 6</i>	model 17	<u>model 20</u>
AICc	model 9	model 17	<u>model 20</u>
AICu	<i>model 6</i>	model 13	<u>model 20</u>
CAIC	model 2	model 4	<i>model 13</i>
BIC	model 2	<i>model 7</i>	model 14
ABIC	<u>model 4</u>	<i>model 7</i>	model 14

Table 2: Best model selected by each IC in each scenario. Bold = best average model, italics = most consistent model, underline = best worst-case model.

3 Method

We created three model selection scenarios by training HMMs using publicly available replay files from Star-Craft II (Blizzard 2021), a popular online multiplayer Real-Time Strategy game. We focused on Zerg (a role in the game) and grouped its more than 100 different actions into 20 categories. The sequences of player actions, called replays, are our observation sequences.

We created three datasets corresponding to three model selection scenarios: a small dataset (scenario 1) comprising 30 replay files, a mid dataset (scenario 2) comprising 490 replay files, and a large dataset (scenario 3) comprising 2980 replay files. All files were randomly sampled for all datasets. For each dataset, we trained 19 candidate HMMs with the number of hidden states ranging from 2 to 20. Then, we calculated the IC values for each candidate model (Appendix B). Table 2 summarizes the best model chosen by each IC in each scenario. The models are denoted by their number of hidden states. For example, model 9 refers to the candidate model with 9 hidden states.

Next, for the candidate models chosen by at least one IC, we ran additional cross-validation tests. For example, in scenario 1, candidate models 2, 4, 6, and 9 appeared at least once in the second column of Table 2, so we further investigated these models. We evaluated their negative loglikelihood terms $-2(\log L)$ using 5-fold cross-validation. For scenarios 2 and 3, the datasets are larger, so we ran 10-fold cross-validation instead of 5-fold. We report the full results in Appendix C.

Table 2 also reflects that the “best average” metric selects the model with the lowest $-2(\log L)$ term average across

the 5 or 10 folds. Lower $-2(\log L)$ term values suggest that the model has higher likelihood. We also calculated the $-2(\log L)$ term’s standard deviation (SD) across the folds. The “most consistent” metric selects the model with the smallest SD. Additionally, for each model, the largest $-2(\log L)$ term value among the folds is considered the “worst case.” The “best worst case” metric selects the model with the smallest worst-case value.

Given these models, we designed a self-paced survey to measure modelers’ preferences in the three model selection scenarios (Appendix D). First, participants completed an informed consent form and a demographics survey (Appendix E). The demographics survey also included a seven-question risk propensity scale survey that measures an individual’s general risk-taking tendencies (Meertens and Lion 2008). We hypothesized that one’s risk propensity might correlate to model selection choices. Then, participants were given background information about HMMs and the ICs.

Next, participants completed an untimed model selection survey, which gave the participants the three model selection scenarios in randomized order. Participants did not know that the models were trained on StarCraft II data. For each scenario, the survey presents the best models chosen by various ICs, the cross-validation results, and the summaries. The participants also have optional access to the tables in Appendix B by clicking a “click to expand” option. The participants are then asked to select only one “best” model based on available information, to indicate which factors influenced their decisions the most, and to briefly explain their reasoning (see Appendix F for the full survey).

Most participants completed the survey in 20 to 40 minutes. The participants were recruited as volunteers but were each given a \$20 Amazon gift card as an appreciation. This study was approved by the Institutional Review Board.

In addition to the human participants, we also incorporated three LLMs into our study: ChatGPT 3.5, ChatGPT 4.0, and Google Bard. Given that LLMs are trained on a vast corpus of human texts, encompassing numerous research papers on model selection, we hypothesized that the LLMs might emulate the most typical human responses to model selection tasks. Given that model selection is an onerous task, we also wanted to explore whether the LLMs could be helpful tools for assisting in this task. For each model selection scenario, the LLMs were presented with identical information as our human participants, including the dataset size, the best models chosen by various ICs, and a summary

of the cross-validation results (Appendix I). The next section presents the results.

4 Results and discussion

We recruited a total of 33 participants, all with some ML experience. Ages ranged from 20-45 yrs, with an average of 27 yrs (SD = 5 yrs). The group included 8 women and 25 men. 27 were undergraduate or graduate students majoring in computer science or related fields, and 6 were professionals in technical roles. Appendix G provides more details on the demographics.

The participants' risk propensity scores ranged from 2.14 to 6.17, with a mean of 3.77 (SD = 1.04). Higher scores indicate more risk-taking. Typical risk propensity scale scores range from 2.00 to 7.00, with a mean of 4.63 (SD = 1.23) (Meertens and Lion 2008). Our mean scores indicate that our group of participants is considerably more risk-averse than the original group, although we cannot establish statistical significance without access to the original data.

4.1 Participant model selection preferences

In two out of three scenarios, participants' model selection choices varied. Figure 1 presents participants' choices in each scenario. When two of the three cross-validation metrics (best average, most consistent, best worst-case) point to the same model, most participants chose that model. For example, in scenario 2, model 7 is both the most consistent model and the model with the best worst-case. 31 out of 33 participants chose model 7 as the best model. A few participants based their choices on evidence that more than one cross-validation metric agreed on model 7. "7 seemed like the obvious choice because it was both the most consistent and the best worst case," wrote one participant. Another participant also noted, "My choice was based primarily on consistency results and best worst case."

However, in the other two scenarios, all three cross-validation metrics point to different models, resulting in significantly more disagreements among participants. Some participants had almost exact opposite reasons for selecting models. For instance, in scenario 1, the simplest HMM possible, a model with two hidden states, is one of the candidate models. Thirteen participants chose this model, with one explaining, "When it comes to model selection, I often prefer parsimony over accuracy." Similarly, another participant simply wrote "the fewest number of states" when asked to explain his or her reasoning.

On the contrary, some participants refrained from choosing such extreme values. One participant wrote, "I just don't like 2 because it is the smallest possible number. Explaining everything with just two variables sounds dangerous." Similarly, another participant noted, "Given 19 observation categories, only 2 latent states (as suggested by BIC) might be too reductionist." A third participant stated, "I usually do not select models at the boundary of the range, e.g., I don't choose 2 in range 2-20." These different attitudes towards extreme simplicity contributed to disagreements about the best model in this scenario.

Participants also held divergent views on how dataset size

should influence model selection. The survey did not explicitly ask how the participants reasoned about dataset sizes, and only six participants (18.2%) mentioned dataset size as a factor they considered. One participant believed that the "most consistent" metric was more important for larger dataset sizes, stating, "Given the large size of the dataset, results on consistency are likely to hold and be a good reflection of the strength of the model." However, another participant held the opposite view, noting, "If the data size is small, I may prefer a more consistent model."

There was also disagreement about the importance of accuracy for models trained on small datasets. One person thought accurate predictions were difficult with a small sample size, stating, "The sample size is really small compared with the previous two datasets. I think it's difficult to get an accurate prediction." Conversely, another participant prioritized accuracy over parsimony for the same scenario, explaining, "There was not much data, so I selected accuracy over parsimony for information criterion."

Information criteria is another factor that affected participants' selections. Different participants placed importance on different ICs. Most participants indicated that more than one IC was important. Table 3 summarizes their responses. The second column is the number of participants who considered the corresponding IC listed in the first column. Across all three scenarios, BIC is considered most frequently. Other ICs have varying degrees of popularity and are not consistent across scenarios. Among the seven ICs, BIC (Schwarz 1978) is also the most cited, reaching over 55,000 citations to date. It is possible that the participants considered BIC more frequently because it is more well-known.

Additionally, ten participants (30.3%) commented that they would like to know more context since it might influence their model selection preferences. Our survey did not give the participants context about the dataset, how it was processed, and the purpose of the model. One participant commented, "The metrics above are useful in a general sense, but domain knowledge of the problem and how and where the models will be used or deployed also play an important role in model selection."

4.2 Participant inconsistencies

We analyzed participants' choice-consistency across scenarios in terms of whether their criteria preferences changed between scenarios. The survey asked each participant to rate the importance of four factors (first column of Table 4(a)) in each scenario. Each factor was rated on a Likert scale of 1 to 5, with 1 being the least important and 5 being the most important. Table 4(a) shows one participant's responses as an example.

Then, we compared participants' ratings across scenarios. For instance, did participants always think that "*a*. one or more information criteria" is more important than "*b*. best average performance in cross-validation"? If they rated choice *a* the same as choice *b* in one scenario, we denote that as $a = b$. Similarly, $a > b$ means that a participant rated choice *a* higher than choice *b*, and $a < b$ means that the participant rated choice *b* higher than choice *a*. If the

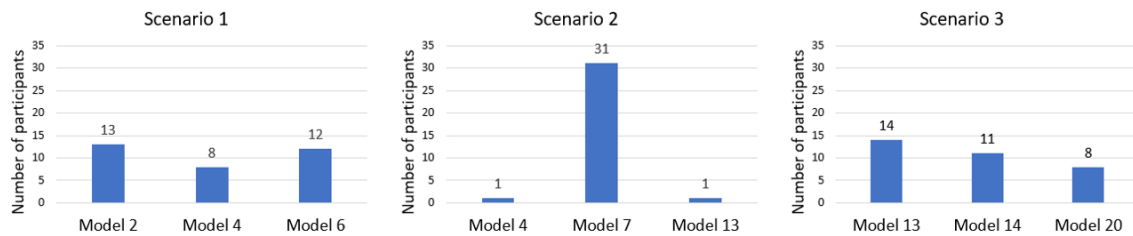


Figure 1: Model selection results

IC considered	Count	IC considered	Count	IC considered	Count
BIC	25	BIC	30	BIC	25
CAIC	19	ABIC	26	AIC	19
AIC3	17	CAIC	14	CAIC	18
AICu	15	AIC	10	ABIC	18
AIC	13	AIC3	7	AICu	15
ABIC	11	AICc	6	AICc	13
AICc	6	AICu	6	AIC3	12

(a) Scenario 1 (small dataset) (b) Scenario 2 (mid dataset) (c) Scenario 3 (large dataset)

Table 3: IC considered for each scenario

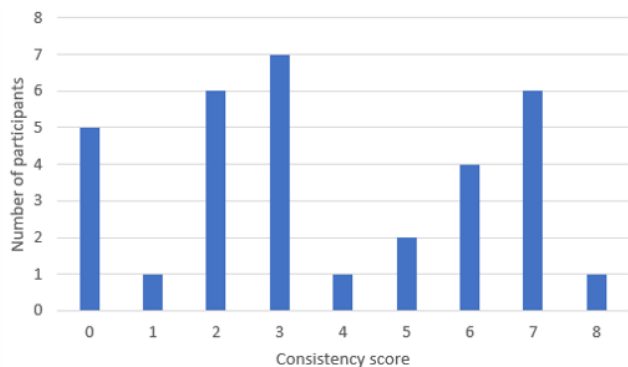


Figure 2: Individual consistency scores (lower scores are more consistent)

comparison symbol is consistent across all three scenarios, we denote a pairwise inconsistency score of 0 (the *a-d* row in Table 4(b) offers an example). Similarly, a pairwise inconsistency score of 1 means the comparison symbol in one scenario differs from the other two (the *a-c* row offers an example). A pairwise inconsistency score of 2 means the comparison symbol differs across all three scenarios (the *a-b* row offers an example).

We added all six pairwise inconsistency scores to obtain an overall consistency score for each participant. In the Table 4 example, the participant’s consistency score is 4. Higher scores indicate more inconsistency. The overall mean score is 3.70 (SD = 2.53). Figure 2 shows the consistency score distribution. We used k-means clustering to define three clusters. We labeled the six participants (18.2%) whose scores ranged from 0 to 1 as “consistent,” the four-

teen participants (42.4%) whose scores ranged from 2 to 4 as “slightly inconsistent,” and the thirteen participants (39.4%) whose scores ranged from 5 to 8 as “inconsistent.”

By this definition, nearly 40% of participants were inconsistent in their model selection preferences. The cause of the inconsistencies is not clear. Only two of thirteen consistent participants explained that they favored different ICs and cross-validation metrics because of different dataset sizes. The others did not explicitly explain why their preferences varied across scenarios, which is in line with behavioral economics research, which has shown that individuals can exhibit inconsistent preferences when presented with the same choice in different forms (Kahneman and Tversky 2013). While no two scenarios are identical in our survey, participants faced similar choices across scenarios, relying on information presented to them in similar forms. The high degree of inconsistency observed in our study suggests that predicting an individual’s model selection preferences in a new scenario is challenging, unless many criteria and metrics agree and the choice is relatively straightforward.

4.3 Participant correlations

We investigated whether consistency scores correlated with gender, risk attitude, and years of ML experience. For risk attitude, we labeled the six participants (18.2%) whose risk propensity scale scores were one standard deviation below the mean as “risk avoiders,” the five participants (15.2%) whose scores were one standard deviation above the mean as “risk takers,” and the remaining as “neutral.” For years of ML experience, the survey asked whether participants had less than one year, one to three years, or more than three years of experience. Since only four participants indicated “less than one year,” we merged the first two experience lev-

	Scenario 1	Scenario 2	Scenario 3
a. One or more information criteria	4	4	5
b. Best average performance	4	5	4
c. Most consistent performance	4	4	4
d. Best worst-case performance	2	2	2

(a) Example survey response of one participant

Pairwise comparison	Scenario 1	Scenario 2	Scenario 3	Pairwise inconsistency score
<i>a-b</i>	$a = b$	$a < b$	$a > b$	2
<i>a-c</i>	$a = c$	$a = c$	$a > c$	1
<i>a-d</i>	$a > d$	$a > d$	$a > d$	0
<i>b-c</i>	$b = c$	$b > c$	$b = c$	1
<i>b-d</i>	$b > d$	$b > d$	$b > d$	0
<i>c-d</i>	$c > d$	$c > d$	$c > d$	0

(b) Example pairwise inconsistencies of one participant

Table 4: Example consistency score calculation

els. We clustered the 23 participants (69.7%) with ≤ 3 years of experience into one group and the 10 participants (30.3%) with > 3 years of experience into another group.

Then, the Fisher’s exact test determined whether nonrandom associations exist. Fisher’s exact test is an alternative to the χ^2 -test and is recommended when the sample size is small (Freeman and Halton 1951). We found no correlations between consistency scores and gender ($p = 0.88$), risk attitudes ($p = 0.78$), and years of ML experience ($p = 0.34$) at the significance level of 0.05.

We also ran Fisher’s exact test to investigate whether one’s gender, risk attitude, years of ML experience, and individual consistency correlate with one’s preferences in model selection. Scenario 2 is omitted for this analysis because 31 out of 33 participants chose the same model. We report the results and p-values in Appendix H. We found no correlations at the significance level of 0.05.

4.4 LLM model selection preferences

Unlike the participants who only took the survey once, LLMs have the capacity to answer the same question with multiple responses. This can be achieved by either selecting “regenerate response” or by starting a new conversation with the identical prompt. For each scenario, we repeated the prompt three times. Table 5 summarizes the “best” models selected by each LLM in each scenario.

In two out of three scenarios, the LLMs’ response patterns closely resembled those of the human participants. In scenario 1, the LLMs’ responses varied the most. Responses were evenly split between models 2 and 6, with one mention of model 4. Human preferences paralleled this, with roughly equal preferences for models 2 and 6 and a lesser preference for model 4. In scenario 2, both LLMs and humans had the highest amount of agreements. The vast majority agreed that model 7 is the best model, as this is a relatively easy case. However, in scenario 3, while LLMs gravitated towards model 14, human responses had more variance. The

reason for this difference is unknown.

When asked to state model selection reasons, different LLMs also showed varying preferences for parsimony. For instance, in scenario 3, ChatGPT 3.5 stated, “The preference for simpler models (14 hidden states) make it a reasonable choice. The preference for simpler models is rooted in the principle of Occam’s razor, which states that among competing hypotheses or models, the simplest one should be preferred until evidence suggests otherwise.” In comparison, instead of simply favoring simpler models, ChatGPT 4.0 stated, “It’s also important to consider the trade-off between model simplicity and the model’s ability to capture complex structures in the data.” These responses mirrored the humans’ responses, where different participants showed different attitudes towards parsimony.

Moreover, similar to 30.3% of the participants, all LLMs recognized that model selection may be context-dependent. For instance, ChatGPT 4.0 commented, “This [model selection] also largely depends on the specific context and what you prioritize in model performance. You may consider factors like interpretability, computation cost, and the consequences of misclassification when making a final decision.” Similarly, Google Bard said, “I would also consider the following factors when selecting the best model: the domain knowledge of the problem, the computational resources available, and the time constraints.”

Like their human counterparts, all LLMs showed inconsistencies in their answers. Each provided different answers to the same prompt in at least one scenario. We prompted them to rate the importance of the four factors shown in Table 4(a), in the same way we asked the human participants to rate these factors (see Appendix I for an example prompt). Using the method detailed in section 4.2, we derived a consistency score for each LLM. Both ChatGPT 3.5 and Google Bard scored 3 (slightly inconsistent), while ChatGPT 4.0 scored 7 (inconsistent).

In summary, the LLMs mirrored human behavior in

LLM	1 st try	2 nd try	3 rd try
ChatGPT 3.5	model 2	model 6	model 6
ChatGPT 4.0	model 2	model 6	model 4
Google Bard	model 2	model 2	model 6

(a) Scenario 1 (small dataset)

LLM	1 st try	2 nd try	3 rd try
ChatGPT 3.5	model 7	model 4	model 7
ChatGPT 4.0	model 7	model 7	model 7
Google Bard	model 7	model 7	model 7

(b) Scenario 2 (mid dataset)

LLM	1 st try	2 nd try	3 rd try
ChatGPT 3.5	model 14	model 20	model 20
ChatGPT 4.0	model 14	model 14	model 14
Google Bard	model 14	model 14	model 14

(c) Scenario 3 (large dataset)

Table 5: LLM model selection results

model selection. Both the LLMs and the humans expressed varying preferences for parsimony, recognized that model selection may be context-dependent, and showed notable inconsistencies in their decision processes.

5 Conclusion

The results highlight that subjectivity can greatly influence the seemingly objective model selection process, especially when different criteria and metrics disagree. Furthermore, a large percentage of human participants and all the LLMs are inconsistent in their model selection preferences, with no trends seen in experience, background, or LLM versions.

Researchers and practitioners must recognize their inherent subjectivity and potential inconsistencies. High levels of subjectivity and inconsistencies cast doubts on the assertions made in ML research and compromise the robustness of ML models. When leveraging tools like LLMs to aid model selection, it is equally important to be cognizant of the limitations and inconsistencies inherent in these tools.

To improve the repeatability and reproducibility of ML studies, the ML community should standardize the reporting of subjective choices in model selection. Our study revealed several sources of subjectivity. First, both the participants and the LLMs had very different views on how parsimonious models should be. The preferred degree of parsimony should be reported and justified in application contexts. This preference should also guide which ICs are considered more important because different ICs quantify different trade-offs between parsimony and accuracy.

Another source of subjectivity is how different dataset sizes should influence model selection. Multiple studies agree that AIC (and other ICs that emphasize accuracy) is preferred for small datasets because underfitting is more likely a concern, while BIC (and other ICs that emphasize parsimony) is preferred for large datasets because overfitting is more likely a concern (Costa and De Angelis 2010; Dziak et al. 2020). Any model selection preferences that violate this recommendation should be reported and justified.

If researchers and practitioners run cross-validation tests in addition to information criteria, then cross-validation metrics should also be reported, since it is a major source of sub-

jectivity. Furthermore, if many metrics disagree, researchers and practitioners should consider whether the model should be trained in the first place. For instance, if many different ICs and cross-validation metrics suggest HMMs with widely-varying hidden states, researchers should consider whether an HMM best describes the data.

5.1 Limitations and future work

One limitation of our study is that it is unknown whether multiple ICs and cross-validation metrics are used in practice. Some studies use BIC alone to select models without discussing alternative ICs (Le Strat and Carrat 1999; Wang et al. 2016).

Another limitation is that our survey did not provide any context about the dataset. As ten participants and all three LLMs commented, context might influence their model selection preferences. Future studies should examine how different contexts affect model selection. However, providing more context might introduce more confounding variables. For example, had participants been informed that the models were trained on StarCraft II data, their prior knowledge of StarCraft II might have influenced their preferences. Hence, future studies will need careful experimental designs to effectively disentangle these confounding influences.

This study revealed that many participants were either unfamiliar with model selection guidelines in the literature or chose to ignore them, as evidenced by varying opinions regarding dataset sizes. Future studies should examine whether or when researchers and practitioners are inclined to follow given technical guidelines and why. Another direction for future studies is whether a data visualization tool could make the model selection process more transparent. Five participants (15.2%) mentioned the information presented in the survey seemed overwhelming, and some visualizations of the data might help.

Ultimately, a better understanding of the researcher degrees of freedom in model selection will inform a more standardized model selection process, which will help to improve the repeatability and reproducibility of various ML studies and ultimately lead to more confidence in various ML models deployed in the real world.

References

- Akaike, H. 1974. A new look at the statistical model identification. *IEEE transactions on automatic control*, 19(6): 716–723.
- Andrews, R. L.; and Currim, I. S. 2003. A comparison of segment retention criteria for finite mixture logit models. *Journal of Marketing Research*, 40(2): 235–243.
- Bacci, S.; Pandolfi, S.; and Pennoni, F. 2014. A comparison of some criteria for states selection in the latent Markov model for longitudinal data. *Advances in Data Analysis and Classification*, 8: 125–145.
- Bai, Z.; Choi, K. P.; and Fujikoshi, Y. 2018. Consistency of AIC and BIC in estimating the number of significant components in high-dimensional principal component analysis. *The Annals of Statistics*, 46(3): 1050–1076.
- Blizzard. 2021. s2client-proto. <https://github.com/Blizzard/s2client-proto>. Accessed: 2021-09-01.
- Bozdogan, H. 1987. Model selection and Akaike's information criterion (AIC): The general theory and its analytical extensions. *Psychometrika*, 52(3): 345–370.
- Bozdogan, H. 1994. Mixture-model cluster analysis using model selection criteria and a new informational measure of complexity. In *Proceedings of the first US/Japan conference on the frontiers of statistical modeling: An informational approach*, 69–113. Springer.
- Buolamwini, J.; and Gebru, T. 2018. Gender shades: Intersectional accuracy disparities in commercial gender classification. In *Conference on fairness, accountability and transparency*, 77–91. PMLR.
- Celeux, G.; and Durand, J.-B. 2008. Selecting hidden Markov model state number with cross-validated likelihood. *Computational Statistics*, 23(4): 541–564.
- Costa, M.; and De Angelis, L. 2010. Model selection in hidden Markov models: a simulation study. Technical report, Department of Statistics, University of Bologna.
- Cummings, M. L.; and Li, S. 2021. Subjectivity in the creation of machine learning models. *ACM Journal of Data and Information Quality*, 13(2): 1–19.
- Dziak, J. J.; Coffman, D. L.; Lanza, S. T.; Li, R.; and Jeremiin, L. S. 2020. Sensitivity and specificity of information criteria. *Briefings in bioinformatics*, 21(2): 553–565.
- Freeman, G.; and Halton, J. H. 1951. Note on an exact treatment of contingency, goodness of fit and other problems of significance. *Biometrika*, 38(1/2): 141–149.
- Huntington-Klein, N.; Arenas, A.; Beam, E.; Bertoni, M.; Bloem, J. R.; Burli, P.; Chen, N.; Grieco, P.; Ekpe, G.; Pugatch, T.; et al. 2021. The influence of hidden researcher decisions in applied microeconomics. *Economic Inquiry*, 59(3): 944–960.
- Hurvich, C. M.; and Tsai, C.-L. 1989. Regression and time series model selection in small samples. *Biometrika*, 76(2): 297–307.
- Kahneman, D.; and Tversky, A. 2013. Prospect theory: An analysis of decision under risk. In *Handbook of the fundamentals of financial decision making: Part I*, 99–127. World Scientific.
- Le Strat, Y.; and Carrat, F. 1999. Monitoring epidemiologic surveillance data using hidden Markov models. *Statistics in medicine*, 18(24): 3463–3478.
- McQuarrie, A.; Shumway, R.; and Tsai, C.-L. 1997. The model selection criterion AICu. *Statistics & probability letters*, 34(3): 285–292.
- Meertens, R. M.; and Lion, R. 2008. Measuring an individual's tendency to take risks: the risk propensity scale 1. *Journal of applied social psychology*, 38(6): 1506–1520.
- Neath, A. A.; and Cavanaugh, J. E. 2012. The Bayesian information criterion: background, derivation, and applications. *Wiley Interdisciplinary Reviews: Computational Statistics*, 4(2): 199–203.
- Plesser, H. E. 2018. Reproducibility vs. replicability: a brief history of a confused terminology. *Frontiers in neuroinformatics*, 11: 76.
- Pohle, J.; Langrock, R.; van Beest, F. M.; and Schmidt, N. M. 2017. Selecting the number of states in hidden Markov models: pragmatic solutions illustrated using animal movement. *Journal of Agricultural, Biological and Environmental Statistics*, 22(3): 270–293.
- Rabiner, L. R. 1989. A tutorial on hidden Markov models and selected applications in speech recognition. *Proceedings of the IEEE*, 77(2): 257–286.
- Schwarz, G. 1978. Estimating the dimension of a model. *The annals of statistics*, 461–464.
- Sclove, S. L. 1987. Application of model-selection criteria to some problems in multivariate analysis. *Psychometrika*, 52: 333–343.
- Simmons, J. P.; Nelson, L. D.; and Simonsohn, U. 2011. False-positive psychology: Undisclosed flexibility in data collection and analysis allows presenting anything as significant. *Psychological science*, 22(11): 1359–1366.
- Visser, I.; Raijmakers, M. E.; and Molenaar, P. 2002. Fitting hidden Markov models to psychological data. *Scientific Programming*, 10(3): 185–199.
- Wang, F.; Tan, S.; Yang, Y.; and Shi, H. 2016. Hidden Markov model-based fault detection approach for a multimode process. *Industrial & Engineering Chemistry Research*, 55(16): 4613–4621.

A Theoretical and practical motivation of different ICs

AIC aims to select the candidate model expected to have the lowest error in predicting future data taken from the same process as training data (Dziak et al. 2020). AIC estimates the relative Kullback-Leibler divergence of the likelihood function specified by a model from the likelihood function of the unknown true process that generated the data (Dziak et al. 2020).

Since Akaike first introduced AIC in 1974, researchers have proposed various modifications of AIC. Some found that changing the penalty term from $2n_p$ to $3n_p$ improves simulation performance in some settings, so they proposed AIC3 (Andrews and Currim 2003). Other researchers found that when the sample size is small, or when the number of parameters is a moderate to large fraction of the sample size, AIC tends to overfit (Hurvich and Tsai 1989). AICc tries to fix this tendency by applying a slightly heavier penalty based on dataset size T and the number of parameters (Hurvich and Tsai 1989). AICu, another alternative, is developed as an unbiased estimator of Kullback-Leibler information (McQuarrie, Shumway, and Tsai 1997). Researchers found that AICu outperforms AICc for moderate to large sample sizes except when the true model is of infinite order (McQuarrie, Shumway, and Tsai 1997).

CAIC ("Consistent AIC") is yet another variation. It is motivated by making AIC consistent (Bozdogan 1987). Consistent information criteria select the correct model with probability approaching 1 in large samples when the true model is of finite dimension and belongs to the set of candidate models (Bozdogan 1987).

BIC has a different theoretical motivation. BIC is derived from the Bayes theorem and aims to select the candidate model that is a posteriori most probable (Neath and Cavanaugh 2012). It is one of the most widely known and pervasively used tools in statistical model selection (Neath and Cavanaugh 2012). Compared to AIC, BIC has a heavier penalty weight and focuses more on parsimony. Researchers have also proposed various modifications of BIC. For example, ABIC is a sample-size-adjusted version of BIC. The penalty term of ABIC is derived from model selection for autoregressive time series models (Sclove 1987).

B Complete IC results

The minimum value of each column is highlighted in green, and the models with the minimum values are selected as "best" models.

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	17412.89	17452.89	17413.54	17454.7	17714.35	17674.35	17547.25
3	17320.83	17383.83	17322.43	17386.84	17795.64	17732.64	17532.44
4	17158.36	17246.36	17161.49	17251.27	17821.58	17733.58	17453.95
5	17105.73	17220.73	17111.08	17228.42	17972.43	17857.43	17492
6	17007.86	17151.86	17016.3	17163.4	18093.13	17949.13	17491.55
7	17030.67	17205.67	17043.19	17222.3	18349.58	18174.58	17618.49
8	16978.46	17186.46	16996.24	17209.65	18546.07	18338.07	17677.12
9	16962.56	17205.56	16986.99	17237.02	18793.96	18550.96	17778.78
10	16980.38	17260.38	17013.05	17302.09	19090.63	18810.63	17920.89
11	17074.21	17393.21	17116.94	17447.43	19478.39	19159.39	18145.72
12	17099.17	17459.17	17154.04	17528.46	19812.35	19452.35	18308.39
13	17184.27	17587.27	17253.64	17674.54	20221.52	19818.52	18537.92
14	17121.23	17569.23	17207.77	17677.78	20497.63	20049.63	18626.04
15	17244.58	17739.58	17351.28	17873.1	20975.2	20480.2	18907.26
16	17298.44	17842.44	17428.68	18005.07	21398.35	20854.35	19125.71
17	17395.45	17990.45	17552.99	18186.81	21879.73	21284.73	19394.02
18	17454.07	18102.07	17643.13	18337.32	22337.79	21689.79	19630.67
19	17529.21	18232.21	17754.48	18512.09	22827.45	22124.45	19890.55
20	17543.82	18303.82	17810.53	18634.7	23271.64	22511.64	20096.62

Figure 3: IC results for scenario 1

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	60874.56	60914.56	60874.75	60915.8	61226.01	61186	61058.89
3	60034.95	60097.95	60035.4	60099.52	60588.48	60525.5	60325.27
4	59461.92	59549.92	59462.81	59552.03	60235.11	60147.2	59867.45
5	59229.54	59344.54	59231.05	59347.43	60239.95	60125	59759.49
6	59179.83	59323.83	59182.19	59327.79	60445.04	60301.1	59843.41
7	58761.94	58936.94	58765.44	58942.32	60299.52	60124.6	59568.38
8	58789.21	58997.21	58794.15	59004.39	60616.73	60408.8	59747.72
9	58701.58	58944.58	58708.34	58954.03	60836.62	60593.8	59821.38
10	58367.9	58647.9	58376.89	58660.13	60828.02	60548.2	59658.2
11	58484.08	58803.08	58495.76	58818.68	61286.86	60968	59954.1
12	58244.22	58604.22	58259.13	58623.85	61407.24	61047.4	59903.18
13	58122.88	58525.88	58141.61	58550.27	61663.71	61260.9	59980
14	58140.81	58588.81	58164.01	58618.78	62077.01	61629.3	60205.29
15	58171.27	58666.27	58199.67	58702.72	62520.43	62025.7	60452.35
16	58019.45	58563.45	58053.85	58607.37	62799.13	62255.4	60526.33
17	57919.07	58514.07	57960.33	58566.54	63146.84	62552.2	60660.96
18	58036.89	58684.89	58085.97	58747.11	63730.33	63082.7	61023.02
19	57909.5	58612.5	57967.45	58685.76	64086.18	63383.6	61149.08
20	58034	58794	58101.94	58879.7	64711.49	63951.9	61536.25

Figure 4: IC results for scenario 2

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	307746.8	307786.8	307746.8	307787.8	308163.4	308123.4	307996.3
3	304364.8	304427.8	304364.8	304428.9	305021	304958	304757.7
4	300902.6	300990.6	300902.8	300991.8	301819.2	301731.2	301451.5
5	301351.5	301466.5	301351.8	301467.9	302549.3	302434.3	302068.8
6	298819.9	298963.9	298820.3	298965.4	300319.7	300175.7	299718.1
7	297029.9	297204.9	297030.6	297206.8	298852.7	298677.7	298121.5
8	295884.1	296092.1	295885	296094.3	298050.6	297842.6	297181.5
9	295276.4	295519.4	295277.7	295522	297807.4	297564.4	296792.2
10	294825.4	295105.4	294827.1	295108.5	297741.8	297461.8	296571.9
11	294260.9	294579.9	294263.2	294583.8	297583.6	297264.6	296250.8
12	292820.2	293180.2	292823	293184.8	296569.8	296209.8	295065.8
13	292905.1	293308.1	292908.7	293313.6	296402.7	296699.7	295418.9
14	291851.7	292299.7	291856.1	292306.2	296517.9	296069.9	294646.2
15	291962.3	292457.3	291967.7	292465.1	297118.1	296623.1	295050
16	291703	292247	291709.6	292256.2	297369.2	296825.2	295096.3
17	291059	291654	291066.9	291664.9	297256.4	296661.4	294770.5
18	290876.2	291524.2	290885.5	291536.8	297625.6	296977.6	294918.2
19	291042.3	291745.3	291053.3	291760	298364.6	297661.6	295427.4
20	290366.8	291126.8	290379.7	291143.9	298282.8	297522.8	295107.5

Figure 5: IC results for scenario 3

C Cross-validation results

Here we present the cross-validation results. The second column, “ $-2(\log L)$ term average,” takes the average of the negative loglikelihood term across the 5 or 10 folds. Lower negative loglikelihood term values suggest that the model has a higher likelihood. For example, in scenario 1, model 4 is the model with the “best average.” To determine whether model 4’s negative loglikelihood term average is significantly better than that of the other model’s, paired T-tests were performed. In scenario 1, the results are insignificant. The fourth column is the standard deviation across the 5 or 10 folds. A lower standard deviation suggests that the model is more consistent. By this standard, in scenario 1, model 6 is “most consistent.” Lastly, for each model, the largest loglikelihood term value among the 5 folds is displayed as the “worst case” in the last column. In scenario 1, model 4 has the “best worst case.”

Model	$-2(\log L)$ term average	Paired T-test	$-2(\log L)$ term SD	Worst case
2	3604.81	N/A	277.59	4000.50
4	3661.31	Not significant between models 2 and 4	256.96	3973.74
6	3788.68	Not significant between models 2 and 6	247.73	4042.62
9	3806.31	Not significant between models 2 and 9	293.81	4206.82

Table 6: Cross-validation results for scenario 1

Model	$-2(\log L)$ term average	Paired T-test	$-2(\log L)$ term SD	Worst case
4	12672.53	N/A	710.77	13615.59
7	12686.57	Not significant between models 4 and 7	617.00	13020.98
13	12730.73	Not significant between models 4 and 13	830.44	13349.28
17	12733.16	Not significant between models 4 and 17	690.22	13373.54
19	12754.90	Not significant between models 4 and 19	735.32	13209.94

Table 7: Cross-validation results for scenario 2

Model	$-2(\log L)$ term average	Paired T-test	$-2(\log L)$ term SD	Worst case
13	32083.97	Not significant between models 14 and 13	1320.71	33925.16
14	32061.27	N/A	1341.95	34213.48
20	32102.46	Not significant between models 14 and 20	1321.69	33866.94

Table 8: Cross-validation results for scenario 3

D Model selection study PowerPoint

Machine learning model selection preferences

Overview

Thank you for participating in this study! This study aims to investigate human preferences in machine learning model selection, which could be an inherently subjective process. The study will last approximately 30 minutes. The procedure is as follows:

1. You will first be asked to fill out an informed consent form and a demographic survey.
2. Then, we will go over some background information about model selection.
3. Finally, you will be asked to fill out a survey about your preferences in model selection.

After you finish this study, you will receive a \$20 Amazon gift card. At any point, if you no longer wish to participate for any reason, you may stop this session and leave. If you leave early, you will lose your eligibility in earning the gift card.

2

Informed consent

Please review and sign the [informed consent form](#) if you wish to participate.

Please let the researcher know that you've signed the form before you continue.

3

Demographic survey

Please fill out [this demographic survey](#).

Then, we'll go over some background information.

4

Background: model selection

When multiple machine learning models can be trained from the same data, researchers/practitioners need to select a best model. In general, there are two goals in model selection:

1. Accuracy. We want to accurately capture the patterns underlying the data.
2. Parsimony (simplicity). We want the model to be generalizable and interpretable. Often, simpler models are more interpretable.

There is often a tradeoff between these two goals. The model needs enough complexity to accurately capture the patterns underlying the data, but too much complexity can cause the model to overfit and hurt the second goal. On the other hand, simpler models are more likely to underfit and hurt the first goal.

5

BIC and AIC

Information criteria, such as Bayesian information criterion (BIC) and Akaike information criterion (AIC), are often used to guide model selection. They seek to balance model accuracy with parsimony. An information criteria value can be calculated for each candidate model. In theory, the candidate model with the minimum information criteria value should be selected as the best model.

The AIC and BIC formula are as follows:

$$BIC = \underbrace{-2(\log L)}_{\text{Log likelihood term}} + \underbrace{n_p \times \log(T)}_{\text{Penalizing term}}$$

Log likelihood Number of freely estimated parameters Total length of the observation sequence

$$AIC = \underbrace{-2(\log L)}_{\text{Log likelihood term}} + \underbrace{2n_p}_{\text{Penalizing term}}$$

6

$$BIC = \underbrace{-2(\log L)}_{\text{Log likelihood term}} + \underbrace{n_p \times \log(T)}_{\text{Penalizing term}}$$

Log likelihood Number of freely estimated parameters Total length of the observation sequence

$$AIC = \underbrace{-2(\log L)}_{\text{Log likelihood term}} + \underbrace{2n_p}_{\text{Penalizing term}}$$


$\log L$ stands for the log likelihood of the data set given the model, n_p stands for the number of freely estimated parameters, and T stands for the total length of the observation sequence. **The log likelihood term $-2(\log L)$ characterizes how accurate the model is: lower negative log likelihood indicate that the model has higher likelihood.**

The model is likely to become more accurate with more parameters, so to keep the model parsimonious, BIC adds a penalizing term $n_p \times \log(T)$, and AIC adds a penalizing term $2n_p$. For both BIC and AIC, **the value of the penalizing term increases as the number of parameters increases.**


7

Even with the guidance of information criteria, model selection can be a subjective task. Take BIC for example. Ideally, when the BIC values of every possible model are plotted, the graph should be U-shaped and have a clear minimum point. The minimum point on the graph corresponds to the best model. However, sometimes the graph is monotonically decreasing, and there is no clear minimum point. Sometimes the graph is relatively flat at an interval, which means a few models have very similar BIC values. In these situations, choosing a best model becomes a subjective task.

Ideal shape of the BIC curve:



Other possible shapes of the BIC curve:



8

Alternatives

There are many alternatives and variations to AIC and BIC. The table below shows 7 different information criteria. They all have the form of $-2(\log L) +$ the penalty term. They only differ in the penalty terms.

Information criterion	Penalty term	Emphasis
AIC	$2n_p$	Predictive accuracy
AIC3	$3n_p$	Predictive accuracy
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy
AICu	$2Tn_p / (T - n_p - 1) + T \log [T / (T - n_p - 1)]$	Predictive accuracy
CAIC	$n_p [\log(T) + 1]$	Parsimony
BIC	$n_p \log(T)$	Parsimony
ABIC	$n_p [\log(T + 2) / 24]$	Emphasis depends on T


AIC, AIC3, AICc, and AICu have lighter penalty weights, so they are more likely to choose more complex models and risk overfitting. CAIC and BIC have heavier penalty weights, so they are more likely to choose simpler models and risk underfitting. ABIC's penalty weight is lighter than that of BIC's and may be lighter or heavier than that of AIC's depending on T . ABIC's penalty weight becomes heavier with larger T . Because of the different penalty terms, these information criteria often suggest different best models when given the same set of candidate models.

9

Background: Hidden Markov Models

This study uses Hidden Markov Models (HMMs) as an example of the model selection problem. If you are already familiar with HMMs, feel free to skip or skim through this section.

An HMM is a stochastic model with two layers: a lower layer of observations, and a higher layer of hidden states that is not directly observable. The figure on the right shows an example HMM with 3 different observation categories (represented by blue blocks) and 2 hidden states (represented by grey circles).

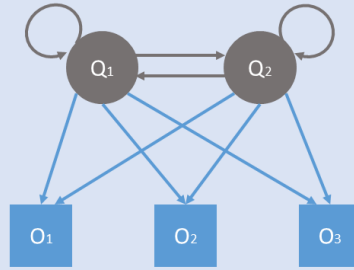

Model parameters

Conventionally, an HMM can be represented by the notation $\lambda = (A, B, \pi)$. A is an $n \times n$ transition matrix that represents the transition probabilities among n different hidden states. B is an $n \times m$ emission matrix that represents the emission probabilities from n hidden states to m different observation categories. π is an n dimensional vector that represents the initial probability distribution among the n hidden states. The important point to note is that, all else equal, **more hidden states means that the model has more parameters**. The matrices will have larger sizes, hence larger n_p .

Notation $\lambda = (A, B, \pi)$

Transition matrix $A \in \mathbb{R}^{n \times n}$


$$\begin{matrix} & Q_1 & Q_2 \\ \begin{matrix} Q_1 \\ Q_2 \end{matrix} & \begin{bmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{bmatrix} \end{matrix}$$

Emission matrix $B \in \mathbb{R}^{n \times m}$

$$\begin{matrix} & O_1 & O_2 & O_3 \\ \begin{matrix} Q_1 \\ Q_2 \end{matrix} & \begin{bmatrix} b_{11} & b_{12} & b_{13} \\ b_{21} & b_{22} & b_{23} \end{bmatrix} \end{matrix}$$

Initial probability distribution $\pi \in \mathbb{R}^n$

HMMs are trained using unsupervised learning. The number of hidden states needs to be specified prior to model training. Given the same data set (data sets are observation sequences), **different models can be trained with different numbers of hidden states specified**, as illustrated in the figure below. Then, researchers need to choose a best model among all candidate models.

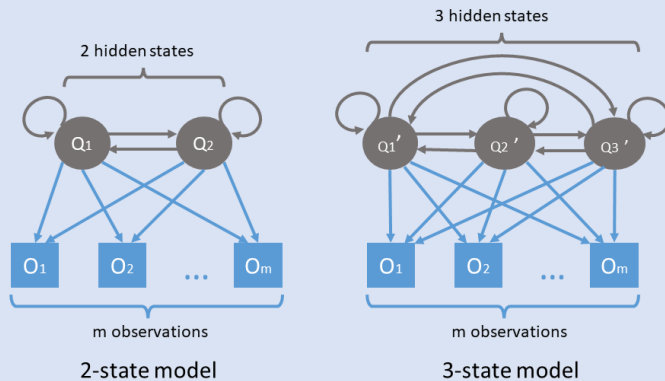

Example data

The dataset in this example consists of 100 files. Each file is an observation sequence, and there are a total of 17786 observations (this is the total length of the observation sequence T). There are 20 different observable categories. 19 candidate HMMs are trained from this dataset: the number of hidden states ranges from 2 to 20.

The aforementioned 7 information criteria choose different “best” models. Here in the “best model selected” column, the numbers represent the number of hidden states. For example, in the first, row, “19” means that the model with 19 hidden states is selected as the best model by AIC.

Information criterion	Best model selected
AIC	19
AIC3	17
AICc	17
AICu	13
CAIC	4
BIC	7
ABIC	7

13

During the model selection survey, you will see a question like this:

See the complete table

Click to expand

Skip

If you choose “click to expand”, you will see a complete table like the one on the right. This table shows all the candidate models and their information criterion scores. The highlighted cells are the min values of each column. If you do not wish to see this table, you could choose “skip” and simply use the summary table only that shows the best model selected by each information criterion.

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	60874.56	60914.56	60874.75	60915.8	61226.01	61186	61058.89
3	60034.95	60097.95	60035.4	60099.52	60588.48	60525.5	60325.27
4	59461.92	59549.92	59462.81	59552.03	60235.11	60147.2	59867.45
5	59229.54	59344.54	59231.05	59347.43	60239.95	60125	59759.49
6	59179.83	59323.83	59182.19	59327.79	60445.04	60301.1	59843.41
7	58761.94	58936.94	58765.44	58942.32	60299.52	60124.6	59568.38
8	58789.21	58997.21	58794.15	59004.39	60616.73	60408.8	59747.72
9	58701.58	58944.58	58708.34	58954.03	60836.62	60593.8	59821.38
10	58367.9	58647.9	58376.89	58660.13	60828.02	60548.2	59658.2
11	58484.08	58803.08	58495.76	58818.68	61286.86	60968	59954.1
12	58244.22	58604.22	58259.13	58623.85	61407.24	61047.4	59903.18
13	58122.88	58525.88	58141.61	58550.27	61663.71	61260.9	59980
14	58140.81	58588.81	58164.01	58618.78	62077.01	61629.3	60205.29
15	58171.27	58666.27	58199.67	58702.72	62520.43	62025.7	60452.35
16	58019.45	58563.45	58053.85	58607.37	62799.13	62255.4	60526.33
17	57919.07	58514.07	57960.33	58566.54	63146.84	62552.2	60660.96
18	58036.89	58684.89	58085.97	58747.11	63730.33	63082.7	61023.02
19	57909.5	58612.5	57967.45	58685.76	64086.18	63383.6	61149.08
20	58034	58794	58101.94	58879.7	64711.49	63951.9	61536.25

14

You could make your choice of the best model just based on the scores of the information criteria.

We could also further investigate the models that appeared at least once in the “best model selected” column. In this example, there are 5 such models: 4, 7, 13, 17, 19. Their loglikelihood terms $-2(\log L)$ can be evaluated using 5-fold cross validation. (With larger data sets, we may be able to perform a 10-fold cross validation.) In this case, the results are as follows:

Model	Loglikelihood term average	Paired T-test	Loglikelihood term standard deviation	Worst case
4	12672.53	N/A	710.77	13615.59
7	12686.57	Not significant between models 4 and 7	617.00	13020.98
13	12730.73	Not significant between models 4 and 13	830.44	13349.28
17	12733.16	Not significant between models 4 and 17	690.22	13373.54
19	12754.90	Not significant between models 4 and 19	735.32	13209.94

15

Model	Loglikelihood term average	Paired T-test	Loglikelihood term standard deviation	Worst case
4	12672.53	N/A	710.77	13615.59
7	12686.57	Not significant between models 4 and 7	617.00	13020.98
13	12730.73	Not significant between models 4 and 13	830.44	13349.28
17	12733.16	Not significant between models 4 and 17	690.22	13373.54
19	12754.90	Not significant between models 4 and 19	735.32	13209.94

The second column, “loglikelihood term average,” takes the average of the negative loglikelihood across the 5 folds. Lower loglikelihood terms suggest that the model has higher likelihood. By this standard, model 4 has the “best average.” To determine whether model 4’s loglikelihood term average is significantly better than that of the other model’s, paired T-tests are performed. In this example, the results are insignificant. The fourth column is the standard deviation across the 5 folds. Lower standard deviation suggests that the model is more consistent. By this standard, model 7 is “most consistent.” Lastly, for each model, the largest loglikelihood term value among the 5 folds is displayed as the “worst case” in the last column. Here, model 7 has the “best worst case,” which is a conservative model because it has the lowest value in the column. The results on the previous slide can be summarized as follows:

	Model
Best average	4
Most consistent	7
Best worst case	7

16

Model selection decision

As seen in the example, different information criterion can select different “best” models, and different measures such as “best average”, “most consistent”, and “best worst case” can also point to different models. Now the researcher/practitioner need to make a choice based on his/her preferences and priorities.

In the model selection survey, you will be asked to state your preferences in model selection.

17

Model selection survey

Now please fill out this [model selection survey](#). The survey consists of three scenarios. In each scenario, there are three tables about some candidate models. The tables are structured just like the example data in the previous section. You will be asked to choose a best model in each scenario and give some reasonings. There are no right or wrong answers.

18

E Demographics survey

How many years of machine learning experience do you have? (Experience includes classes/bootcamps, personal projects, internships, and/or full-time jobs.)

- None
- Less than 1 year
- 1 to 3 years
- More than 3 years

How many years of model selection experience do you have?

- None
- Less than 1 year
- 1 to 3 years
- More than 3 years

Are you a student or a professional?

- Student
- Professional

If you are a student, please list the relevant classes you have taken:


What is your major?

What is your gender?

- Male
- Female
- Non-binary / third gender
- Prefer not to say


What is your age?

For the following questions, please respond whether you agree or disagree with each statement on a scale of 1 to 9, with 1 being totally disagree, 5 being neutral, and 9 being totally agree.





For the next question, please use the following scale:

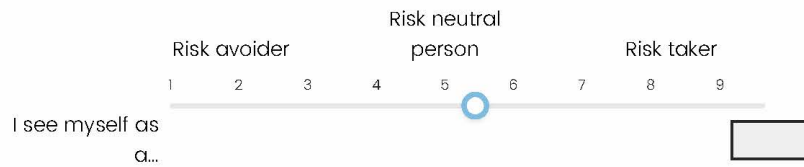

F Model selection survey

mid data set

In this scenario, the dataset consists of 490 files. There are a total of 90741 observations. There are 20 different observable categories. 19 candidate HMMs are trained from this dataset: the number of hidden states ranges from 2 to 20.

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	19
AIC3	$3n_p$	Predictive accuracy	17
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy	17
AICu	$2Tn_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	13
CAIC	$n_p [\log (T) + 1]$	Parsimony	4
BIC	$n_p \log (T)$	Parsimony	7
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	7

See the complete table

- Click to expand
- Skip

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	60874.56	60914.56	60874.75	60915.8	61226.01	61186	61058.89
3	60034.95	60097.95	60035.4	60099.52	60588.48	60525.5	60325.27
4	59461.92	59549.92	59462.81	59552.03	60235.11	60147.2	59867.45
5	59229.54	59344.54	59231.05	59347.43	60239.95	60125	59759.49
6	59179.83	59323.83	59182.19	59327.79	60445.04	60301.1	59843.41
7	58761.94	58936.94	58765.44	58942.32	60299.52	60124.6	59568.38
8	58789.21	58997.21	58794.15	59004.39	60616.73	60408.8	59747.72
9	58701.58	58944.58	58708.34	58954.03	60836.62	60593.8	59821.38
10	58367.9	58647.9	58376.89	58660.13	60828.02	60548.2	59658.2
11	58484.08	58803.08	58495.76	58818.68	61286.86	60968	59954.1
12	58244.22	58604.22	58259.13	58623.85	61407.24	61047.4	59903.18
13	58122.88	58525.88	58141.61	58550.27	61663.71	61260.9	59980
14	58140.81	58588.81	58164.01	58618.78	62077.01	61629.3	60205.29
15	58171.27	58666.27	58199.67	58702.72	62520.43	62025.7	60452.35
16	58019.45	58563.45	58053.85	58607.37	62799.13	62255.4	60526.33
17	57919.07	58514.07	57960.33	58566.54	63146.84	62552.2	60660.96
18	58036.89	58684.89	58085.97	58747.11	63730.33	63082.7	61023.02
19	57909.5	58612.5	57967.45	58685.76	64086.18	63383.6	61149.08
20	58034	58794	58101.94	58879.7	64711.49	63951.9	61536.25

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	19
AIC3	$3n_p$	Predictive accuracy	17
AICc	$2n_p / (T - n_p - 1)$	Predictive accuracy	17
AICu	$2n_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	13
CAIC	$n_p [\log (T) + 1]$	Parsimony	4
BIC	$n_p \log (T)$	Parsimony	7
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	7

You could make your choice of the best model just based on the above information. We could also further investigate the models that appeared at least once in the “best model selected” column. Their loglikelihood terms $-2(\log L)$ are evaluated using 5-fold cross-validation.

Model	Loglikelihood term average	Paired T-test	Loglikelihood term standard deviation	Worst case
4	12672.53	N/A	710.77	13615.59
7	12686.57	Not significant between models 4 and 7	617.00	13020.98
13	12730.73	Not significant between models 4 and 13	830.44	13349.28
17	12733.16	Not significant between models 4 and 17	690.22	13373.54
19	12754.90	Not significant between models 4 and 19	735.32	13209.94

	Model
Best average	4
Most consistent	7
Best worst case	7


Based on the above information, which model do you think is the best model in this scenario? (Please choose only one.)

- 4
- 7
- 13
- 17
- 19

Which information criterion did you consider? (You could select multiple ones if desired.)

- AIC
- AIC3
- AICc
- AICu
- CAIC
- BIC
- ABIC

How important was each of the following factors in your model selection process?

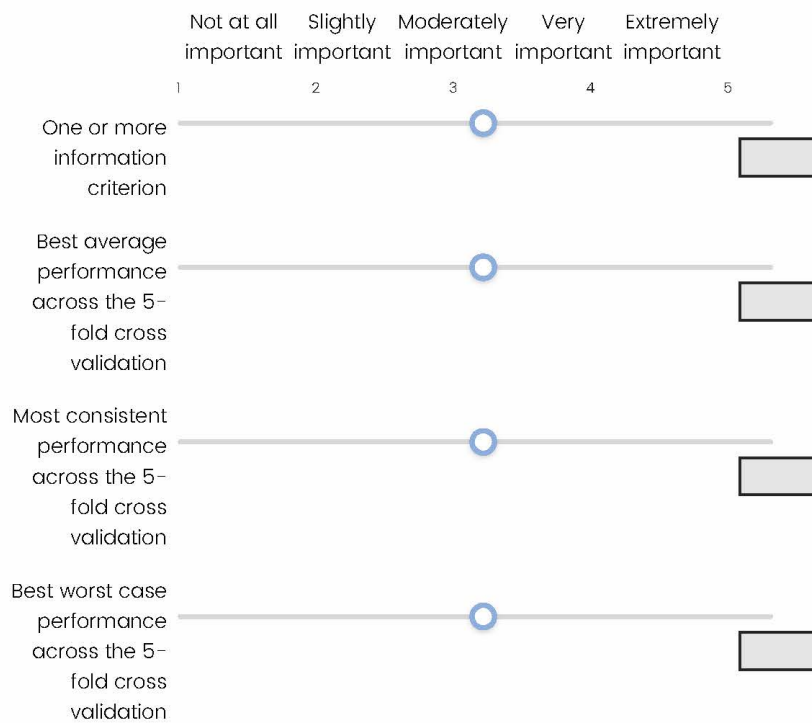

Are there any other factors that you considered? If so, please specify:

small data set

In this scenario, the dataset consists of 30 files. There are a total of 5139 observations. There are 20 different observable categories. 19 candidate HMMs are trained from this dataset: the number of hidden states ranges from 2 to 20.

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	9
AIC3	$3n_p$	Predictive accuracy	6
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy	9
AICu	$2Tn_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	6
CAIC	$n_p [\log (T) + 1]$	Parsimony	2
BIC	$n_p \log (T)$	Parsimony	2
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	4

See the complete table

- Click to expand
- Skip

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	17412.89	17452.89	17413.54	17454.7	17714.35	17674.35	17547.25
3	17320.83	17383.83	17322.43	17386.84	17795.64	17732.64	17532.44
4	17158.36	17246.36	17161.49	17251.27	17821.58	17733.58	17453.95
5	17105.73	17220.73	17111.08	17228.42	17972.43	17857.43	17492
6	17007.86	17151.86	17016.3	17163.4	18093.13	17949.13	17491.55
7	17030.67	17205.67	17043.19	17222.3	18349.58	18174.58	17618.49
8	16978.46	17186.46	16996.24	17209.65	18546.07	18338.07	17677.12
9	16962.56	17205.56	16986.99	17237.02	18793.96	18550.96	17778.78
10	16980.38	17260.38	17013.05	17302.09	19090.63	18810.63	17920.89
11	17074.21	17393.21	17116.94	17447.43	19478.39	19159.39	18145.72
12	17099.17	17459.17	17154.04	17528.46	19812.35	19452.35	18308.39
13	17184.27	17587.27	17253.64	17674.54	20221.52	19818.52	18537.92
14	17121.23	17569.23	17207.77	17677.78	20497.63	20049.63	18626.04
15	17244.58	17739.58	17351.28	17873.1	20975.2	20480.2	18907.26
16	17298.44	17842.44	17428.68	18005.07	21398.35	20854.35	19125.71
17	17395.45	17990.45	17552.99	18186.81	21879.73	21284.73	19394.02
18	17454.07	18102.07	17643.13	18337.32	22337.79	21689.79	19630.67
19	17529.21	18232.21	17754.48	18512.09	22827.45	22124.45	19890.55
20	17543.82	18303.82	17810.53	18634.7	23271.64	22511.64	20096.62

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	9
AIC3	$3n_p$	Predictive accuracy	6
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy	9
AICu	$2Tn_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	6
CAIC	$n_p [\log (T) + 1]$	Parsimony	2
BIC	$n_p \log (T)$	Parsimony	2
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	4

You could make your choice of the best model just based on the above information. We could also further investigate the models that appeared at least once in the “best model selected” column. Their loglikelihood terms $-2(\log L)$ are evaluated using 5-fold cross-validation.

Model	Loglikelihood term average	Paired T-test	Loglikelihood term standard deviation	Worst case
2	3604.81	N/A	277.59	4000.50
4	3661.31	Not significant between models 2 and 4	256.96	3973.74
6	3788.68	Not significant between models 2 and 6	247.73	4042.62
9	3806.31	Not significant between models 2 and 9	293.81	4206.82

	Model
Best average	2
Most consistent	6
Best worst case	4


Based on the above information, which model do you think is the best model in this scenario? (Please choose only one.)


- 2
- 4
- 6
- 9

Which information criterion did you consider? (You could select multiple ones if desired.)

- AIC
- AIC3
- AICc
- AICu
- CAIC
- BIC
- ABIC

How important was each of the following factors in your model selection process?

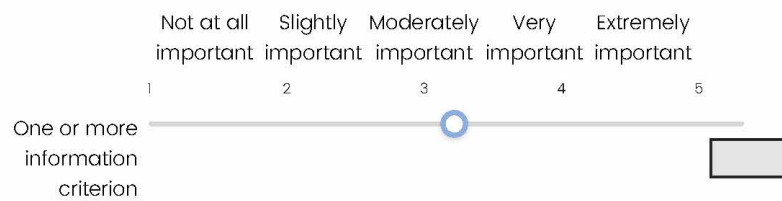

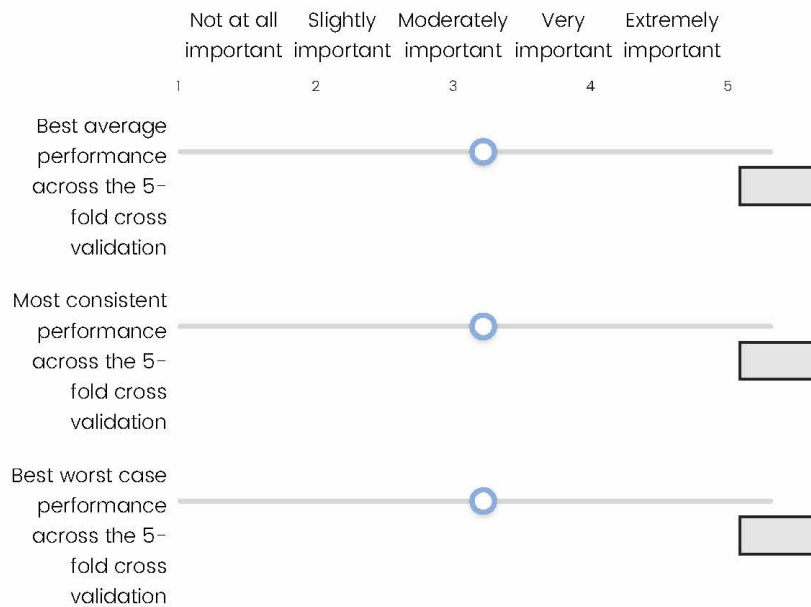

Are there any other factors that you considered? If so, please specify:

large data set

In this scenario, the dataset consists of 2,980 files. There are a total of 548,322 observations. There are 20 different observable categories. 19 candidate HMMs are trained from this dataset: the number of hidden states ranges from 2 to

20.

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	20
AIC3	$3n_p$	Predictive accuracy	20
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy	20
AICu	$2Tn_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	20
CAIC	$n_p [\log (T) + 1]$	Parsimony	13
BIC	$n_p \log (T)$	Parsimony	14
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	14

See the complete table

- Click to expand
- Skip

Model	AIC	AIC3	AICc	AICu	CAIC	BIC	ABIC
2	307746.8	307786.8	307746.8	307787.8	308163.4	308123.4	307996.3
3	304364.8	304427.8	304364.8	304428.9	305021	304958	304757.7
4	300902.6	300990.6	300902.8	300991.8	301819.2	301731.2	301451.5
5	301351.5	301466.5	301351.8	301467.9	302549.3	302434.3	302068.8
6	298819.9	298963.9	298820.3	298965.4	300319.7	300175.7	299718.1
7	297029.9	297204.9	297030.6	297206.8	298852.7	298677.7	298121.5
8	295884.1	296092.1	295885	296094.3	298050.6	297842.6	297181.5
9	295276.4	295519.4	295277.7	295522	297807.4	297564.4	296792.2
10	294825.4	295105.4	294827.1	295108.5	297741.8	297461.8	296571.9
11	294260.9	294579.9	294263.2	294583.8	297583.6	297264.6	296250.8
12	292820.2	293180.2	292823	293184.8	296569.8	296209.8	295065.8
13	292905.1	293308.1	292908.7	293313.6	296402.7	296699.7	295418.9
14	291851.7	292299.7	291856.1	292306.2	296517.9	296069.9	294646.2
15	291962.3	292457.3	291967.7	292465.1	297118.1	296623.1	295050
16	291703	292247	291709.6	292256.2	297369.2	296825.2	295096.3
17	291059	291654	291066.9	291664.9	297256.4	296661.4	294770.5
18	290876.2	291524.2	290885.5	291536.8	297625.6	296977.6	294918.2
19	291042.3	291745.3	291053.3	291760	298364.6	297661.6	295427.4
20	290366.8	291126.8	290379.7	291143.9	298282.8	297522.8	295107.5

Information criterion	Penalty term	Emphasis	Best model selected
AIC	$2n_p$	Predictive accuracy	20
AIC3	$3n_p$	Predictive accuracy	20
AICc	$2Tn_p / (T - n_p - 1)$	Predictive accuracy	20
AICu	$2Tn_p / (T - n_p - 1) + T \log [t / (T - n_p - 1)]$	Predictive accuracy	20
CAIC	$n_p [\log (T) + 1]$	Parsimony	13
BIC	$n_p \log (T)$	Parsimony	14
ABIC	$n_p [\log (T + 2) / 24]$	Depends on data set size	14

You could make your choice of the best model just based on the above information. We could also further investigate the models that appeared at least once in the “best model selected” column. Their loglikelihood terms $-2(\log L)$ are evaluated using 10-fold cross-validation.

Model	Loglikelihood term average	Paired T-test	Loglikelihood term standard deviation	Worst case
13	32083.97	Not significant between models 14 and 13	1320.71	33925.16
14	32061.27	N/A	1341.95	34213.48
20	32102.46	Not significant between models 14 and 20	1321.69	33866.94

	Model
Best average	14
Most consistent	13
Best worst case	20

Based on the above information, which model do you think is the best model in this scenario? (Please choose only one.)


- 13
 14
 20

Which information criterion did you consider? (You could select multiple ones if desired.)

- AIC
 AIC3
 AICc

- AICu
- CAIC
- BIC
- ABIC

How important was each of the following factors in your model selection process?

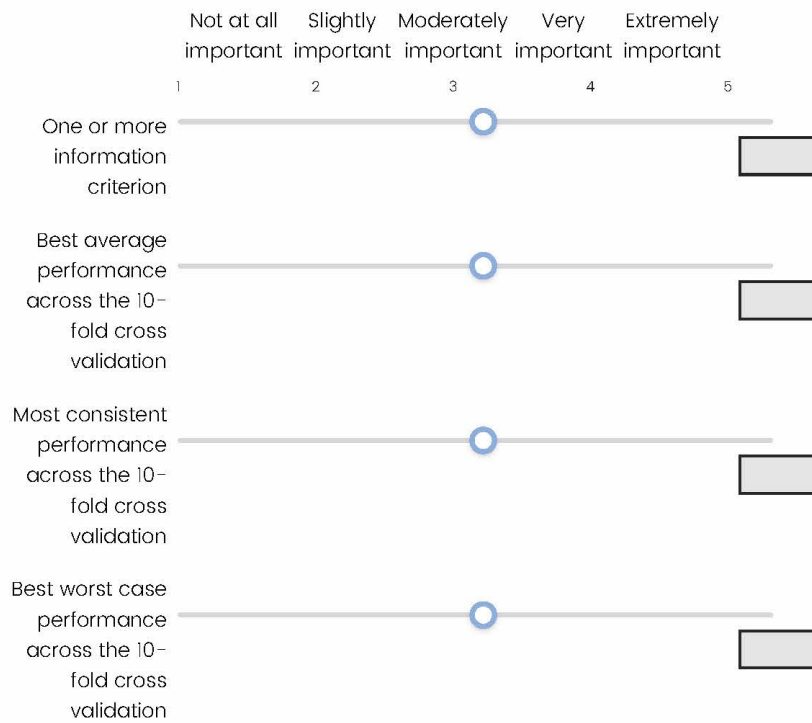

Are there any other factors that you considered? If so, please specify:


Additional questions

Did you find the information presented ("best" models selected by different information criteria, cross-validation results, and summary) helpful for the model selection process?

Did you find any helpful information missing?

Are there any additional thoughts or comments that you would like to add?

G Demographics data

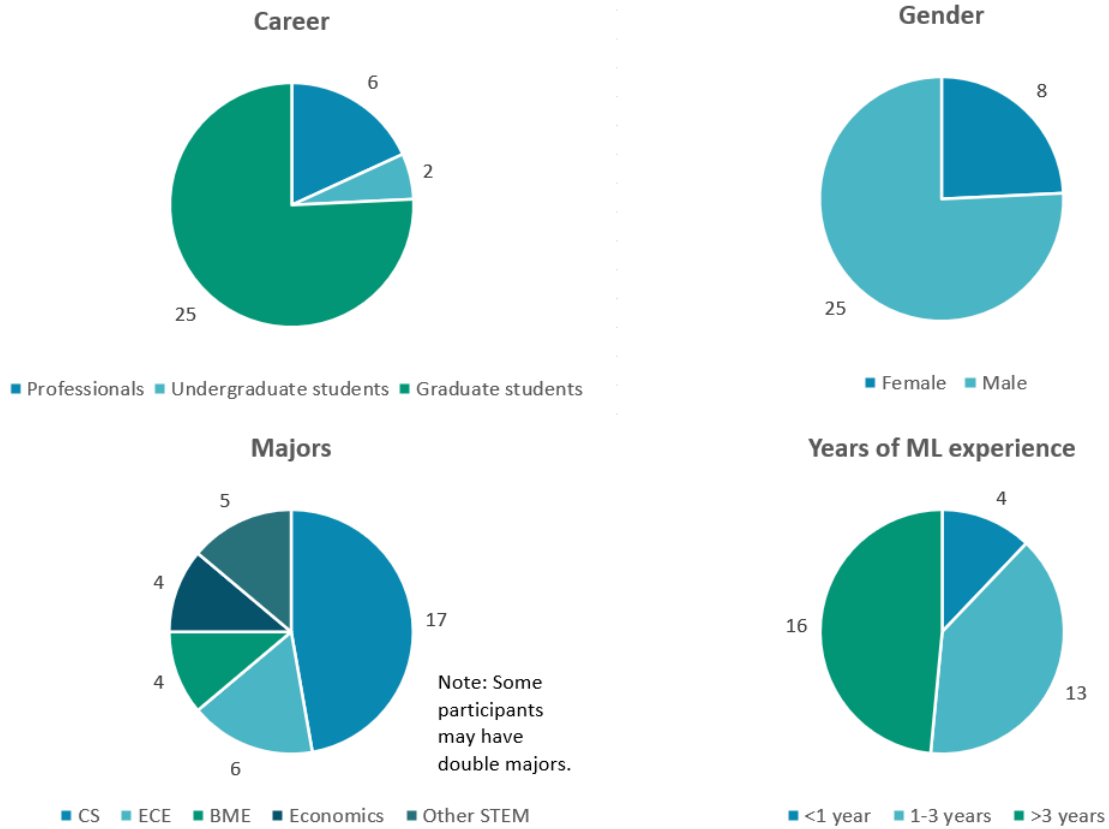

H Correlations

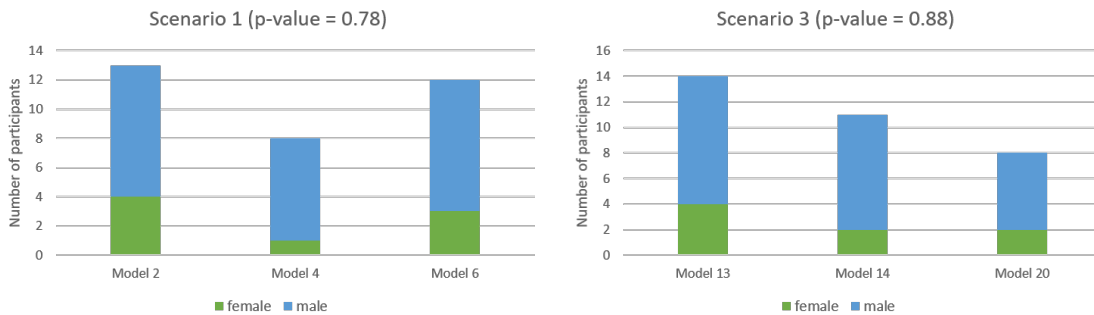


Figure 6: Gender

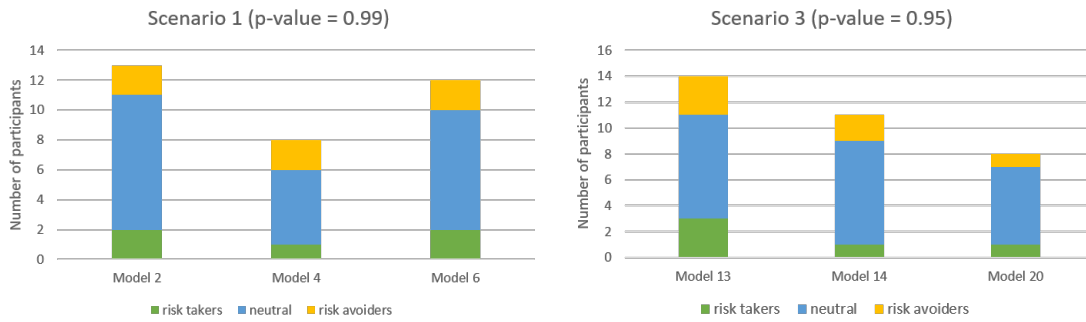


Figure 7: Risk attitude

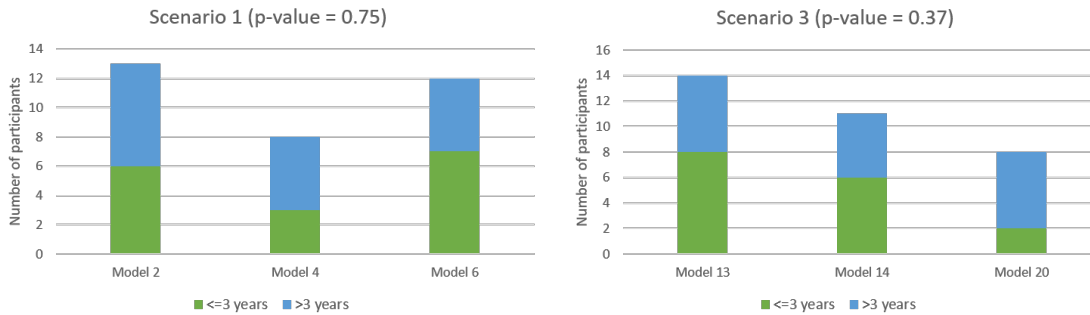


Figure 8: ML experience

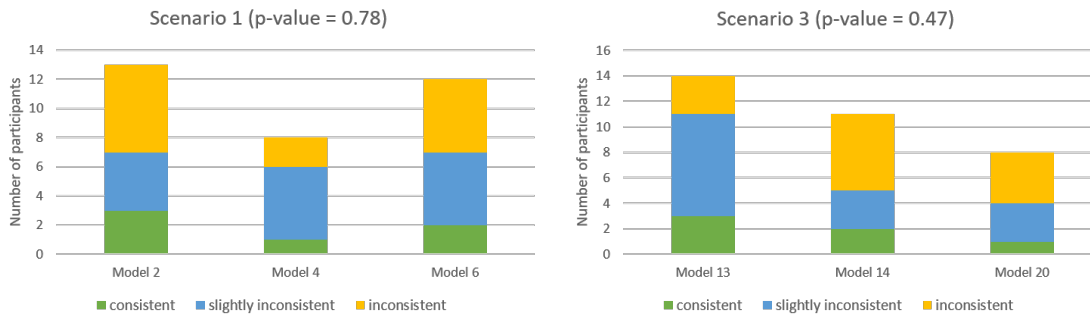


Figure 9: Individual consistency

I Example prompts for Large Language Models

I.1 Prompt 1

Now suppose you're a machine learning researcher. You have a data set of 30 files, and you trained 19 Hidden Markov Models based on the files. Their number of hidden states range from 2 to 20. You used multiple information criterion to do model selection. The best model selected by each IC are:

- AIC: model with 9 hidden states
- AIC3: model with 6 hidden states
- AICc: model with 9 hidden states
- AICu: model with 6 hidden states
- CAIC: model with 2 hidden states
- BIC: model with 2 hidden states
- ABIC: model with 4 hidden states

You also ran cross-validation tests on model 2, 4, 6, and 9. The “best average” metric selects the model with the lowest negative loglikelihood term across the folds. The “most consistent” metric selects the model with the smallest standard deviation. Additionally, for each model, the largest negative loglikelihood term value among the folds is considered the “worst case.” The “best worst case” metric selects the model with the smallest worst-case value. In this case, the results are:

Best average: model with 2 hidden states

Most consistent: model with 6 hidden states

Best worst case: model with 4 hidden states

Given these information, which model would you select as the best model? Why?

I.2 Prompt 2

In this case, how important was each of the following factors in your model selection decision?

- a. one or more information criterion
- b. best average
- c. most consistent
- d. best worst case

Please rate each factor on a scale of 1 to 5 with 1 being not at all important and 5 being extremely important.