# Large Synthetic Data from the ar $\chi$ iv for OCR Post Correction of Historic Scientific Articles

J. P. Naiman<sup>1</sup>[0000-0002-9397-6189]</sup>, Morgan G. Cosillo<sup>1</sup>[0009-0008-4755-7531]</sup>, Peter K. G. Williams<sup>2[0000-0003-3734-3587]</sup>, and Alyssa</sup>Goodman<sup>2[0000-0003-1312-0477]</sup>

<sup>1</sup> School of Information Sciences, University of Illinois, Urbana-Champaign, 61820, USA {jnaiman,mcosil2}@illinois.edu

<sup>2</sup> Harvard-Smithsonian Center for Astrophysics, Cambridge, 02138, USA {pwilliams,agoodman}@cfa.harvard.edu

Abstract. Historical scientific articles often require Optical Character Recognition (OCR) to transform scanned documents into machinereadable text, a process that often produces errors. We present a pipeline for the generation of a synthetic ground truth/OCR dataset to correct the OCR results of the astrophysics literature holdings of the NASA Astrophysics Data System (ADS). By mining the  $ar\chi iv$  we create, to the authors' knowledge, the largest scientific synthetic ground truth/OCR post correction dataset of 203,354,393 character pairs. Baseline models trained with this dataset find the mean improvement in character and word error rates of 7.71% and 18.82% for historical OCR text, respectively. Interactive dashboards to explore the dataset are available online: https:// readingtimemachine.github.io/projects/1-ocr-groundtruth-may2023, and data and code, are hosted on GitHub: https://github.com/ReadingTimeMachine/ ocr\_post\_correction.

Keywords: scholarly document processing · optical character recognition  $\cdot$  astronomy.

#### 1 Introduction

The ability to digitally store and parse scientific literature is vital to ensure access and proliferation of scientific ideas [28, 40, 44]. While digital storage is supported for much of contemporary scientific literature, the text of many historical documents is "trapped" within scanned pages of paper journals and theses.

Recently, various deep learning methods have been employed to extract page objects (e.g., figures) from scans [10, 11, 20, 32]. An obstacle to the extraction of information from historical articles is the accuracy of these extracted materials. This is especially of concern for any text objects which contain the bulk of the information in an article. A typical solution is to extract text with Optical Character Recognition (OCR) engines [48]. However, the generated text is often noisy which is not only an issue for comprehension by humans and screen readers [41], but also can affect "downstream" natural language processing tasks such as topic modeling, sentence segmentation and named entity recognition [12], often times causing significant errors in these processes [47].

Here, we discuss a new method for addressing OCR noise in the context of the extraction of text from a subset of  $\sim$ 56k articles from the pre-digital holdings

of the the Astrophysics Data System (ADS)<sup>3</sup> from ~1850-1997 [29]. While our ultimate goal is to correct all historical text within the ADS holdings, our initial focus is on the correction of "plain text" in the main portions of articles (i.e., not text within tables or captions). Our method relies on generating synthetic data from mining the ar $\chi$ iv source files (LaTeX/TeX files which compile to PDFs [49]) for "post correction" models which are applied to previously extracted OCR text.

Post correction methods are vital to the extraction of text from the historical holdings of ADS as only a small portion of the articles can be mined with PDF-parsing software [29, 30]. Additionally, in many large historical corpora it is not computationally feasible to re-OCR holdings each time an OCR engine is upgraded [51], making post correction the only option to reduce errors.

While the work presented here focuses on the literature of the "big-data" science of astronomy and astrophysics [42, 46], our methods of synthetic data generation can be generalized to other scientific fields. To aid in future generalizability, we use the open-source OCR engine Tesseract [43] and provide all code in Python. Because the dataset is large we provide interactive visualizations to assist any user of our resource in their investigation of the dataset.

# 2 OCR Noise Reduction Techniques & Mining the $ar\chi iv$

OCR noise is prevalent in the majority of OCR datasets used in the fields of digital humanities and cultural analytics [19]. OCR errors do not follow patterns of typical misspellings, thus their correction generally relies on different tools than spell-checking software [31]. OCR post correction, a method of error mitigation, in which OCR'd text is de-noised, is a field covering a wide range of digitization applications [36] and models have historically taken several forms [53]. More recently, deep learning models have been developed to tackle post correction [27] which typically make use of sequence-to-sequence models [26, 34, 50].

These deep learning methods require large training datasets, making their testing predominately completed with well known OCR post correction datasets from the community [13,16,37]. As manual annotations can be time consuming at scale [27,45], synthetic datasets are often used [24,25,52]. In particular, mining the ar $\chi$ iv is a popular method to generate synthetic machine learning training datasets [24, 25, 33]. Given the variety of journals represented in the ar $\chi$ iv database, its mining represents a vital opportunity to create domain-specific synthetic data [21, 22, 35], which is necessary as models trained on one type of document will often fail on documents dissimilar to the training data [15].

## 3 Methods

In what follows, we make use of two decades of the oldest articles available through the  $ar\chi$ iv Bulk Downloads [1] (1991-2011) for a total of 712,975 articles.

#### 3.1 Compiling the Astrophysics $ar\chi iv$ Bulk Downloads

Once downloaded, all article files are checked for corrupt decompression formats and a main TeX file (those containing \documentclass or \documentstyle) for a

<sup>&</sup>lt;sup>3</sup> https://ui.adsabs.harvard.edu/

total of 318,033 articles. To construct an "astronomy article" list, class/style commands are parsed with **regex** and those which denote typical astrophysical journal names (e.g., "aastex", "apj", "mn") are kept. These names correspond to the three journals which have the most complete scanned historical corpus (The Astrophysical Journal, Astronomy & Astrophysics, and Monthly Notices of the Royal Astronomical Society) [14]. This results in a total of 65,132 articles.

This set of  $\sim$ 65k files are tested for PDF-compilation errors for a total of 26,578 successfully compiled astronomy articles. The main sources of error are missing files (e.g., missing figure files) and an inability to distinguish which TeX file in a directory is the main article document.

#### 3.2 Segmentation of TeX Documents

Many parsers exist for TeX files with output formats such as plain text (e.g., opendetex [6]), XML (e.g., LaTeXML [17], unarXive [39]) or document trees (e.g., TexSoup [8]). With all methods, this parsing tends to be non-trivial [38]. As the documents are compiled once marking modifications are applied to the TeX to track synthetic ground truth (SGT) locations, any parser must account for errors that could occur in the compilation process. Additionally, checks for incorrect splitting of TeX source into trees are required. This excludes "off the shelf" parsers which only run a subset of these checks<sup>4</sup>. Thus this work makes use of a custom-built TeX parser.

Figure 1 diagrams the segmentation process which uses regex to break TeX files into document trees. A raw TeX document ("Raw LaTeX" snippet shown in upper left gray panel) is parsed to find the locations of special characters denoting commands, variables, and environments ("Splits with regex" blue upper middle panel). A hierarchy is then constructed with checks for closing and opening statements of commands (closing {}) inline math formulas (paired \$'s) and environments (\begin, \end) and stored in a tree ("Tree" purple upper right panel). Commands which reside within plain text sentences such as inline math, citations, and references ("\ref{}" commands) are stored with special tags.

**3.3** Marking the "ground truth" words in LaTeX & OCR'ing Pages Many methods for marking TeX documents to generate synthetic data for page objects (e.g., figures) modify the LaTeX to add bounding boxes in specific colors around objects and use image processing techniques to extract object locations after the PDF is rendered [24, 25]. Rendered PDFs can potentially be mined for SGT text, however, this can lead to errors in the extracted SGT text [25].

To avoid SGT-text parsing errors, this work adopts a different approach by modifying the TeX source documents with markers denoting every word, inline equation, citation, and reference using the tikzmark [9] package as shown within the green outlined "Marked LaTeX" box of Figure 1. Inline math, citations, and references are included as they are frequently interspersed with the plain text.

After storing the locations of each SGT object ("Tree" purple box in Figure 1), all text within the "plain text" sections are split into words using white

<sup>&</sup>lt;sup>4</sup> For example, following the process in Section 3.3, TeXSoup finds errors in only 46.2% of files, while our method finds errors in 70.4%.

4 J.P. Naiman et al.

space and starting (ending) \tikzmark commands are placed at the word/citation/reference/inline math start (end). Once the TeX document is compiled, the marks are stored in the auxilary (.aux) file produced during compilation which is then parsed to match each word to its location on the final, rendered PDF page. At this stage, documents which contain the \input command are ignored as these can include text external to the document being parsed.

Once the marked files are compiled, each page of each article is OCR'd with **Tesseract**, following methods used with articles from the historical holdings of the ADS [29,30]. Examples of these bounding boxes and words are shown in the orange "OCR with boxes" panel of Figure 1.

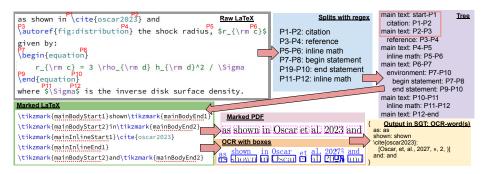


Fig. 1. Diagram of TeX parsed into its attributes ("Raw LaTeX", "Splits with regex"), and the tree structure built from the positions of these splits within the document ("Tree"), as outlined in Section 3.2. TeX is then marked with the tikzmark package and OCR'd (section from three top lines in "Tree" shown in "Marked LaTeX", Section 3.3). Once the TeX is compiled into a PDF, the auxiliary files are parsed to locate the SGT word locations on the rendered PDF page ("Marked PDF", Section 3.4), OCR words are collected ("OCR with boxes"), and SGT-OCR boxes are aligned ("Output data SGT: OCR-word(s)", Section 3.4). See text for more details.

#### 3.4 The OCR-SGT Alignment Algorithm & Dataset Characteristics

The final step in creating our SGT - OCR dataset is to align the OCR and SGT words. In what follows, "element" is defined as a plain text word, inline math formula, citation, or reference. Our alignment routine is as follows:

- Step 1: Locations of the bottom left and right bounds of each marked element are found from the .aux files. These locations are shown as solid magenta lines in the magenta "Marked PDF" panel of Figure 1.
- Step 2: As tikzmark gives only the lower y-position of each element, a bounding box is created by assuming 11pt font for each element (11pt font is an average value, font size is not always specified explicitly in the TeX file), shown by the dashed magenta lines in the "Marked PDF" panel of Figure 1.
- Step 3: If the bounding box is found to span more than one line, the SGT element is assumed to be hyphenated and each part is marked as a separate word. Alignment operates page-by-page, therefore hyphenated elements which span multiple pages are ignored.
- Step 4: The "raw" SGT element is extracted from the source TeX.

- Step 5: All OCR bounding boxes which overlap with a SGT box are associated with that SGT element. If an OCR bounding box is associated with more than one SGT element, the OCR element is associated with the SGT element with which it has the largest intersection-over-union (IOU).
- Step 6: All OCR elements associated with a SGT element are ordered by increasing horizontal position and combined into a single OCR element for that SGT element. This is shown by the data structure in the yellow "Output in SGT: OCR-words" box of Figure 1.
- Step 7: SGT word "type" is stored along with SGT word (plain text, inline math, citation, reference and whether the word is hyphenated).
- Step 8: Elements are ordered by tikzmarks and aligned with edit distance operations [5]. spaCY [18] is used to tokenize aligned pages as sentences [7].

While the majority of articles are aligned without error, Tesseract errors are possible on single pages. From this corpus of 7,850 articles which contain successfully aligned pages, our algorithm produces a total of 71,735 pages of 1,527,118 SGT/OCR sentence pairs which contain a total of 203,354,393 character pairs.

The relationships between SGT and OCR aligned characters closely follow other popular datasets with the majority of Levenshtein edit distance [23] operations in our dataset (other datasets) being replacements  $\sim 61.5\%$  ( $\sim 40-60\%$ ), followed by deletions  $\sim 19.6\%$  ( $\sim 10-18\%$ ) and insertions  $\sim 18.9\%$  ( $\sim 5-24\%$ ) [31].

Interactive versions of large confusion matrices for alphabetic characters, digits, punctuation marks and frequent words are hosted on this project's webpage<sup>5</sup>.

# 4 Post Correction Model Baseline Tests

To test the post correction effectiveness of our dataset we train a baseline transformer model – byt5 [50] – with the dataset. This model is effective for datasets such as ours which contain many out-of-vocabulary OCR words [27]. The model's initial training uses 100k aligned sentences for training, and 5k in the validation and test datasets. Here, transfer learning from the byt5/google-small model on HuggingFace [3] is used, and, for all models, training occurs on a NVIDIA V100 for ~87000 iterations over ~24 hours, in which the model converges.

The entry above the first thick line of Table 1 ("byt5,words") shows the ability of the model to correct only the parts of each aligned SGT-OCR text which have been tagged as plain text in the test datasets. Here, byt5 improves the character error rate (CER) by 67.35% and the word error rate (WER) by 60.18%.

While the focus of this work is on correcting the plain text within our corpus, historical ADS articles also contain inline math and citations. Here, we simplify the problem by testing the accuracy of the model on *detecting* these elements in the text. To proceed, we modify the input and output text by marking these environments with characters that do not appear in the plain text corpus. For example, we replace each instance of a SGT or post corrected OCR inline math formula with a single character (\$) and determine how often these characters align in the SGT and predicted OCR. The "byt5,full,fixed" row in Table 1 lists the results of this "fixed" model, trained on 500k "fixed" sentences (10k in the

<sup>&</sup>lt;sup>5</sup> https://readingtimemachine.github.io/projects/1-ocr-groundtruth-may2023

validation and test sets). Here, the CER and WER improvements have both increased to their highest rates of 85.51% and 84.44%, respectively.

To test the model's accuracy on pre-digital OCR, we apply the "byt5,full,fixed" model to 202 hand-annotated sentences from the main text of articles in the historical ADS corpus [10, 29, 30, 32]. When applied to this dataset, the mean improvement,  $\langle I \rangle$ , in CER and WER from correction with the fixed-byt5 model (i.e. "byt5,full,fixed" for the ar $\chi$ iv data) are 7.71% and 18.82%, respectively, as shown in the "historical,full,fixed" row of Table 1. While the improvements in CER and WER are more modest than the improvement in the ar $\chi$ iv dataset, they are nonetheless significantly larger than those from a generic post correction model [4] ( $\langle I \rangle_{\text{CER}}$ =-2499.35%,  $\langle I \rangle_{\text{WER}}$ =-499.26%) or from when byt5 is trained on the words from the historical dataset alone ( $\langle I \rangle_{\text{CER}}$ =-443.18%,  $\langle I \rangle_{\text{WER}}$ =-209.74%), both of which result in a large *negative* improvement.

	CER in %				WER in %			
Model	$\langle B \rangle$	$\langle A \rangle$	$\langle I \rangle$	% Improved	$\langle B \rangle$	$\langle A \rangle$	$\langle I \rangle$	% Improved
byt5,words	5.50	2.37	67.35	93.00	15.34	6.46	60.18	90.38
byt5,full,fixed	12.53	2.47	85.51	98.22	19.81	3.84	84.44	99.24
historical,full,fixed	5.53	3.94	7.71	82.67	8.98	8.20	18.82	82.67

**Table 1.** Mean CER and WER in percent for original datasets,  $\langle B \rangle$ , after post correction with listed models,  $\langle A \rangle$ , and the improvement percent,  $\langle I \rangle$ . Also shown are the percent of test instances with improvement ( $\langle A \rangle \langle \langle B \rangle$ ) as "% Improved". All calculations use the ar $\chi$ iv dataset except for the last row which uses the historical dataset.

### 5 Current Limitations & Future Work

While the full dataset cannot be shared directly (ar $\chi$ iv administrators, Private communication), we share a subset of our aligned sentences along with analysis notebooks in GitHub<sup>6</sup>. We are currently working with the ar $\chi$ iv to make a larger portion of the dataset available to the public.

LaTeX source from ~1990-2010 is known to be difficult to compile due to updates in TeX compilation software [2] which, in part, lead to the drop of the initial ~65k astronomy articles to ~7k. Partnership with the  $ar\chi iv$  to support more documents, along with adding support for a wider range of documents (e.g., those with the \input command) will increase the dataset size.

While the accuracy of the "byt5,full,fixed" model applied to the historical dataset ("historical,full,fixed") is lower overall, because there is no associated TeX with these historical documents, some ambiguity in the "ground truth" is expected (e.g., the phrase " $\leq 90\%$ " can be written as  $\lambda = 90\%$ ,  $\lambda = 90\%$  or  $\lambda = 90\%$  and the meaning of the phrase is unchanged). Post correction with consideration for these nuances is relegated to future work.

Finally, a larger historical dataset would undeniably enhance our post correction accuracy. A discussion of the methods used to generate a larger manual dataset is relegated to future work.

**Acknowledgments** This work is supported by a NASA Astrophysics Data Analysis Program Grant (20-ADAP20-0225).

<sup>&</sup>lt;sup>6</sup> https://github.com/ReadingTimeMachine/ocr\_post\_correction

# References

- arχiv bulk downloads. https://info.arxiv.org/help/bulk\_data\_s3.html, accessed: 2022-03-05
- 2. arxiv hiring and needs. https://info.arxiv.org/hiring/, accessed: 2023-07-17
- 3. Huggingface byt5-small. https://huggingface.co/google/byt5-small, accessed: 2023-03-25
- Huggingface yelpfeast/byt5-base-english-ocr-correction. https://huggingface. co/yelpfeast/byt5-base-english-ocr-correction, accessed: 2023-07-20
- The levenshtein package. https://github.com/maxbachmann/Levenshtein, accessed: 2023-05-29
- 6. Opendetex. https://github.com/pkubowicz/opendetex, accessed: 2023-05-29
- The spacy sentence tokenizer. https://spacy.io/api/sentencizer, accessed: 2023-05-29
- 8. Texsoup. https://github.com/alvinwan/TexSoup, accessed: 2022-10-30
- The tikzmark package. https://texdoc.org/serve/tikzmark/0, accessed: 2023-05-29
- Accomazzi, A., Kurtz, M.J., Henneken, E.A., Grant, C.S., Thompson, D., Chyla, R., Holachek, A., Sudilovsky, V., Murray, S.S.: Improved Functionality and Curation Support in the ADS. In: American Astronomical Society Meeting Abstracts #225. American Astronomical Society Meeting Abstracts, vol. 225, p. 336.55 (Jan 2015)
- Ahuja, A., Devera, A., Fox, E.A.: Parsing electronic theses and dissertations using object detection. In: Proceedings of the first Workshop on Information Extraction from Scientific Publications. pp. 121–130. Association for Computational Linguistics, Online (Nov 2022), https://aclanthology.org/2022.wiesp-1.14
- Boros, E., Nguyen, N.K., Lejeune, G., Doucet, A.: Assessing the impact of OCR noise on multilingual event detection over digitised documents. International Journal on Digital Libraries 23(3), 241–266 (Sep 2022). https://doi.org/10.1007/s00799-022-00325-2
- Chiron, G., Doucet, A., Coustaty, M., Moreux, J.P.: Icdar2017 competition on post-ocr text correction. In: 2017 14th IAPR International Conference on Document Analysis and Recognition (ICDAR). vol. 01, pp. 1423–1428 (2017). https://doi.org/10.1109/ICDAR.2017.232
- Eichhorn, G., Accomazzi, A., Grant, C.S., Kurtz, M.J., Rey Bacaicoa, V., Murray, S.S.: New Data and Search Features in the NASA ADS Abstract Service p. 1298 (Mar 2002), https://ui.adsabs.harvard.edu/abs/2002LPI....33.
  1298E, conference Name: Lunar and Planetary Science Conference ADS Bibcode: 2002LPI....33.1298E
- Etter, D., Rawls, S., Carpenter, C., Sell, G.: A Synthetic Recipe for OCR. In: 2019 International Conference on Document Analysis and Recognition (ICDAR). pp. 864–869. IEEE, Sydney, Australia (Sep 2019). https://doi.org/10.1109/ICDAR.2019.00143
- Evershed, J., Fitch, K.: Correcting noisy ocr: Context beats confusion. In: Proceedings of the First International Conference on Digital Access to Textual Cultural Heritage. p. 45–51. DATeCH '14, Association for Computing Machinery, New York, NY, USA (2014). https://doi.org/10.1145/2595188.2595200
- Ginev, D., Miller, B.R.: Latexml 2012-a year of latexml. In: Intelligent Computer Mathematics: MKM, Calculemus, DML, and Systems and Projects 2013, Held as Part of CICM 2013, Bath, UK, July 8-12, 2013. Proceedings 6. pp. 335–338. Springer (2013)

- 8 J.P. Naiman et al.
- Honnibal, M., Montani, I.: spaCy 2: Natural language understanding with Bloom embeddings, convolutional neural networks and incremental parsing (2017), to appear
- Jiang, M., Hu, Y., Worthey, G., Dubnicek, R.C., Capitanu, B., Kudeki, D., Downie, J.S., et al.: The gutenberg-hathitrust parallel corpus: A real-world dataset for noise investigation in uncorrected ocr texts. In: iConference 2021 (Poster) (2021)
- 20. Kahu, S.Y.: Figure Extraction from Scanned Electronic Theses and Dissertations. Master's thesis, Virginia Tech (2020)
- 21. Krishnan, P., Jawahar, C.: Generating synthetic data for text recognition. arXiv preprint arXiv:1608.04224 (2016)
- Le, T.A., Baydin, A.G., Zinkov, R., Wood, F.: Using synthetic data to train neural networks is model-based reasoning. In: 2017 international joint conference on neural networks (IJCNN). pp. 3514–3521. IEEE (2017)
- Levenshtein, V.I.: Binary Codes Capable of Correcting Deletions, Insertions and Reversals. Soviet Physics Doklady 10, 707 (Feb 1966)
- Li, M., Cui, L., Huang, S., Wei, F., Zhou, M., Li, Z.: TableBank: A Benchmark Dataset for Table Detection and Recognition (Jul 2020), http://arxiv.org/abs/ 1903.01949, arXiv:1903.01949 [cs]
- Li, M., Xu, Y., Cui, L., Huang, S., Wei, F., Li, Z., Zhou, M.: Docbank: A benchmark dataset for document layout analysis. In: Proceedings of the 28th International Conference on Computational Linguistics. pp. 949–960 (2020)
- Liu, Y., Gu, J., Goyal, N., Li, X., Edunov, S., Ghazvininejad, M., Lewis, M., Zettlemoyer, L.: Multilingual Denoising Pre-training for Neural Machine Translation. Transactions of the Association for Computational Linguistics 8, 726–742 (11 2020). https://doi.org/10.1162/tacl\_a\_00343
- Maheshwari, A., Singh, N., Krishna, A., Ramakrishnan, G.: A Benchmark and Dataset for Post-OCR text correction in Sanskrit (Nov 2022). https://doi.org/10.48550/arXiv.2211.07980, arXiv:2211.07980 [cs]
- Mayernik, M.S., Hart, D.L., Maull, K.E., Weber, N.M.: Assessing and tracing the outcomes and impact of research infrastructures. Journal of the Association for Information Science and Technology 68(6), 1341–1359 (2017). https://doi.org/https://doi.org/10.1002/asi.23721
- Naiman, J.P., Williams, P.K., Goodman, A.: The digitization of historical astrophysical literature with highly localized figures and figure captions. International Journal on Digital Libraries pp. 1–21 (2023)
- 30. Naiman, J., Williams, P.K., Goodman, A.: Figure and figure caption extraction for mixed raster and vector pdfs: Digitization of astronomical literature with ocr features. In: Linking Theory and Practice of Digital Libraries: 26th International Conference on Theory and Practice of Digital Libraries, TPDL 2022, Padua, Italy, September 20–23, 2022, Proceedings. pp. 52–67. Springer (2022)
- Nguyen, T.T.H., Jatowt, A., Coustaty, M., Nguyen, N.V., Doucet, A.: Deep Statistical Analysis of OCR Errors for Effective Post-OCR Processing. In: 2019 ACM/IEEE Joint Conference on Digital Libraries (JCDL). pp. 29–38 (Jun 2019). https://doi.org/10.1109/JCDL.2019.00015
- Pepe, A., Goodman, A., Muench, A.: The ADS All-Sky Survey. In: Ballester, P., Egret, D., Lorente, N.P.F. (eds.) Astronomical Data Analysis Software and Systems XXI. Astronomical Society of the Pacific Conference Series, vol. 461, p. 275 (Sep 2012)
- 33. Pfahler, L., Morik, K.: Self-Supervised Pretraining of Graph Neural Network for the Retrieval of Related Mathematical Expressions in Scientific Articles (Aug 2022), http://arxiv.org/abs/2209.00446, arXiv:2209.00446 [cs]

- Ramirez-Orta, J.A., Xamena, E., Maguitman, A., Milios, E., Soto, A.J.: Postocr document correction with large ensembles of character sequence-to-sequence models. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 36, pp. 11192–11199 (2022)
- Ren, X., Chen, K., Sun, J.: A CNN Based Scene Chinese Text Recognition Algorithm With Synthetic Data Engine. arXiv e-prints arXiv:1604.01891 (Apr 2016). https://doi.org/10.48550/arXiv.1604.01891
- 36. Rigaud, C., Doucet, A., Coustaty, M., Moreux, J.P.: ICDAR 2019 Competition on Post-OCR Text Correction
- 37. Rigaud, C., Doucet, A., Coustaty, M., Moreux, J.P.: Icdar 2019 competition on post-ocr text correction. In: 2019 International Conference on Document Analysis and Recognition (ICDAR). pp. 1588–1593 (2019). https://doi.org/10.1109/ICDAR.2019.00255
- Saier, T., Färber, M.: Bibliometric-enhanced arxiv: A data set for paper-based and citation-based tasks. In: BIR@ ECIR. pp. 14–26 (2019)
- Saier, T., Krause, J., Färber, M.: unarXive 2022: All arXiv Publications Pre-Processed for NLP, Including Structured Full-Text and Citation Network. arXiv e-prints arXiv:2303.14957 (Mar 2023). https://doi.org/10.48550/arXiv.2303.14957
- 40. Sandy, H.M., Mitchell, E., Corrado, E.M., Budd, J., West, J.D., Bossaller, J., VanScoy, A.: Making a case for open research: Implications for reproducibility and transparency. Proceedings of the Association for Information Science and Technology 54(1), 583–586 (2017). https://doi.org/https://doi.org/10.1002/pra2.2017.14505401079
- Schmitt-Koopmann, F.M., Huang, E.M., Darvishy, A.: Accessible PDFs: Applying Artificial Intelligence for Automated Remediation of STEM PDFs. In: Proceedings of the 24th International ACM SIGACCESS Conference on Computers and Accessibility. pp. 1–6. ASSETS '22, Association for Computing Machinery, New York, NY, USA (Oct 2022). https://doi.org/10.1145/3517428.3550407
- Smith, L., Arcand, K., Smith, R., Bookbinder, J., Smith, J.: Capturing the many faces of an exploded star: communicating complex and evolving astronomical data. JCOM Journal of Science Communication 16, 16050202 (Nov 2017). https://doi.org/10.22323/2.16050202
- 43. Smith, R.: An overview of the tesseract ocr engine. In: Proceedings of the Ninth International Conference on Document Analysis and Recognition - Volume 02. p. 629–633. ICDAR '07, IEEE Computer Society, USA (2007)
- Sohmen, L., Charbonnier, J., Blümel, I., Wartena, C., Heller, L.: Figures in scientific open access publications. In: International Conference on Theory and Practice of Digital Libraries. pp. 220–226. Springer (2018)
- 45. Springmann, U., Reul, C., Dipper, S., Baiter, J.: Ground truth for training ocr engines on historical documents in german fraktur and early modern latin. Journal for Language Technology and Computational Linguistics 33(1), 97–114 (2018)
- 46. Stephens, Z.D., Lee, S.Y., Faghri, F., Campbell, R.H., Zhai, C., Efron, M.J., Iyer, R., Schatz, M.C., Sinha, S., Robinson, G.E.: Big data: Astronomical or genomical? PLOS Biology 13(7), 1–11 (07 2015). https://doi.org/10.1371/journal.pbio.1002195
- 47. Strien, D., Beelen, K., Coll Ardanuy, M., Hosseini, K., Mcgillivray, B., Colavizza, G.: Assessing the impact of ocr quality on downstream nlp tasks. SCITEPRESS-Science and Technology Publications (02 2020). https://doi.org/10.5220/0009169004840496

- 10 J.P. Naiman et al.
- 48. Tafti, A.P., Baghaie, A., Assefi, M., Arabnia, H.R., Yu, Z., Peissig, P.: Ocr as a service: an experimental evaluation of google docs ocr, tesseract, abbyy finereader, and transym. In: Advances in Visual Computing: 12th International Symposium, ISVC 2016, Las Vegas, NV, USA, December 12-14, 2016, Proceedings, Part I 12. pp. 735–746. Springer (2016)
- 49. Urban, M.: An introduction to LATEX. TEX users group (1986)
- 50. Xue, L., Barua, A., Constant, N., Al-Rfou, R., Narang, S., Kale, M., Roberts, A., Raffel, C.: ByT5: Towards a Token-Free Future with Pre-trained Byte-to-Byte Models. Transactions of the Association for Computational Linguistics 10, 291–306 (2022). https://doi.org/10.1162/tacl\_a\_00461, place: Cambridge, MA Publisher: MIT Press
- 51. Zaytsev, A.: Hathitrust and a mission for accessibility. Journal of Electronic Publishing **18**(3) (2015)
- 52. Zharikov, I., Nikitin, F., Vasiliev, I., Dokholyan, V.: DDI-100: Dataset for Text Detection and Recognition. In: Proceedings of the 2020 4th International Symposium on Computer Science and Intelligent Control. pp. 1–5 (Nov 2020). https://doi.org/10.1145/3440084.3441192, arXiv:1912.11658 [cs]
- Zhu, W., Liu, Y., Hao, L.: A Novel OCR Approach Based on Document Layout Analysis and Text Block Classification. In: 2016 12th International Conference on Computational Intelligence and Security (CIS). pp. 91–94 (Dec 2016). https://doi.org/10.1109/CIS.2016.0029