

---

# ONLINE MULTIVARIATE CHANGEPOINT DETECTION: LEVERAGING LINKS WITH COMPUTATIONAL GEOMETRY

---

**Liudmila Pishchagina**

Université Paris-Saclay, CNRS, Univ Evry  
Laboratoire de Mathématiques et Modélisation d'Evry  
91037, Evry-Courcouronnes, France  
liudmila.pishchagina@univ-evry.fr

**Gaetano Romano**

Department of Mathematics and Statistics,  
Lancaster University, Lancaster LA1 4YF, UK  
g.romano@lancaster.ac.uk

**Paul Fearnhead**

Department of Mathematics and Statistics,  
Lancaster University, Lancaster LA1 4YF, UK  
p.fearnhead@lancaster.ac.uk

**Vincent Runge**

Université Paris-Saclay, CNRS, Univ Evry  
Laboratoire de Mathématiques et Modélisation d'Evry  
91037, Evry-Courcouronnes, France  
vincent.runge@univ-evry.fr

**Guillem Rigail**

Université Paris-Saclay, CNRS, Univ Evry  
Laboratoire de Mathématiques et Modélisation d'Evry  
91037, Evry-Courcouronnes, France

Université Paris-Saclay, CNRS, INRAE, Univ Evry  
Institute of Plant Sciences Paris-Saclay (IPS2)  
Orsay, France  
guillem.rigail@inrae.fr

July 31, 2024

## ABSTRACT

The increasing volume of data streams poses significant computational challenges for detecting changepoints online. Likelihood-based methods are effective, but a naive sequential implementation becomes impractical online due to high computational costs. We develop an online algorithm that exactly calculates the likelihood ratio test for a single changepoint in  $p$ -dimensional data streams by leveraging fascinating connections with computational geometry. This connection straightforwardly allows us to recover sparse likelihood ratio statistics exactly: that is assuming only a subset of the dimensions are changing. Our algorithm is straightforward, fast, and apparently quasi-linear. A dyadic variant of our algorithm is provably quasi-linear, being  $\mathcal{O}(n \log(n)^{p+1})$  for  $n$  data points and  $p$  less than 3, but slower in practice. These algorithms are computationally impractical when  $p$  is larger than 5, and we provide an approximate algorithm suitable for such  $p$  which is  $\mathcal{O}(np \log(n)^{\tilde{p}+1})$ , for some user-specified  $\tilde{p} \leq 5$ . We derive some statistical guarantees for the proposed procedures in the Gaussian case, and confirm the good computational and statistical performance, and usefulness, of the algorithms on both empirical data and on NBA data.

**Keywords** computational geometry, convex hull, dynamic programming, functional pruning, online changepoint detection.

## 1 Introduction

In recent years, many methods have been proposed for detecting one or multiple changepoints offline or online in data streams. The reason for such a keen interest in changepoint detection methods lies in its importance for various real-world applications, including bioinformatics [1, 2], econometrics [3, 4], medicine [5, 6, 7], climate and oceanography [8, 9, 10, 11, 12], finance [13, 14], autonomous driving [15], entertainment [16, 17, 18], computer vision [19] or neuroscience [20]. Whether this is online (i.e. observations are processed as they become available) or offline (i.e. observations are processed only once the whole data is available) the ever-increasing size of the data stream raises computational challenges. Ideally, a changepoint procedure should be linear or quasi-linear in the size of the data and, for online applications, should also be able to process new observations sequentially, and as quickly as they arrive. A common idea for both offline and online parametric (multiple) changepoint model estimation, is to optimise a likelihood function or calculate likelihood ratio statistics [21, 22]. From a computational perspective this optimisation can either be done (1) heuristically using, for example, Page CUSUM [23] in an online context or Binary Segmentation and its variants [24, 14] in an offline context, or (2) exactly using dynamic programming techniques as in the Segment Neighbourhood, or Optimal Partitioning algorithms [22, 25]. Importantly, these later algorithms used with an appropriate penalty enjoy good statistical properties [26, 27, 28, 29] and have shown good properties in numerous applications [30, 31].

Pruning ideas have emerged in the literature to speed up these dynamic programming algorithms without sacrificing their exactness [10, 32, 33, 34]. Two types of rules have been proposed. Inequality pruning rules, as in the PELT algorithm [10], apply to a wide range of changepoint models but are efficient only if the number of true changepoints increases quickly with the size of the data. Functional pruning, as in the pDPA, FPOP or FOCuS [32, 33, 34] algorithms, applies mostly to univariate models but is efficient even when the number of true changepoints is small in comparison to the size of the data. Interestingly, these algorithms are sequential in nature and empirically quasi-linear. This quasi-linearity was recently proven for the online detection of a single changepoint [34]. The pDPA, FPOP, and FOCuS algorithms rely on functionalisation of the problem, that is they consider the likelihood as a function of the last segment parameter. A direct extension of these ideas to a higher dimension ( $p > 1$ ) has proven difficult because it involves computing the intersection and subtraction of many convex sets in  $\mathbb{R}^p$  [35, 36].

In this paper, we study online models with one changepoint, where the likelihood can be algebraically written as a log-likelihood from the  $p$ -variate natural exponential family. This includes, for example, the Gaussian, Poisson, categorical and Pareto type-I distribution (assuming the minimum value is known) and also (see Section 5) non-parametric e-detectors [37]. We extend the functional pruning approach to such  $p$ -variate models using a linearisation argument embedding all likelihoods into a bigger space of dimension  $p + 2$ . This idea allows us to demonstrate a link between the functional problem and problems studied in computational geometry.

In particular, we show that the solutions of this extension correspond to identifying the supporting hyperplanes of a particular half-space intersection problem and for models with one changepoint demonstrate that this problem further simplifies and is dual to a lower dimensional convex hull problem of dimension  $p + 1$ . In this later case, we further prove, assuming i.i.d data, that the number of points on this hull at time  $n$  is asymptotically  $\mathcal{O}(\log^p(n))$ . Leveraging this leads to an empirically log-linear per iteration algorithm for calculating the likelihood ratio test statistics for a change at  $t$ .

At any time-step of this algorithm, we can exactly compute the maximum likelihood ratio-statistics and maximum sparse likelihood ratio-statistics allowing only  $s$  coordinates to change with  $s \leq p$ . In Supplementary Material H, we derive non-asymptotic bounds of these statistics to control the false alarm rate and derive a bound on the expected detection delay. While the computational cost is quasi-linear, our exact algorithms become impractical for large  $p$ , due to the  $\log^p(n)$  scaling. For such cases we provide an approximation storing only an order of  $\mathcal{O}(p \log^{\tilde{p}}(n))$  candidates on the hull, where  $\tilde{p} \leq p$  is chosen by the user.

The paper has the following structure. Section 2 describes the maximum likelihood framework we are using. Section 3 presents the mathematical formulation of the functional pruning problem and how it is related to a half-space intersection problem and a convex hull problem. In Section 4, the theory from Section 3 is applied to the online detection of a single changepoint with known or unknown pre-changepoint parameter. The proposed method, called MdFOCuS, is introduced in Subsection 4.3 followed with dyadic, sparse, and approximation variants in Subsection 4.4. We provide, in the Gaussian setting with known pre-change parameter, statistical guarantees (on the false alarm rate, and the detection delay) in Subsection 4.5. In Section 4.6, empirical efficiency comparisons of MdFOCuS in dimension  $p$  with  $p \times$ FOCuS [34] and ocd [38] are performed on simulated data. In Section 5 we apply our methodology to track the performances of an NBA team and discuss how our theory could accelerate the recently proposed non-parametric e-detectors [37].

## 2 Maximum Likelihood Methods for Online Single Changepoint Detection

### 2.1 Problem set-up

We consider observations  $\{y_t\}_{t=1,2,\dots}$  in  $\mathbb{R}^{p'}$  and wish to detect the possible presence of a changepoint and estimate its location. If there is a change, we denote the time of the change as  $\tau$ . We will consider likelihood-based methods for doing this, which involve postulating a model for the data within each segment between consecutive data points. Our model will be that the data point  $y_t$  is independent and identically distributed from a distribution with density  $f_Y(y_t|\theta_1)$  before the change and  $f_Y(y_t|\theta_2)$  after the change.

At time  $n$  twice the log-likelihood for the time series  $\{y_t\}_{t=1,\dots,n}$ , in terms of the pre-changepoint parameter,  $\theta_1$  in  $\mathbb{R}^{p'}$ , the post-changepoint parameter,  $\theta_2$  in  $\mathbb{R}^{p'}$ , and the location of a change,  $\tau$ , is

$$\ell_{\tau,n}(\theta_1, \theta_2) = 2 \left( \sum_{t=1}^{\tau} \log f_Y(y_t|\theta_1) + \sum_{t=\tau+1}^n \log f_Y(y_t|\theta_2) \right). \quad (1)$$

Depending on the application one may assume that the pre-changepoint parameter  $\theta_1$  is either known or unknown. In either case, we can get the log-likelihood for a changepoint at  $\tau$  by maximising this equation over the unknown parameter, so  $\theta_2$  if the pre-changepoint parameter is known or both  $\theta_1$  and  $\theta_2$  otherwise. In practice we do not know the changepoint location, so we would maximise this log-likelihood over  $\tau$ . We can define the maximum likelihood estimator for  $\tau$ , for the pre-changepoint parameter being either known or unknown respectively, as

$$\begin{aligned} \hat{\tau}(\theta_1) &= \arg \max_{\tau} (\max_{\theta_2} \ell_{\tau,n}(\theta_1, \theta_2)), \\ \hat{\tau}(\cdot) &= \arg \max_{\tau} (\max_{\theta_1, \theta_2} \ell_{\tau,n}(\theta_1, \theta_2)). \end{aligned}$$

We then obtain a Generalized Likelihood Ratio (GLR) statistic [21] for a change  $\tau$  by comparing with twice the log-likelihood for a model with no change. That is  $2 \sum_{t=1}^n \log f_Y(y_t|\theta_1)$  if  $\theta_1$  is known and  $\max_{\theta_1} 2 \sum_{t=1}^n \log f_Y(y_t|\theta_1)$  if it is not. Often it is appropriate (see for example [38]) to consider a sparse version of the likelihood that allows only  $s$  coordinates to jump that is  $s = \|\theta_1 - \theta_2\|_0$ , where  $\|\mathbf{v}\|_0$  is equal to the number of non-zero entries of  $\mathbf{v}$ .

$$\hat{\tau}^s(\theta_1) = \arg \max_{\tau} \left( \max_{\substack{\theta_2 \\ \|\theta_1 - \theta_2\|_0 = s}} \ell_{\tau,n}(\theta_1, \theta_2) \right), \quad (2)$$

$$\hat{\tau}^s(\cdot) = \arg \max_{\tau} \left( \max_{\substack{\theta_1, \theta_2 \\ \|\theta_1 - \theta_2\|_0 = s}} \ell_{\tau,n}(\theta_1, \theta_2) \right). \quad (3)$$

It should be clear that  $\hat{\tau}^p(\theta_1) = \hat{\tau}(\theta_1)$  and  $\hat{\tau}^p(\cdot) = \hat{\tau}(\cdot)$ .

Offline, optimising Equation (1) is simple. Indeed assuming we have access to all the data it suffices to compute, for every possible changepoint location from 1 to  $n - 1$ , the likelihood (which can be done efficiently using summary statistics) and then pick the best value. Online, the problem is substantially more difficult as one needs to recompute the maximum for every new observation. Applying the previous offline strategy for every new observation is inefficient as it takes order  $n$  to process the  $n$ th observation. It is infeasible for an online application, where  $n$  grows unbounded, and for this reason various heuristic strategies have been proposed (see [39] for a recent review). From a computational perspective, we roughly identify two main types of heuristics. The first idea is to restrict the set of possible  $(\theta_1, \theta_2)$  pairs to be discrete. The simplest case is to consider just one pair of  $(\theta_1, \theta_2)$  as in the Page CUSUM strategy [23] but one typically considers a grid of values [38]. The second idea is to restrict the set of changepoint locations one considers. The simplest case is arguably to consider a grid of window lengths  $w_1, \dots, w_M$  and at time  $n$  compute the GLR statistic only for changes at  $\tau = n - w_1, \dots, n - w_M$  [40, 41]. But this naturally introduces a trade-off between computational efficiency and statistical power: the larger the grid of windows, the larger the computational overhead [39].

Recently, the FOCuS algorithm has been introduced that calculates the maximum likelihood and likelihood ratio test exactly but with a per-iteration cost that increases only logarithmically with the amount data [34, 42] - however this algorithm is only applicable for detecting changes in a univariate feature of a data stream. A key insight from the FOCuS algorithm is that to maximise the likelihood one only needs to consider changes that correspond to points on a particular convex hull in the plane. This link to geometrical features of the data is one that we leverage later in developing algorithms for detecting changes in multivariate features.

## 2.2 Detection of a single change in the parameter of distribution in the exponential family

We briefly introduce our basic notations. We use  $\mathbf{1}_p$  to denote a vector of length  $p$  in which all elements are set to one. For any vector  $\mu = (\mu^1, \dots, \mu^p)$  in  $\mathbb{R}^p$ , we define its  $q$ -norm as  $\|\mu\|_q := (\sum_{k=1}^p |\mu^k|^q)^{1/q}$ , where  $(q > 1)$  in  $\mathbb{R}$ . For two vectors,  $\mu_1 = (\mu_1^1, \dots, \mu_1^p)$  and  $\mu_2 = (\mu_2^1, \dots, \mu_2^p)$  in  $\mathbb{R}^p$ , we define their scalar product as  $\langle \mu_1, \mu_2 \rangle = \sum_{k=1}^p \mu_1^k \mu_2^k$ . The symbol  $|\cdot|$  signifies the cardinality of  $\cdot$  depending on the context.

We are now ready to describe our model. We assume that the density  $f_Y(y_t|\theta_k)$ , for observation  $y_t$  in segment  $k \in \{1, 2\}$  which has segment-specific parameter  $\theta_k$ , can be written in the form

$$f_Y(y_t|\theta_k) = \exp \left\{ -\frac{1}{2} [A'(r(\theta_k)) - 2\langle r(\theta_k), s(y_t) \rangle + B'(s(y_t))] \right\}, \quad (4)$$

where  $s$  and  $r$  are functions mapping respectively the observations,  $y_t$ , and the parameters,  $\theta_k$ , to  $\mathbb{R}^p$ ,  $A'$  is some convex function from  $\mathbb{R}^p$  to  $\mathbb{R}$ , and  $B'$  from  $\mathbb{R}^p$  to  $\mathbb{R}$ . Defining the natural parameter  $\eta_k$  as  $\eta_k = r(\theta_k)$ , and  $x_t$  as  $x_t = s(y_t)$  we rewrite this density as a function of  $\eta_k$  and  $x_t$ :

$$f_X(x_t|\eta_k) = \exp \left\{ -\frac{1}{2} [A'(\eta_k) - 2\langle \eta_k, x_t \rangle + B'(x_t)] \right\}. \quad (5)$$

This class encompasses many common exponential family models, see Table 1 for examples of several models of changes in the mean of  $p$ -variate data (where  $p = p' = p''$ ) and the corresponding functions  $s$ ,  $r$ ,  $A'$  and  $B'$ . Later we will model a change in the mean ( $\theta_1$ ) and variance ( $\theta_2$ ) (so  $p'' = 2$ ) of a Gaussian signal in  $\mathbb{R}$  (so  $p' = 1$ ). In this slightly more complex case we have  $p' \neq p = 2$  and we can define  $s$ ,  $r$ ,  $A'$  and  $B'$  as follows

$$\theta = (\theta_1, \theta_2), \quad \eta = \left( \frac{\theta_1}{\theta_2}, -\frac{1}{2\theta_2} \right), \quad s(y) = (y, y^2), \quad A'(\eta) = \frac{\theta_1^2}{\theta_2} - \log(\theta_2), \quad B'(x) = \log(2\pi).$$

Let us denote the pre-change-point natural parameter as  $\eta_1$  and the post-change-point natural parameter by  $\eta_2$ . We can then define the log-likelihood of our (transformed) data  $x_1, \dots, x_t$ , under a model with a change at  $\tau$  as

$$\ell_{\tau,n}(\eta_1, \eta_2) = -\sum_{t=1}^{\tau} [A'(\eta_1) - 2\langle x_t, \eta_1 \rangle + B'(x_t)] - \sum_{t=\tau+1}^n [A'(\eta_2) - 2\langle x_t, \eta_2 \rangle + B'(x_t)]. \quad (6)$$

The log-likelihood estimator for  $\tau$ , for the pre-change parameter being either known or unknown respectively, is

$$\begin{aligned} \hat{\tau}(\eta_1) &= \arg \max_{\tau} (\max_{\eta_2} \ell_{\tau,n}(\eta_1, \eta_2)), \\ \hat{\tau}(\cdot) &= \arg \max_{\tau} (\max_{\eta_1, \eta_2} \ell_{\tau,n}(\eta_1, \eta_2)). \end{aligned}$$

The GLR statistic for a change  $\tau$  is obtained by comparing with  $\sum_{t=1}^n [A'(\eta_1) - 2\langle x_t, \eta_1 \rangle + B'(x_t)]$  if  $\eta_1$  is known and with  $\max_{\eta_1} \sum_{t=1}^n [A'(\eta_1) - 2\langle x_t, \eta_1 \rangle + B'(x_t)]$  if it is not.

For any fixed  $\eta_1$  and any  $\eta_2$  the addition of  $\sum_{t=1}^n [A'(\eta_2) - 2\langle x_t, \eta_2 \rangle + B'(x_t)]$  to (6) does not change the arg-maximiser:  $\arg \max_{\tau} \ell_{\tau,n}(\eta_1, \eta_2)$ . Moreover, this addition eliminates the dependence on  $n$ . Hence when searching for the maximum likelihood change we can redefine  $\ell_{\tau,n}(\eta_1, \eta_2)$  as follows:

$$\ell_{\tau}(\eta_1, \eta_2) = \tau [A'(\eta_2) - A'(\eta_1)] - 2 \left\langle \sum_{t=1}^{\tau} x_t, \eta_2 - \eta_1 \right\rangle, \quad (7)$$

and be sure that the optimal change optimises  $\ell_{\tau}(\eta_1, \eta_2)$  at least for a pair  $(\eta_1, \eta_2)$ .

**Remark 1.** In some changepoint problems it might make sense to regularise the parameters. This can be done by adding a function of the parameter  $\Omega(\eta_1, \eta_2)$  to the likelihood in Equation (6). For example, one could consider a lasso penalty on  $\eta_1$  (that is,  $\Omega(\eta_1, \eta_2) = \lambda \|\eta_1\|_1$  for some  $\lambda > 0$ ) to favour many  $\eta_1$  coordinates being exactly zero. We will not study this further in the rest of the paper, but by the previous addition trick any such regularisation term could be subtracted, and therefore the rest of our argument would hold.

For all subsequent proofs, it will suffice to study the special case where  $\eta_1$  is known. Our results for the unknown case (on  $\hat{\tau}(\cdot)$  in Theorem 5) are derived as a by-product: considering all possible  $\eta_1$  simultaneously and realising they all lead to the same geometrical problem. Considering  $\eta_1$  to be fixed we thus introduce the following definitions:

$$\mu = \eta_2 - \eta_1, \quad A(\mu) = A'(\mu + \eta_1) - A'(\eta_1),$$

and rewrite the function  $\ell_{\tau}(\eta_1, \eta_2)$  as a function of  $\mu$ :

$$\ell_{\tau}(\mu) = \tau A(\mu) - 2 \left\langle \sum_{t=1}^{\tau} x_t, \mu \right\rangle. \quad (8)$$



Table 1: Modelling a change in the mean of a  $p$ -variate data with independent Gaussian (known variance), Poisson, Binomial, Exponential, and Pareto type-I errors. Examples of distributions from the natural exponential family with a parameter  $\theta$  in  $\mathbb{R}^p$  and the corresponding forms of the functions  $s$ ,  $r$ ,  $A'$ , and  $B'$ . Without loss of generality, the variance of the Gaussian model is assumed to be 1 for all dimensions. The number of trials is assumed to be  $m$  for all dimensions in the Binomial model. For the Pareto type-I model, the minimum value for each dimension, denoted  $y_m$ , is assumed to be known.

Distribution	$\eta := r(\theta)$	$x := s(y)$	$A'(\eta)$	$B'(x)$
Gaussian (changes in mean)	$\theta$	$y$	$\ \eta\ ^2$	$\ x\ ^2 + \log(2\pi)^p$
Poisson	$\log \theta$	$y$	$2 \langle e^\eta, \mathbf{1}_p \rangle$	$2 \langle \log x!, \mathbf{1}_p \rangle$
Binomial	$\log \frac{\theta}{1-\theta}$	$y$	$2m \langle \log(1 + e^\eta), \mathbf{1}_p \rangle$	$-2 \left\langle \log \binom{m}{x}, \mathbf{1}_p \right\rangle$
Exponential	$-\theta$	$y$	$-2 \langle \log(-\eta), \mathbf{1}_p \rangle$	0
Pareto type-I	$-\theta - 1$	$\log(y)$	$-2 \langle \log(-1 - \eta), \mathbf{1}_p \rangle + 2 \langle 1 + \eta, \log(y_m) \rangle$	0

### 3 Linear Relaxation of the Functional Pruning Problem

#### 3.1 Mathematical Formulation

Functional pruning ideas give the potential of an efficient approach to recursively calculate the GLR statistic for a change at time  $n + 1$  given calculations at time  $n$  [34]. The idea is to restrict the set of possible changepoints prior to  $n + 1$  that we need to consider. Working out which changepoint locations we need to consider is obtained by viewing the GLR statistic as a function of the post-changepoint parameter difference  $\mu = \eta_2 - \eta_1$  (see Equation (8)), and finding the set of changepoint locations which contribute to this, i.e. for which the GLR statistic is maximum for some value of  $\mu$ .

In more details, at step  $n$  of a functional pruning algorithm, we consider a list of possible changepoints  $\tau$  of the data from  $x_1, x_2 \dots$  to  $x_n$ . Each changepoint is represented by a function  $f_\tau$  of the last segment parameter  $\mu$  and a set of  $\mu$  values for which it is maximising the likelihood:  $Set_\tau = \{\mu | \forall \tau' \neq \tau, f_\tau(\mu) > f_{\tau'}(\mu)\}$ . To proceed to the next data point  $n + 1$  the update is informally done as follows.

1. We include in the list of segmentations the one with a last change at  $n$  which is represented by a function  $f_n$ .
2. We compare all other functions to this new function and accordingly restrict the set of  $\mu$  for which they are optimal. That is we compute the intersection  $Set_\tau \leftarrow Set_\tau \cap \{\mu | f_\tau(\mu) > f_n(\mu)\}$  for all  $\tau < n$ , and the intersection  $Set_n \leftarrow \cap_\tau \{\mu | f_n(\mu) > f_\tau(\mu)\}$ .
3. We discard all changepoints whose set  $Set_\tau$  is empty.

The left column of Figure 1 provides a graphical representation of these steps. The pruning of the third step is valid because whatever the data points after  $n + 1$  might be these functions (or equivalently changepoints) can never maximise the log-likelihood. Formally, we now consider a set  $\mathcal{T}$  indexing functions  $f_\tau$  such that

$$f_\tau(\mu) = a_\tau A(\mu) - 2 \langle \mu, b_\tau \rangle + c_\tau, \quad (9)$$

where  $a_\tau, c_\tau$  are in  $\mathbb{R}$ , and  $b_\tau$  is in  $\mathbb{R}^p$  and  $A$  is a convex function from  $\mathcal{D}_A$ , a subset of  $\mathbb{R}^p$ . We define  $Im(A)$  as the image of the function  $A$ . The idea is that at the current step of a functional pruning algorithm we are storing functions of the post-changepoint parameter difference, here denoted by  $\mu$ . Function  $f_\tau$  corresponds to the log-likelihood for a segmentation with a change at  $\tau$  and with parameter difference  $\mu$ . This function will depend on  $\mu$  through the log-likelihood contribution of the data in this segment, which will impact all the coefficients and the maximum log-likelihood for data in earlier segments. The functional form of  $f_\tau$  will depend on the specific likelihood model. As an example, for detecting a change in the mean of Gaussian data with  $\eta_1 = 0$ , we would have  $A(\mu) = \|\mu\|^2$ , with  $Im(A) = \mathbb{R}^+$  and  $\mathcal{D}_A = \mathbb{R}^p$ .

We then define

$$F_{\mathcal{T}}(\mu) = \max_{\tau \in \mathcal{T}} \{f_\tau(\mu)\},$$

and, as informally stated, our goal is to recover all the indices  $\tau$  maximising  $F_{\mathcal{T}}$  for at least one value of  $\mu$ . Formally, we define:

$$\mathcal{F}_{\mathcal{T}} = \{\tau | \exists \mu \in \mathcal{D}_A \subset \mathbb{R}^p, \forall \tau' \in \mathcal{T} \text{ with } \tau' \neq \tau : f_\tau(\mu) > f_{\tau'}(\mu)\}. \quad (10)$$

**Remark 2.** Index set  $\mathcal{F}_{\mathcal{T}}$  is defined using a strict inequality. As function  $A$  is strictly convex, (and assuming that for all  $\tau \neq \tau'$  we cannot have simultaneously  $a_\tau = a_{\tau'}$ ,  $b_\tau = b_{\tau'}$  and  $c_\tau = c_{\tau'}$ ) equality can be obtained only over a set of zero measure, consequently this case can be ignored.

### 3.2 Linearisation of the Functional Pruning Problem

The size of the set  $\mathcal{F}_{\mathcal{T}}$  depends on the nature of the function  $A$ . In essence, to consider any possible function  $A$ , we introduce a new parameter  $\lambda$  to replace  $A(\mu)$ . This way we get a problem that does not depend on the form of  $A$  and, as we will see, is easier to solve, albeit at the cost of an additional dimension. To be specific, for any function  $\mu \mapsto f_{\tau}(\mu)$  we associate an (augmented) function  $(\lambda, \mu) \mapsto g_{\tau}(\lambda, \mu)$  defined as:

$$g_{\tau}(\lambda, \mu) = a_{\tau}\lambda - 2\langle \mu, b_{\tau} \rangle + c_{\tau}.$$

As for the  $f_{\tau}$ , we define the maximum  $G_{\mathcal{T}}(\lambda, \mu)$  as

$$G_{\mathcal{T}}(\lambda, \mu) = \max_{\tau \in \mathcal{T}} \{g_{\tau}(\lambda, \mu)\}.$$

Again our goal will be to recover the index  $\tau$  strictly maximising  $G_{\mathcal{T}}$ :

$$\mathcal{G}_{\mathcal{T}} = \{\tau \mid \exists (\lambda, \mu) \in \text{Im}(A) \times \mathcal{D}_A, \forall \tau' \in \mathcal{T} \text{ with } \tau' \neq \tau : g_{\tau}(\lambda, \mu) > g_{\tau'}(\lambda, \mu)\}.$$

In the previous definition, the parameter  $\lambda$  is constrained to be in the image of the function  $A$ . The values attained by  $f_{\tau}$  are also attained by  $g_{\tau}$  on a parametric curve of the  $(\lambda, \mu)$  space given by equation  $\lambda = A(\mu)$ , so that  $f_{\tau}(\mu) = g_{\tau}(A(\mu), \mu)$ . This trivially leads to the following result that the set of  $\tau$  strictly maximising  $\mathcal{G}_{\mathcal{T}}$  must contain the set strictly maximising  $\mathcal{F}_{\mathcal{T}}$ .

**Theorem 1.**  $\mathcal{F}_{\mathcal{T}} \subseteq \mathcal{G}_{\mathcal{T}}$ .

Without any further assumptions on the function  $A$ , the set  $\mathcal{G}_{\mathcal{T}}$  could be much larger than  $\mathcal{F}_{\mathcal{T}}$ . The following theorem demonstrates that equality holds for strictly convex power functions.

**Theorem 2.** *If for all  $\tau \in \mathcal{T}$ ,  $c_{\tau} = 0$  and  $A(\mu) = \|\mu\|^q$  with  $q > 1$ , then  $\mathcal{F}_{\mathcal{T}} = \mathcal{G}_{\mathcal{T}}$ .*

The proof of this Theorem can be found in Supplementary Material A.1.

**Remark 3.** *In particular, with  $q = 2$  we get the Gaussian loss function with  $\eta_1 = 0$ . Assuming  $\eta_1 = 0$  is not restrictive because if  $\eta_1$  is not 0 we can consider the translated data  $(x_t - \eta_1)$ .*

**Remark 4.** *A more general approach with milder conditions for function  $A$  is proposed in Supplementary Material B. One sufficient condition consists of the strong convexity of the function  $A$  with  $A(0) = 0$ .*

### 3.3 Half-space intersections and functional pruning

All  $g_{\tau}$  functions are linear in  $(\lambda, \mu)$ . Considering yet another variable  $\kappa$  we can associate to every  $g_{\tau}$  a function  $h_{\tau}$  and a half-space  $H_{\tau}$  of  $\mathbb{R}^{p+2}$ :

$$H_{\tau} = \{\kappa, \lambda, \mu \mid h_{\tau}(\kappa, \lambda, \mu) = a_{\tau}\lambda - 2\langle b_{\tau}, \mu \rangle + c_{\tau} - \kappa \leq 0\}.$$

From here we straightforwardly get that our linearised functional problem is included in a half-space intersection problem. This result is formalised in the following theorem.

**Theorem 3.** *If  $\tau$  is in  $\mathcal{G}_{\mathcal{T}}$  then*

1. *there exists  $(\kappa, \lambda, \mu)$  such that  $h_{\tau}(\kappa, \lambda, \mu) = 0$  and for all  $\tau' \neq \tau$ ,  $h_{\tau'}(\kappa, \lambda, \mu) < 0$ ;*
2. *the hyperplane defined by  $h_{\tau}(\kappa, \lambda, \mu) = 0$  is a supporting hyperplane of the set  $\cap_{\tau} H_{\tau}$ .*

**Remark 5.** *The set  $\cap_{\tau} H_{\tau}$  defines an unbounded polyhedron as taking any  $\kappa \geq \max_{\tau} \{c_{\tau}\}$ ,  $\lambda = 0$ , and  $\mu = 0$  we solve all inequalities.*

In Figure 1 we illustrate our linearised functional problem for the special case where, for all  $\tau$  in  $\mathcal{T}$ ,  $c_{\tau} = 0$ .

Computing the intersection of  $|\mathcal{T}|$  half-spaces is a well-studied problem in computational geometry. It is closely related to the convex hull problem by projective duality [43] and several algorithms have been proposed (see for example [44, 45, 46, 47, 48, 49]). See [50] for a recent short introduction to this topic.

### 3.4 Projective-duality

In this section we study the special case where for all  $\tau$  in  $\mathcal{T}$   $c_{\tau} = 0$ . The following theorem states that in this case the half-space intersection problem in dimension  $p + 2$  is dual to a convex hull problem in dimension  $p + 1$ .

**Theorem 4.** *If for all  $\tau$  in  $\mathcal{T}$ ,  $c_{\tau} = 0$ , then  $\tau$  being in  $\mathcal{G}_{\mathcal{T}}$  is equivalent to the point  $(a_{\tau}, b_{\tau})$  in  $\mathbb{R}^{p+1}$  being a vertex of the convex hull of  $\{(a_{\tau}, b_{\tau})\}_{\tau \in \mathcal{T}}$ .*

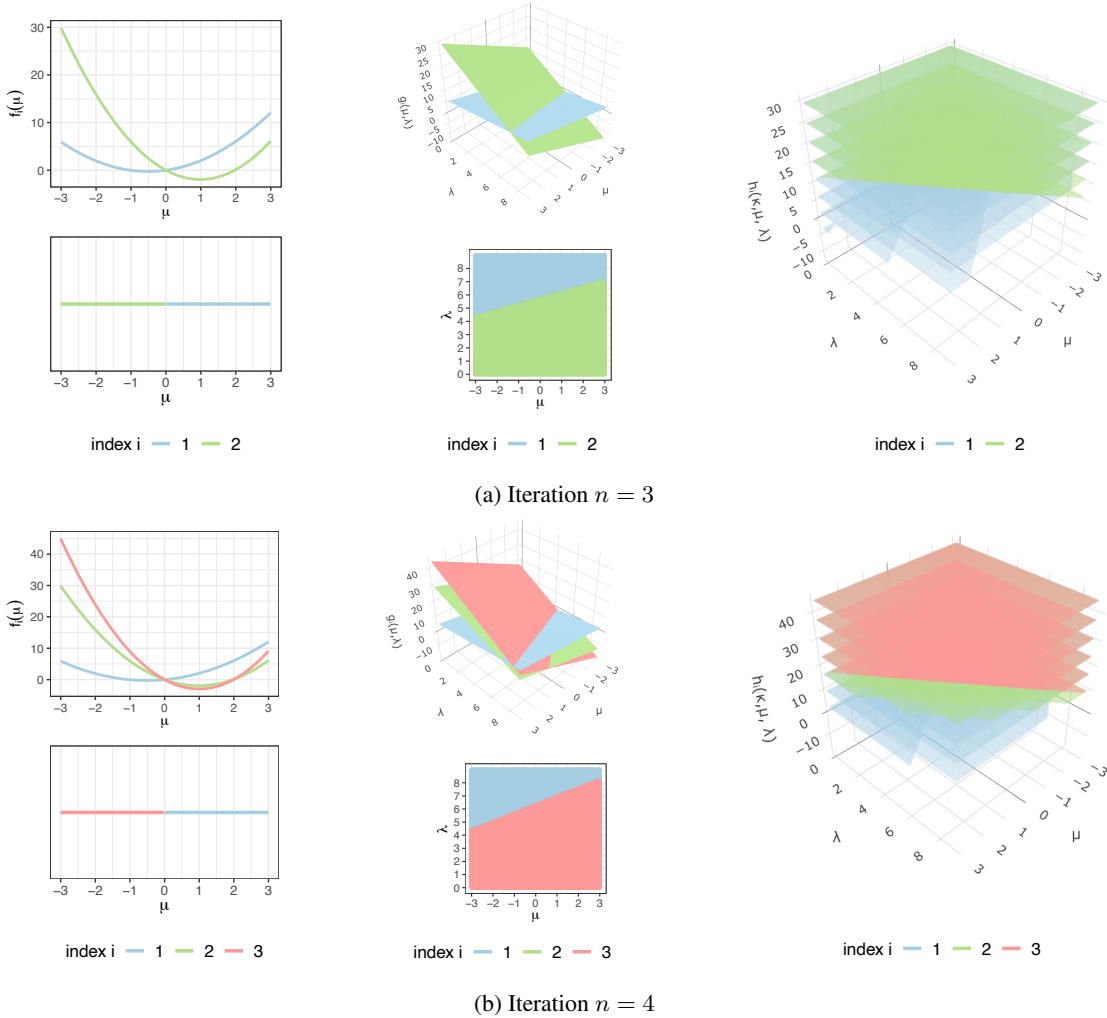


Figure 1: Example of the functional pruning problem and linearised functional problem over times:  $f_i$  and  $\text{proj}\{\max_i\{f_i(\mu)\}\}$  functions (left);  $g_i$  and  $\text{proj}\{\max_i\{g_i(\mu, \lambda)\}\}$  functions (middle); the level surfaces of  $h_i$  functions, where each surface is for a fixed  $\kappa$  value (right) for changepoint candidates  $i \in \mathcal{T}$ . We simulate time series  $\{x_t\}_{t=1,2,\dots} \sim \mathcal{N}(0, 1)$  and consider two time-steps,  $n = 3$  and  $n = 4$ . We define the coefficients  $a_i$  as  $i$ ,  $b_i$  as  $\sum_{t=1}^i x_t$  and  $c_i$  as zero. Note that the change  $i = 2$  associated with quadratics  $f_2$  and surface  $g_2$  is pruned at  $n = 4$ .

The proof can be found in Supplementary Material A.2.

We illustrate the points on the convex hull of Theorem 4 for  $p = 1$  and  $p = 2$  in Figure 2. As will be seen in Section 4 this is relevant for the online detection of a single changepoint (see also Equation (8)). Importantly, computing the convex hull of  $|\mathcal{T}|$  points is a well-studied problem in computational geometry. Over the years many algorithms have been developed [51, 52, 48, 53, 54, 55, 56]. In the rest of this paper we will only use the *QuickHull* algorithm of [48] and its implementation in the *qhull* library <http://www.qhull.org/>. The *QuickHull* algorithm works in any dimension and is reasonably fast for our application up to  $p = 5$ .

## 4 On The Detection of a Single Changepoint Online

### 4.1 From Functional Description to Convex Hull

We now apply the results of Section 3 to the problem of detecting a single changepoint described in Section 2.2, to develop an efficient online algorithm. To do this, it is helpful to define a one-to-one mapping  $P$  between any changepoint

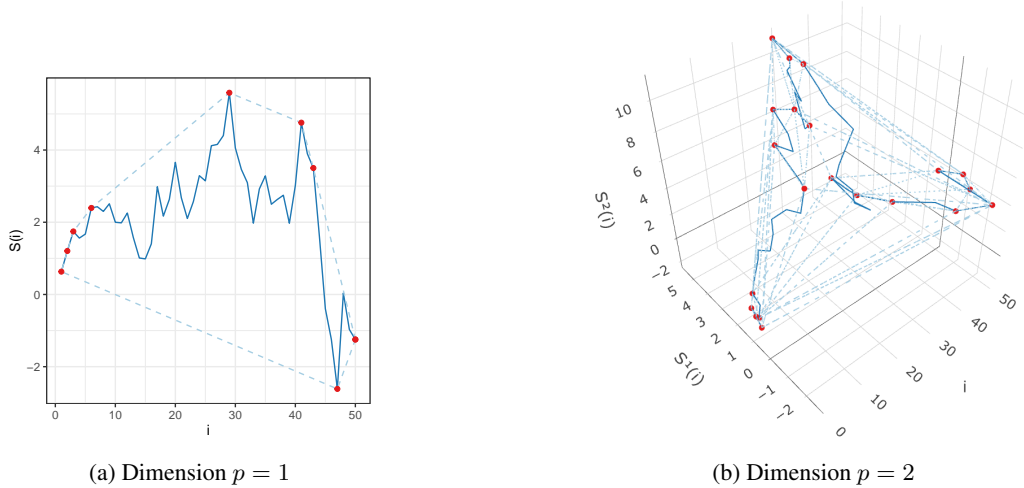


Figure 2: Plot of  $S(i) = \sum_{t=1}^i x_t$  as a function of  $i$  (dark blue) and the convex hull of  $\{(a_i = i, b_i = S(i))\}_{i \in \{1, \dots, n-1\}}$  (dashed blue line) for dimensions  $p = 1$  and  $2$ . The vertices of the convex hull  $\tau \in \mathcal{T}$  are marked in red. We simulated time series  $\{x_t\}_{t \in \{1, \dots, n\}}$  with  $n = 51$  data points (without changepoints,  $x_t \sim \mathcal{N}(0, I_p)$  i.i.d.).

$\tau$  and a point in dimension  $p + 1$ :

$$P(\tau) = \left( \tau, \sum_{t=1}^{\tau} x_t \right).$$

The following theorem, based on Theorem 4 essentially states that the changepoint maximising the likelihood (6) for some value  $\eta_1$  and  $\eta_2$  corresponds to a points on a particular convex hull.

**Theorem 5.** *Assume the log-likelihood,  $\ell_{\tau, n}(\eta_1, \eta_2)$  of a change at  $\tau$  in  $\{1, \dots, n-1\}$  can be written as in Equation (6). Then, for any  $\eta_1$  and  $s \leq p$  taking  $\hat{\tau} = \hat{\tau}^s(\eta_1)$  or  $\hat{\tau}^s(\cdot)$  we have that  $P(\hat{\tau})$  is on the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ .*

The proof of this theorem can be found in Supplementary Material A.3.

Theorem 5 is coherent with the notion of pruning as in the FOCuS algorithm [34]. If  $P(\tau_0)$  is strictly inside the hull (i.e. not on the boundary of the hull  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ ) at time  $n$ , then it is certainly inside the hull at any future time  $n' \geq n$  (i.e. not on the boundary of the hull  $\{P(\tau)\}_{\tau \in \{1, \dots, n'-1\}}$ ). Thus based on Theorem 5 the likelihood associated with the change at time  $\tau_0$  will never be optimal after time  $n$ .

From a computational perspective, Theorem 5 is useful only if the set of points on the convex hull is significantly smaller than  $n$ . In the following subsections, we will prove using [57] that, under natural assumptions, the number of vertices of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  is of order  $2(\log n)^p$ . This shows that for sufficiently large  $n$  the number of candidate changepoints one needs to store to optimise the likelihood (or the likelihood ratio test) is much smaller than  $n$ .

## 4.2 Bound on The Number of Changepoint Candidates

In this subsection using the recent paper [57], we provide the expected number of faces and vertices of the convex hull  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ , assuming that the components of  $x_\tau$ ,  $x_\tau^d$  (with  $d = 1, \dots, p$ ), are independent and identically distributed with a continuous distribution. In turn, using Theorem 4 this gives us an upper bound on the expected number of changepoints that can maximise the likelihood function (6) for some value of  $\eta_1$  and  $\eta_2$ . From a computational perspective, this bound will be useful to derive guarantees on the computational complexity of the procedure (see Algorithms 1 and 3).

To apply the result of [57] we need to prove that the random walk  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}} = \{(\tau, \sum_{t=1}^{\tau} x_t)\}_{\tau \in \{1, \dots, n-1\}}$  satisfies two properties,  $(Ex)$  and  $(GP)$  defined below.

- $(Ex)$  For any permutation  $\sigma$  of the set  $\{1, \dots, n-1\}$ , we have the distributional equality

$$\{(1, x_\tau)\}_{\tau \in \{1, \dots, n-1\}} \stackrel{D}{=} \{(1, x_{\tau'})\}_{\tau' \in \sigma}$$

- (GP) Any  $p + 1$  vectors of the form  $(\tau, \sum_{t=1}^{\tau} x_t)$  are almost surely linearly independent.

**Lemma 1.** *Assuming that all  $x_{\tau}^d$  are independent and identically distributed with a continuous distribution, the properties (Ex) and (GP) of [57] are satisfied.*

The proof of this lemma can be found in Supplementary Material A.4.

We can now state the expected number of faces and vertices of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ .

**Theorem 6.** *Assuming all  $x_{\tau}^d$  (with  $d = 1, \dots, p$ ) are independent and identically distributed with a continuous distribution, then the expected number of faces (denoted as  $U_n^p$ ) and vertices (denoted as  $V_n^p$ ) of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  are the following:*

$$\mathbb{E}(U_n^p) = \frac{2p!}{(n-1)!} \left[ \begin{matrix} n \\ p+1 \end{matrix} \right], \quad \mathbb{E}(V_n^p) = \frac{2}{(n-1)!} \sum_{l=0}^{\infty} \left[ \begin{matrix} n \\ p+1-2l \end{matrix} \right],$$

where  $\left[ \begin{matrix} n \\ m \end{matrix} \right]$  are the Stirling numbers of the first kind [58].

*Proof.* Based on Lemma 1 properties (Ex) and (GP) hold and we can apply formula (2) from [57] on the expected values of  $U_n^p$  and  $V_n^p$ .  $\square$

**Corollary 1.** *We have the following equivalents for the expected numbers of faces  $U_n^p$  and vertices  $V_n^p$ :*

$$\mathbb{E}(U_n^p) \sim 2(\log(n))^p, \quad \mathbb{E}(V_n^p) \sim \frac{2}{p!}(\log(n))^p, \quad n \rightarrow \infty.$$

The proof of Corollary 1 follows from Remark 1.4 of [57]. The theorem and corollary provide an expected upper limit on the number of points, or candidate locations for changepoints, that need to be evaluated to compute the CUSUM likelihood ratio test (6) exactly without resorting to approximations. Although this limit increases as  $\mathcal{O}(\log(n)^p)$  and thus as a power of  $p$ , it is not overly restrictive. In some online applications, we often encounter situations where  $n \gg p$ , making an exact implementation feasible. In the following paragraph, we will evaluate scenarios up to 5 dimensions.

**Remark 6.** *Theorem 6 gives the expectation for i.i.d. observations. One might wonder what happens if there is a changepoint in the distribution at  $i < n$ . Note that the points on the hull  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  are necessarily on the hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, i\}}$  or on the hull of  $\{P(\tau)\}_{\tau \in \{i+1, \dots, n-1\}}$ . Thus applying the theorem on all points from 1 to  $i$  and from  $i+1$  to  $n-1$  we expect at most  $\mathbb{E}(V_{i+1}^p) + \mathbb{E}(V_{n-i}^p) \leq 2\mathbb{E}(V_n^p)$  points on the hull (as the expectation of  $V_i^p$  is increasing with  $i$ ). Thus if there is a changepoint (and assuming we haven't stop because the GLR statistics is lower than the specified threshold) the expected number of candidate changepoints is still in  $\mathcal{O}(\log(n)^p)$ .*

**Empirical validation of the bound** We empirically tested the validity of Theorem 6. We use the Gaussian distribution as an example of a distribution with continuous density and independent dimensions. To be specific, for  $p$  from 1 to 5, we simulated time series  $x_{1:n}$ , with  $x_t \sim \mathcal{N}_p(0, I_p)$  i.i.d. We varied the time series length from  $2^{10} + 1 (\approx 10^3)$  to  $2^{23} + 1 (\approx 8 \times 10^6)$  and simulated 100 data sets for each length. We used the *QuickHull* algorithm [48] implemented in the R package *geometry* [59] to evaluate the number of faces and vertices of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ . It can be seen in Figure 3 that the observed number of faces and vertices are close to their theoretical expectations (from Theorem 6). Additional details on the calculations of the Stirling numbers are provided in Supplementary Material C.

The proof of Theorem 6 depends on the fact that the distribution is continuous. We thus empirically tested the robustness of the expectations to this assumption by considering time series drawn with a discrete i.i.d. Poisson distribution. The results closely resemble the Gaussian case and details can be found in Supplementary Material E.2.

### 4.3 MdFOCuS(0): a Simple Online Algorithm

In this section we propose an algorithm to compute the GLR statistics at every time step  $n$  for a known and unknown  $\eta_1$ . In both cases, based on Theorem 5 we only need to consider the changepoints  $\tau$  such that  $P(\tau)$  is on the hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ .

Let us call  $\mathcal{T}_n$  the set of index  $\tau$  such that  $P(\tau) = (\tau, \sum_{t=1}^{\tau} x_t)$  is on the convex hull of all  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ . Restating Theorem 4, the changepoint  $\hat{\tau}$  maximising the likelihood (6) (i.e  $\hat{\tau}(\eta_1)$  if  $\eta_1$  is known or  $\hat{\tau}(\cdot)$  if it is not) is in  $\mathcal{T}_n$ . Hence, computationally speaking, at step  $n$  we only need to compute the likelihood (and likelihood ratio statistics)

of changepoints  $\tau$  in  $\mathcal{T}_n$ . Furthermore, as already explained after Theorem 5 we can prune all  $\tau$  that are not in  $\mathcal{T}_n$  as they will never be in  $\mathcal{T}_{n'}$  for any  $n' \geq n$ .

Computing the convex hull from scratch at every time step  $n$  is inefficient: it would require at least  $\mathcal{O}(n)$  operations and lead to an overall complexity at least quadratic in the number of data points. Ideally, we would like to update the hull using an efficient online or dynamic convex hull algorithm as the one in [60]. There exists implementations of such an algorithm in dimension  $p = 2$  [61] and  $p = 3$  [62]. However, out of simplicity, here we rely on an iterative use of the offline *QuickHull* algorithm [48] that also works for larger dimensions and is available in the *geometry* R package [59].

In detail, for any  $n' > n$  we have  $\mathcal{T}_{n'} \subset \mathcal{T}_n \cup \{n, \dots, n' - 1\}$ . Therefore if we have already computed  $\mathcal{T}_n$ , with *QuickHull*, when we compute  $\mathcal{T}_{n'}$  we need not restart from scratch but simply apply *QuickHull* to the points  $P(\tau)$  with  $\tau$  in  $\mathcal{T}_n \cup \{n, \dots, n' - 1\}$ . A first idea would be to apply the *QuickHull* algorithm at every time step  $n, n + 1, \dots$ , that is compute  $\mathcal{T}_n$  as the hull of all  $P(\tau)$  with  $\tau$  in  $\mathcal{T}_{n-1} \cup \{n\}$ . In practice, we discovered that running the *QuickHull* algorithm intermittently, rather than at every iteration, resulted in faster run times. Specifically, we maintain a set of linearly increasing indices, denoted as  $\mathcal{T}'_n$ , and only periodically execute *QuickHull* to reconstruct the true  $\mathcal{T}_n$ . More precisely, to decide when to run *QuickHull* we update a maximum size variable for  $\mathcal{T}'_n$  (denoted *maxSize*). Then, at step  $n + 1$ :

- either the size of  $\mathcal{T}'_n, |\mathcal{T}'_n|$ , is smaller than *maxSize* in that case we set  $\mathcal{T}'_{n+1}$  to  $\mathcal{T}'_n \cup \{n\}$ ,
- or it is larger and in that case we compute  $\mathcal{T}'_{n+1}$  as the convex hull of all  $P(\tau)$  with  $\tau$  in  $\mathcal{T}'_n \cup \{n\}$ .

In the later case we also update *maxSize* to  $\text{maxSize} = \lfloor \alpha |\mathcal{T}'_{n+1}| + \beta \rfloor$ , with  $\alpha \geq 1$  and  $\beta \geq 0$ . It is important to note that, in this way, we always retain a few more possible changepoints than necessary:  $\mathcal{T}_{n+1} \subseteq \mathcal{T}'_{n+1}$ .

Taking  $\beta = 1$  and  $\alpha = 1$ , we run the *QuickHull* algorithm at every time step. Increasing the value of  $\alpha$  allows to run it less often at the cost of having a longer list of indices  $\mathcal{T}'_n$ . In Figure 11 we considered different value for  $\alpha$  with  $\beta = 1$  and found that a value of  $\alpha = 2$  gives good practical performances (see Supplementary Material E.1).

A formal description of our procedure, called MdFOCuS if  $\eta_1$  is unknown and MdFOCuS0 if it is, is available in Algorithm 1. The only difference between MdFOCuS and MdFOCuS0 variants is in the calculation of the likelihood (lines 9 and 10). Therefore the two variants store the same number of candidate changepoints and have the same time and memory complexities. In detail, computing the full likelihood ratio statistics for any particular changepoint can be done in  $\mathcal{O}(p)$  and therefore lines 9 and 10 in Algorithm 1 can be done  $\mathcal{O}(|\mathcal{T}|p)$ . Recovering the maximum is then in  $\mathcal{O}(|\mathcal{T}|)$ . Overall, this is  $\mathcal{O}(|\mathcal{T}|p)$ .

---

**Algorithm 1** MdFOCuS(0) algorithm
 

---

```

1: Input 1:  $p$ -variate independent time series  $\{x_t\}_{t=1,2,\dots}$ 
2: Input 2: threshold thrs and  $\eta_1$  if known pre-change parameter
3: Input 3: pruning index  $\text{maxSize} > p + 1$ , the parameters  $\alpha \geq 1, \beta \geq 0$ .
4: Output: stopping time  $n$  and maximum likelihood change :  $\hat{\tau}(\cdot)$  or  $\hat{\tau}(\eta_1)$ 
5:  $\log\text{LikelihoodRatio} \leftarrow -\infty, \mathcal{T} \leftarrow \emptyset, n \leftarrow 0$ 
6: while ( $\log\text{LikelihoodRatio} < \text{thrs}$ ) do
7:    $n \leftarrow n + 1$ 
8:    $\mathcal{T} \leftarrow \mathcal{T} \cup \{n - 1\}$ 
9:    $\text{maxLogLikelihood} \leftarrow \max_{\tau \in \mathcal{T}} \{ \max_{\eta_1, \eta_2} \ell_{\tau, n}(\eta_1, \eta_2) \}$  ▷  $\eta_1$  is fixed in MdFOCuS0
10:   $\log\text{LikelihoodRatio} \leftarrow \text{maxLogLikelihood} - \max_{\eta_1, \eta_2} \ell_{n, n}(\eta_1, \eta_2)$  ▷  $\eta_1$  is fixed in MdFOCuS0
11:  if ( $|\mathcal{T}| > \text{maxSize}$ ) then
12:     $\mathcal{T} \leftarrow \text{QUICKHULL}(\{P(\tau)\}_{\tau \in \mathcal{T}})$  ▷ Returns the indices on the hull of all  $P(\tau)$ .
13:     $\text{maxSize} \leftarrow \lfloor \alpha |\mathcal{T}| + \beta \rfloor$ 
14:  end if
15: end while
16: return  $n$  and  $\log\text{LikelihoodRatio}$ 
    
```

---

**Empirical Pruning and Run time Evaluations** We give a link to an implementation of Algorithm 1 for a change in the mean of  $p$ -dimensional Gaussian signal in about a hundred lines of R code in the Supplementary Material. Our code is based on the *convhulln* function implementing the *QuickHull* algorithm in the *geometry* R package [59] and for  $p = 3$  it is able to process in 2 minutes  $n = 5 \times 10^5$  data points on an Intel(R) Xeon(R) Gold 6252 CPU @ 2.10GHz processor choosing  $\alpha = 2$  and  $\beta = 1$ . As can be seen in Figure 5 (left), such run time is comparable to that of the *ocd* R package [38].

We also implemented Algorithm 1 for a change in the mean of multi-dimensional Gaussian signal (see Table 1) in R/C++ using the *qhull* library (see link in Supplementary Material). We evaluated its running time. We simulated data as in the empirical validation of Theorem 6 on the expected number of faces and vertices for dimension  $p = 1$  to 6. The average run times as a function of  $n$  are presented in the log-scale in Figure 4. As expected, it is faster than our R implementation: for example for  $p = 3$  it processes in 2 minutes  $n = 10^6$  rather than  $5 \times 10^5$ . Note also that the run times for a known or unknown  $\eta_1$  are almost identical. Finally, we made a simple linear regression to model the logarithm of the run time as a function of  $\log(n)$ . The estimated slope coefficients are reported in Figure 4 and are all smaller than 1.2.

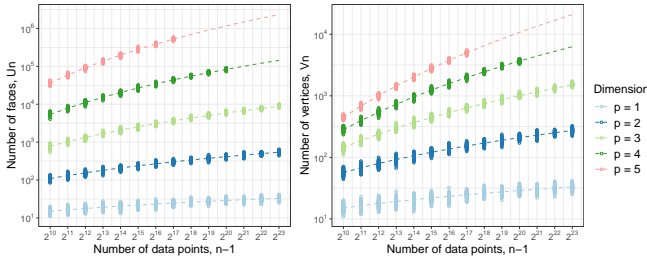


Figure 3: The number of faces (left) and vertices (right) of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  for dimension  $1 \leq p \leq 5$ . We simulated 100 i.i.d. Gaussian data  $\mathcal{N}_p(0, I_p)$  for  $n$  from  $(2^{10} + 1)$  to  $(2^{23} + 1)$ . Dashed lines correspond to the expected number of faces (left) and vertices (right) presented in Theorem 6. We consider a maximum running time of 40 minutes for the *QuickHull* algorithm. This is why some results for  $p = 4$  and 5 for large number of observations are missing.

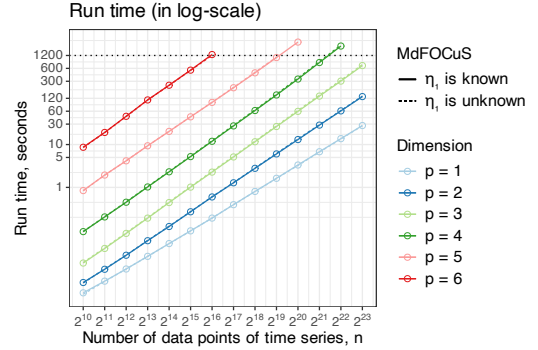


Figure 4: Run times in seconds of MdfOCuS with known (dashed line) and unknown (full line) pre-change parameter  $\eta_1$ , both with  $\alpha = 2$  and  $\beta = 1$ , in dimension  $p = 1, \dots, 6$  using time series  $x_{1:n}$  (without change,  $x_t \sim \mathcal{N}_p(0, I_p)$  i.i.d). Run times are averaged over 100 data sets. We considered a maximum running time of 20 minutes (horizontal dotted black line) for the algorithms. That is why we do not report run times for  $p = 4, 5$  and 6 for large number of observations. We report here the slope of the curves estimated using a simple linear regression: for known  $\eta_1$ :  $\approx 1.005$  ( $p = 1$ ),  $\approx 1.116$  ( $p = 2$ ),  $\approx 1.180$  ( $p = 3$ ),  $\approx 1.196$  ( $p = 4$ ),  $\approx 1.143$  ( $p = 5$ ) and  $\approx 1.202$  ( $p = 6$ ); for unknown  $\eta_1$ :  $\approx 1.006$  ( $p = 1$ ),  $\approx 1.118$  ( $p = 2$ ),  $\approx 1.183$  ( $p = 3$ ),  $\approx 1.202$  ( $p = 4$ ),  $\approx 1.144$  ( $p = 5$ ) and  $\approx 1.197$  ( $p = 6$ ).

#### 4.4 MdfOCuS(0) dyadic, MdfOCuS(0) Sp and MdfOCuS(0) Sp $\tilde{p}d$ : Three Variants of the Algorithm

In this subsection, we describe three variants of the previous algorithm. The first, MdfOCuS(0) dyadic, is slower but provably quasi-linear. The second, MdfOCuS(0) Sp, computes sparse likelihood ratio statistics. The third, MdfOCuS(0)  $\tilde{p}d$  Sp, is an approximation designed to handle large values of  $p$ .

##### 4.4.1 MdfOCuS(0) dyadic: a more complex yet provably quasi-linear online algorithm

Algorithm 1 is exact and empirically fast but it is non-trivial to derive its worst or expected time complexity as the time at which we run *QuickHull* is stochastic. In Supplementary Material F we propose Algorithm 3 that is closely related and easier to analyse theoretically. This algorithm updates the set  $\mathcal{T}$  (lines 11 to 14 in Algorithm 1) in a deterministic manner on predetermined subsets or chunks of the observations. This deterministic choice of chunks is likely improvable but it allows for a precise quantification of the expected complexity of the algorithm under the assumption of Theorem 6 (or Corollary 1) and under the assumption that the convex hull algorithm is at worst quadratic. To be specific here are our assumptions.

**Assumption 1.** In any dimension  $p \geq 1$ , there are positive constants  $c_1$  and  $c_2$  for which the expected number of vertices,  $\mathbb{E}[V_n^p]$ , can be bounded as follows:

$$\mathbb{E}[V_n^p] \leq c_1 \log(n)^p + c_2.$$

This is true under the conditions of Corollary 1.

**Assumption 2.** *We assume that the convex hull algorithm we are using is at worst quadratic in time and assume there exist two positive constants  $c_3$  and  $c_4$  such that for  $n$  points the time complexity is  $\text{Time}(n) \leq c_3 n^2 + c_4$ .*

The assumption on the quadratic complexity is true for *QuickHull* in dimensions 2 and 3 (so for  $p \leq 2$ ) [48, 63] and using the algorithm of Chazelle [64] it is also true in dimension 4 (so for  $p \leq 3$ ). Still following Chazelle this is no longer true for any dimension strictly larger than 4 and therefore  $p > 3$ .

In essence, our deterministic Algorithm 3 computes the convex hull using a divide and conquer strategy. Out of simplicity let us consider the offline setting and assume  $n - 1$  is a power of 2, that is  $n - 1 = 2^{\log_2(n-1)}$ . Rather than running the hull algorithm on all points  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  we first run the algorithm on smaller chunks of size  $2^{q_{min}}$ :  $\tau \in \{2^{q_{min}}j + 1, \dots, 2^{q_{min}}j + 2^{q_{min}}\}$ , with  $q_{min}$  a constant chosen by the user and  $j$  a number smaller than  $(n - 1)/2^{q_{min}}$ , and then dyadically merge the results. To be specific for each scale  $q$  with  $q_{min} < q < \log_2(n - 1)$  we get the point on chunk  $\{2^{q+1}j + 1, \dots, 2^{q+1}j + 2^{q+1}\}$ , by merging the results of the two smaller chunks  $\{2^{q+1}j + 1, \dots, 2^{q+1}j + 2^q\}$ , and  $\{2^{q+1}j + 2^q + 1, \dots, 2^{q+1}j + 2^{q+1}\}$ . This merging is computationally efficient because, under Assumption 1, the number of points on the hull of a chunk of size  $2^q$  is expected to be small (of order  $(\log(2^q))^p = (q \log(2))^p$ ).

One difficulty in Algorithm 3 is to make this dyadic or divide and conquer merging in an online fashion. To the best of our efforts, this makes the formal description a bit tedious, and we refer the interested reader to the Supplementary Material F for a precise description. We now state our bound on the expected complexity of this algorithm.

**Lemma 2.** *Under the assumption of Corollary 1 (see Assumption 1) and Assumption 2, the expected time complexity of Algorithm 2 is*

$$\mathbb{E}(\text{Time}(\text{Algorithm 2})) = \mathcal{O}(n \log(n)^{p+1}). \quad (11)$$

We empirically study the complexity of Algorithm 3 in Figure 16 of Supplementary Material F. It can be seen that it is slower than Algorithm 1. Algorithm 3 considers at least all points on the hull to maximise the likelihood for every new data point. For a fixed  $p$  following, Theorem 6 and its corollary the number of points on the hull at step  $i$  is in  $\Omega((\log(i))^p)$ . To recover a lower bound on the complexity, we first sum overall  $i \leq n$ , and then consider only  $i \geq n/2$  to recover that the overall number of points we will consider is in  $\Omega(n/2(\log(n/2))^p)$  and thus  $\Omega(n(\log(n))^p)$ . Relative to that Algorithm 3 loose just one  $\log(n)$  term, we thus argue our bound is relatively tight.

#### 4.4.2 MdFOCuS(0) Sp: A simple online algorithm with sparse statistics

Out of simplicity in lines 9 and 10 of Algorithm 1 we only consider the full (or dense) max-likelihood ratio statistics, as in Equation (6), that is assuming all coordinates are changing. However, based on Theorem 5 the changepoints maximising sparse likelihood ratio statistics, that is assuming only a subset of  $s$  coordinates are changing (see Equation (2)), also correspond to points on the hull.

Computing all sparse max-likelihood ratio statistics, as in Equation (2), is a bit more difficult than the full likelihood ratio statistics. To be specific, for each candidate changepoint we sort the per-dimension ratio statistics (this can be done in  $\mathcal{O}(p \log(p))$ ) and we then sum these from the largest to the smallest in  $\mathcal{O}(p)$  to iteratively recover the best for all sparsity level  $s$ . Once this is done for all candidates, we recover the maximum for each sparsity level in  $\mathcal{O}(\mathcal{T})$ . Adding these up, even if we consider all sparsity levels (that is all  $s$  between 1 and  $p$ ) we are overall in  $\mathcal{O}(|\mathcal{T}|p \log(p))$ .

In practice, it makes sense to consider a subset of all sparsity levels. In our simulations we consider:  $s \in \{1, 2, \dots, 2^{\lfloor \log_2(p) \rfloor}, p\}$ . In the spirit of our FOCuS approximation [34] we also consider the sum of the max statistics: that is we get for each coordinate the max likelihood ratio statistics and sum these. We call these procedures respectively MdFOCuS0 Sp if we know the pre-change parameter and MdFOCuS Sp if not. As can be seen in Figure 5 (left), the empirical runtime of MdFOCuS Sp is slower than that of MdFOCuS and comparable to that of the ocd R package [38].

#### 4.4.3 MdFOCuS(0) $\tilde{p}$ d Sp: An approximate algorithm for large $p$

Under the condition of Theorem 6, Algorithm 1 is expected to store  $\mathcal{O}(\log^p(n))$  candidates and the  $\log^p(n)$  terms means that the algorithm is impractical for  $p$  larger than 5, as exemplified in Figure 4. In Supplementary Material G we propose an approximate algorithm by recovering only a subset of the points on the hull. We obtain this subset by considering projections on at most  $\tilde{p}$  variates, running the hull algorithm on each projection, and taking the union of the time-points (of the vertices) retained for each projection. For each projection or group of variates, and under the condition of Theorem 6 we thus store  $\mathcal{O}(\log^{\tilde{p}}(n))$  candidates. Considering  $p$  such groups we thus store  $\mathcal{O}(p \log^{\tilde{p}}(n))$  candidates in total thus effectively controlling the quality of the approximation and reducing the computational complexity.

This heuristic for  $\tilde{p} = 2$ , implemented in R, runs on average in about 100 seconds for  $p = 100$  and  $n = 10000$ . We further explore the run times of this heuristic in Figure 5 and show that its run time is comparable to ocd [38].



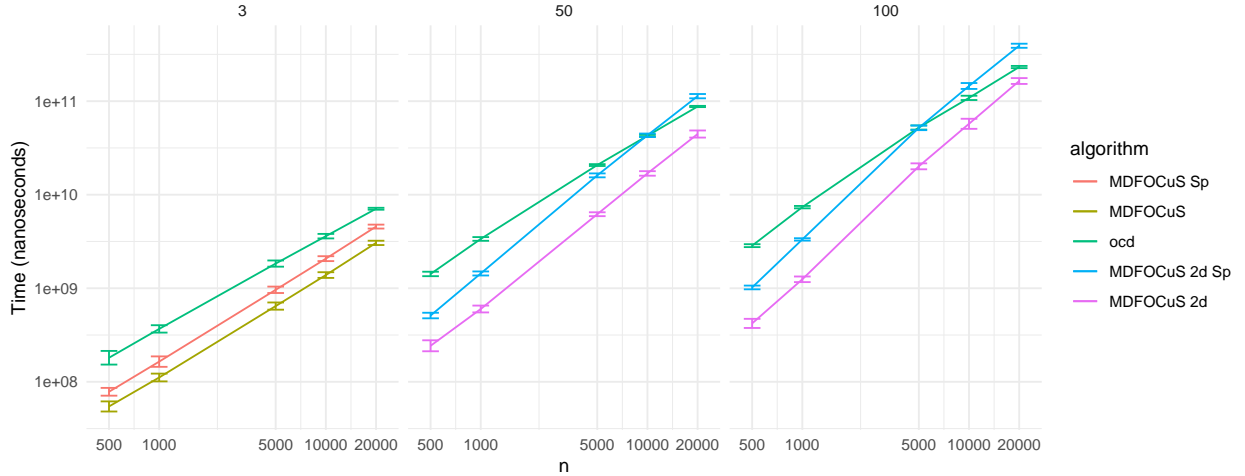


Figure 5: Average run times of MdFOCuS, MdFOCuS Sp (with sparse statistics), the  $2d$  approximation and ocd over 50 replicates for each scenario, for  $p = 3, 50$  and  $100$  and  $n$  varying from 500 to 10000 on an Intel Xeon Gold 6342 (32) @ 2.793GHz.

Recovering just  $\mathcal{O}(p \log^2(n))$  points of the hull out  $\mathcal{O}(p \log^p(n))$  is arguably a crude approximation, but as shown in Section 4.6 it already provides good statistical performance relative to ocd or the FOCuS(0) multivariate approximation.

#### 4.5 A Note on Statistical Theoretical Guarantees

In Corollary 2, in Supplementary Material H, we provide time-varying thresholds (i.e. increasing with the number of observations  $n$ ) that control the probability of incorrectly detecting a change (i.e. probability of false alarms) for the i.i.d. Gaussian setting. These results are for considering only a sparse max likelihood ratio statistics with  $s = 1$  and the full max likelihood ratio statistics (that is with  $s = p$ ). We also provide fixed thresholds to control the average run length. Further, in Lemma 3 we derive a bound on the average detection delay (ADD) for a fixed threshold.

We derive the thresholds following the peeling approach of [65] combined with the Chi-square concentration bound of [66]. For the sparse statistics our threshold is  $8 \log(np/\alpha)$  and for the full or dense statistics it is  $p + 2\sqrt{p(4 \log(n) - \log(\alpha) + 1)} + 4 \log(n) - \log(\alpha) + 1$ , where  $2\alpha$  is the desired false positive detection rate. These thresholds are comparable to the  $T^{diag}$  and  $T^{off}$  thresholds of ocd [38].

Note that, in Supplementary Material, we only consider two sparsity levels:  $s = 1$  and  $s = p$ . In MdFOCuS Sp we typically consider more, say  $s$  in  $1, 2, \dots, 2^{\lfloor \log_2(p) \rfloor}$ . Here is one way to extend the thresholds to this case. First, for any sparsity  $s$  strictly larger than 1 and smaller than  $p$ , we consider a union bound over all possible choices of  $s$  coordinates among  $p$ , which is  $\binom{p}{s}$  (see the partial norm statistics in [67]). Second, we consider a union bound over all  $\log_2(p)$  sparsity levels. Combining these, we recover a  $\log(\log_2(p))$  term in all thresholds (as in the  $T^{diag}$  and  $T^{off}$  thresholds of ocd) and a  $\log(\binom{p}{s}) \leq s \log(ep/s)$  term in thresholds for sparsity  $s$  strictly larger than 1 and smaller than  $p$ .

For the ADD our bound is inversely proportional to the size of the change. Combined with the threshold, this supports the intuition that if a change is in just one dimension it should be detected by a partial statistics ( $s = 1$ ) while if it is dense it should be detected by full maximum likelihood ratio statistics ( $s = p$ ). In the dense case, our bound on the ADD is proportional to the threshold and therefore includes a term linear in  $p$ . This is likely sub-optimal and due to our proof technique based on a martingale argument. We show in Subsection H.2.1 in Supplementary Material exploiting the peeling argument of [65] and [68] that with probability at least  $1 - \alpha$  the detection delay is smaller than a constant only involving a  $\sqrt{p}$  terms divided by the size of the change.

#### 4.6 Empirical statistical performances

We evaluate the empirical performance of the R implementation of MdFOCuS Sp (which computes the sparse likelihood ratio statistics) on synthetic data (the link to the code is available in the Supplementary Material). In this section, we analyse 3, 5, and 100-dimensional time series under the Gaussian change-in-mean setting, with an additional simulation

study for 50-dimensional time series presented in Supplementary Material E.3. We consider two scenarios: pre-change mean known and unknown. For each experiment, we report results aggregated from 300 data sets.

For MdFOCuS Sp for dimension  $p = 3$  and 5, we consider sparsity level  $s = 1$ , the full max-likelihood ratio (either  $s = 3$  or  $s = 5$  depending on the dimension), and the sum of the max likelihood ratio statistics per dimension as proposed in [34] (see Subsection 4.4). For higher dimensions ( $p = 100$  and 50), we set the sparsity levels as in Section 4.4. We compare the performance of MdFOCuS with the high-dimensional online changepoint detection method ocd from [38] and a naive multivariate implementation of FOCuS, obtained by running FOCuS independently for each dimension and summing or taking the maximum of the resulting traces (see Section 6 of [34]) at each iteration. Additionally, for the pre-change mean unknown case, we report results of FOCuS and ocd where a plug-in estimate of the pre-change parameter was obtained over a probation (training) period of 250 observations.

Thresholds were selected under a Monte-Carlo simulation to achieve an average run length of  $5 \times 10^3$  observations with no change, consistent with the empirical evaluation studies of both [34] and [38]. An additional study controlling the false positive rate can be found in Supplementary Material E.3. For a change at  $t = 1000$ , we evaluate performances for a range of different change magnitudes and density regimes, e.g., for a change affecting only a portion of the time series. To compare performances across different density regimes, changes in the affected time series were normalised such that the change direction lies in the  $p$ -dimensional sphere, i.e.,  $(\|\eta_1 - \eta_2\|_2^2 = \delta)$ , where  $\delta$  is the overall change magnitude and  $\eta_1, \eta_2$  are the pre- and post-change means, respectively.

We report below tables summarising the ADD over various magnitudes and for different change densities across all replicates, respectively for 3-dimensional time series (in Table 2), 5-dimensional time series (in Table 3), and finally 100-dimensional time series (in Table 4).

In all tables, the two leftmost columns indicate the scenario in terms of change magnitude and density. In the pre-change parameter known scenario, on the left, with FOCuS0, MdFOCuS0 Sp, and ocd (oracle), we indicate the respective algorithms with plug-in oracle pre-changepoint parameter. On the right, for the pre-change mean unknown scenario, with FOCuS0 (est 250) and ocd (est 250), we report the pre-change mean known methods, using a plug-in pre-change mean estimate, and with FOCuS, the independent FOCuS algorithm, and finally MdFOCuS Sp, the procedure introduced in this manuscript. Finally, for the 100-dimensional profiles, with MdFOCuS0 2d Sp and MdFOCuS 2d Sp, we indicate that the procedure is employing the 2d approximation for the convex hull.

Globally, for all dimensions, in both pre-change parameter known and unknown scenarios, we observe that MdFOCuS Sp and MdFOCuS0 Sp generally achieve smaller detection delays in cases where the change affects all the time series and over changes of larger magnitudes. In scenarios with density 1, the simple FOCuS aggregation tends to be slightly better. This is expected as if we only have a change in one dimension, both the sparse statistics of FOCuS and MdFOCuS Sp will be the same, but MdFOCuS Sp will have a slightly larger threshold, resulting in a slower delay.

Focusing on the pre-change mean known case, over changes of smaller magnitudes, we find MdFOCuS0 Sp to be relatively close to the best competitor in terms of ADD, while it generally outperforms the other methods over changes of larger magnitudes. Furthermore, MdFOCuS0 Sp is seen to have quite consistent performances across different sparsity regimes over the same change magnitudes. As ocd uses a grid for the possible size of change for each variate, its performance is affected by how close the true change size is to the nearest point on the grid. In particular, its performance deteriorates when the true change is outside the set of grid values. We observe this in its deterioration of performance for low magnitudes (0.125) and large magnitudes (1 or 2), in particular over dimensions  $p = 3, 5$ . This effect emerging from a grid-based approximation has already been observed thoroughly, albeit in the 1-d case, in the main simulation study of [34].

Moving to the pre-change mean unknown scenario, we observe that MdFOCuS Sp generally outperforms competitor methods for magnitudes larger than 0.250 in most scenarios, with the exception of scenarios with a change in a single dimension, as explained above. Moreover, in dimensions  $p = 5$  and 100, we can clearly see the advantages of performing the likelihood ratio test for a change when the pre-change mean is unknown over FOCuS0 or ocd, where the pre-change mean unknown parameter needs to be estimated. The only exception occurs in the case of FOCuS (est 250) for  $p = 3$ , where in the lowest magnitude, it is seen outperforming all other methods. Whilst this might seem counter-intuitive, as the error from the estimation should propagate, in dimension  $p = 3$  for a small signal-to-noise ratio, the estimation is good enough to not impair the average run length and increase the thresholds, while benefiting from an easier optimisation (as we see in the pre-change mean known case). However, as we move to higher dimensions  $p = 5$  and 100, it is more unlikely to obtain a better estimate of the true pre-change parameter simultaneously in all dimensions. This results in larger thresholds to control the desired run length, and therefore in a global loss of power for FOCuS0 (est) and ocd (est). Of course, having more training observations improves the results, in particular for  $p = 3$ , however, this still has little to no effect in higher dimensions (we report results with more training observations in Supplementary Material E.4). Moreover, in Supplementary Material E.3, where we control for false positives and

have a much later change, it can be seen in Table 5, that our 2d approximation MdFOCuS 2d Sp is actually better than the 1d approximation of FOCuS [34] for dense changes showing the advantage of considering larger  $\tilde{p}$ .

Table 2: Average detection delay with 3-dimensional time series for a change at time  $t = 1000$ . Pre-change parameter is known on the left, and unknown on the right. Best results per row are highlighted in bold.

magnitude	density	Pre-change Known			Pre-change Unknown			
		FOCuS0	MdFOCuS0 Sp	ocd (ora)	FOCuS0 (est 250)	FOCuS	MdFOCuS Sp	ocd (est 250)
0.125	1	<b>786.67</b>	806.54	1227.57	<b>1470.76</b>	1644.05	1726.24	1783.41
0.125	2	<b>791.36</b>	817.12	1421.54	<b>1693.06</b>	1770.33	1815.88	1987.04
0.125	3	<b>859.03</b>	886.83	1496.18	<b>1723.76</b>	1806.46	1853.35	2097.23
0.250	1	250.58	255.78	<b>227.18</b>	470.69	<b>340.46</b>	364.50	430.33
0.250	2	<b>253.56</b>	256.76	268.86	556.86	369.36	<b>363.55</b>	516.28
0.250	3	273.92	<b>266.27</b>	300.69	630.94	404.19	<b>395.40</b>	559.66
0.500	1	65.85	66.46	<b>56.46</b>	113.75	69.73	<b>69.36</b>	83.90
0.500	2	71.85	69.93	<b>65.18</b>	132.99	78.42	<b>75.28</b>	96.50
0.500	3	79.21	76.52	<b>74.50</b>	155.61	87.95	<b>84.11</b>	103.97
0.750	1	31.80	32.16	<b>28.95</b>	50.73	32.62	<b>33.22</b>	39.46
0.750	2	34.66	33.31	<b>32.52</b>	61.46	36.15	<b>35.35</b>	43.47
0.750	3	37.19	<b>34.84</b>	35.43	71.75	39.40	<b>36.47</b>	46.40
1.000	1	<b>18.51</b>	19.04	18.87	29.18	<b>19.06</b>	19.53	24.16
1.000	2	20.30	<b>19.53</b>	20.45	34.55	20.94	<b>20.42</b>	25.45
1.000	3	21.68	<b>20.27</b>	21.52	40.03	22.49	<b>20.72</b>	26.23
2.000	1	<b>5.35</b>	5.41	6.40	8.06	<b>5.43</b>	5.53	7.12
2.000	2	5.97	<b>5.72</b>	6.64	9.46	6.13	<b>5.78</b>	7.25
2.000	3	6.51	<b>6.09</b>	6.80	10.62	6.71	<b>6.16</b>	7.41

## 5 Application on NBA Plus-Minus

In this section, we illustrate our methodology to detect a change in the Cleveland Cavaliers (an NBA team) Plus-Minus score from season 2010-11 to 2017-18. This example was proposed in [37]. We use this example for two reasons. First, it highlights that our computational framework is also applicable to CUSUM Exponential baseline e-detectors proposed in [37] which in essence are a non parametric generalization of generalized likelihood ratio rules. Second, it illustrates how modelling not only the signal’s mean but also its variance can simplify the calibration of the detection threshold, without necessarily resorting to a non-parametric approach.

We recovered the Plus-Minus score using the nbastatR package [69] available on GitHub <https://github.com/abresler/nbastatR>. The Cavaliers Plus-Minus is represented in Figure 6. This score represents how well the Cavaliers fared against their opponent. In this subsection, we assume that we are observing these matches one after the other and we are interested in detecting a changepoint online.

As detailed in [37] it is nontrivial to fit this problem into commonly used parametric sequential changepoint detection procedures for two main reasons. First, it is not easy to choose a parametric model to fit the score. In particular, we would like to take into account that we have integer-valued data, and we expect some form of dependency. Second, assuming we have chosen a model or likelihood function, calibrating the threshold to detect a changepoint is not trivial. A small change in the distribution we use as a reference can substantially change the threshold and as a consequence increase the detection time or lead to false detections. E-detectors of [37], are an interesting non-parametric solution to these two problems assuming some knowledge of the pre-change distribution.

### 5.1 Convex hull for CUSUM e-detectors

Following equations (27) of [37] and considering an exponential baseline increment as in their equation (41) we can write their update of the e-detector CUSUM statistics for a given  $\lambda$  as

$$M_n^{CU}(\lambda) = \exp(\lambda s(x_n) - \psi(\lambda)v(x_n)) \max\{M_{n-1}^{CU}(\lambda), 1\},$$

Table 3: Average detection delay with 5-dimensional time series for a change at time  $t = 1000$ . Pre-change parameter is known on the left, and unknown on the right. Best results per row are highlighted in bold.

magnitude	density	Pre-change Known			Pre-change Unknown				
		FOCuS0	MdFOCuS0	Sp	ocd (ora)	FOCuS0 (est 250)	FOCuS	MdFOCuS	Sp
0.125	1	<b>833.11</b>	866.74	911.17	2219.97	<b>1718.76</b>	1802.03	2458.66	
0.125	2	<b>892.82</b>	918.78	1106.68	2221.24	<b>1874.47</b>	2049.54	2441.70	
0.125	3	<b>925.08</b>	940.54	1101.38	2255.65	<b>1924.89</b>	2036.49	2493.92	
0.125	4	<b>835.44</b>	836.87	1059.06	2102.15	<b>1825.65</b>	1881.13	2296.26	
0.125	5	953.85	<b>948.59</b>	1297.37	2228.96	<b>2005.88</b>	2062.98	2448.01	
0.250	1	259.75	267.12	<b>229.64</b>	871.35	<b>360.65</b>	368.47	1064.11	
0.250	2	281.77	279.88	<b>253.79</b>	963.88	<b>433.69</b>	450.35	1084.21	
0.250	3	297.41	289.83	<b>287.10</b>	1004.43	<b>456.72</b>	467.69	1077.31	
0.250	4	260.23	<b>242.46</b>	265.40	918.63	413.22	<b>382.42</b>	852.33	
0.250	5	304.13	<b>288.07</b>	309.16	1023.24	504.75	<b>495.38</b>	1000.05	
0.500	1	72.98	73.81	<b>64.74</b>	206.83	<b>80.54</b>	80.69	247.08	
0.500	2	84.75	80.83	<b>73.93</b>	243.50	95.86	<b>91.35</b>	253.56	
0.500	3	91.31	84.41	<b>83.54</b>	267.82	103.57	<b>96.62</b>	252.69	
0.500	4	80.89	<b>71.59</b>	75.94	250.83	94.23	<b>81.13</b>	199.82	
0.500	5	95.41	<b>86.77</b>	89.48	293.72	110.49	<b>100.25</b>	235.87	
0.750	1	33.44	34.02	<b>32.98</b>	91.82	<b>34.46</b>	35.00	108.72	
0.750	2	39.21	37.79	<b>36.22</b>	113.10	40.34	<b>39.06</b>	113.74	
0.750	3	41.29	<b>38.16</b>	38.61	124.88	44.27	<b>41.49</b>	110.91	
0.750	4	37.03	<b>33.10</b>	34.71	116.62	41.61	<b>35.94</b>	87.09	
0.750	5	45.65	<b>40.26</b>	42.24	137.55	50.88	<b>44.03</b>	104.84	
1.000	1	<b>19.63</b>	19.84	21.37	51.75	<b>20.02</b>	20.30	62.33	
1.000	2	22.88	<b>21.86</b>	22.88	63.86	23.55	<b>22.49</b>	62.99	
1.000	3	24.67	<b>22.83</b>	23.65	71.35	25.38	<b>23.47</b>	62.24	
1.000	4	22.45	<b>19.29</b>	20.32	67.41	23.76	<b>20.20</b>	49.88	
1.000	5	27.18	<b>23.63</b>	25.07	81.02	28.62	<b>24.79</b>	61.01	
2.000	1	<b>5.79</b>	5.84	7.25	13.40	<b>5.73</b>	5.82	15.78	
2.000	2	6.88	<b>6.58</b>	7.47	16.57	6.86	<b>6.53</b>	15.66	
2.000	3	7.21	<b>6.55</b>	7.33	18.62	7.29	<b>6.72</b>	15.74	
2.000	4	6.64	<b>5.72</b>	6.10	17.92	6.92	<b>5.90</b>	12.99	
2.000	5	7.91	<b>6.87</b>	7.40	21.30	8.24	<b>7.08</b>	15.55	

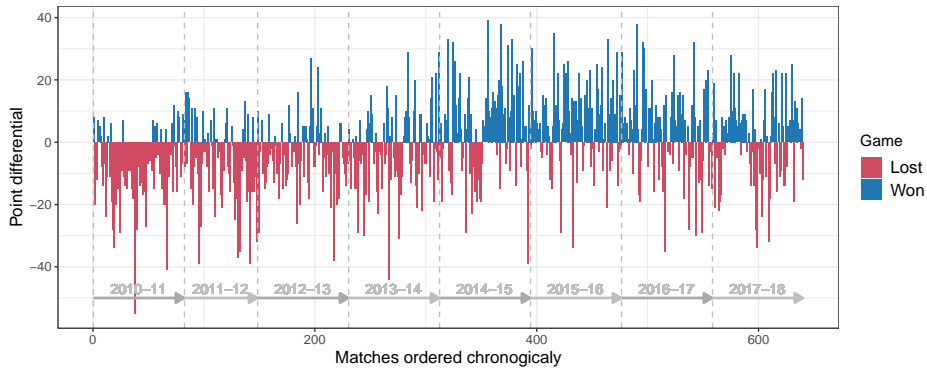


Figure 6: Plus-Minus score of the Cavaliers from season 2010-11 to season 2017-18 as a bar plot. Losses are in dark red and wins are in dark blue. Ends of seasons are represented with vertical dashed lines and seasons are shown on the bottom with grey arrows.

where  $\lambda$  is in a subset of  $\mathbb{R}$ ,  $s$  and  $v$  are real-valued functions, and  $\psi$  is a finite and strictly convex function. Taking the log and considering all possible changepoints prior to  $n$  we recover with induction that

$$\log(M_n^{CU}(\lambda)) = \max_{\tau < n} \left\{ \sum_{t=\tau+1}^n (\lambda s(x_t) - \psi(\lambda)v(x_t)) \right\}.$$

Table 4: Average detection delay with 100-dimensional time series for a change at time  $t = 1000$ . Pre-change parameter is known on the left, and unknown on the right. Best results per row are highlighted in bold.

magnitude	density	Pre-change Known			Pre-change Unknown					
		FOCuS0	MdFOCuS0	2d Sp	ocd (ora)	FOCuS0 (est 250)	FOCuS	MdFOCuS	2d Sp	ocd (est 250)
0.125	1	1417.15		1391.54	<b>1171.63</b>	3459.08	2708.45	<b>2704.65</b>		3546.43
0.125	5	1881.10		1810.57	<b>1627.00</b>	3497.94	<b>2859.51</b>		2872.20	3595.24
0.125	10	2084.84		1978.85	<b>1940.41</b>	3501.48	<b>2846.45</b>		2874.17	3595.46
0.125	50	<b>2252.48</b>		2289.56	2386.98	3494.67	2888.46	<b>2881.59</b>		3591.96
0.125	100	<b>2323.59</b>		2338.00	2431.51	3507.66	<b>2859.11</b>		2887.60	3599.24
0.250	1	389.11		380.09	<b>335.95</b>	2659.50	730.54	<b>720.45</b>		2841.37
0.250	5	641.18		555.57	<b>505.39</b>	3054.36	1520.80	<b>1451.53</b>		3232.02
0.250	10	789.27		673.15	<b>595.10</b>	3178.29	1879.64	<b>1692.20</b>		3334.21
0.250	50	1057.30		895.53	<b>827.30</b>	3323.17	2353.01	<b>2309.73</b>		3453.27
0.250	100	1080.26		916.64	<b>891.09</b>	3346.50	<b>2341.24</b>		2414.38	3476.58
0.500	1	105.79		107.89	<b>104.79</b>	721.53	<b>118.84</b>		121.50	859.71
0.500	5	169.93		147.36	<b>139.23</b>	1297.63	214.14	<b>185.07</b>		1449.56
0.500	10	232.04		176.44	<b>170.03</b>	1653.97	296.51	<b>217.84</b>		1850.22
0.500	50	357.90		248.41	<b>239.08</b>	2480.88	578.17	<b>348.83</b>		2719.69
0.500	100	372.34		254.51	<b>244.07</b>	2611.86	679.19	<b>365.79</b>		2841.33
0.750	1	<b>47.78</b>		48.67	57.56	310.89	<b>50.08</b>		50.68	461.51
0.750	5	75.34		<b>66.80</b>	73.47	580.05	85.34	<b>73.90</b>		715.73
0.750	10	104.45		<b>80.81</b>	84.16	798.60	117.25	<b>88.30</b>		925.56
0.750	50	184.09		116.47	<b>114.29</b>	1626.21	239.73	<b>133.60</b>		1836.28
0.750	100	193.77		120.24	<b>115.21</b>	1823.30	279.42	<b>137.98</b>		2074.96
1.000	1	<b>27.12</b>		27.55	38.67	173.04	<b>27.76</b>		28.41	317.49
1.000	5	43.72		<b>39.02</b>	46.07	325.28	46.44	<b>41.45</b>		476.20
1.000	10	60.36		<b>47.40</b>	50.77	458.62	63.85	<b>49.35</b>		599.74
1.000	50	109.11		67.33	<b>66.02</b>	1074.41	135.79	<b>73.06</b>		1218.93
1.000	100	116.60		69.23	<b>67.59</b>	1288.45	157.47	<b>75.55</b>		1466.28
2.000	1	<b>7.58</b>		7.65	12.93	43.03	<b>7.53</b>		7.73	142.00
2.000	5	12.92		<b>11.12</b>	13.80	82.41	12.95	<b>11.33</b>		203.48
2.000	10	16.46		<b>13.16</b>	14.80	117.67	16.30	<b>13.48</b>		250.44
2.000	50	31.85		18.37	<b>18.08</b>	315.56	34.85	<b>18.70</b>		451.59
2.000	100	34.28		18.97	<b>18.34</b>	422.46	41.93	<b>19.37</b>		493.39

By subtracting  $\sum_{t=1}^n (s(x_t)\lambda - \psi(\lambda)v(x_t))$  in the previous bracket, we do not change the maximum of the argument, and we recover our functional pruning framework of Equation (9) taking for any changepoint at  $\tau < n$ ,  $a_\tau = \sum_{t=1}^\tau v(x_t)$ ,  $2b_\tau = \sum_{t=1}^\tau s(x_t)$ , and  $c_\tau = 0$ . Applying Theorem 4 and its proof we get that the changepoint optimising the e-detector CUSUM score for a given  $\lambda$  value corresponds to a vertex on the convex hull of the following points in  $\mathbb{R}^2$ :

$$\left( \sum_{t=1}^\tau v(x_t), \frac{1}{2} \sum_{t=1}^\tau s(x_t) \right)_{\tau < n}. \quad (12)$$

As argued in [37] it makes sense to consider a mixture of e-detectors, that is different  $\lambda$  values. For computational reasons [37] considered a finite number of values. In practice, this number is determined using their computeBaseLine function that is detailed in their appendix B in Algorithm 3.

We will now compare the baseline numbers of two e-detectors for Plus-Minus score to the number of points on the hull of (12). [37] considered two e-detector models. In the first, which we call Winning rate, they model the winning rate and consider, see their equation (64), for the exponential increment  $v(x_t) = 1$  and  $s(x_t) = \mathbb{1}_{x_t > 0} - p_0$ , where  $\mathbb{1}$  is the indicator function and  $p_0$  is taken to be 0.49 in the numerical application. With the function computeBaseLine they report selecting 69  $\lambda$  values. In their second e-detector model, which we call Plus-Minus, they analyse the Plus-Minus score more directly. The score is first normalized between 0 and 1 as follows  $x'_t = (x_t + 80)/160$ . Then they define  $s(x') = (x'/m - 1)$  and  $v(x) = (x'/m - 1)^2$ , where  $m$  is chosen to be 0.494 in the numerical application. With the computeBaseLine function, they report selecting 190  $\lambda$  values. For both e-detectors we computed the number of points in the convex hull for  $n$  between 10 and  $n = 640$  (the last match of season 2017-18) and obtained for Winning Rate at most 16 and for Plus-Minus at most 18 points. Therefore out of the, respectively, 69 and 190 candidates suggested by computeBaseLine many are redundant as they correspond to the same changepoint.

## 5.2 A parametric approach to the Plus-Minus score

Considering a change in the mean of the Gaussian model to fit the Plus-Minus score of the Cavaliers seems rather naive, as it does not take into account the discrete nature of the data and possible dependencies. In this context, we argue that it is also not clear how one could get a valid estimation of the pre-change point parameter. Finally, as argued in [37] and shown a bit later calibrating the threshold to detect a changepoint is not trivial. Roughly speaking the threshold depends on the choice of the null distribution and this largely affects the position at which a change is detected. Here as a robust parametric solution to these problems, we consider a change in the mean and variance of a univariate Gaussian signal with unknown pre-change point parameters.

For a change in mean and variance using our convex hull framework Equation (9) and following its natural parametrisation presented in Section 2.2 we need to keep track of the vertices on the hull of a 3-dimensional set of points

$$\left( \tau, \sum_{t=1}^{\tau} x_t, \sum_{t=1}^{\tau} x_t^2 \right)_{\tau < n}. \quad (13)$$

As we will see this second model, although still parametric, is much more robust to the choice of the null distribution.

Interestingly, this mean and variance model is invariant to shift and scaling. Based on that, we see that all the points on the convex hull of the Plus-Minus e-detector are on the hull of the change in mean and variance model. Indeed for this second e-detector the raw Plus-Minus score was normalized as follows  $x'_t = (x_t + 80)/160$  and then  $s$  and  $v$  were chosen to be  $s(x') = (x'/m - 1)$  and  $v(x') = s(x')^2$ . Therefore all changepoints tested by the Plus-Minus e-detector will also be tested by our mean and variance model.

As the data is discrete it is not unlikely that two consecutive scores are exactly equal (this happens 19 times out of 639 in the Plus-Minus score of the Cavaliers from 2010 to 2018). In fact, we also observed 2 stretches of 3 equal scores. For such stretches the estimated variance would be 0 and the likelihood would blow up to infinity. To get around this problem we considered a minimum value for the variance. We computed the per-season variance of all NBA teams from season 2003-2004 to season 2018-2019 and observed a minimum of 97.02, a maximum of 247.38 and a mean of 170.68. Hence, we argue that setting a minimum variance of 1 (which is roughly a hundred times smaller) should not hamper our ability to detect changes, while also limiting the impact of small segments with equal values.

In Figure 7 we represent the CUSUM statistics for the change in mean and change in mean and variance model. Although the scales are quite different, the two statistics have very similar trends and importantly both seem to increase around season 2013-14 (starting at match number 312 represented by a vertical dotted line). Although both models reconstruct the same changepoint, we will see in the next subsection that the mean-variance model shows less variability in terms of detection delay, achieving faster detections once a threshold is set to achieve a fixed run length.

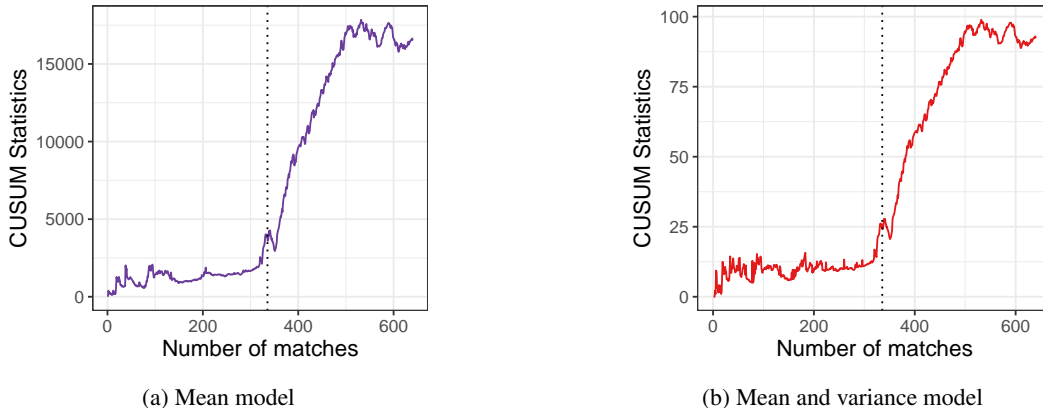


Figure 7: CUSUM statistics for the mean model for the mean and variance model. The dotted line corresponds to the beginning of season 2014-15 and match number 312.

Interestingly, at any time-point after 320 (8th match of season 2014-15) the maximum likelihood changepoint is always 279 (5th of February 2014) for both models (mean and, mean and variance). Furthermore, the convex hull for the mean and variance model (in Equation (13)) - and hence the mean model and Plus-Minus e-detector (recall that all changepoints tested by the Plus-Minus e-detector are tested by the mean and variance model) - no longer contains vertex 312 after time  $n = 320$  (8th match of season 2014-15).

Match 279 was played on the 5th of February 2014, well before the beginning of season 2014-15 in October 2014. At first, this might come as a surprise. But, it indeed seems that the mean Plus-Minus score increased after the 6th of February 2014 (average score of  $-6.28$  before compared to  $1.12$  after and significant t-test p-values of  $0.01584$ ). See also the zoom on the Plus-Minus score over season 2013-14 and 2014-15 in Figure 8. Also, as discussed on the Wikipedia web page of David Griffin [70] “On February 6, 2014, he was named the acting general manager for the Cavaliers” and David Griffin, was the one “to sign LeBron James back” for season 2014-15.

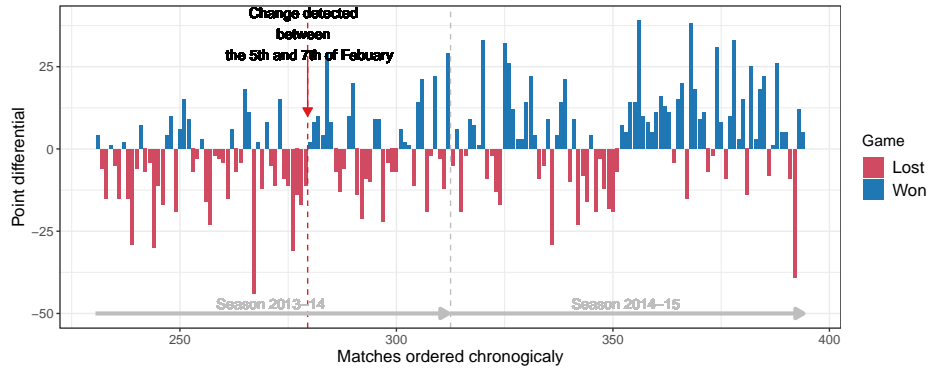


Figure 8: Plus-Minus score of the Cavaliers from seasons 2013-14 to 2014-15 as a bar plot. Losses are in reddark red and wins are in dark blue. The ends of seasons are represented with vertical dashed lines (grey) and seasons are shown on the bottom with grey arrows.

### 5.2.1 Simulating NBA Plus-Minus scores without changepoint

Based on Figure 7 it is clear that for a particular range of the threshold both the mean and mean and variance model with unknown pre-changepoint parameter can detect a changepoint after the beginning of season 2014-15. To calibrate this threshold one typically needs a simulation model without a changepoint. Here, we will set the CUSUM threshold such that under our null simulation over 1000 matches we would detect a change only in 5% of the cases.

Our idea here is not to precisely model the Plus-Minus score of the Cavaliers but rather explore a few natural optimistic and pessimistic options to model it and check how this affects the threshold of the two models and in turns the time at which they detect the change.


The Plus-Minus score is integer-valued. A straightforward, albeit maybe simple, choice would be to consider the difference of two independent Poisson distributions. This is the so-called Skellam distribution. It has two parameters (the mean of the first and second Poisson  $\lambda_1$  and  $\lambda_2$ ). We simulated data using values of  $\lambda_1 = \lambda_2$  both equal to 95, 105, and 115. We considered mean values around 100 as the points per team of an NBA match from season 1999-00 to season 2021-22 range from 93.40 to 112.09 with a mean of 101.07.

A slightly more complex choice is to consider the difference of two independent Negative Binomial distributions with equal scale parameters,  $r_1$  and  $r_2$ . As for the Poisson we considered  $\lambda_1 = \lambda_2$ , which were set to 95, 105, and 115, along with scale parameters  $r_1 = r_2$  at values of 500, 100, 50, and 10. This makes a total of 12 combinations.

A data-driven way to model the Plus-Minus score without changepoint is to re-sample past games. We did this sampling uniformly at random past matches of the Cavaliers from season 1999-2000 to 2009-2010 or uniformly at random past matches of any NBA team from season 1999-2000 to 2009-2010. Finally, following the argument of [37] and noting that the Plus-Minus score is never larger than 80 we simulated integer valued score uniformly at random between  $-80$  and  $80$ .

In the Poisson and Negative Binomial based model, we could further model dependencies in the data. To do this we varied the mean of the first Poisson (or Negative Binomial) over time. We considered two scenarios. In the first, we added to the mean an auto-regressive process of order 1 and coefficient 0.6 multiplied by either 1, 2, 4, or 8. In the second we added sin waves with a period of 20 matches multiplied by either 1, 2, 4, or 8. We present in Figure 9 two simulated score profiles.

Figure 10a represents the various thresholds (in log-scale) we get for our two models, mean and mean and variance. The corresponding detection times are represented in Figure 10b.

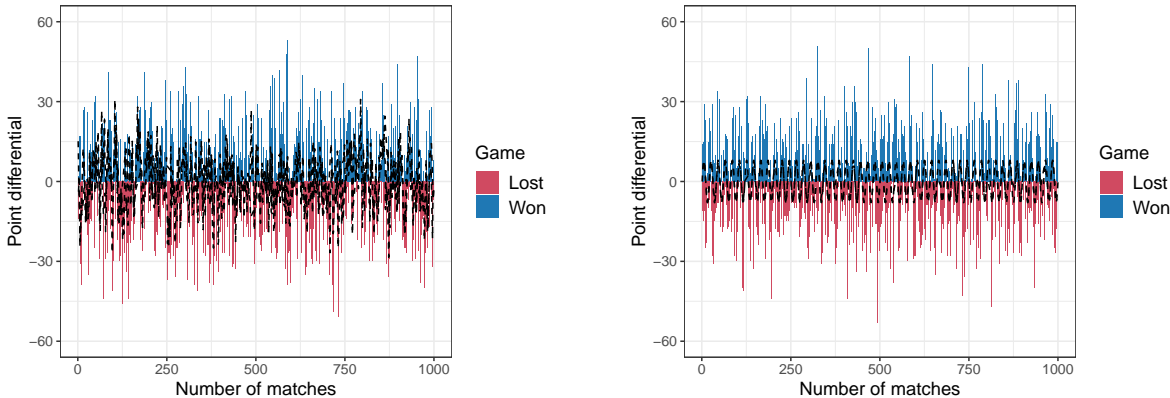


(a) Using AR(1) with AR parameter 0.6 (multiplied by 8) (b) Using sin waves with a period of 20 matches (multiplied by 8)

Figure 9: Two Plus-Minus score simulation examples based on the Negative Binomial model with a mean of 115 and scale parameter of 50 using two dependency scenarios.

It can be noted that the threshold is much more variable for the changepoint in the mean model and this translates to a much more variable detection time. To be specific for the mean model, the change is detected at the earliest at match 330 (the 5th of December 2014), but in 21.7% of the cases the threshold is so high that the changepoint is never detected (reported in the histogram as a detection at 1000). For the mean and variance model, the change is always detected at the earliest at match 339 (the 23rd of December 2014) and at the latest at match 368 (the 20th of February 2015). In fact in 94.2% of the simulation models the change is detected before with the mean and variance model.

Based on this numerical application we argue that being able to run efficiently a bi-parametric model online can be beneficial even if the model (Gaussian here) does not properly fit the nature (discrete here) of the data.

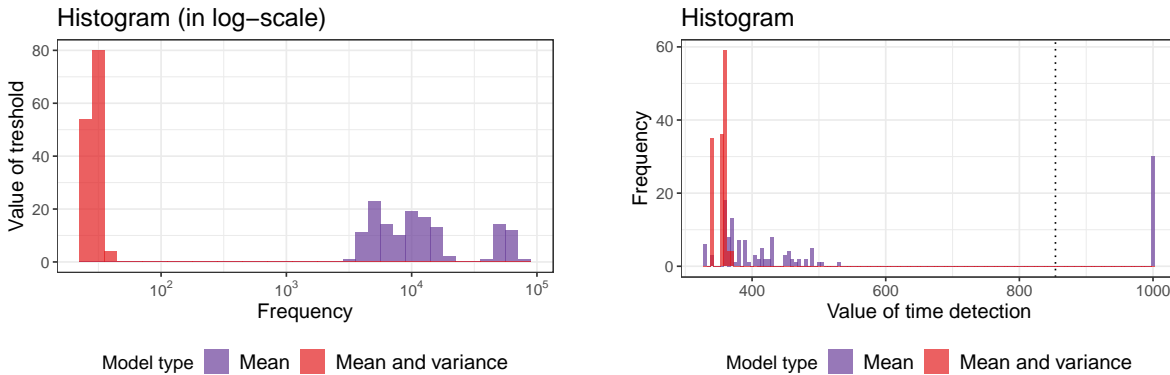

(a) Threshold (b) Detection time (1000 = not detected)

Figure 10: Threshold and Detection time obtained for the mean and mean and variance model.

## 6 Discussion

In this paper, we establish a connection between the detection of a single changepoint in  $p$ -dimensional data streams and a convex hull problem in dimension  $p + 1$ . Assuming independence of all observations and dimensions and a continuous distribution we demonstrate using the recent probabilistic paper [57] that the expected number of faces and vertices of the convex hull is of order  $2(\log(n))^p$  where  $n$  is the number of data points.

Based on this, we derive a simple yet efficient algorithm, MdFOCuS Sp, that allows maximising the full or restricted likelihood-ratio test statistics (that is allowing only  $s$  coordinates to change with  $s \leq p$ ) over all possible window sizes. MdFOCuS Sp generalises the FOCuS algorithm [34] to the multivariate case. We show that MdFOCuS Sp is empirically fast for up to  $p = 5$  and allows to process more than  $10^5$  data points in a matter of minutes. For larger  $p$  we provide an



approximation storing only  $\mathcal{O}(p \log^{\tilde{p}}(n))$  vertices of the convex hull where  $\tilde{p} \leq p$ . For  $\tilde{p} = 2$  this approximation is suitable for high-dimensional data. We also show using simulation that MdFOCuS Sp and its approximation (MdFOCuS  $\tilde{p}$ d Sp) are statistically competitive in particular when the change affects all dimensions or when the parameter prior to the change is unknown.

A few improvements to the computational complexity of the procedure could be made to allow the procedure to scale to higher dimensions and longer sequences. The most computationally expensive components of the procedure are respectively the *QuickHull* algorithm, for pruning the list of indices, and the maximisation step. We mentioned already how further research could go towards a sequential update of the boundary of the convex hull of our points, to improve on the complexity of *QuickHull*. The idea would be to employ information from the hull at the previous iteration, evaluate the inclusion of the most recent point, and update the faces of the neighbouring vertex consequently.

Recently, [71] offered a solution to improve on the maximisation step. Instead of looking at the maxima of all indices to calculate the test statistic, the authors exploit a bound on the maxima of the differences of contiguous indices. The main idea is that the overall maximum, our test statistics, is bounded by the sum of those maxima of the differences. If this sum does not pass the threshold there is no need to compute the likelihood ratio-statistics for all unpruned changepoints. Fast sequential updates of the sum of the maxima of the difference exists, effectively rendering the univariate algorithm constant per iteration [71]. Whilst this bound translates exactly to the multivariate case, it is easily much larger than the threshold, given that we need to store and sum a large amount of indices even in dimension 2. A less conservative bound could be the object of future study to improve on the maximisation step in higher dimensions.

To conclude, our mathematical argument is valid for a large collection of parametric online single changepoint models with distributions taken from the exponential family (or more generally with a likelihood that can be algebraically written as the natural exponential family). Note that this includes models where data are of different types (e.g. with  $p = 2$  a first Poisson component, and a second Gaussian component). We also show in Supplementary Material D that there is a connection between multiple changepoint models and the half-space intersection problem of Theorem 3. Furthermore, we show in Section 5 that Theorem 5 could be beneficial to speed the calculation of the non-parametric e-detectors. Finally, note that no assumptions are made on the set of indices  $\mathcal{T}$  in Equation (9) and for example, our theory also applies to changepoint models with observations on a tree rather than a chain [72]. For all these reasons we argue that this connection between changepoints and convex hull (or half-space intersection) sheds light on the geometric nature of the changepoint detection problem and is a promising line for future research.

## Supplementary Material

The implementation of the MdFOCuS algorithm, the Plus-Minus score data, the computer code for the simulation study, and the applications discussed in this article can be found in the following GitHub repositories:

- <https://github.com/guillemr/Focused/tree/main> is a link to the R implementation of the MdFOCuS algorithm and R code for simulation studies.
- <https://github.com/lpishchagina/focus> is a link to the R/C++ implementation of the MdFOCuS algorithm.
- A Python implementation of the MdFOCuS algorithm will be released in due course
- <https://github.com/lpishchagina/dyadicMdFOCuS> is a link to the R/C++ implementation of the MdFOCuS algorithm with dyadic update. It is a different repository from the MdFOCuS algorithm because the dyadic version is interesting mostly from a theoretical perspective to bound the expected complexity but empirically much slower than MdFOCuS;
- <https://github.com/abresler/nbastatR> is the R package [69] we used to recover the Plus-Minus score data.

## A Proofs

### A.1 The proof of Theorem 2

*Proof.* Consider that  $\tau$  is in  $\mathcal{G}_{\mathcal{T}}$ . By definition, there exists  $(\lambda_0, \mu_0) \in \text{Im}(A) \times \mathcal{D}_A = \mathbb{R}^+ \times \mathbb{R}^p$  such that for all  $\tau' \neq \tau$  in  $\mathcal{T}$  we have:  $g_{\tau}(\lambda_0, \mu_0) > g_{\tau'}(\lambda_0, \mu_0)$ . Using condition  $c_{\tau} = c_{\tau'} = 0$  and multiplying by  $\alpha > 0$  we get by linearity

$$g_{\tau}(\alpha\lambda_0, \alpha\mu_0) = \alpha g_{\tau}(\lambda_0, \mu_0) > \alpha g_{\tau'}(\lambda_0, \mu_0) = g_{\tau'}(\alpha\lambda_0, \alpha\mu_0).$$

Therefore, the optimality of index  $\tau$  is true on the half-line  $\{\alpha(\lambda_0, \mu_0), \alpha > 0\}$ . Note that we can exclude the cases  $\|\mu_0\| = 0$  or  $\lambda_0 = 0$  as, by a continuity argument, the optimal set for index  $\tau$  in  $\mathcal{G}_{\mathcal{T}}$  (if non empty) is an open set.

We now search for  $\alpha_0 \in (0, +\infty)$  such that for any index  $\tau'' \in \mathcal{T}$ ,  $g_{\tau''}(\alpha_0\lambda_0, \alpha_0\mu_0) = f_{\tau''}(\alpha_0\mu_0)$ . If such  $\alpha_0$  exists, we have

$$a_{\tau''}\alpha_0\lambda_0 - 2\langle \alpha_0\mu_0, b_{\tau''} \rangle = a_{\tau''}\|\alpha_0\mu_0\|^q - 2\langle \alpha_0\mu_0, b_{\tau''} \rangle,$$

leading to solution  $\alpha_0 = \frac{\lambda_0^{\frac{1}{q-1}}}{\|\mu_0\|^{\frac{q}{q-1}}}$ .  $\alpha_0$  is well defined as we excluded  $\|\mu_0\| = 0$  and  $\lambda_0 = 0$ . Further, note that the result is still true for  $a_{\tau} = 0$  or  $a_{\tau'} = 0$ .  $\square$

### A.2 The proof of Theorem 4

*Proof.* Consider any  $\tau$  in  $\mathcal{G}_{\mathcal{T}}$ . Using Theorem 3 we have that  $h_{\tau}(\kappa, \lambda, \mu) = 0$  and for all  $\tau' \neq \tau$   $h_{\tau'}(\kappa, \lambda, \mu) < 0$ . It can not be that  $\lambda = 0$  and  $\mu = 0$  as in that case  $h_{\tau}(\kappa, 0, 0) = 0$  and then  $\kappa = 0$ , and  $h_{\tau'}(\kappa, 0, 0) = 0$  contradicting  $h_{\tau'}(\kappa, \lambda, \mu) < 0$ .

Now we have the following equivalence:

1.  $\exists \kappa, \lambda, \mu$ , with  $(\lambda, \mu) \neq 0$  such that  $h_{\tau}(\kappa, \lambda, \mu) = 0$  and  $\forall \tau' \neq \tau$   $h_{\tau'}(\kappa, \lambda, \mu) < 0$ .
2.  $\exists \kappa, \lambda, \mu$ , with  $(\lambda, \mu) \neq 0$  such that  $\langle (a_{\tau}, b_{\tau}), (\lambda, -2\mu) \rangle = \kappa$  and  $\forall \tau' \neq \tau$   $\langle (a_{\tau'}, b_{\tau'}), (\lambda, -2\mu) \rangle < \kappa$ .
3.  $(a_{\tau}, b_{\tau})$  is on the convex hull  $\{(a_{\tau'}, b_{\tau'})\}_{\tau' \in \mathcal{T}}$ .

To go from (2) to (3) we note that a point is a part of the convex hull if there is a hyperplane (defined by a non-zero vector and a constant) going through this point and such that all other points are strictly on one side of the hyperplane.  $\square$

### A.3 The proof of Theorem 5

*Proof.* First consider the case  $s = p$ . Starting from equation (6), we get to equation (8) as described in section 2.2 and we recover our functional pruning problem of equation (10) as described in Section 3.1, taking  $\mathcal{T} = \{1, \dots, n-1\}$ ,  $a_{\tau} = \tau$ ,  $b_{\tau} = \sum_{t=1}^{\tau} x_t$  and  $c_{\tau} = 0$ . Thus applying Theorem 4, and then Theorem 1 we get the desired result for  $\hat{\tau}(\eta_1)$ .

The index maximising the likelihood and its value do depend on  $\eta_1$ , however, the set of points we need to build the convex hull does not depend on the value of  $\eta_1$ . Considering  $\eta_1 = \arg \max_{\eta_1} (\max_{\eta_2} \ell_{\hat{\tau}(\cdot), n}(\eta_1, \eta_2))$  we have  $\hat{\tau}(\cdot) = \hat{\tau}(\eta_1)$  and we recover the desired result for  $\hat{\tau}(\cdot)$ .

Without loss of generality let us now consider the  $s$  first coordinates of  $x_t$ . We call  $x'_t$  the vector of  $\mathbb{R}^s$  containing the first  $s$  coordinates of  $x_t$  and define  $P'(\tau) = (\tau, \sum_{t=1}^{\tau} x'_t)$ . Now using the previous result the change maximizing the likelihood restricted to the first  $s$  coordinates is on the hull of  $P'(\tau)$  and therefore also on the hull of  $P(\tau)$ .  $\square$

### A.4 The proof of Lemma 1

*Proof.* In the case where all  $x_t^d$  are independent and identically distributed, the property  $(Ex)$  holds. To show that property  $(GP)$  holds, consider time  $n \geq p+2$  and choose any indices  $\tau_1, \dots, \tau_{p+1}$  such that  $0 < \tau_1 < \dots < \tau_{p+1} < n$ . We define the following variables for  $d = 1, \dots, p+1$ :

$$S_d = \left( \tau_d, \sum_{t=1}^{\tau_d} x_t \right) \in \mathbb{R}^{p+1}, \quad M_d = S_d - S_{d-1}, \quad \text{with } S_0 = 0.$$

It can be observed that  $S_d = \sum_{k \leq d} M_k$  for any  $d = 1, \dots, p+1$ . Therefore, the linear independence of  $S_1, \dots, S_{p+1}$  is equivalent to the linear independence of  $M_1, \dots, M_{p+1}$ . We denote the matrix of size  $(p+1) \times (p+1)$  where its

$d$ -th column is  $M_d$  as  $M$ . Consider its transpose matrix  $M^T$ . Its first column-vector is filled with integers between 1 and  $n - 1$ . Linear algebra shows that proving linear independence for column vectors in  $M$  or in  $M^T$  is equivalent. The last  $p$  column vectors in  $M^T$  are drawn independently with a continuous density and thus are almost surely linearly independent, spanning a hyperplane of dimension  $p$ . The probability that a point in  $\mathbb{R}^{p+1}$ , the first column vector of  $M^T$ , is in this span is 0. In conclusion, for any given  $n$ , there are finitely many matrices  $M$  to consider, and their probabilities satisfy  $(GP)$ , ensuring that property  $(GP)$  holds.  $\square$

## B Index Set Equality

The equality  $\mathcal{F}_{\mathcal{T}} = \mathcal{G}_{\mathcal{T}}$  can be proved with weaker conditions on  $A$  than those of Theorem 2. This equality has a simple geometric interpretation: to be true, any half-line in  $Im(A) \times \mathcal{D}_A$  has to intersect the manifold defined by  $\{(A(\mu), \mu), \mu \in \mathcal{D}_A\}$ .

**Theorem 7.** *If for all  $\tau \in \mathcal{T}$ ,  $c_{\tau} = 0$  and  $A$  is continuous defined on a cone with  $Im(A) = \mathbb{R}^+$  such that  $A(0) = 0$ ,  $\nabla A(0) = 0$  and  $\lim_{\|\mu\| \rightarrow \infty} \frac{A(\mu)}{\|\mu\|} = +\infty$  we have  $\mathcal{F}_{\mathcal{T}} = \mathcal{G}_{\mathcal{T}}$ .*

*Proof.* Consider  $\tau$  in  $\mathcal{G}_{\mathcal{T}}$ . For all  $\tau' \neq \tau$ , the inverse image of the open set  $(0, +\infty)$  by linear functions  $g_{\tau} - g_{\tau'}$  is a non-empty intersection of half-spaces. Moreover, there exists  $(\lambda_0, \mu_0) \in Im(A) \times \mathcal{D}_A$  such that for all  $\tau' \neq \tau$  in  $\mathcal{T}$  we have:  $g_{\tau}(\lambda_0, \mu_0) > g_{\tau'}(\lambda_0, \mu_0)$ . Using condition  $c_{\tau} = c_{\tau'} = 0$  and  $\alpha > 0$  we get by linearity

$$g_{\tau}(\alpha\lambda_0, \alpha\mu_0) = \alpha g_{\tau}(\lambda_0, \mu_0) > \alpha g_{\tau'}(\lambda_0, \mu_0) = g_{\tau'}(\alpha\lambda_0, \alpha\mu_0).$$

Therefore, as all points of the half-line  $\{\alpha(\lambda_0, \mu_0), \alpha > 0\}$  belong to this set, it shows that index  $\tau$  is optimal on an open polyhedral cone.

Suppose that for the considered  $(\lambda_0, \mu_0)$ , there exists  $\alpha_0 > 0$  such that  $\lambda_0 = \frac{A(\alpha_0\mu_0)}{\alpha_0}$  then  $\alpha_0\mu_0$  is a value in the cone  $\mathcal{D}_A$  verifying all the constraints  $f_{\tau}(\alpha_0\mu_0) > f_{\tau'}(\alpha_0\mu_0)$ , so that  $\tau$  also belongs to  $\mathcal{F}_{\mathcal{T}}$ . In geometric terms, this means that any half-line in the polyhedral cone associated with index  $\tau$  intersects the manifold defined by  $\{(A(\mu), \mu), \mu \in \mathcal{D}_A\}$ .

It remains to prove that the proposed assumptions over  $A$  are sufficient to find such an alpha proving the set equality. We consider the same half-line  $\{\alpha(\lambda_0, \mu_0), \alpha > 0\}$ . By linear approximation in 0, we have  $A(\epsilon) = A(0) + \langle \epsilon, \nabla A(0) \rangle + o(\|\epsilon\|) = o(\|\epsilon\|)$  and locally, we get  $A(\alpha\mu_0) = o(\|\alpha\mu_0\|) < \alpha\lambda_0$  for small  $\alpha$ . Notice that as  $Im(A) = \mathbb{R}^+$  and the cone is open, we have  $\lambda_0 > 0$  and can choose  $\|\mu_0\| > 0$ . The half-line is therefore above the manifold (" $\alpha\lambda_0, \alpha\mu_0 > (A(\alpha\mu_0), \alpha\mu_0)$ ").

Using condition  $\lim_{\alpha \rightarrow \infty} \frac{A(\alpha\mu_0)}{\|\alpha\mu_0\|} = +\infty$ , continuity of  $A$  and previous local result  $\frac{A(\alpha\mu_0)}{\|\alpha\mu_0\|} = o(1)$  for small  $\alpha$ , it shows that there exists  $\alpha_0$  such that  $\frac{A(\alpha_0\mu_0)}{\|\alpha_0\mu_0\|} = \frac{\lambda_0}{\|\mu_0\|}$  (as  $\frac{\lambda_0}{\|\mu_0\|} > 0$ ). Thus  $(\alpha_0\lambda_0, \alpha_0\mu_0) = (A(\alpha_0\mu_0), \alpha_0\mu_0)$  which leads to  $f_{\tau}(\alpha_0\mu_0) > f_{\tau'}(\alpha_0\mu_0)$  and index  $\tau$  is in  $\mathcal{F}_{\mathcal{T}}$ .  $\square$

## C Stirling numbers of the first kind in terms of the harmonic series

To obtain numerical values of  $U_n^p$  and  $V_n^p$  of the convex hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$  for  $1 \leq p \leq 5$  we need to know the expressions of  $\begin{bmatrix} n \\ m \end{bmatrix}$  for  $m = 0, \dots, 6$ . As shown in [58], the general formula for the Stirling numbers of the first kind in terms of the harmonic series is

$$\begin{bmatrix} n \\ m \end{bmatrix} = \frac{(n-1)!}{(m-1)!} \omega(n, m-1). \quad (14)$$

The  $\omega$ -sequence is defined recursively by

$$\omega(n, m) = \mathbb{1}_{m=0} + \sum_{k=0}^{m-1} (1-m)_k \sigma_{k+1} \omega(n, m-1-k),$$

where  $\sigma_{k+1} = \sum_{i=1}^{n-1} \frac{1}{i^{k+1}}$  is the partial sums of the harmonic series  $\{\frac{1}{i^{k+1}}\}_{i=1,2,\dots}$  and  $(1-m)_k$  are the Pochhammer symbols. Applying the formula (14) for  $m = 0, \dots, 6$ , we get

$$\begin{bmatrix} n \\ 0 \end{bmatrix} = 1, \quad \begin{bmatrix} n \\ 1 \end{bmatrix} = (n-1)!, \quad \begin{bmatrix} n \\ 2 \end{bmatrix} = (n-1)! \sigma_1,$$

$$\begin{aligned} \begin{bmatrix} n \\ 3 \end{bmatrix} &= \frac{(n-1)!}{2}(\sigma_1^2 - \sigma_2), & \begin{bmatrix} n \\ 4 \end{bmatrix} &= (n-1)! \left( \frac{\sigma_1^3}{6} - \frac{\sigma_1\sigma_2}{2} + \frac{\sigma_3}{3} \right), \\ \begin{bmatrix} n \\ 5 \end{bmatrix} &= (n-1)! \left( \frac{\sigma_1^4}{24} - \frac{\sigma_1^2\sigma_2}{4} + \frac{\sigma_1\sigma_3}{3} + \frac{\sigma_2^2}{8} - \frac{\sigma_4}{4} \right), \\ \begin{bmatrix} n \\ 6 \end{bmatrix} &= (n-1)! \left( \frac{\sigma_1^5}{120} - \frac{\sigma_1^3\sigma_2}{12} + \frac{\sigma_1^2\sigma_3}{6} + \frac{\sigma_1\sigma_2^2}{8} - \frac{\sigma_1\sigma_4}{4} - \frac{\sigma_2\sigma_3}{6} + \frac{\sigma_5}{5} \right). \end{aligned}$$

## D Detection of multiple changes in the parameter of a distribution in the exponential family

We define the set  $\mathcal{M}_n^K$  of all possible segmentations in  $K$  changepoints of time series  $\{y_t\}_{t=1,\dots,n}$  as:

$$\mathcal{M}_n^K = \{\tau = (\tau_0, \tau_1, \dots, \tau_K, \tau_{K+1}) \in \mathbb{N}^{K+2} \mid 0 = \tau_0 < \tau_1 < \dots < \tau_K < \tau_{K+1} = n\}.$$

For any segmentation  $\tau$  in  $\mathcal{M}_n^K$  we define its size as  $|\tau| = K$ . We denote  $\mathcal{M}_n^\infty$  as the set of all possible segmentations of  $\{y_t\}_{t=1,\dots,n}$ :

$$\mathcal{M}_n^\infty = \bigcup_K \mathcal{M}_n^K, \quad (15)$$

and take the convention that  $M_n^{\infty-1} = M_n^\infty$ .

From a statistical perspective given a subset of all segmentations  $\mathcal{M}_n^K$  for  $K$  in  $\mathbb{N} \cup \{\infty\}$  it makes sense to recover the segmentation maximising a penalised likelihood of our (transformed as in Section 2.2) data  $\{x_t\}_{t=1,\dots,n}$ :

$$C_n^K = \max_{\tau \in \mathcal{M}_n^K} \left\{ \sum_{k=1}^{|\tau|+1} \max_{\eta_k} \left[ \sum_{t=\tau_{k-1}+1}^{\tau_k} 2 \log(f_X(x_t|\eta_k)) - \beta \right] \right\}, \quad (16)$$

where  $\beta$  is a penalty value in  $\mathbb{R}^+$ .

The previous equation encompasses two common multiple changepoints strategies. In the first, which we call Segment Neighbourhood (SN) [22] the user is given a maximum number of changepoints  $K_{max}$  and solve Equation (16) for all  $K \leq K_{max}$  (setting  $\beta$  to 0). In the second step all these solutions are compared using an appropriate model selection criteria such as [28, 73] to select the number of changepoints. In the second strategy, which we call Optimal Partitioning (OP) [25] the position and number of changepoints are estimated in one go solving (16) for  $K = \infty$  and picking an appropriate value for  $\beta$  such as  $2\hat{\sigma}^2 \log(n)$  in a Gaussian setting with  $p = 1$  [74] where  $\hat{\sigma}^2$  is an estimate of the Gaussian variance.

Finding the maximum of (16) in either case can be done using dynamic programming. For any segmentation  $\tau$  with  $|\tau| > 1$ , observe that the first  $|\tau|$  terms in the previous sum are by definition smaller than  $C_{\tau_{|\tau|}}^{K-1}$ . Hence, we only need to consider the position of the last changepoint and we recover the update rule of the SN [22] and OP [25] algorithms:

$$C_t^K = \max_{i < t} \left\{ C_i^{K-1} + \max_{\eta} \left[ \sum_{s=i+1}^t 2 \log(f_X(x_s|\eta)) - \beta \right] \right\}. \quad (17)$$

With this recursion solved for increasing  $t$ , and, in the case of SN, increasing  $K$ .

Directly solving this recursion has a computational cost that is quadratic in  $n$ . This has led to pruning ideas that speed up the computation whilst still solving the maximisation problem exactly. The idea of these pruning rules is that at any time  $t$  we need only consider a subset of possible changepoint locations. The most efficient pruning rules are based on so-called functional pruning (as in the pDPA or FPOP algorithms [32, 33]). The idea is to consider the best segmentation of the data to time  $t$  as a function of the parameter of the final segment. For each value of this parameter there will be an optimal position of the most recent changepoint prior to  $t$ , and at the next iteration, we need only consider these positions and  $t$  for the possible position of the most recent changepoint prior to  $t + 1$ . Implementing this algorithm requires calculating regions of the parameter space that are optimal for each value of the most recent changepoint. When  $p = 1$  this is straightforward as we are manipulating intervals, but for  $p > 1$  this becomes challenging, and often computationally prohibitive, as it involves computing the intersection and subtraction of many convex sets in  $\mathbb{R}^p$  [35, 36].

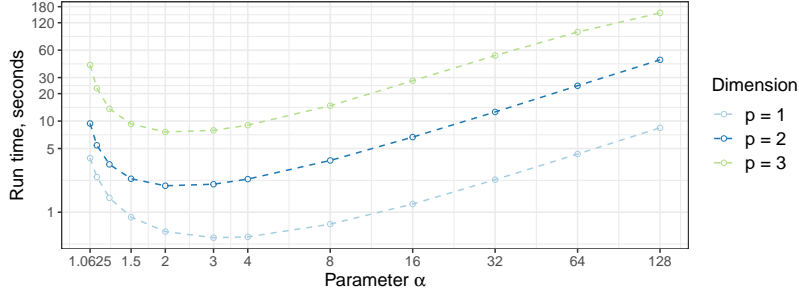


Figure 11: Run time of MdFOCuS0 as a function of  $\alpha$  for  $p$ -variate time series with  $n = 10^5$  data points in dimension  $p = 1, 2$  and  $3$ . We simulated 100 i.i.d. Gaussian data  $\mathcal{N}_p(0, I_p)$  and report the average run time.

### D.1 Connection between the Detection of Multiple changepoints and the half-space intersection problem

In Section 4, we established that the maximum likelihood estimator of a single changepoint problem corresponds to a vertex on the hull of a particular set of points. This result is primarily based on Theorem 4, which follows from the Half-space Intersection Theorem 3.

In the following theorem, we establish that the last changepoint of the maximum likelihood segmentation (see Equation (16)) of a multiple changepoint problem corresponds to a supporting hyperplane of a particular half-space intersection problem defined as in Theorem 3.

**Theorem 8.** *The last changepoint  $\hat{i}$  of the segmentation  $\hat{\tau}$  maximising the likelihood (16) is such that  $H_{\hat{i}}$  is a supporting hyperplane of  $\cap_i H_i$  where  $i$  is in  $\{1, \dots, n-1\}$  and  $H_i$  is defined as the hyperplane*

$$H_i = \{\kappa, \lambda, \mu \mid h_i(\kappa, \lambda, \mu) = a_i \lambda - 2\langle b_i, \mu \rangle + c_i - \kappa \leq 0\},$$

with  $a_i = i$ ,  $b_i = \sum_{t=1}^i x_t$  and  $c_i = C_i^{K-1} - \sum_{t=1}^i B'(x_t)$ .

*Proof.* We start from Equation (16). There is a value  $\hat{\eta}$  for which  $\hat{\tau}$  is optimal. Now if we subtract  $\sum_{t=1}^n \{2 \log(f_X(x_t|\eta)) - \beta\}$ ,  $\hat{\eta}$  is still optimal for  $\eta = \hat{\eta}$ . Now applying Theorem 3 and restricting our attention to the last changepoint as explained for Equation (9) we get the desired result.  $\square$

Contrary to the single changepoint case, we do not propose an algorithm based on this connection. Nonetheless, in a manner similar to the MdFOCuS algorithm, we think one could restrict the set of last changepoints to consider in the standard SN or OP algorithm using the output of a half-space intersection algorithm.

## E Additional Empirical evaluations

### E.1 Run time as a function of a slope parameter

Now we consider the empirical run times of the MdFOCuS algorithm with a known pre-change parameter  $\eta_1$  as a function of a slope parameter  $\alpha$ . Using the implementation of Algorithm 1 for a change in the mean of multi-dimensional Gaussian signal (see Table 1) in R/C++ using the qhull library (see link in the Supplementary Material) we studied how the  $\alpha$  parameter affects its running time. To do this, we generate 100 time series with  $n = 10^5$  data points (without changepoints, and  $x_t \sim \mathcal{N}_p(0, I_p)$  i.i.d.) in dimension  $p = 1, 2$  and  $3$ . In Figure 11 we report the average run time as a function of  $\alpha$  for MdFOCuS0 (that is for a known value of  $\eta_1$ ) and values of  $\alpha$  in  $\{1 + \{2^i\}_{i \in \{-4, \dots, 0\}}, 3, \{2^j\}_{j \in \{2, \dots, 7\}}\}$ . The value of  $maxSize$  was always initialised to  $p + 2$  and  $\beta$  was always set to 1. We observe a minimum run time for  $\alpha$  in  $[2, 4]$ . As a consequence in the rest of the simulations we always set  $\alpha$  to 2.

### E.2 Multidimensional Poisson Model

We simulated time series with a Poisson distribution :  $x_{1:n}(x_t \sim \mathcal{P}(\mathbf{1}_p), t = 1, \dots, n)$ . We varied  $p$  and  $n$  as in Section 4.2.

### E.2.1 Empirical validation of the bound

Using the same procedure as in Section 4.2, we evaluate the number of faces and vertices of the convex hull  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ . The results are presented in Figure 12. We note that the results are similar to the Gaussian case (see Figure 3).

### E.2.2 Empirical run times of the algorithm as a function of dimension

Using the same procedure as in Section 4.3 we evaluate the run times of MdFOCuS0 and MdFOCuS for Poisson distribution. The results are presented in Figure 13. We note that the results are similar to the Gaussian case (see Figure 4).

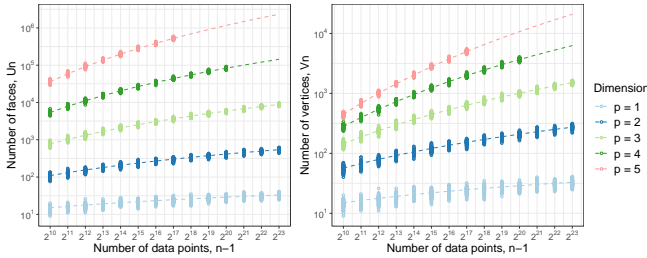


Figure 12: The number of faces (left) and vertices (right) of the convex hull built from the set of points  $\{P(i)\}_{i \in \{1, \dots, n-1\}}$  for dimension  $1 \leq p \leq 5$ . We simulated 100 i.i.d.  $p$ -variate Poisson data  $\mathcal{P}(\mathbf{1}_p)$  for each  $n$  from  $(2^{11} + 1)$  to  $(2^{23} + 1)$ . Dashed lines correspond to the expected number of faces (left) and vertices (right) presented in Theorem 6. We consider a maximum running time of 40 minutes for the *Quickhull* algorithm. That is why we don't have data points for  $p = 4$  and  $5$  for large number of observations.

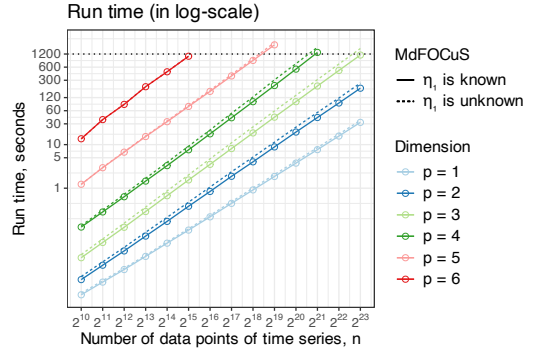


Figure 13: Run times in seconds of MdFOCuS with known (dashed line) and unknown (full line) pre-change parameter  $\eta_1$ , both with  $\alpha = 2$ ,  $\beta = 1$  and  $maxSize = 14$ , in dimension  $p = 1, \dots, 6$  using time series  $x_{1:n}$  (without change,  $x_t \sim \mathcal{P}(\mathbf{1}_p)$  i.i.d.). Run times are averaged over 100 data sets. We considered a maximum running time of 20 minutes (horizontal dotted black line) for the algorithms. That is why we do not report run times for  $p = 4, 5$  and  $6$  for large number of observations. We report here the slope of the curve obtained using a simple linear regression: for known  $\eta_1$ :  $\approx 1.013$  ( $p = 1$ ),  $\approx 1.126$  ( $p = 2$ ),  $\approx 1.192$  ( $p = 3$ ),  $\approx 1.210$  ( $p = 4$ ),  $\approx 1.172$  ( $p = 5$ ) and  $\approx 1.250$  ( $p = 6$ ); for unknown  $\eta_1$ :  $\approx 1.018$  ( $p = 1$ ),  $\approx 1.138$  ( $p = 2$ ),  $\approx 1.213$  ( $p = 3$ ),  $\approx 1.240$  ( $p = 4$ ),  $\approx 1.190$  ( $p = 5$ ) and  $\approx 1.254$  ( $p = 6$ ).

### E.3 50-dimensional time series, controlled by false positive rate

We present an additional simulation study to compare the 1d approximation proposed by [34] (here called FOCuS), with the high-dimensional approximation for MdFOCuS (in Table 5). We compare MdFOCuS 2d Sp, which utilizes a two-dimensional approximation of the convex hull alongside the partial likelihood ratio statistic (see subsection G). To facilitate a fair comparison, we tune the thresholds of all methods to achieve the same pre-change false positive rate of 0.01. We applied a Bonferroni correction to cope with multiple thresholds. The simulation scenarios mirror those of the main study but with the changepoint occurring at time 10000. This is to emphasize the impact of the approximations. We expect the two-dimensional approximation to outperform the one-dimensional approximation proposed by [34], particularly for small-magnitude changes. However, as observed in the main study, the original FOCuS method is still superior when observing a change in one dimension, as, despite in that case the statistics being equal, its threshold is slightly lower (because it considers less statistics in total).

Table 5: Average detection delay with 50-dimensional time series for a change at time  $t = 10000$ . Pre-change parameter is known on the left, and unknown on the right. Best results per row are highlighted in bold. Results are by controlling the false positive rate.

magnitude	density	Pre-change Known		Pre-change Unknown		
		FOCuS0	MdFOCuS0 2d Sp	FOCuS0 (est 500)	FOCuS	MdFOCuS 2d Sp
0.125	1	<b>2347.52</b>	2426.00	9980.48	<b>3161.26</b>	3295.96
0.125	5	3524.53	<b>3380.42</b>	9981.21	6088.01	<b>5375.96</b>
0.125	10	3997.59	<b>3814.82</b>	9980.60	7299.97	<b>6362.57</b>
0.125	25	4288.27	<b>4224.50</b>	9979.48	8474.92	<b>7479.11</b>
0.125	50	4509.18	<b>4362.75</b>	9982.43	8874.72	<b>7853.60</b>
0.250	1	<b>584.56</b>	599.49	8932.53	<b>627.85</b>	644.16
0.250	5	977.95	<b>871.53</b>	9779.57	1167.59	<b>970.06</b>
0.250	10	1159.92	<b>996.14</b>	9845.31	1504.27	<b>1117.59</b>
0.250	25	1299.23	<b>1096.57</b>	9893.83	1925.51	<b>1322.48</b>
0.250	50	1350.10	<b>1163.00</b>	9893.97	2216.25	<b>1400.04</b>
0.500	1	<b>147.73</b>	151.25	2711.61	<b>150.70</b>	153.69
0.500	5	245.45	<b>212.26</b>	4818.17	259.12	<b>215.56</b>
0.500	10	310.56	<b>247.15</b>	6139.80	357.20	<b>257.50</b>
0.500	25	358.34	<b>274.32</b>	7015.92	458.89	<b>290.81</b>
0.500	50	385.03	<b>290.86</b>	7316.34	534.77	<b>309.12</b>
0.750	1	<b>66.55</b>	67.78	1194.15	<b>66.86</b>	68.33
0.750	5	109.84	<b>96.61</b>	2208.06	112.88	<b>97.46</b>
0.750	10	146.07	<b>111.96</b>	3022.77	159.63	<b>113.25</b>
0.750	25	173.78	<b>123.47</b>	3713.07	208.40	<b>128.58</b>
0.750	50	185.83	<b>129.10</b>	3977.72	239.54	<b>134.76</b>
1.000	1	<b>37.90</b>	39.03	668.06	<b>38.16</b>	39.06
1.000	5	63.03	<b>55.14</b>	1254.92	64.23	<b>55.10</b>
1.000	10	84.73	<b>63.52</b>	1759.00	89.73	<b>63.96</b>
1.000	25	102.40	<b>73.13</b>	2226.95	120.41	<b>75.12</b>
1.000	50	109.77	<b>75.73</b>	2427.92	139.52	<b>78.38</b>
2.000	1	<b>10.22</b>	10.52	166.65	<b>10.20</b>	10.52
2.000	5	17.22	<b>14.74</b>	314.93	17.38	<b>14.75</b>
2.000	10	23.24	<b>17.06</b>	456.38	24.11	<b>17.10</b>
2.000	25	28.69	<b>18.96</b>	596.50	32.33	<b>19.40</b>
2.000	50	31.41	<b>19.90</b>	662.81	38.29	<b>20.43</b>

#### E.4 Additional Plug-in estimated methods

The following Tables 6, 7 and 8 show detection delays for various amount of training data prior to the monitoring period, and can be used to aid the comparison of the methods in the main simulation study.

## F Dyadic MdFOCuS : an algorithm with a quasi-linear expected complexity

In this appendix we present an algorithm for online changepoint detection. In essence, as in the MdFOCuS algorithm of the main text, it maintains a set of points that is slightly larger than the set of points on the hull. It does so applying the *QuickHull* (or any convex hull) algorithm on successive and non-overlapping deterministic chunks of the points. This deterministic choice of chunks is likely sub-optimal but it allows for a precise quantification of the expected complexity

Table 6: Average detection delay with 3-dimensional time series for a change at time  $t = 1000$ . Comparison of oracle against pre-change mean known methods with plug-in mean estimate

magnitude	density	FOCuS0	FOCuS0 (est 500)	FOCuS0 (est 250)	FOCuS0 (est 100)	ocd (ora)	ocd (est 500)	ocd (est 250)	ocd (est 100)
0.125	1	786.67	1162.32	1470.76	2253.81	1227.57	1721.56	1783.41	2490.39
0.125	2	791.36	1327.92	1693.06	2302.31	1421.54	2043.79	1987.04	2415.50
0.125	3	859.03	1352.66	1723.76	2329.12	1496.18	2046.77	2097.23	2337.57
0.250	1	250.58	325.38	470.69	1251.62	227.18	330.05	430.33	1102.87
0.250	2	253.56	364.98	556.86	1375.63	268.86	389.39	516.28	1173.38
0.250	3	273.92	401.56	630.94	1433.94	300.69	468.61	559.66	1204.47
0.500	1	65.85	80.59	113.75	312.64	56.46	71.71	83.90	177.84
0.500	2	71.85	92.22	132.99	354.26	65.18	81.19	96.50	181.77
0.500	3	79.21	106.81	155.61	396.17	74.50	92.76	103.97	169.63
0.750	1	31.80	37.30	50.73	133.10	28.95	34.93	39.46	67.11
0.750	2	34.66	42.69	61.46	154.01	32.52	38.90	43.47	70.93
0.750	3	37.19	49.00	71.75	172.62	35.43	42.38	46.40	68.02
1.000	1	18.51	21.83	29.18	73.23	18.87	21.98	24.16	35.99
1.000	2	20.30	25.32	34.55	86.22	20.45	23.68	25.45	37.82
1.000	3	21.68	27.79	40.03	98.67	21.52	24.70	26.23	37.56
2.000	1	5.35	6.18	8.06	19.03	6.40	7.06	7.12	9.14
2.000	2	5.97	7.18	9.46	22.10	6.64	7.10	7.25	9.64
2.000	3	6.51	7.89	10.62	24.63	6.80	7.32	7.41	9.48

 Table 7: Average detection delay with 5-dimensional time series for a change at time  $t = 1000$ . Comparison of oracle against pre-change mean known methods with plug-in mean estimate

magnitude	density	FOCuS0	FOCuS0 (est 500)	FOCuS0 (est 250)	FOCuS0 (est 100)	ocd (ora)	ocd (est 500)	ocd (est 250)	ocd (est 100)
0.125	1	833.11	1488.18	2219.97	2706.40	911.17	1583.01	2458.66	3081.32
0.125	2	892.82	1534.50	2221.24	2685.51	1106.68	1599.44	2441.70	3074.78
0.125	3	925.08	1615.20	2255.65	2691.14	1101.38	1706.65	2493.92	3053.87
0.125	4	835.44	1472.64	2102.15	2629.56	1059.06	1472.04	2296.26	3005.94
0.125	5	953.85	1584.83	2228.96	2701.14	1297.37	1621.73	2448.01	3046.09
0.250	1	259.75	435.84	871.35	1775.82	229.64	387.14	1064.11	2268.01
0.250	2	281.77	493.33	963.88	1839.07	253.79	424.68	1084.21	2281.61
0.250	3	297.41	517.02	1004.43	1924.93	287.10	446.80	1077.31	2336.42
0.250	4	260.23	471.25	918.63	1819.93	265.40	365.10	852.33	2140.46
0.250	5	304.13	541.09	1023.24	1988.96	309.16	439.40	1000.05	2350.21
0.500	1	72.98	107.78	206.83	537.16	64.74	96.04	247.08	763.99
0.500	2	84.75	128.09	243.50	610.94	73.93	108.04	253.56	828.08
0.500	3	91.31	139.43	267.82	655.26	83.54	110.27	252.69	846.27
0.500	4	80.89	131.85	250.83	608.11	75.94	93.22	199.82	686.05
0.500	5	95.41	154.27	293.72	703.96	89.48	111.43	235.87	841.18
0.750	1	33.44	47.69	91.82	228.48	32.98	44.57	108.72	341.20
0.750	2	39.21	58.27	113.10	267.93	36.22	48.39	113.74	380.14
0.750	3	41.29	64.95	124.88	294.45	38.61	49.04	110.91	381.23
0.750	4	37.03	61.29	116.62	277.83	34.71	41.39	87.09	305.25
0.750	5	45.65	74.44	137.55	326.77	42.24	50.95	104.84	366.27
1.000	1	19.63	27.77	51.75	128.48	21.37	27.25	62.33	209.80
1.000	2	22.88	33.47	63.86	151.84	22.88	28.27	62.99	220.30
1.000	3	24.67	36.48	71.35	167.23	23.65	28.63	62.24	216.61
1.000	4	22.45	35.42	67.41	156.69	20.32	23.52	49.88	167.50
1.000	5	27.18	43.05	81.02	186.18	25.07	29.31	61.01	204.52
2.000	1	5.79	7.72	13.40	31.86	7.25	7.97	15.78	56.68
2.000	2	6.88	9.16	16.57	38.91	7.47	8.06	15.66	55.90
2.000	3	7.21	10.14	18.62	42.92	7.33	8.15	15.74	53.75
2.000	4	6.64	10.04	17.92	40.14	6.10	6.66	12.99	42.46
2.000	5	7.91	11.92	21.30	48.72	7.40	8.10	15.55	52.15

of the algorithm under the assumption of Theorem 6 (or Corollary 1) and under the assumption that the convex hull algorithm is at worst quadratic. To be specific we obtain a  $\mathcal{O}(n \log(n)^{p+1})$  bound on the expected time complexity.

The algorithm we propose (as one of the main text) considers at least all points on the hull to maximise the likelihood for every new data point. For a fixed  $p$  following, Theorem 6 and its corollary the number of points on the hull at step  $i$  is in  $\Omega((\log(i))^p)$ . To recover a lower bound on the complexity, we first sum overall  $i \leq n$ , and then consider only  $i \geq n/2$



Table 8: Average detection delay with 100-dimensional time series for a change at time  $t = 1000$ . Comparison of oracle against pre-change mean known methods with plug-in mean estimate.

magnitude	density	FOCuS0	FOCuS0 (est 500)	FOCuS0 (est 250)	FOCuS0 (est 100)	ocd (ora)	ocd (est 500)	ocd (est 250)	ocd (est 100)
0.125	1	1417.15	3269.06	3459.08	3615.97	1171.63	3361.86	3546.43	3696.77
0.125	5	1881.10	3429.84	3497.94	3604.75	1627.00	3490.18	3595.24	3691.58
0.125	10	2084.84	3450.20	3501.48	3607.64	1940.41	3510.97	3595.46	3695.33
0.125	50	2252.48	3473.50	3494.67	3611.70	2386.98	3547.64	3591.96	3704.31
0.125	100	2323.59	3505.76	3507.66	3610.74	2431.51	3564.11	3599.24	3705.24
0.250	1	389.11	1552.28	2659.50	3436.24	335.95	1643.28	2841.37	3542.47
0.250	5	641.18	2363.35	3054.36	3510.27	505.39	2477.35	3232.02	3607.01
0.250	10	789.27	2590.60	3178.29	3518.29	595.10	2706.71	3334.21	3622.86
0.250	50	1057.30	3026.93	3323.17	3549.36	827.30	3142.73	3453.27	3662.49
0.250	100	1080.26	3101.34	3346.50	3544.06	891.09	3200.56	3476.58	3650.38
0.500	1	105.79	359.11	721.53	1798.04	104.79	411.98	859.71	2132.81
0.500	5	169.93	661.68	1297.63	2580.08	139.23	708.99	1449.56	2809.88
0.500	10	232.04	900.72	1653.97	2868.20	170.03	958.71	1850.22	3077.24
0.500	50	357.90	1730.82	2480.88	3231.38	239.08	1868.74	2719.69	3408.29
0.500	100	372.34	1916.38	2611.86	3237.55	244.07	2093.59	2841.33	3407.16
0.750	1	47.78	158.37	310.89	761.25	57.56	228.43	461.51	1138.50
0.750	5	75.34	297.90	580.05	1389.39	73.47	354.74	715.73	1704.61
0.750	10	104.45	408.77	798.60	1831.94	84.16	458.03	925.56	2114.73
0.750	50	184.09	958.18	1626.21	2651.16	114.29	1036.67	1836.28	2889.70
0.750	100	193.77	1156.00	1823.30	2730.10	115.21	1283.48	2074.96	2956.24
1.000	1	27.12	89.54	173.04	419.58	38.67	158.25	317.49	772.93
1.000	5	43.72	168.56	325.28	791.73	46.07	237.96	476.20	1142.06
1.000	10	60.36	235.29	458.62	1094.25	50.77	298.13	599.74	1422.86
1.000	50	109.11	580.49	1074.41	2036.18	66.02	630.09	1218.93	2284.94
1.000	100	116.60	747.72	1288.45	2190.83	67.59	823.90	1466.28	2453.87
2.000	1	7.58	22.69	43.03	103.23	12.93	71.01	142.00	341.47
2.000	5	12.92	42.04	82.41	199.48	13.80	101.81	203.48	485.40
2.000	10	16.46	60.00	117.67	283.82	14.80	124.40	250.44	594.86
2.000	50	31.85	162.50	315.56	734.61	18.08	226.70	451.59	1021.58
2.000	100	34.28	222.17	422.46	920.47	18.34	255.33	493.39	1104.39

to recover that the overall number of points we will consider is in  $\Omega(n/2(\log(n/2))^p)$  and thus  $\Omega(n(\log(n))^p)$ . Relative to that our algorithm loses just one  $\log(n)$  term, we thus argue our bound is relatively tight.

The assumption on the quadratic complexity is true for *QuickHull* in dimensions 2 and 3 (so for  $p \leq 2$ ) [48, 63] and using the algorithm of Chazelle [64] it is also true in dimension 4 (so for  $p \leq 3$ ). Still following Chazelle this is no longer true for any dimension strictly larger than 4 and therefore  $p > 3$ .

We begin with two preliminary results. The first is a crude bound on the expectation of the square of the number of points on the convex hull of  $n$  points (that is  $(V_n^p)^2$  following the notation of Section 4.2) under the assumptions of Theorem 6. The second result bounds the expected complexity of computing the hull of  $2n$  points if we already know the points on the hull of the first  $n$  points and the last  $n$  points. In all that follows we will assume that Assumptions 1 and 2 described in the main text are true. For ease of reading, we repeat them here.

**Assumption 1.** *In any dimension  $p \geq 1$ , there are positive constants  $c_1$  and  $c_2$  for which the expected number of vertices,  $\mathbb{E}[V_n^p]$ , can be bounded as follows:*

$$\mathbb{E}[V_n^p] \leq c_1 \log(n)^p + c_2.$$

This is true under the conditions of Corollary 1.

**Assumption 2.** *We assume that the convex hull algorithm we are using is at worst quadratic in time and assume there exist two positive constants  $c_3$  and  $c_4$  such that for  $n$  points the time complexity is  $\text{Time}(n) \leq c_3 n^2 + c_4$ .*

We now state our bound on the expectation of the square of the number of points on the hull  $V_n^p$ .

**Lemma 3.**

$$\mathbb{E}[(V_n^p)^2] \leq c_1 n \log(n)^p + c_2 n. \quad (18)$$

*Proof.*  $V_n^p$  is bounded by 0 and  $n - 1$ . It follows that

$$\mathbb{E}[(V_n^p)^2] = \sum_{i=0}^n \mathbb{P}(V_n^p = i) i^2 \leq n \sum_{i=0}^n \mathbb{P}(V_n^p = i) i \leq n \mathbb{E}[V_n^p] \leq c_1 n \log(n)^p + c_2 n. \quad (19)$$

We get the last inequality with Assumption 1.  $\square$

We now state our bound on the complexity of merging the hull of two successive chunks.

**Lemma 4.** *Consider we have  $2n$  data points. Assume we know  $\mathcal{W}_1$  the index of the points on the hull of  $\{P(\tau)\}_{1 \leq \tau \leq n}$  and  $\mathcal{W}_2$  the index of the points on the hull of  $\{P(\tau)\}_{n+1 \leq \tau \leq 2n}$ . Under the condition of Corollary 1 and Assumption 2 computing the index of the points on the hull of  $\{P(\tau)\}_{1 \leq \tau \leq 2n}$  can be done in less than  $4c_1c_3n(\log n)^p + 4c_2c_3n + c_4$  time.*

*Proof.* We will compute those points as the points on the hull of  $\{P(\tau)\}_{\tau \in \mathcal{W}_1 \cup \mathcal{W}_2}$ . By Assumption 2 the time complexity of processing these  $|\mathcal{W}_1| + |\mathcal{W}_2|$  points is

$$\text{Time}(|\mathcal{W}_1| + |\mathcal{W}_2|) \leq c_3 (|\mathcal{W}_1| + |\mathcal{W}_2|)^2 + c_4 \leq 2c_3 (|\mathcal{W}_1|^2 + |\mathcal{W}_2|^2) + c_4.$$

Now taking the expectation and noting that under the assumption of Corollary 1 the distribution of  $|\mathcal{W}_1|$  is the same as the distribution of  $|\mathcal{W}_2|$  we get

$$\mathbb{E}(\text{Time}(|\mathcal{W}_1| + |\mathcal{W}_2|)) \leq 4c_3\mathbb{E}(|\mathcal{W}_1|^2) + c_4.$$

Using (18) we get that the expected complexity is

$$\mathbb{E}(\text{Time}(|\mathcal{W}_1| + |\mathcal{W}_2|)) \leq 4c_1c_3n(\log n)^p + 4c_2c_3n + c_4. \quad (20)$$

□

## F.1 Dyadic algorithm for MdFOCuS

### F.1.1 Set of candidates

Recall that at time  $n$  we would ideally only store the vertices on the hull of  $\{P(\tau)\}_{\tau < n}$ . In the following algorithm we store the vertices on the hull of chunks of the form  $\{k2^q + 1, \dots, (k+1)2^q\}$  for all  $q \geq q_{\min}$ . To be specific, we consider the base 2 description of  $n$ :  $n = \sum_{q=0}^{\lfloor \log_2(n) \rfloor} \bar{n}_q 2^q$ , with  $\bar{n}_q = 0$  or 1, and define for  $q$  in  $\{0, \dots, \lfloor \log_2(n-1) \rfloor\}$  the subset  $\mathcal{U}_n^q$  of  $\{1, \dots, n-1\}$  as

$$\mathcal{U}_n^q = \left\{ \tau \mid \sum_{q'=q+1}^{\lfloor \log_2(n-1) \rfloor} \overline{(n-1)}_{q'} 2^{q'} < \tau \leq \sum_{q'=q}^{\lfloor \log_2(n-1) \rfloor} \overline{(n-1)}_{q'} 2^{q'} \right\},$$

with the convention that for  $q = \lfloor \log_2(n-1) \rfloor$  the sum  $\sum_{q'=q+1}^{\lfloor \log_2(n-1) \rfloor} \overline{(n-1)}_{q'} 2^{q'}$  is equal to 0.

We provide a few examples of these sets for  $n = 20$  to  $n = 31$  in Table 9. It can be observed that often  $\mathcal{U}_n^q$  differs from  $\mathcal{U}_{n+1}^q$  only for small values of  $q$ .

Table 9: A few  $\mathcal{U}_n^q$  sets.

$n$	$q = 4$	$q = 3$	$q = 2$	$q = 1$	$q = 0$
31	{1, ... 16}	{17, ... 24}	{25, ... 28}	{29, 30}	∅
30	{1, ... 16}	{17, ... 24}	{25, ... 28}	∅	{29}
29	{1, ... 16}	{17, ... 24}	{25, ... 28}	∅	∅
28	{1, ... 16}	{17, ... 24}	∅	{25, 26}	{27}
27	{1, ... 16}	{17, ... 24}	∅	{25, 26}	∅
26	{1, ... 16}	{17, ... 24}	∅	∅	{25}
25	{1, ... 16}	{17, ... 24}	∅	∅	∅
24	{1, ... 16}	∅	{17, ... 20}	{21, 22}	{23}
23	{1, ... 16}	∅	{17, ... 20}	{21, 22}	∅
22	{1, ... 16}	∅	{17, ... 20}	∅	{21}
21	{1, ... 16}	∅	{17, ... 20}	∅	∅
20	{1, ... 16}	∅	∅	{17, 18}	{19}

Now note that for any  $q_{\min} \leq \lfloor \log_2(n-1) \rfloor$

$$\bigcup_{q=q_{\min}}^{\lfloor \log_2(n-1) \rfloor} \mathcal{U}_n^q \cup \left\{ \tau \mid \sum_{q'=q_{\min}}^{\lfloor \log_2(n-1) \rfloor} \overline{(n-1)}_{q'} 2^{q'} < \tau \leq n-1 \right\},$$

is a partition of  $\{1, \dots, n-1\}$ . The right-side set of this partition has at most  $2^{q_{min}}$  elements. We use this partition to update the set of candidates. To be specific our algorithm maintains

$$\mathcal{T}_n = \bigcup_{q=q_{min}}^{\lfloor \log_2(n-1) \rfloor} \mathcal{W}_n^q \cup \left( \{P(\tau) \mid \sum_{q'=q_{min}}^{\lfloor \log_2(n-1) \rfloor} \overline{(n-1)_{q'}} 2^{q'} < \tau \leq n-1\} \right),$$

with  $\mathcal{W}_n^q = \text{HULL}(\{P(\tau)\}_{\tau \in \mathcal{U}_n^q})$ . Note that  $\mathcal{T}_n$  contains all the points (or index of the points) on the hull of  $\{P(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ .

In the next paragraphs, we bound the expected number of points in  $\mathcal{T}_n$  and then explain how we compute  $\mathcal{T}_{n+1}$  from  $\mathcal{T}_n$ .

**Lemma 5.** *For a fixed  $q_{min}$ , under Assumption 1 we have*

$$\mathbb{E}(|\mathcal{T}_n|) \leq 2c_1(\log n)^{p+1} + 2c_2 \log n + 2^{q_{min}}. \quad (21)$$

*Proof.* For a fixed  $q_{min}$  using Assumption 1 for all  $\mathcal{U}_n^q$  we get that

$$\begin{aligned} \mathbb{E}(|\mathcal{T}_n|) &\leq \sum_{q=q_{min}}^{\lfloor \log_2(n-1) \rfloor} (c_1(\log 2^q)^p + c_2) + 2^{q_{min}} \\ &\leq \sum_{q=q_{min}}^{\lfloor \log_2(n-1) \rfloor} (c_1(\log n)^p + c_2) + 2^{q_{min}} \\ &\leq 2c_1(\log n)^{p+1} + 2c_2 \log n + 2^{q_{min}}. \end{aligned}$$

We get the last inequality using the fact that we sum over at most  $\log_2(n)$  terms and  $1/\log(2) \leq 2$ .  $\square$

### F.1.2 Updating the set of candidates

To compute  $\mathcal{T}_{n+1}$  from scratch we need to apply the hull algorithm on all  $\mathcal{U}_{n+1}^q$  for  $q \geq q_{min}$ . Assuming we already computed  $\mathcal{T}_n$  computing  $\mathcal{T}_{n+1}$  is a bit easier. This is because it is often the case that  $\mathcal{U}_{n+1}^q = \mathcal{U}_n^q$ . Therefore we directly get the indices of the point on the hull of  $\mathcal{U}_{n+1}^q$  as  $\mathcal{U}_n^q \cap \mathcal{T}_n$  because

$$\mathcal{W}_n^q = \text{HULL}(\{P(\tau)\}_{\tau \in \mathcal{U}_n^q}) = \mathcal{U}_n^q \cap \mathcal{T}_n.$$

Algorithm 2 formalise this idea and iteratively merge chunks of size  $2^q$  to take advantage of Lemma 4.

---

#### Algorithm 2 Update of the set of candidates

---

```

1: Input :  $n$  and  $\mathcal{T} = \mathcal{T}_n$ 
2:  $\mathcal{T} \leftarrow \mathcal{T} \cup \{n\}$ 
3:  $q \leftarrow q_{min}$ 
4: while  $\text{remainder}(n/2^q) = 0$  do
5:    $\mathcal{T}' \leftarrow \{\tau \in \mathcal{T} \mid \tau > n - 2^q\}$ 
6:    $\mathcal{T}'' \leftarrow \text{QUICKHULL}(\{P(\tau)\}_{\tau \in \mathcal{T}'})$ 
7:    $\mathcal{T} \leftarrow \mathcal{T} \setminus (\mathcal{T}' \setminus \mathcal{T}'')$   $\triangleright$  discard vertices in  $\mathcal{T}'$  not in  $\mathcal{T}''$ 
8:    $q \leftarrow q + 1$ 
9: end while
10: return  $\mathcal{T} = \mathcal{T}_{n+1}$ 

```

---

**Remark 7.** *In Algorithm 2 we assume that if the set of points  $\{P(\tau)\}_{\tau \in \mathcal{T}'}$  doesn't define a proper volume in dimension  $p+1$  then the output of  $\text{QUICKHULL}(\{P(\tau)\}_{\tau \in \mathcal{T}'})$  is simply  $\mathcal{T}'$ . If we choose  $q_{min}$  such that  $2^{q_{min}}$  is larger than  $p+2$  this is unlikely to happen for data drawn from a distribution with a continuous density.*

We now continue with an informal description of Algorithm 2. Looking at line 4 when we include a new data point  $n+1$  two cases can happen.

- $n$  is not a multiple of  $2^{q_{min}}$ . In that case for all  $q \geq q_{min}$  we have  $\mathcal{U}_{n+1}^q = \mathcal{U}_n^q$ . We just need to add  $n$  as a possible changepoint to  $\mathcal{T}_n$  to recover  $\mathcal{T}_{n+1}$ . This was done in line 2.

- $n$  is a multiple of  $2^{q_{min}}$ . In that case for some  $q \geq q_{min}$  we have that  $\mathcal{U}_{n+1}^q$  is different from  $\mathcal{U}_n^q$ . We therefore need to update the set of points using the hull algorithm.

For the later case let us define  $q_n \geq q_{min}$  as the largest integer such that  $2^{q_n}$  divides  $n$ . Before we explain the update of lines 5, 6, and 7 note the following facts.

- In base 2,  $n$  ends with a one followed by  $q_n$  zeros. In other words  $\bar{n}_{q_n} = 1$  and for all  $q < q_n$   $\bar{n}_q = 0$ . Thus all  $\mathcal{U}_{n+1}^q$  with  $q < q_n$  should be empty and  $\mathcal{U}_{n+1}^{q_n}$  is not.
- In base 2,  $n - 1$  ends with a zero followed by  $q_n$  ones. In other words  $\overline{(n-1)}_{q_n} = 0$  and for all  $q < q_n$   $\overline{(n-1)}_q = 1$ . Thus all  $\mathcal{U}_n^q$  with  $q < q_n$  are not empty.
- We know the index of the points on the hull for all sets of indices  $\mathcal{U}_n^q$  with  $q < q_n$ :

$$\mathcal{W}_n^q = \text{HULL}(\{P(\tau)\}_{\tau \in \mathcal{U}_n^q}) = \mathcal{U}_n^q \cap \mathcal{T}_n.$$

- Finally,  $\mathcal{U}_{n+1}^{q_n} = (\cup_{q_{min} \leq q < q_n} \mathcal{U}_n^q) \cup \{\tau | n - 2^{q_{min}} < \tau \leq n\}$ .

Our goal is to get the point (or indices of these points) on the hull of  $P(\tau)$  for  $\tau$  in  $\mathcal{U}_{n+1}^{q_n}$ . To exploit the merging bound of (20) Algorithm 2 iteratively apply the hull algorithm on larger and larger chunks of the data trimming the points that are not on the hull. In the while loop, from lines 4 to 9, of Algorithm 2 we can distinguish two cases.

1. For  $q = q_{min}$  on lines 5 and 6 the algorithm applies the hull algorithm on the  $2^q$  right-most points:  $\text{HULL}(\{P(\tau)\}_{n-2^q < \tau \leq n})$ . It then discards on line 7 all indices larger than  $n - 2^q$  that are not on this hull.
2. If  $q_{min} < q \leq q_n$  on lines 5 and 6 the algorithm applies the hull algorithm on indices that are larger than  $n - 2^q$ . In essence it is applying the hull algorithm on the points computed during the previous while step (indices larger than  $n - 2^{q-1}$  and in  $\mathcal{T}$ ) with those of  $\mathcal{W}_n^q = \text{HULL}(\{P(\tau)\}_{\tau \in \mathcal{U}_n^q}) = \mathcal{U}_n^q \cap \mathcal{T}_n$  (indices between  $n - 2^q$  and  $n - 2^{q-1}$ , and in  $\mathcal{T}$ ). A bit more formally, calling  $\mathcal{W}_{n+1}^{q-1}$  the output of line 6 ( $\mathcal{T}''$ ) at step  $q$  of the while loop, we are merging  $\mathcal{W}_n^q$  and  $\mathcal{W}_{n+1}^{q-1}$  as follows:

$$\mathcal{W}_{n+1}^q = \text{HULL}(\{P(\tau)\}_{\tau \in \mathcal{W}_n^q \cup \mathcal{W}_{n+1}^{q-1}}).$$

On line 7 the algorithm is discarding all indices larger than  $n - 2^q$  that are not on this hull  $\mathcal{W}_{n+1}^q$ .

Proceeding in such a way at each step we merge the points on the hull of two successive chunks of size  $2^{q-1}$  to recover the point on the hull of a chunk of size  $2^q$ . Figure 14 is a schematic representation of these successive fusions (applications of the hull algorithm).

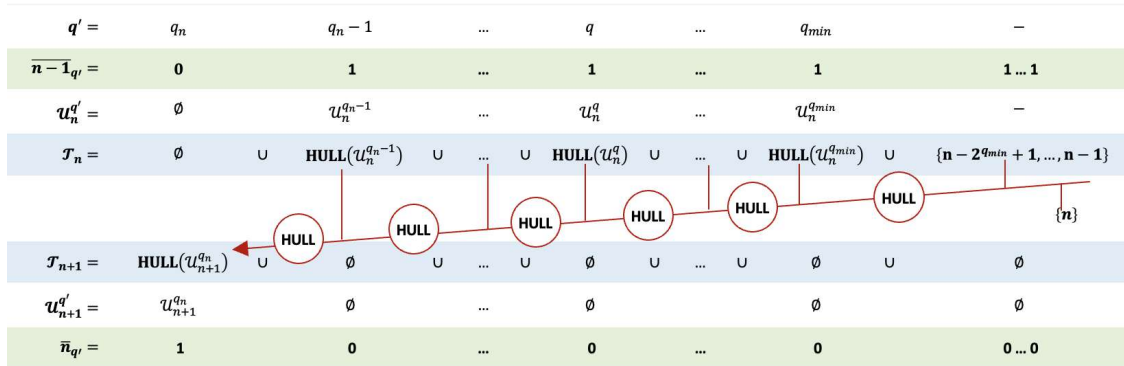


Figure 14: Schematic representation of the while loop of Algorithm 2 for  $q_n$  being the largest  $q$  such that  $2^q$  divides  $n$ . First applying the hull algorithm on  $\{n - 2^{q_{min}} + 1, \dots, n\}$  (on the right) following the red arrow we iteratively aggregate the result with the hull of points in  $\mathcal{U}_n^q$  to recover the point on the hull of  $\mathcal{U}_{n+1}^{q_n}$  (on the left). In such a way we effectively retrieve  $\mathcal{T}_{n+1}$  as all  $\mathcal{U}_{n+1}^q$  are empty for  $q < q_n$ .

**Example 1.** In this paragraph we explain how the algorithm proceeds for  $n = 24$  and  $q_{min} = 2$ . In base 2,  $n - 1 = 10111$ . Therefore (see the definition of set  $\mathcal{T}_n$ ) we already computed the points on the hull of  $P(\tau)$  for  $\tau$  in  $\mathcal{U}_{24}^4 = \{1, \dots, 16\}$  and  $\tau$  in  $\mathcal{U}_{24}^2 = \{17, \dots, 20\}$ , and additionally we store all indices  $\tau$  larger than  $24 - 2^2 : \{21, 22, 23\}$ . When we include a new observation  $n + 1 = 25$ , we need to include a possible change at  $n = 24$ , and here is what we do with the while loop (starting with  $q = 2$ ):

- for  $q = 2$ : we run *Quickhull* on points with indices strictly larger than 20 :  $\{21, 22, 23, 24\}$ ;
- for  $q = 3$ : to recover  $\mathcal{U}_{25}^3$  we run *Quickhull* on points with indices strictly larger than 16 that is the points obtained in the previous step ( $q = 2$ ) union those of the hull of  $\mathcal{U}_{24}^2$  (that were computed for  $n + 1 = 21$  as the point on the hull of  $\mathcal{U}_{21}^2$ ).
- for  $q = 4$ : we stop as the remainder of  $24/2^4$  is not 0.

We are now ready to give the proof of Lemma 2 in the main text, which we rewrite here to ease reading.

**Lemma 2.** *Under the assumption of Corollary 1 (see Assumption 1) and Assumption 2, the expected time complexity of Algorithm 2 is*

$$\mathbb{E}(\text{Time}(\text{Algorithm 2})) = \mathcal{O}(n \log(n)^{p+1}). \quad (22)$$

*Proof.* Considering all time steps up to  $n + 1$  the algorithm used the *QuickHull* algorithm on all successive (and nonoverlapping) chunks of size  $2^q$  for  $q$  larger than  $q_{min}$  and smaller than  $\lfloor \log_2(n) \rfloor$ .

For the smallest scale,  $n' = 2^{q_{min}}$ , we have  $n/2^{q_{min}}$  chunks and run *QuickHull* on all points. Using Assumption 2, the worst time per chunk is less than  $c_3(2^{q_{min}})^2 + c_4$ , and summing overall chunks we get  $nc_32^{q_{min}} + \frac{nc_4}{2^{q_{min}}}$  operations. So the smallest scale is in  $\mathcal{O}(n)$ .

We will now successively consider all larger scales  $n' = 2^q$  for  $q_{min} < q \leq \lfloor \log_2(n) \rfloor$ . Note that the hull of a chunk of size  $n' = 2^q$  is obtained by combining the hulls of two smaller chunks of size  $2^{q-1}$ . For any such chunk we can thus exploit Lemma 4 and equation (20) with  $|\mathcal{W}_1| = |\mathcal{W}_2| = n'/2 = 2^{q-1}$  and we get

$$\mathbb{E}(\text{Time}(|\mathcal{W}_1| + |\mathcal{W}_2|)) \leq 4c_1c_32^{q-1}(\log 2^{q-1})^p + 4c_2c_32^{q-1} + c_4.$$

Multiplying by  $n/2^q$  to consider all chunks of size  $2^q$  we get that the time to process scale  $2^q$  is

$$\begin{aligned} \mathbb{E}(\text{Time}(\text{“Scale } 2^q\text{”})) &\leq \frac{n}{2^q} (4c_1c_32^{q-1}(\log 2^{q-1})^p + 4c_2c_32^{q-1} + c_4) \\ &\leq 4c_1c_3 \frac{n}{2} (\log 2^{q-1})^p + 4c_2c_3 \frac{n}{2} + c_4 \frac{n}{2^q} \\ &\leq 4c_1c_3 \frac{n}{2} (\log n)^p + 4c_2c_3 \frac{n}{2} + c_4 \frac{n}{2^q}. \end{aligned}$$

So scale  $2^q$  is in  $\mathcal{O}(n \log(n)^p)$ . Multiplying by  $\log_2(n)$  to consider all scales we get the desired result.  $\square$

### F.1.3 MdFOCuS with dyadic update

The MdFOCuS Algorithm implementing this update of the set of candidates is presented in Algorithm 3. Combining Lemma 5 and 2 we get an overall expected complexity in  $\mathcal{O}(n \log(n)^{p+1})$  complexity.

We implemented Algorithm 3 also for a change in the mean of multi-dimensional Gaussian signal (see Table 1) in R/C++ using the qhull library (see link in the Supplementary Material).

We evaluate the empirical run times of Algorithm 3 with various values of  $q_{min}$  using the profiles of Supplementary Material E.1. In Figure 15 we report the average run time as a function of the dyadic parameter  $q_{min}$  for MdFOCuS0 with dyadic update (that is for a known value of  $\eta_1$ ) and values of  $q_{min}$  in 3, . . . , 12. We observe a minimum run time for  $q_{min}$  in 6 for  $p = 1$ , in 7 for  $p = 2$  and in 8 for  $p = 3$ . As a consequence in the rest of the simulations we always set  $q_{min}$  to  $p + 5$ .

Using the simulation framework of Section 4.3 we evaluated the run times of MdFOCuS0 with dyadic update for dimension  $p = 1$  to  $p = 3$  and compared it with run times of MdFOCuS. The average run times are presented in Figure 16. Dyadic MdFOCuS0 is slower than MdFOCuS0, about 2 times slower.

## G An approximation for large $p$

Based on Theorem 6 and its corollary at step  $n$  we expect Algorithm 1 to store  $\mathcal{O}(\log^p(n))$  candidates. Considering the calculation of the full and sparse maximum likelihood in lines 9 and 10 should thus be in  $\mathcal{O}(p \log^p(n))$ . The power  $\log(n)^p$  is problematic making the algorithm impractical for  $p$  larger than 6, as exemplified in Figure 4. Here we propose a heuristic solution to this problem. Our idea is to get a subset of the point on the hull considering projections on at most  $\tilde{p}$  variates.

**Algorithm 3** MdFOCuS(0) Dyadic algorithm

---

```

1: Input 1:  $p$ -variate independent time series  $\{x_t\}_{t=1,2,\dots}$ 
2: Input 2: threshold  $thrs$  and  $\eta_1$  if known pre-change parameter
3: Input 3:  $q_{min}$  min power 2 scale at which we run QuickHull
4: Output: stopping time  $n$  and maximum likelihood change:  $\hat{\tau}(\cdot)$  or  $\hat{\tau}(\eta_1)$ 
5:  $\logLikelihoodRatio \leftarrow -\infty$ ,  $\mathcal{T} \leftarrow \emptyset$ ,  $n \leftarrow 0$ 
6: while ( $\logLikelihoodRatio < thrs$ ) do
7:    $n \leftarrow n + 1$ 
8:    $\mathcal{T} \leftarrow \mathcal{T} \cup \{n - 1\}$ 
9:    $\maxLogLikelihood \leftarrow \max_{\tau \in \mathcal{T}} \{\max_{\eta_1, \eta_2} \ell_{\tau, n}(\eta_1, \eta_2)\}$  ▷  $\eta_1$  is fixed in MdFOCuS0
10:   $\logLikelihoodRatio \leftarrow \maxLogLikelihood - \max_{\eta_1, \eta_2} \ell_{n, n}(\eta_1, \eta_2)$  ▷  $\eta_1$  is fixed in MdFOCuS0
11:   $q \leftarrow q_{min}$ 
12:  while  $\text{remainder}(\frac{n-1}{2^q}) = 0$  do
13:     $\mathcal{T}' \leftarrow \{\tau \in \mathcal{T} \mid \tau > n - 2^q\}$ 
14:     $\mathcal{T}'' \leftarrow \text{QUICKHULL}(\{P(\tau)\}_{\tau \in \mathcal{T}'})$ 
15:     $\mathcal{T} \leftarrow \mathcal{T} \setminus (\mathcal{T}' \setminus \mathcal{T}'')$  ▷ discard vertices in  $\mathcal{T}'$  not in  $\mathcal{T}''$ 
16:     $q \leftarrow q + 1$ 
17:  end while
18: end while
19: return  $n$  and  $\logLikelihoodRatio$ 

```

---

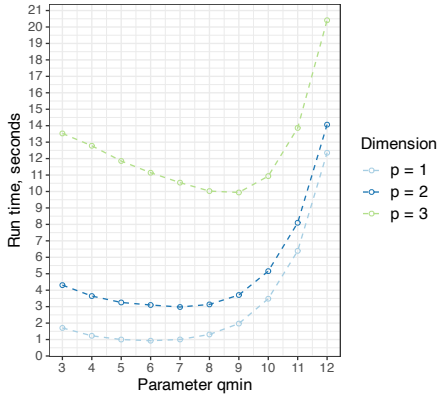


Figure 15: Run time of MdFOCuS0 with dyadic update as a function of  $q_{min}$  for  $p$ -variate time series with  $n = 10^5$  data points in dimension  $p = 1, 2$  and  $3$ . We simulated 100 i.i.d. Gaussian data  $\mathcal{N}_p(0, I_p)$  and report the average run time.

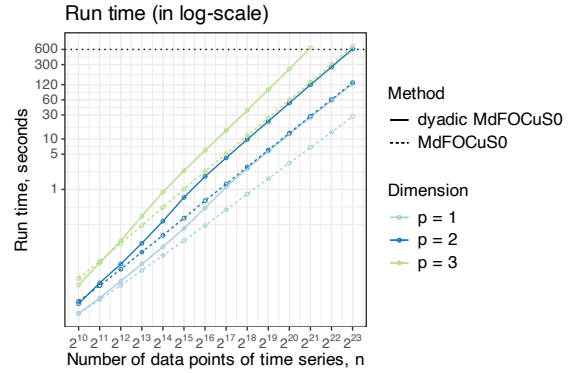


Figure 16: Run times in seconds of MdFOCuS0 (dotted) and MdFOCuS0 with dyadic update (full) both with  $q_{min} = 5 + p$  in dimension  $p = 1, 2$  and  $3$  using time series  $x_{1:n}$  (without change,  $x_t \sim \mathcal{N}_p(0, I_p)$  i.i.d.). Run times are averaged over 100 data sets. We considered a maximum running time of 10 minutes for the algorithms. That is why we do not report run times for  $p = 3$  for large signals.

More formally for any ordered subset  $S = \{S_1, \dots, S_{|S|}\}$  of  $\{1, \dots, p\}$ , with  $|S|$  the size of  $S$ , we define  $x_t^{[S]}$  the vector in  $\mathbb{R}^{|S|}$  such that the  $i$ -th coordinate of  $x_t^{[S]}$  is the  $S_i$ -coordinate of  $x_t$ . We then define  $P^{[S]}(\tau)$  accordingly:

$$P^{[S]}(\tau) = \left( \tau, \sum_{t=1}^{\tau} x_t^{[S]} \right),$$

Similarly, we call  $\mathcal{T}_n^{[S]}$  the set of index  $\tau$  such that  $P^{[S]}(\tau)$  is on the hull of  $\{P^{[S]}(\tau)\}_{\tau \in \{1, \dots, n-1\}}$ . We now consider  $\mathcal{S}$  a subset of all subsets of  $\{1, \dots, p\}$  (i.e  $\mathcal{P}(\{1, \dots, p\})$  or  $2^{\{1, \dots, p\}}$ ) and we get an inner approximation of  $\mathcal{T}_n$  taking a union over all  $\mathcal{T}_n^{[S]}$ :

$$\cup_{S \in \mathcal{S}} \mathcal{T}_n^{[S]} \subseteq \mathcal{T}_n.$$

Based on Theorem 6 and its corollary at step  $n$   $E(|\mathcal{T}_n^{[S]}|) = \mathcal{O}(\log(n)^{|S|})$ . The quality of the approximation is thus be governed by  $|\mathcal{S}|$  and  $\max_{S \in \mathcal{S}} (|S|)$ . The resulting procedure is formally described in Algorithm 4.

In our simulations as a minimalist implementation of this approximation we considered  $\tilde{p} = 2$  and subsets of the form  $\{\tilde{p}j + 1, \dots, \tilde{p}j + \tilde{p}\}$  for  $j \leq p/\tilde{p}$ . We have  $p/\tilde{p}$  such sets and under the condition of Theorem 6 we thus expect to store  $\mathcal{O}(p \log^{\tilde{p}}(n))$  candidate changepoints rather than  $\mathcal{O}(\log^p(n))$  with the exact Algorithm 1. For  $p = 100$  and  $n = 10000$ , our approximation with  $\tilde{p} = 2$ , called MdFOCuS 2d, implemented in R runs on average in less than 100 seconds. More generally it can be seen in Figure 5 that run times of our R implementation of MdFOCuS, and our 2d approximation for larger  $p$  are comparable to ocd [38].

---

**Algorithm 4** MdFOCuS(0)  $\tilde{p}$ d approximation
 

---

```

1: Input 1:  $p$ -variate independent time series  $\{x_t\}_{t=1,2,\dots}$ 
2: Input 2: threshold  $thrs$  and  $\eta_1$  if known pre-change parameter
3: Input 3:  $\mathcal{S}$  a subset of all subsets of  $\{1, \dots, p\}$  of size  $\tilde{p}$ 
4: Input 4: For all  $S \in \mathcal{S}$  a list of index  $\mathcal{T}^{[S]}$ 
5: Input 5: For all  $S \in \mathcal{S}$  a  $S$  specific pruning index  $maxSize^{[S]}$ 
6: Output: stopping time  $n$  and approximated maximum likelihood change :  $\hat{\tau}(\cdot)$  or  $\hat{\tau}(\eta_1)$ 
7:  $logLikelihoodRatio \leftarrow -\infty$ , For all  $S \in \mathcal{S}$   $\mathcal{T}^{[S]} \leftarrow \emptyset$ ,  $n \leftarrow 0$ 
8: while ( $logLikelihoodRatio < thrs$ ) do
9:    $n \leftarrow n + 1$ 
10:  For all  $S \in \mathcal{S}$   $\mathcal{T}^{[S]} \leftarrow \mathcal{T}^{[S]} \cup \{n - 1\}$ 
11:   $maxLogLikelihood \leftarrow \max_{\tau \in \mathcal{T}} \{\max_{\eta_1, \eta_2} \ell_{\tau, n}(\eta_1, \eta_2)\}$  ▷  $\eta_1$  is fixed in MdFOCuS0
12:   $logLikelihoodRatio \leftarrow maxLogLikelihood - \max_{\eta_1, \eta_2} \ell_{n, n}(\eta_1, \eta_2)$  ▷  $\eta_1$  is fixed in MdFOCuS0
13:  for all  $S \in \mathcal{S}$  do
14:    if ( $|\mathcal{T}^{[S]}| > maxSize^{[S]}$ ) then
15:       $T^{[S]} \leftarrow \text{QUICKHULL}(\{P^{[S]}(\tau)\}_{\tau \in \mathcal{T}^{[S]}})$ 
16:       $maxSize^{[S]} \leftarrow \lfloor \alpha |\mathcal{T}^{[S]}| + \beta \rfloor$ 
17:    end if
18:  end for
19: end while
20: return  $n$  and  $logLikelihoodRatio$ 
    
```

---

## H On the probability of false alarms, average-run-length and average detection delay in the multivariate Gaussian case

In the section we consider the multivariate Gaussian case. That is we consider a sequence of  $\{y_t\}_{t=1,\dots}$  with elements in  $\mathbb{R}^p$ , with  $y_t = \mu_t + \varepsilon_t$ , and  $\varepsilon_t$  in  $\mathbb{R}^p$  i.i.d.  $\mathcal{N}_p(0, I_p)$ . We consider three types of statistics: a sparse statistics  $S_{s,n}$ , a dense statistics  $D_{s,n}$  and a one-dimensional statistics  $O_{s,n}^i$  defined as follow:

$$\begin{aligned}
 S_{s,n} &= (\max_i |O_{s,n}^i|)^2, \\
 D_{s,n} &= \left\| \frac{1}{\sqrt{(n-s)}} \sum_{t=s+1}^n \varepsilon_t \right\|_2^2, \\
 O_{s,n}^i &= \frac{1}{\sqrt{(n-s)}} \sum_{t=s+1}^n \varepsilon_t^i.
 \end{aligned}$$

where  $\varepsilon_t^i$  is the  $i$ -th coordinate of  $\varepsilon_t$  in  $\mathbb{R}^p$ . In this appendix, using the arguably standard peeling arguments [65, 68] on all three statistics we demonstrate (1) that by using a time-varying threshold (i.e. increasing with the number of observations  $n$ ), we can control the probability of detecting a change when there is none, that is the probability of false alarms, (2) that by using some fixed (independent of time) threshold we can control the average run length (ARL), and (3) that for a fixed threshold we can control the difference between the detection time  $T$  and the true location of the change (that is the detection delay) in expectation and probability.

### H.1 Probability of false alarms in the dense and sparse case

**Corollary 2.** *Considering a time-varying threshold of  $b_{n,\alpha}^{sparse} = 8 \log(np/\alpha)$  for the sparse statistics and  $b_{n,\alpha}^{dense} = p + 2\sqrt{p x_{n,\alpha}} + 2x_{n,\alpha}$  with  $x_{n,\alpha} = 4 \log(n) - \log(\alpha) + 1$  for the dense statistics we get that*

1. Assuming there is no change, the probability of detecting a change is bounded by  $2\alpha$ . More precisely

$$\mathbb{P}(\exists s, n \in \mathbb{N}^2 \mid S_{s,n} > b_{n,\alpha}^{\text{sparse}}) \leq \alpha \quad , \text{ and } \quad \mathbb{P}(\exists s, n \in \mathbb{N}^2 \mid D_{s,n} > b_{n,\alpha}^{\text{dense}}) \leq \alpha .$$

2. Assuming there is a change at  $\tau$  the probability of detecting a change prior to  $\tau$  is bounded by  $2\alpha$ . More precisely

$$\mathbb{P}(\exists s, n \in \{1, \dots, \tau\}^2 \mid S_{s,n} > b_{n,\alpha}^{\text{sparse}}) \leq \alpha \quad , \text{ and } \quad \mathbb{P}(\exists s, n \in \{1, \dots, \tau\}^2 \mid D_{s,n} > b_{n,\alpha}^{\text{dense}}) \leq \alpha .$$

*Proof.* We follow step 1 and step 2 of the proof of Theorem 1 in [65] using peeling concentration bounds of our Lemma 4.  $\square$

**Remark 8.** We can also control the average run length with a fixed threshold. Let's assume we want an average run length of  $\gamma$ . Noting that  $b_{n,\alpha}^{\text{sparse}}$  and  $b_{n,\alpha}^{\text{dense}}$  are increasing with  $n$ , using two fixed thresholds  $b_{n_{\max},\alpha}^{\text{sparse}}$  and  $b_{n_{\max},\alpha}^{\text{dense}}$  we can lower bound the average run length by  $(1 - 2\alpha)n_{\max}$ . Thus taking  $\alpha = 1/4$  and  $n_{\max} = 2\gamma$  we obtain the desired average-run-length.

## H.2 Average detection delay for a fixed threshold

Assume that a change in mean occurs immediately after time  $\tau$ . Assume we are using a test statistic with a fixed threshold (following Remark 8) and let  $T$  be the first time that our test statistic exceeds the threshold. The average detection delay is defined as

$$\text{ADD} = \sup_{y_1, \dots, y_\tau} \mathbb{E}(T - \tau \mid T \geq \tau).$$

That is, it is the worst-case expected time from the change until it is detected, conditional on no detection prior to  $\tau$ .

**Lemma 3.** For a change of size  $\delta$ , with  $\|\delta\|_2^2$  its square norm, the average detection delay for the dense statistic and threshold  $c$  satisfies

$$\text{ADD} \leq \frac{c + \|\delta\|_2 \sqrt{8/\pi}}{\|\delta\|_2^2} + 1.$$

*Proof.* Let  $\tau$  be the time of the change, and  $T$  the time at which the dense statistic first exceeds  $c$ . Consider the test statistic for a change at  $\tau$  of size  $\delta$ , which at time  $\tau + t$ , for  $t = 1, 2, \dots$  is of the form:

$$A_t = \sum_{i=1}^t (2\delta^T y_{\tau+i} - \|\delta\|_2^2). \quad (23)$$

Define  $A_0 = 0$ . Now for any data  $y_{1:t+\tau}$  we have  $A_t \leq \max_{s=0}^{\tau+t-1} D_{s,\tau+t}$ . Let  $T'$  be the time that  $A_t$  first exceeds  $c$ . It follows that conditional on  $T > \tau$ , we have  $T' \geq T - \tau$ . Thus we can bound the ADD by  $\mathbb{E}(T')$ .

Denote each term in the sum on the right-hand side of (23) by  $a_i$ . We have these terms are independent, normally distributed with mean  $\mathbb{E}(a_i) = \delta^T \delta = \|\delta\|_2^2$  and variance  $4\|\delta\|_2^2$ . Let  $\mu = \|\delta\|_2^2$ . For each  $t$  it is trivial to see that  $\mathbb{E}(|A_t|) < \infty$ , and thus  $A_t - t\mu$  is a Martingale. It is also straightforward to show that  $T'$  is a stopping time and  $\mathbb{E}(T') < \infty$  so we can apply the optional stopping theorem. This gives

$$\mathbb{E}(A_{T'} - T'\mu) = 0.$$

Thus  $\mathbb{E}(T') = \mathbb{E}(A_{T'})/\mu$ . We can bound  $\mathbb{E}(A_{T'})$  from above by considering the distribution of  $A_{T'}$  conditional on  $A_{T'-1}$ . We have

$$\mathbb{E}(A_{T'} \mid A_{T'-1} = A) = \mathbb{E}(A + \mu + \sqrt{4\mu}\epsilon \mid A + \mu + \sqrt{4\mu}\epsilon \geq c),$$

where  $\epsilon$  has a standard normal distribution. This expectation is monotone increasing in  $A$ , and as  $A < c$  we can bound  $\mathbb{E}(A_{T'})$  by the value of the conditional expectation in the limit as  $A \rightarrow c$  from below. This gives

$$\mathbb{E}(A_{T'}) \leq \mathbb{E}(c + \mu + \sqrt{2\mu}|\epsilon|) = c + \mu + \sqrt{2\mu} \sqrt{\frac{2}{\pi}}.$$

The result follows.  $\square$

**Remark 9.** It is simple to extend this result to get a bound on the average detection delay of the sparse statistic; as the same argument applies to the statistic that considers any given variate changing.  $\|\delta\|_2$  would simplify to  $|\delta_j|$  with  $j$  the variate that is changing.



### H.2.1 Probabilistic bound on the Detection Delay in the dense case

The bound on the ADD in Lemma 3 is proportional to the threshold and therefore in the dense case (see Lemma 2) it includes a linear term in  $p$ . We argue that this is likely sub-optimal due to our proof technique. Considering the dense statistics and following Remark 8 we control the ARL at  $\gamma$  taking a fixed threshold of  $b_{2\gamma,.25} = p + 2\sqrt{px_{2\gamma,.25}} + 2x_{2\gamma,.25}$  with  $x_{2\gamma,.25} = 4\log(2\gamma) - \log(\alpha) + 1$ . Now using Lemma 5 and a maximum run length of  $2\gamma$  we can further control the detection delay in probability. Assume there is a change at  $\tau$  of  $\delta$  we have for any  $n > \tau$ :

$$\begin{aligned} \max_{s,n} D_{s,n} &\geq \left\| \sum_{t=\tau+1}^n \frac{y_t}{\sqrt{n-\tau}} \right\|_2^2 = \left\| \sum_{t=\tau+1}^n \frac{\varepsilon_t}{\sqrt{n-\tau}} + \sqrt{n-\tau}\delta \right\|_2^2 \\ &\geq \|\delta\|_2^2(n-\tau) + 2\sqrt{n-\tau} \frac{\sum_{\tau+1}^n \langle \delta, \varepsilon_i \rangle}{\|\delta\|\sqrt{n-\tau}} + \frac{\|\sum_{\tau+1}^n \varepsilon_i\|_2^2}{n-\tau}. \end{aligned}$$

Notice that  $\frac{\langle \delta, \varepsilon_i \rangle}{\|\delta\|}$  are i.i.d. Gaussian. We can thus apply Lemma 5. We can also use Lemma 4 Equation (26) on  $\frac{\|\sum_{\tau+1}^n \varepsilon_i\|_2^2}{n-\tau}$ . Now, considering a maximum run length of  $2\gamma$ , we get that with probability at least  $1 - 2\alpha$

$$\max_{s,n} D_{s,n} \geq \|\delta\|_2^2(n-\tau) - 4\|\delta\| \sqrt{(n-\tau)x'_{2\gamma,\alpha}} + p - 2\sqrt{x_{2\gamma,\alpha}}$$

with  $x'_{2\gamma,\alpha} = 2\log(\log(6\gamma)) - \log(\alpha) + 1$ . Considering the previous equation as a second degree polynomial in  $\sqrt{n-\tau}\|\delta\|$  and searching for the first  $n^*$  such that it is superior to  $b_{2\gamma,.25}$  we get that  $n^*$  is the smallest integer such that

$$\|\delta\|_2 \sqrt{n-\tau} \geq 2\sqrt{x'_{2\gamma,\alpha}} + \sqrt{4x'_{2\gamma,\alpha} + 2\sqrt{px_{2\gamma,\alpha}} + 2\sqrt{px_{2\gamma,.25}} + 2x_{2\gamma,.25}}.$$

Taking the square and using the fact that  $(a+b)^2 \leq 2a^2 + 2b^2$  we get with probability at least  $1 - 2\alpha$  that the detection time is such that

$$T - \tau \leq \frac{1}{\|\delta\|_2^2} (16x'_{2\gamma,\alpha} + 4\sqrt{px_{2\gamma,\alpha}} + 4\sqrt{px_{2\gamma,.25}} + 4x_{2\gamma,.25}) + 1.$$

Observe that numerator is in  $\|\delta\|_2^2$  and the denominator has no linear term in  $p$ .

### H.3 Some peeling bounds

In this subsection we provide bounds on the sparse ( $S_{s,n}$ ) and dense ( $D_{s,n}$ ) statistics, which are useful to control the probability of false alarms (see Corollary 2). We then recall a bound by [68] which is useful to study the detection delay.

**Lemma 4.** *Assume  $\varepsilon_t$  are i.i.d. Gaussian with identity variance matrix. For  $\alpha$  in  $(0, 1)$  we have:*

- **Sparse statistic**

$$\mathbb{P}(\exists s, n \in \mathbb{N} \mid S_{s,n} > 8\log(np/\alpha)) \leq \alpha. \quad (24)$$

- **Dense statistic** Taking  $x_{n,\alpha} = 4\log(n) - \log(\alpha) + 1$ , we have

$$\mathbb{P}(\exists s, n \in \mathbb{N} \mid D_{s,n} > p + 2\sqrt{px_{n,\alpha}} + 2x_{n,\alpha}) \leq \alpha; \quad (25)$$

$$\mathbb{P}(\exists s, n \in \mathbb{N} \mid D_{s,n} < p - 2\sqrt{px_{n,\alpha}}) \leq \alpha. \quad (26)$$

*Proof.* For the dense case, the proof follows the peeling argument of Lemma 8 in [65] replacing the tail bound from their sub-Gaussianity assumption with the upper and lower bound on the tail probability of a chi-square distribution with  $p$  degrees of freedom from Lemma 1 of [66]. For any non-decreasing sequence  $b_n$  applying a union bound (that is for any  $n$  events  $A_i$  with  $i$  in  $\{1, \dots, n\}$ )  $\mathbb{P}(\cup_i A_i) \leq \max_i n \mathbb{P}(A_i)$  several times we get:

$$\begin{aligned}
 \mathbb{P}(\exists s, n \in \mathbb{N} \mid D_{s,n} > b_n^2) &\leq \sum_{j=0}^{\infty} \mathbb{P}\left(\max_{2^j \leq n < 2^{j+1}} \max_{1 \leq s < n} D_{s,n} > b_n^2\right) \\
 &\leq \sum_{j=0}^{\infty} 2^j \max_{2^j \leq n < 2^{j+1}} \mathbb{P}\left(\max_{1 \leq s < n} D_{n,s} > b_n^2\right) \\
 &\leq \sum_{j=0}^{\infty} 2^j \max_{2^j \leq n < 2^{j+1}} n \mathbb{P}(W^2 > b_n^2) \\
 &\leq \sum_{j=0}^{\infty} 2^{2j+1} \mathbb{P}(W^2 > b_{2^j}^2),
 \end{aligned}$$

where  $W^2$  has a chi-square distribution with  $p$  degrees of freedom. We then take  $b_n^2 = (p + 2\sqrt{px'_{\alpha,n}} + 2x'_{\alpha,n})$  with  $x'_{\alpha,n} = 2 \log(n) + \log(\log(2n)) + \log(\log(4n)) - \log(2) - 2 \log(\log(2)) - \log(\alpha)$ . Using the tail-bound from [66] we get that

$$\begin{aligned}
 2^{2j+1} \mathbb{P}(W^2 > b_{2^j}^2) &\leq 2^{2j+1} \exp(-x'_{\alpha,2^{2j}}) \\
 &\leq \exp((2j+1) \log(2) - 2j \log(2) - \log(2) - \log((j+1)) - \log((j+2)) + \log(\alpha)) \\
 &\leq \frac{\alpha}{(j+1)(j+2)}.
 \end{aligned}$$

Summing over all  $j$  we get  $\mathbb{P}(\exists s, n \in \mathbb{N} \mid S_{s,n} > b_n^2) \leq \alpha$ . Out of simplicity we consider  $x_{\alpha,n} = 4 \log(n) - \log(\alpha) + 1$  which is larger than  $x'_{\alpha,n}$ , because  $2 \log(n) \geq \log(\log(2n)) + \log(\log(4n))$  for  $n \geq 1$ , and  $1 \geq -\log(2) - 2 \log(\log(2))$ .

We get the lower bound (26) similarly considering the lower bound in Lemma 1 of [66].

For the sparse case we apply the peeling argument of Lemma 8 of [65] to each variate and use a union bound overall  $p$  variates.  $\square$

**Remark 10.** *The proof would still work if we consider a fixed and finite maximum run length,  $n_{max}$  say, as for any  $j_{max}$  we have  $\sum_{j=0}^{j_{max}} \frac{1}{j+1} - \frac{1}{j+2} \leq 1$ . Furthermore, as the threshold increases with  $j$ , with a finite maximum run length the proof would still hold with the fixed threshold  $x_{n_{max}, \alpha}$ .*

We now recall a bound of [68] to control the variations of  $O_{s,n}^i$  (or more generally  $\frac{1}{\sqrt{(n-s)}} \sum_{t=s+1}^n \varepsilon'_t$  for  $\varepsilon'_t$  i.i.d Gaussian with variance 1 and mean 0) which is useful to study the detecting delay (see subsection H.2.1).

**Lemma 5.** *For a given  $s$  in  $\mathbb{N}$  and  $i \in \{1, \dots, p\}$ ,*

$$\mathbb{P}\left(\exists n \in \mathbb{N} \mid O_{s,n}^i > 2\sqrt{2 \log(\log(3(n-s)))} - \log(\alpha) + 1\right) \leq \alpha.$$

*Proof.* We follow the proof of Lemma 5 in [68]. We highlight below the key steps. First, based on their Lemma 4 we have

$$\mathbb{P}\left(\max_{s+2^j \leq n < s+2^{j+1}} O_{s,n}^i > 2x\right) \leq \exp(-x^2/4). \quad (27)$$

Second, we apply a union bound over all  $j$  :

$$\mathbb{P}\left(\exists j \mid \sup_{s+2^j \leq n < s+2^{j+1}} O_{s,n}^i > 2\sqrt{\log[(j+1)(j+2)]} - \log(\alpha)\right) \leq \sum_{j=0}^{\infty} \frac{\alpha}{(j+1)(j+2)} = \alpha. \quad (28)$$

In the last step we use  $\frac{1}{(j+1)(j+2)} = \frac{1}{j+1} - \frac{1}{j+2}$  and the telescoping nature of the resulting sum. Finally, we note that for any  $n$  such that  $s + 2^j \leq n < s + 2^{j+1}$  then

$$\log((j+1)(j+2)) \leq 2 \log(\log(3(n-s))) + 1.$$

$\square$

**Remark 11.** *As for Lemma 4 the proof would still work if we consider a fixed and finite maximum run length,  $n_{max}$  say, as for any  $j_{max}$  we have  $\sum_{j=0}^{j_{max}} \frac{1}{j+1} - \frac{1}{j+2} \leq 1$ . Furthermore, as the threshold increases with  $j$ , with a finite maximum run length the proof would still hold considering a fixed threshold  $2\sqrt{2 \log(\log(3n_{max}))} - \log(\alpha) + 1$ .*

## References

- [1] Adam Olshen, E.S. Venkatraman, Robert Lucito, and Michael Wigler. Circular binary segmentation for the analysis of array-based dna copy number data. *Biostatistics (Oxford, England)*, 5:557–72, 11 2004.
- [2] Franck Picard, Stephane Robin, Marc Lavielle, Christian Vaisse, and Jean-Jacques Daudin. A statistical approach for array cgh data analysis. *BMC Bioinformatics*, 6:np, 2005.
- [3] Jushan Bai and Pierre Perron. Computation and analysis of multiple structural change models. *Journal of Applied Econometrics*, 18(1):1–22, 2003.
- [4] Alexander Aue, Lajos Horváth, Marie Hušková, and Piotr Kokoszka. Change-point monitoring in linear models. *The Econometrics Journal*, 9(3):373–403, 2006.
- [5] Marcel Bosc, Fabrice Heitz, Jean-Paul Armspach, Izzie Jacques Namer, Daniel Gounot, and Lucien Rumbach. Automatic change detection in multimodal serial mri: application to multiple sclerosis lesion evolution. *NeuroImage*, 20:643–656, 2003.
- [6] Martin Staudacher, Stefan Telser, Anton Amann, Hartmann Hinterhuber, and Monika Ritsch-Martel. A new method for change-point detection developed for on-line analysis of the heart beat variability during sleep. *Physica A-statistical Mechanics and Its Applications*, 349:582–596, 2005.
- [7] Rakesh Malladi, Giridhar P. Kalamangalam, and Behnaam Aazhang. Online bayesian change point detection algorithms for segmentation of epileptic activity. *2013 Asilomar Conference on Signals, Systems and Computers*, pages 1833–1837, 2013.
- [8] Jaxk Reeves, Jien Chen, Xiaolan L. Wang, Robert Lund, and Qi Qi Lu. A review and comparison of changepoint detection techniques for climate data. *Journal of Applied Meteorology and Climatology*, 46(6):900 – 915, dec 2007.
- [9] Jean-François Ducre-Robitaille, Lucie A. Vincent, and Gilles Boulet. Comparison of techniques for detection of discontinuities in temperature series. *International Journal of Climatology*, 23, 2003.
- [10] Rebecca Killick, Paul Fearnhead, and Idris A. Eckley. Optimal detection of changepoints with a linear computational cost. *Journal of the American Statistical Association*, 107(500):1590–1598, 2012.
- [11] Itoh Naoki and Juergen Kurths. Change-point detection of climate time series by nonparametric method. *Lecture Notes in Engineering and Computer Science*, 2186, 10 2010.
- [12] Claudie Beaulieu and Rebecca Killick. Distinguishing trends and shifts from memory in climate data. *Journal of Climate*, 31(23):9519 – 9543, 2018.
- [13] Elena Andreou and Eric Ghysels. Detecting multiple breaks in financial market volatility dynamics. *Journal of Applied Econometrics*, 17(5):579–600, 2002.
- [14] Piotr Fryzlewicz. Wild binary segmentation for multiple change-point detection. *The Annals of Statistics*, 42(6), dec 2014.
- [15] Enric Galceran, Alexander Cunningham, Ryan Eustice, and Edwin Olson. Multipolicy decision-making for autonomous driving via changepoint-based behavior prediction: Theory and experiment. *Autonomous Robots*, 41, 08 2017.
- [16] David Rybach, Christian Gollan, Ralf Schluter, and Hermann Ney. Audio segmentation for speech recognition using segment features. In *2009 IEEE International Conference on Acoustics, Speech and Signal Processing*, pages 4197–4200, 2009.
- [17] R.J. Radke, S. Andra, O. Al-Kofahi, and B. Roysam. Image change detection algorithms: a systematic survey. *IEEE Transactions on Image Processing*, 14(3):294–307, 2005.
- [18] Richard A. Davis, Thomas C.M. Lee, and Gabriel A. Rodriguez-Yam. Structural break estimation for nonstationary time series models. *Journal of the American Statistical Association*, 101:223–239, 2006.
- [19] Ananth Ranganathan. Pliss: Labeling places using online changepoint detection. *Auton. Robots*, 32(4):351–368, may 2012.
- [20] Sean Jewell, Paul Fearnhead, and Daniela Witten. Testing for a change in mean after changepoint detection., 2019.
- [21] David Siegmund and ES Venkatraman. Using the generalized likelihood ratio statistic for sequential detection of a change-point. *The Annals of Statistics*, pages 255–271, 1995.
- [22] Ivan E. Auger and Charles E. Lawrence. Algorithms for the optimal identification of segment neighborhoods. *Bulletin of Mathematical Biology*, 51(1):39–54, Jan 1989.

- [23] Ewan S Page. Continuous inspection schemes. *Biometrika*, 41(1/2):100–115, 1954.
- [24] Andrew Jhon Scott and M Knott. A cluster analysis method for grouping means in the analysis of variance. *Biometrics*, pages 507–512, 1974.
- [25] Brad Jackson, Jeffrey D Scargle, David Barnes, Sundararajan Arabhi, Alina Alt, Peter Gioumouis, Elyus Gwin, Paungkaew Sangtrakulcharoen, Linda Tan, and Tun Tao Tsai. An algorithm for optimal partitioning of data on an interval. *IEEE Signal Processing Letters*, 12(2):105–108, 2005.
- [26] Yi-Ching Yao. Estimation of a noisy discrete-time step function: Bayes and empirical bayes approaches. *The Annals of Statistics*, 12(4):1434–1447, 12 1984.
- [27] Marc Lavielle and Eric Moulines. Least-squares estimation of an unknown number of shifts in a time series. *Journal of time series analysis*, 21(1):33–59, 2000.
- [28] Emilie Lebarbier. Detecting multiple change-points in the mean of gaussian process by model selection. *Signal Processing*, 85:717–736, 04 2005.
- [29] Damien Garreau and Sylvain Arlot. Consistent change-point detection with kernels, 2017.
- [30] Weil R Lai, Mark D Johnson, Raju Kucherlapati, and Peter J Park. Comparative analysis of algorithms for identifying amplifications and deletions in array cgh data. *Bioinformatics*, 21(19):3763–3770, 2005.
- [31] Arnaud Liehrmann, Guillem Rigaiil, and Toby Dylan Hocking. Increased peak detection accuracy in over-dispersed chip-seq data with supervised segmentation models. *BMC bioinformatics*, 22(1):1–18, 2021.
- [32] Guillem Rigaiil. A pruned dynamic programming algorithm to recover the best segmentations with 1 to  $k_{\max}$  change-points. *Journal de la Société Française de Statistique*, 156(4):180–205, 2015.
- [33] Robert Maidstone, Toby Hocking, Guillem Rigaiil, and Paul Fearnhead. On optimal multiple changepoint algorithms for large data. *Statistics and Computing*, 27(2):519–533, Mar 2017.
- [34] Gaetano Romano, Idris Eckley, Paul Fearnhead, and Guillem Rigaiil. Fast online changepoint detection via functional pruning cusum statistics, 2022.
- [35] Vincent Runge. Is a finite intersection of balls covered by a finite union of balls in euclidean spaces? *Journal of Optimization Theory and Applications*, 187(2):431–447, 2020.
- [36] Liudmila Pishchagina, Guillem Rigaiil, and Vincent Runge. Geometric-based pruning rules for change point detection in multiple independent time series. *arXiv preprint arXiv:2306.09555*, 2023.
- [37] Jaehyeok Shin, Aaditya Ramdas, and Alessandro Rinaldo. E-detectors: a nonparametric framework for sequential change detection. *arXiv preprint arXiv:2203.03532*, 2022.
- [38] Yudong Chen, Tengyao Wang, and Richard J Samworth. High-dimensional, multiscale online changepoint detection, 2022.
- [39] Haoyun Wang and Yao Xie. Sequential change-point detection: Computation versus statistical performance. *Wiley Interdisciplinary Reviews: Computational Statistics*, page e1628, 2022.
- [40] Peter Eiauer and Peter Hackl. The use of mosums for quality control. *Technometrics*, 20(4):431–436, 1978.
- [41] Alexander Meier, Claudia Kirch, and Haeran Cho. mosum: A package for moving sums in change-point analysis. *Journal of Statistical Software*, 97:1–42, 2021.
- [42] Kes Ward, Giuseppe Dilillo, Idris Eckley, and Paul Fearnhead. Poisson-focus: An efficient online method for detecting count bursts with application to gamma ray burst detection, 2022.
- [43] David Avis and David Bremner. How good are convex hull algorithms? In *Proceedings of the eleventh annual symposium on Computational geometry*, pages 20–28, 1995.
- [44] Franco P. Preparata and David E. Muller. Finding the intersection of  $n$  half-spaces in time  $o(n \log n)$ . *Theoretical Computer Science*, 8(1):45–55, 1979.
- [45] Arne Brøndsted. *An introduction to convex polytopes*, by A. Brøndsted. Pp 160. DM69. 1983. ISBN3-540-90722-X (Springer-Verlag). Springer New York, NY, 1983.
- [46] Franco P. Preparata and Michael Ian Shamos. *Computational Geometry - An Introduction*. Texts and Monographs in Computer Science. Springer, 1985.
- [47] Herbert Edelsbrunner. *Algorithms in Combinatorial Geometry*. Springer Berlin, Heidelberg, 1987.
- [48] C. Bradford Barber, David P. Dobkin, and Hannu Huhdanpaa. The quickhull algorithm for convex hulls. *ACM Trans. Math. Softw.*, 22(4):469–483, dec 1996.

- [49] Joseph O’Rourke. *Convex Hulls in Three Dimensions.*, page 101–154. Cambridge University Press, 2 edition, 1998.
- [50] Raimund Seidel. Convex hull computations. In *Handbook of discrete and computational geometry*, pages 687–703. Chapman and Hall/CRC, 2017.
- [51] Donald R. Chand and Sham S. Kapur. An algorithm for convex polytopes. *J. ACM*, 17:78–86, 1970.
- [52] F. P. Preparata and S. J. Hong. Convex hulls of finite sets of points in two and three dimensions. *Communications of the ACM*, 20(2):87–93, feb 1977.
- [53] Ben Kenwright. Convex hulls: Surface mapping onto a sphere, 2023.
- [54] Nancy M. Amato, Michael T. Goodrich, and Edgar A. Ramos. Parallel algorithms for higher-dimensional convex hulls. *Proceedings 35th Annual Symposium on Foundations of Computer Science*, pages 683–694, 1994.
- [55] Mikhail J. Atallah, Richard Cole, and Michael T. Goodrich. Cascading divide-and-conquer: A technique for designing parallel algorithms. *SIAM Journal on Computing*, 18(3):499–532, 1989.
- [56] R. Miller and Q.F. Stout. Efficient parallel convex hull algorithms. *IEEE Transactions on Computers*, 37(12):1605–1618, 1988.
- [57] Zakhar Kabluchko, Vladislav Vysotsky, and Dmitry Zaporozhets. Convex hulls of random walks: Expected number of faces and face probabilities., 2017.
- [58] Victor S. Adamchik. On stirling numbers and euler sums. *Journal of Computational and Applied Mathematics*, 79:119–130, 1997.
- [59] Kai Habel, Raoul Grasman, Robert B. Gramacy, Pavlo Mozharovskiy, and David C. Sterratt. *geometry: Mesh Generation and Surface Tessellation*, 2023. R package version 0.4.7.
- [60] Kenneth L. Clarkson and Peter W. Shor. Applications of random sampling in computational geometry, ii. *Discrete & Computational Geometry*, 4(5):387–421, 1989.
- [61] Avraham A. Melkman. On-line construction of the convex hull of a simple polyline. *Information Processing Letters*, 25(1):11–12, April 1987.
- [62] Susan Hert and Stefan Schirra. 3D convex hulls. In *CGAL User and Reference Manual*. CGAL Editorial Board, 5.6 edition, 2023.
- [63] Wikipedia. Quickhull — Wikipedia, 2023. [Online; accessed 26-Oct-2023].
- [64] Bernard Chazelle. An optimal convex hull algorithm in any fixed dimension. *Discrete & Computational Geometry*, 10(4):377–409, 1993.
- [65] Yi Yu, Oscar Hernan Madrid Padilla, Daren Wang, and Alessandro Rinaldo. A note on online change point detection. *Sequential Analysis*, 42(4):438–471, 2023.
- [66] Beatrice Laurent and Pascal Massart. Adaptive estimation of a quadratic functional by model selection. *Annals of statistics*, pages 1302–1338, 2000.
- [67] Emmanuel Pilliat, Alexandra Carpentier, and Nicolas Verzelen. Optimal multiple change-point detection for high-dimensional data. *Electronic Journal of Statistics*, 17(1):1240–1315, 2023.
- [68] Nicolas Verzelen, Magalie Fromont, Matthieu Lerasle, and Patricia Reynaud-Bouret. Optimal change-point detection and localization., 2020.
- [69] Alex Bresler. *nbastatR: R’s interface to NBA data*, 2023. R package version 0.1.152.
- [70] Wikipedia. David griffin — Wikipedia, 2023. [Online; accessed 27-Oct-2023].
- [71] Kes Ward, Gaetano Romano, Idris Eckley, and Paul Fearnhead. A constant-per-iteration likelihood ratio test for online changepoint detection for exponential family models, 2023.
- [72] Solène Thépaut. *Problèmes de clustering liés à la synchronie en écologie: estimation de rang effectif et détection de ruptures sur les arbres*. PhD thesis, Université Paris-Saclay (ComUE), 2019.
- [73] Nancy Zhang and Siegmund David. A modified bayes information criterion with applications to the analysis of comparative genomic hybridization data. *Biometrics*, 63:22–32, 04 2007.
- [74] Yi-Ching Yao. Estimating the number of change-points via schwarz’ criterion. *Statistics & Probability Letters*, 6(3):181–189, 1988.