## Analytics, have some humility: a statistical view of fourth-down decision making

Ryan S. Brill<sup>\*</sup>, Ronald Yurko<sup>†</sup>, and Abraham J. Wyner<sup>‡</sup>

July 22, 2024

#### Abstract

The standard mathematical approach to fourth-down decision making in American football is to make the decision that maximizes estimated win probability. Win probability estimates arise from machine learning models fit from historical data. These models attempt to capture a nuanced relationship between a noisy binary outcome variable and game-state variables replete with interactions and non-linearities from a finite dataset of just a few thousand games. Thus, it is imperative to knit uncertainty quantification into the fourth-down decision procedure; we do so using bootstrapping. We find that uncertainty in the estimated optimal fourth-down decision is far greater than that currently expressed by sports analysts in popular sports media.

*Keywords:* Decision making under uncertainty, applications and case studies, machine learning, bootstrap/resampling, statistics in sports

<sup>\*</sup>Graduate Group in Applied Mathematics and Computational Science, University of Pennsylvania. Correspondence to: ryguy123@sas.upenn.edu

<sup>&</sup>lt;sup>†</sup>Dept. of Statistics and Data Science, Carnegie Mellon University

<sup>&</sup>lt;sup>‡</sup>Dept. of Statistics and Data Science, The Wharton School, University of Pennsylvania

## 1 Introduction

In-game strategic decision making is one of the fundamental objectives of sports analytics. To mathematically compare strategies, analysts need a value function that measures the value of each game-state. The optimal decision maximizes the value of the next game-state. Across sports, however, value functions are not observable quantities; they are defined by models. It is the sports analysts' task to infer the value of each game-state from the massive dataset of all plays in the recent history of a given sport.

The two most widely used value functions by analysts of American football are win probability and expected points (Yurko et al., 2018). *Win probability* (WP) measures the probability that the team with possession at the current game-state wins the game. *Expected points* (EP) measures the expected value of the net number of points of the next score in the game, relative to the team with possession, given the current game-state. The most prominent example of analysts using these value functions to dictate in-game strategy is fourth-down decision making. On fourth down, a football coach has three choices: go for it (Go), attempt a field goal (FG), or punt the ball (Punt). Previous work by Romer (2006) and Burke (2009) suggest making the decision that maximizes estimated EP. Yet a team's goal is to win the game, not score more points on average, so EP is the wrong objective function. Hence, modern approaches by Baldwin (2021) and Burke<sup>1</sup> suggest making the decision that maximizes estimated WP. Each of analyses found that National Football League (NFL) coaches are too conservative on fourth down; they often settle for kicks even when they should go for it.

The win probability estimates used for fourth-down decision making typically arise from statistical models fit from historical data. Given the play-by-play results of the entire recent history of football, these models fit the relationship between a binary win/loss outcome variable and certain game-state variables using data-driven regression or machine learning approaches. Analysts then recommend the optimal decision according to the model. This approach overlooks the uncertainty inherent in estimating win probability with limited data. The win/loss outcome variable is noisy and there are only a few thousand games in

 $<sup>^{1}</sup>$ Burke releases fourth-down decision recommendations with the ESPN analytics team, and their recommendation algorithm is proprietary.

the dataset that produce an outcome. The outcome variable, moreover, is not independent across plays because every non-tied game has only one winner, which reduces the effective sample size of the dataset. Therefore, it is critical to quantify uncertainty in win probability estimates. This uncertainty should percolate into the fourth-down decision procedure.

Our focus is not to "fix" win probability models by adjusting for additional covariates or reducing model bias. Rather, we shed light on the high variance nature of estimating win probability and show that such estimates are subject to nontrivial uncertainty. We use bootstrapping to quantify uncertainty in fourth-down recommendations and recommend a decision when we are confident it has higher WP than all other decisions. We find that far fewer fourth-down decisions are as obvious as previously thought. Thus, we ask football analysts to have some humility: for many game-states, there is simply not enough data to trust WP point estimates.

The remainder of this paper is organized as follows. In Section 2 we estimate win probability and detail the traditional fourth-down decision procedure. In Section 3 we knit uncertainty quantification into the decision procedure. In Section 4 we present our main findings and we conclude in Section 5.

## 2 The traditional fourth-down decision procedure

The standard fourth-down decision procedure involves making the decision that maximizes estimated win probability. In this section we overview this procedure and detail how analysts commonly estimate win probability today. We begin with a brief overview of our historical dataset of football plays in Section 2.1. Then in Section 2.2 we illustrate the traditional decision process through example plays. In Section 2.3 we estimate the win probability of a fourth-down decision. These estimates are functions of first-down win probability and decision transition probabilities, which we estimate in Sections 2.4 and 2.5, respectively.

#### 2.1 Data

We access every NFL play from 1999 to 2022 using the R package nflFastR (Carl and Baldwin, 2022). Each play includes variables that describe the context of the play, which are relevant to estimating win probability, such as the score differential, time remaining, yardline, down, yards to go, etc. (see Table 2 in Appendix A for descriptions of relevant variables). Note that yardline is a real number in  $\{0, 1, ..., 99, 100\}$  measuring the number of yards from the opponent's endzone, where 0 represents a touchdown and 100 indicates a safety. Holding out plays from 1999 to 2005 and from 2022 for various models and validation procedures discussed later in this paper, we are left with a primary dataset of 600, 825 plays, with 229, 635 first-down plays and 4, 101 non-tied games from 2006 to 2021, henceforth referred to as the "observed play-by-play football dataset." We fit our win probability models using this dataset. The code for this study, which includes code to scrape the dataset used in this study, is publicly available on Github.<sup>2</sup>

#### 2.2 Example plays

The strength of a traditional decision recommendation is proportional to the effect size, or the estimated gain in win probability by making that decision. Notably, Baldwin (2021) and Burke employ this decision procedure and post their fourth-down recommendations on X (formerly known as Twitter).<sup>3</sup> Baldwin has posted a recommendation for many fourthdown plays since at least 2021<sup>4</sup> and Burke has posted a recommendation for select fourth down plays since at least 2022. We illustrate this procedure through two example plays.

**Example play 1.** First, we consider an example of Baldwin's fourth-down decision charts. Figure 1 illustrates his charts for a fourth-down play in which the Patriots had the ball against the Colts in Week 10 of 2023. Baldwin views **Go** as a "strong" decision because he estimates that going for it provides a 3.6% gain in win probability over attempting a field goal.

<sup>&</sup>lt;sup>2</sup>https://github.com/snoopryan123/fourth\_down

<sup>&</sup>lt;sup>3</sup>Baldwin's posts his fourth-down recommendations at **@ben\_bot\_baldwin** and Burke posts his at **@bburkeESPN**.

 $<sup>^{4}</sup>$ As of the writing of this paper, <code>@ben\_bot\_baldwin</code> has over 11,000 posts (decision recommendations) on X.

**Example play 2.** Next, we give an example of Burke's decision chart. Figure 2 illustrates his chart for a play from the 2023 NFC Championship game. Burke views **Go** as the right decision because the yellow dot (denoting the actual play's yardline and yards to go) lies squarely in the red region (denoting that **Go** is the estimated optimal decision) and is far from the decision boundary.

#### 2.3 Estimating the win probability of a fourth-down decision

An offense has three possible decisions to make on fourth down: it can punt the ball, kick a field goal, or attempt a conversion (colloquially known as "going for it"), denoted Punt, FG, and Go, respectively. In this section we estimate the win probability of a fourth-down decision in {Punt, FG, Go} in terms of first-down win probability (denoted WP<sub>1</sub>) and decision transition probabilities (punt outcome distribution, field goal success probability, and conversion outcome distribution). We estimate first-down win probability in Section 2.4 and decision transition probabilities in Section 2.5.

Punt win probability. Suppose the offensive team has possession on fourth down at yardline y and denote the remainder of the game-state by  $\mathbf{x}$ . If the offensive team punts, the opposing team has possession on first down at the subsequent yardline, which we model as a random variable. Hence the win probability of punting is one minus the opponent's first-down win probability at the next yardline y' and next game-state  $\mathbf{x}'$ ,

$$\sum_{y'} (1 - \mathsf{WP}_1(\text{yardline } y', \mathbf{x}')) \cdot \mathbb{P}(\text{yardline after punting is } y'|\mathbf{x}).$$
(1)

The next game-state  $\mathbf{x}'$  flips the current game-state variables in  $\mathbf{x}$  that are relative to the team with possession (e.g., score differential, team quality metrics, timeouts remaining, etc.) and doesn't alter the other variables (e.g., time remaining). We re-write this expression in terms of the expectation over the outcome of the punt,


$$\mathbb{E}_{\text{punt}}[1 - \mathsf{WP}_1(\text{yardline } y', \mathbf{x}') | \mathbf{x}].$$
(2)

First-down win probability is mostly linear in yardline at most game-states, so for simplicity

		Win % if	
cess %	<sup>1</sup> Fail	Succeed	
45	27	47	
91	26	33	
in • Nov 12			
	Nov 12	Nov 12	

Figure 1: Baldwin's decision charts for example play 1. The top image summarizes his models' outputs for each decision, including estimated fourth-down win probability (in red), Go/FG success probability (second column), and win probability given Go/FG failure or success (third and fourth column). The bottom image is a screenshot of his post on X, which summarizes the recommended decision and the actual play.

4th Down Recommendation

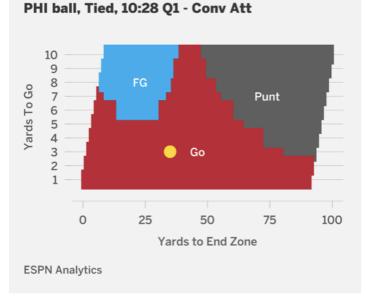

# Figure 2: Burke's decision boundary chart for example play 2. The chart visualizes the estimated optimal decision according to effect size (color) as a function of yardline (x-axis) and yards to go (y-axis), holding the other game-state variables constant. The yellow dot denotes the actual play's yardline and yards to go.

we instead compute win probability at the expected next yardline after punting,

$$1 - \mathsf{WP}_{1}(\text{yardline } \mathbb{E}_{\text{punt}}[y'|\mathbf{x}], \mathbf{x}').$$
(3)

We model the expected next yardline after punting as a function of yardline and punter quality in Section 2.5.

FG win probability. We decompose field goal win probability in terms of field goal success probability and first-down win probability on the subsequent play,

$$WP(make FG) \cdot \mathbb{P}(make FG) + WP(miss FG) \cdot (1 - \mathbb{P}(make FG)).$$
(4)

We model the probability of a successful field goal as a function of yardline and kicker quality in Section 2.5. If the kicking team misses the field goal and the spot of the kick is within the 20 yardline, the opposing team has a first-down possession at yardline 80. If the kicking team misses the field goal and the spot of the kick is beyond the 20 yardline, the opposing team has a first-down possession at the spot of the kick. The spot of the kick is typically 7 yards behind the line of scrimmage, so in terms of the current yardline y, the next yardline relative to the opposing team is min $\{80, 100 - (y + 7)\}$ . Denoting the remaining game-state variables relative to the opposing team at the next play by  $\mathbf{x}'$ , we have

$$WP(miss FG) = 1 - WP_1(yardline min\{80, 100 - (y+7)\}, \mathbf{x}').$$
(5)

If the kicking team makes the field goal, it scores three points and the opposing team has a first-down possession after a kickoff. Denoting the score differential relative to the kicking team by s, we have

$$WP(make FG) = 1 - \mathbb{E}_{kickoff}[WP_1(vardline y', s' = -s - 3, \mathbf{x}')].$$
(6)

As we did in estimating **Punt** win probability, for simplicity we instead compute win probability at the expected next yardline after a kickoff,

$$WP(make FG) \approx 1 - WP_1(yardline \mathbb{E}_{kickoff}[y'], s' = -s - 3, \mathbf{x}').$$
(7)

The vast majority of kickoffs end in a touchback (yardline 75), so for simplicity we instead compute

$$WP(make FG) \approx 1 - WP_1(yardline 75, s' = -s - 3, \mathbf{x}').$$
(8)

Go win probability. Suppose the offensive team has possession on fourth down and z yards-to-go at yardline y. If the offensive team goes for it and gains  $\Delta \geq z$  yards, then in the next play it either has possession on first down at yardline  $y - \Delta$  or scores a touchdown. Conversely, if the offensive team goes for it and gains  $\Delta < z$  yards, then in the next play the opposing team has possession on first down at yardline  $100 - (y - \Delta)$ . Hence the expected value of going for it on fourth down is

$$\mathbb{E}_{\text{go}}\left[\mathbb{I}\left(\Delta \geq z\right) \cdot \mathsf{WP}_{1}(\text{yardline } y - \Delta) + \mathbb{I}\left(\Delta < z\right) \cdot \left(1 - \mathsf{WP}_{1}(\text{yardline } 100 - (y - \Delta))\right)\right].$$
(9)

This quantity is implicitly a function of the game-state.

This expectation is defined in terms of the conversion outcome conditional density  $\mathbb{P}_{go}(\text{gain }\Delta \text{ yards}|\mathbf{x})$ . This distribution is highly complex, non-normal, and non-symmetric. For instance, pass plays feature a spike at zero yards gained for incompletions. The mean yards gained and the tail vary as yardline changes. There is a spike at the endzone for touchdowns, which increases as the yardline approaches the endzone. The density differs for each team depending the particularities of a team's play calling and personnel. Recent research has gone into estimating this conditional density: Biro and Walker (2023a) model the conditional density of a run play using a skew-t distribution and Biro and Walker (2023b) model the conditional density of a pass play using a generalized gamma distribution, which they fit using Markov chain Monte Carlo methods.

For simplicity, we instead switch the order of the expectation and  $WP_1$  as we did in estimating Punt and FG win probability,

$$\mathbb{P}(\Delta \ge z | \mathbf{x}) \cdot \mathsf{WP}_{1}(\text{yardline } y - \mathbb{E}_{\text{go}}[\Delta | \mathbf{x}, \Delta \ge z], \mathbf{x}') + \mathbb{P}(\Delta < z | \mathbf{x}) \cdot (1 - \mathsf{WP}_{1}(\text{yardline } 100 - (y - \mathbb{E}_{\text{go}}[\Delta | \mathbf{x}, \Delta < z]), \mathbf{x}')).$$
(10)

Here,  $\mathbf{x}$  is the game-state on fourth down and  $\mathbf{x}'$  is the game-state on the subsequent play (which, as before, flips the game-state variables that are relative to the team with possession

and doesn't alter the other variables). We model the expected outcome of a successful conversion attempt  $\mathbb{E}_{go}[\Delta | \mathbf{x}, \Delta \geq z]$ , that of a failed conversion attempt  $\mathbb{E}_{go}[\Delta | \mathbf{x}, \Delta < z]$ , and conversion probability  $\mathbb{P}(\Delta \geq z | \mathbf{x})$  in Section 2.5.

#### 2.4 Estimating first-down win probability

Now, we estimate first-down win probability as a function of game-state. Win probability estimates arise broadly from one of two classes of models, probabilistic state-space models or statistical models. On one hand, state-space models simplify the game of football into a series of transitions between game-states. Transition probabilities are estimated from play-level data and are then propagated into win probability by simulating games. When implemented correctly, these models are sensible ways to estimate WP. However, they are difficult in practice, as they require: a careful encoding of the convoluted rules of football into a set of states and the actions between those states, careful estimation of transition probabilities, and enough computing power to run enough simulated games to achieve desired granularity. Each of these are nontrivial.

On the other hand, statistical models are fit entirely from historical data. Given the results of a set of observed football plays, statistical models fit the relationship between certain game-state variables using data-driven regression or machine learning approaches. These models are widely used today in football analytics thanks to the accessbility of publicly available play-by-play data (e.g., nflFastR (Carl and Baldwin, 2022)) and accessible off-the-shelf machine learning models (e.g., XGBoost (Chen and Guestrin, 2016)). Additionally, due to a perceived abundance of data, flexible machine learning models are viewed as more "trustworthy" than previous mathematical models that make more simplifying assumptions. For these reasons, the open source win probability models used today in football analytics are statistical / machine learning models, which we focus on in this paper.

Lock and Nettleton (2014) use a Random Forest (RF) (Breiman, 2001) to estimate win probability from historical data. The response variable is a binary variable indicating whether the team with possession wins the game. They model win probability as a function of score differential, game seconds remaining, yardline, down, yards to go, the number of timeouts remaining for each team, pre-game point spread, total points scored, and an additional feature to capture the change in impact of score differential over the course of a game,

adjusted score = 
$$\frac{\text{score differential}}{\sqrt{1 + \text{game seconds remaining}}}$$
. (11)

They use a Random Forest of 500 regression trees with parameters mtry = 2 and nodesize = 200.

Baldwin (2021) uses XGBoost (Chen and Guestrin, 2016) to estimate win probability from historical data. He uses the same binary win/loss response variable as before. Baldwin models win probability as a function of score differential, game seconds remaining, half seconds remaining, yardline, down, yards to go, whether the team with possession is at home, whether the team with possession receives the second half kickoff, and the number of timeouts remaining for each team. He uses two additional features to capture the change in impact of point spread and score differential over the course of a game,

spread-time = (point spread) 
$$\cdot \exp\left(-4 \cdot \left(1 - \frac{3600}{\text{game seconds remaining}}\right)\right)$$
 (12)

and

diff-time-ratio = (score differential) 
$$\cdot \exp\left(-4 \cdot \left(1 - \frac{3600}{\text{game seconds remaining}}\right)\right)$$
. (13)

Baldwin includes monotonic constraints for yardline, yards to go, down, score differential, timeouts remaining for each team, spread-time, and diff-time-ratio. He tunes the XGBoost hyper-parameters by minimizing cross validated log-loss (Baldwin, 2021).

We also initially considered the generalized additive model (GAM) (Hastie and Tibshirani, 1986) win probability model from Yurko et al. (2018) but opted in this paper to focus just on flexible non-parametric models because we expect win probability to be replete with interactions between variables.

The aforementioned models are fit from a historical play-by-play dataset that includes plays from all downs. Those models fit first-down win probability by including down as a covariate. We fit an XGBoost model just using first-down plays. This model predicts binary win/loss as a function of score differential, game seconds remaining, pre-game point spread, yardline, receive  $2^{nd}$  half kickoff indicator, offensive team's number of timeouts remaining, defensive team's number of timeouts remaining, total score, and

scoreTimeRatio = 
$$\frac{\text{score differential}}{0.01 + \text{game seconds remaining}}$$
. (14)

We include monotonic increasing constraints for score differential, scoreTimeRatio, and offensive timeouts remaining and monotonic decreasing constraints for point spread, yardline, and defensive timeouts remaining.

Now, we compare the out-of-sample predictive performance of various first-down win probability models. Our full dataset consists of all football plays from 2006 to 2021. We split our dataset in half by randomly sampling 50% of the games. The first-down plays from the first 50% of these games form the hold-out test set. All the plays from the other 50% of these games form the training set. To tune the XGBoost models, we split the training set in half by randomly sampling 50% of the games from the training set. The plays from the first 50% of these games form the XGBoost training set, and the remaining plays form the first 50% of these games form the XGBoost training set, and the remaining plays form the validation set for hyper-parameter tuning. We then tune our XGBoost models in a similar fashion as Baldwin (2021). We view the results of our prediction contest in Table 1. Our model fit from just first-down plays performs the best out-of-sample. Thus, in the remainder of this paper we use our proposed first-down win probability model.

model	model	plays	out-of-sample
name	type	in dataset	logloss
Our proposed model	XGBoost	first downs	0.440
Lock and Nettleton $(2014)$	RF	all downs	0.447
Baldwin (2021)	XGBoost	all downs	0.476

Table 1: Predictive performance of first-down win probability models.

#### 2.5 Estimating fourth-down decision transition probabilities

Next, we estimate fourth-down decision transition probabilities. We model the expected outcome (yardline) of a punt, field goal success probability, conversion success probability, and the expected outcome (yardline) of a successful or a failed conversion attempt.

Punt expected outcome model. We use linear regression to model the expected next yardline after a punt as a function of yardline and punter quality (denoted pq, whose

specification is detailed in Appendix B),

$$\mathbb{E}_{\text{punt}}[\text{next yardline}] = \vec{\alpha} \cdot \text{B-spline}(\text{yardline}, \text{ df} = 4) + \beta_1 \cdot \mathbf{pq} + \beta_2 \cdot \mathbf{pq} \cdot \text{yardline}.$$
(15)

We use a B-spline to capture a nonlinear trend in yardline (de Boor, 1978). The model is trained on a dataset of 36,493 punts from 2006 to 2021, all beyond the 30 yardline. We visualize this model in Figure 3a. The above expectation is more properly defined in terms of the punt outcome conditional density  $\mathbb{P}_{punt}$  (next yardline  $|\mathbf{x}\rangle$ ). But, that distribution is difficult to model (recall our discussion in Section 2.3 of modeling the conditional density of yards gained). A more sophisticated analysis would use that conditional density.

**FG success probability model.** We use logistic regression to model the probability that a kicker makes a field goal as a function of yardline and kicker quality (denoted kq, whose specification is detailed in Appendix B),

$$\log\left(\frac{\mathbb{P}(\text{make FG})}{1 - \mathbb{P}(\text{make FG})}\right) = \vec{\alpha} \cdot \text{B-spline}(\text{yardline}, \text{ df} = 5) + \beta \cdot \text{kq}.$$
(16)

Fitting this model on our dataset of 15,472 observed field goals from 2006 to 2021 yields nontrivial probability predictions for extremely long field goals that have never before been made (e.g., nontrivial probability for a 73-yard field goal from the 55 yardline). To shrink these field goal probability predictions to zero, we impute 500 synthetic missed field goals, randomly distributed from the 51 to the 99 yardline, into our dataset. We visualize this model in Figure 3b.

Go conversion probability model. Due to a small sample size of fourth-down conversion attempts, some existing fourth-down conversion probability models use third down as a proxy for fourth down (e.g., Romer (2006)), as they are also high-pressure situations in which the offensive team attempts to obtain a first down. But, there may be a fundamental difference in conversion probability between third and fourth-down plays, perhaps due to psychological reasons or a differing distribution of play calls. In our model selection process, we train some models on a dataset consisting entirely of fourth-down plays and other models on a dataset consisting of third and fourth-down plays, testing models on a random 50% of fourth-down plays. The parameters of our best conversion probability

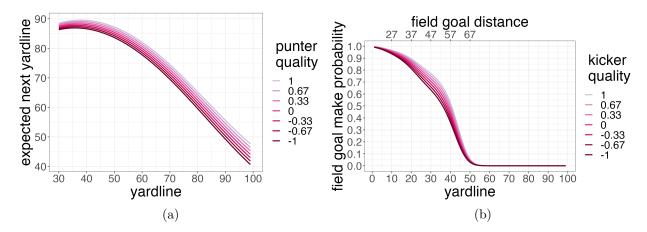


Figure 3: (a) The expected next yardline after a punt (y-axis) according to our model as a function of yardline (x-axis) and punter quality (color). (b) The probability of making a field goal (y-axis) according to our model as a function of yardline (x-axis) and kicker quality (color).

model borrow strength from third-down plays.

We use logistic regression to model fourth-down conversion probability as a function of yards to go, down (third vs. fourth down), and our offensive and defensive quality metrics (whose specification is detailed in Appendix B): quarterback quality of the offensive team (qbqot), non-quarterback offensive quality of the offensive team (oqrot), defensive quality of the defensive team against the pass (dqdtap), and defensive quality of the defensive team against the run (dqdtar). We use these team quality metrics, rather than pre-game point spread, since they yield better predictive performance. This may be because quarterback quality significantly impacts conversion probability while the other team quality measures have a small impact, as seen in Figure 4. Formally, we model

$$\log\left(\frac{\mathbb{P}(\text{convert})}{1 - \mathbb{P}(\text{convert})}\right) = \vec{\alpha_1} \cdot \mathbb{I} (\text{fourth down}) \cdot \text{B-spline} (\log(\text{yards to go} + 1), \text{ df} = 4) + \vec{\alpha_2} \cdot \mathbb{I} (\text{third down}) \cdot \text{B-spline} (\log(\text{yards to go} + 1), \text{ df} = 4) + \beta_0 + \beta_1 \cdot \text{qbqot} + \beta_2 \cdot \text{oqrot} + \beta_3 \cdot \text{dqdtap} + \beta_4 \cdot \text{dqdtar}.$$
(17)

Go expected outcome models. We use linear regression to model the expected outcome (yards gained  $\Delta$ ) of a conversion attempt with z yards to go given that it is

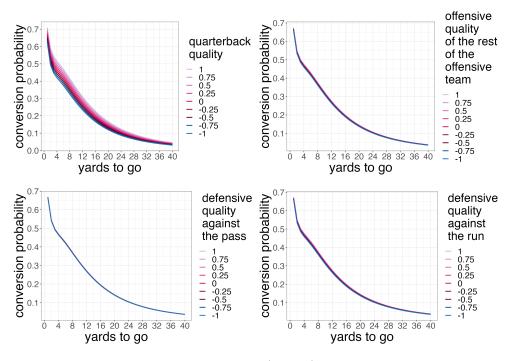


Figure 4: Fourth-down conversion probability (y-axis) according to our model as a function of yards to go (x-axis) and team quality (color). Quarterback quality has by far the largest impact on conversion probability, visualized by a larger spread amongst the colored lines.

successful by

$$\mathbb{E}_{\text{go}}[\Delta|\mathbf{x}, \Delta \ge z] = \vec{\alpha_1} \cdot \mathbb{I} \text{ (fourth down)} \cdot \text{B-spline} \left( \log(\text{yards to go}), \text{ df} = 4 \right) + \vec{\alpha_2} \cdot \mathbb{I} \text{ (third down)} \cdot \text{B-spline} \left( \log(\text{yards to go}), \text{ df} = 4 \right) + \vec{\alpha_3} \cdot \mathbb{I} \text{ (yards to go} = 1) \cdot \text{B-spline} \text{ (yardline, df} = 3 \text{)}$$
(18)  
+  $\vec{\alpha_4} \cdot \mathbb{I} \text{ (yards to go} \ne 1) \cdot \text{B-spline} \text{ (yardline, df} = 4 \text{)} + \beta_0 + \beta_1 \cdot \text{qbqot} + \beta_2 \cdot \text{oqrot} + \beta_3 \cdot \text{dqdtap} + \beta_4 \cdot \text{dqdtar}.$ 

Similarly, we model the expected outcome of a conversion attempt with z yards to go given that it is unsuccessful by

$$\mathbb{E}_{go}[\Delta | \mathbf{x}, \Delta < z] = \alpha_1 \cdot \mathbb{I} \text{ (fourth down)} \cdot \log(\text{yards to go} + 1) \\ + \alpha_2 \cdot \mathbb{I} \text{ (third down)} \cdot \log(\text{yards to go} + 1) \\ + \beta_0 + \beta_1 \cdot \mathsf{qbqot} + \beta_2 \cdot \mathsf{oqrot} + \beta_3 \cdot \mathsf{dqdtap} + \beta_4 \cdot \mathsf{dqdtar}.$$
(19)

These two expectations are more properly defined in terms of the conversion outcome

conditional density  $\mathbb{P}_{go}(\text{gain } \Delta \text{ yards} | \mathbf{x})$ . But, as discussed in Section 2.3, that distribution is highly complex, non-normal, and non-symmetric, making it difficult to model. A more sophisticated analysis would use that conditional density.

## 3 Fourth-down decision making under uncertainty

The standard approach, recommending the decision that maximizes estimated win probability, disregards the uncertainty that arises from estimating win probability from a finite dataset. Thus, in this section, we modify the fourth-down decision procedure to account for uncertainty.

Analysts may be inclined to trust estimates from win probability models because they are fit from an ostensibly massive dataset: there are 600, 825 plays and 229, 635 first-down plays in our play-by-play dataset. Nonetheless, several characteristics of this dataset reveal just how difficult it is to estimate win probability. First, the binary win/loss outcome variable is coarse. Since win probability is a continuous quantity in the interval [0, 1], to capture it with fine granularity from raw zeros and ones requires a massive amount of data. Estimating win probability as a function of game-state, with such a large set of possible game-states, dramatically increases the difficulty of the task. Win probability consists of complex nonlinear and interacting relationships between game-state variables, not simple additive relationships, which makes it even more difficult.

Moreover, the binary win/loss response variable is clustered: all plays from the same game share the same win/loss outcome. This dependence structure reduces the effective sample size, which is somewhere between the number of first-down plays (229, 635) and the number of non-tied games (4, 101) in our dataset. According to the simulation study in Brill and Wyner (2024), we effectively have half as much data as we think. In other words, a win probability estimator fit from a dataset consisting of half as many plays, but where each play has an independent outcome, has the same accuracy as an estimator fit from a clustered dataset like our historical play-by-play dataset.

Thus, there is likely not enough data to experience the full variability of the nonlinear and interacting variables of score differential, time remaining, point spread, yardline, yards to go, timeouts, etc. In fitting win probability models, we are in a limited-data context. Therefore, it is imperative to incorporate uncertainty quantification into the fourth-down decision procedure.

Since we estimate win probability using machine learning models, we need a nonparametric method to quantify uncertainty in these estimates. Bootstrapping is a natural choice to capture such uncertainty. The bootstrapping process begins with generating Bbootstrapped datasets from our original dataset. To do so, we use a randomized cluster bootstrap: re-sample games uniformly with replacement and within each game re-sample drives uniformly with replacement. According to the simulation study in Brill and Wyner (2024), although the randomized cluster bootstrap achieves higher coverage than the standard i.i.d. bootstrap (re-sample plays uniformly with replacement), it produces undercovered intervals that are too narrow. Thus, we also tune our randomized cluster bootstrap using a fractional bootstrap as recommended in Brill and Wyner (2024). We choose an appropriate value for B (B = 101) in Appendix C.

Then, to each bootstrapped dataset, which represents a re-draw of the recent history of football, we fit a full fourth-down decision model (described in Section 2). At each game-state, each model yields an estimated optimal decision. To quantify uncertainty in the estimated optimal decision, we bag the decision itself. Specifically, we consider the *bootstrap percentage* (boot%), or the percentage of bootstrapped models that report each decision to be optimal. Formally, at game-state  $\mathbf{x}$  we have the original estimated optimal decision  $d(\mathbf{x}) \in \{\text{Go}, \text{FG}, \text{Punt}\}$  (the point estimate) and B bootstrapped estimated optimal decisions  $d_1(\mathbf{x}), ..., d_B(\mathbf{x})$ . Then

$$\mathsf{boot}\%(\mathbf{x}) = 100\% \cdot \frac{1}{B} \sum_{b=1}^{B} \mathbb{I}\left(d_b(\mathbf{x}) = d(\mathbf{x})\right).$$
(20)

Bootstrap percentage quantifies how confident we are that a recommendation has higher win probability than the other decisions. A high **boot**% ( $\approx 100\%$ ) reflects high confidence: the estimated optimal decision remains the same across the vast majority of re-draws of the training set. Conversely, a low **boot**% ( $\approx 50\%$ ) reflects low confidence: the estimated optimal decision differs substantially across different re-draws of the training set. A low **boot**% is  $\approx 50\%$  or lower because a fourth-down decision almost always boils down to picking between **Go** and one of the kicks, as it is clearly sub-optimal to punt near the opponent's endzone and to attempt a field goal far from the opponent's endzone.

Regardless of the effect size, when **boot**% is low we cannot trust the point estimate: the effect size at that game-state is too dependent on the random idiosyncrasies of its particular training set. In other words, the edge detected by the point estimate is more due to noise than signal. In a "parallel universe" in which we re-drew each random win/loss game outcome, the estimated optimal decision at that game-state may differ solely due to the randomness inherent in drawing the history of football.

We also consider confidence intervals on the effect size  $g(\mathbf{x})$ , the gain in win probability by making a fourth-down decision at game-state  $\mathbf{x}$ . Given the original estimated effect size  $\hat{g}(\mathbf{x})$  and the *B* bootstrapped effect sizes  $\hat{g}_1(\mathbf{x}), ..., \hat{g}_B(\mathbf{x})$ , sorted from least to greatest, we construct a confidence interval on the effect size using the quantiles. For B = 101, a 90% confidence interval on the effect size is  $[\hat{g}_6(\mathbf{x}), \hat{g}_{96}(\mathbf{x})]$ . This confidence interval represents the following: assume that the win/loss outcomes across football history are generated by some underlying win probability function. If we re-simulated the history of football *B* times from that WP function, keeping the pre-game conditions of each game the same, the true win probability is expected to lie in the 90% confidence interval  $0.9 \cdot B$  times.

We find it easier for bootstrap percentage to drive decision making than confidence intervals because the former is defined by one number whereas the latter is defined by two numbers. For example, consider a play in which the estimated gain in win probability for **Go** is 1%. If our confidence interval for this gain is [-3%, 5%], it is not clear how strongly we should recommend **Go**. Similarly, it is difficult to compare two confidence intervals of varying lengths. For example, it is not clear whether our recommendation for a confidence interval of [-3%, 5%] should be weaker than that for a confidence interval of [-1%, 3%]. Also, our primary interest is to quantify uncertainty in the decision itself (Friedman et al., 1999), which is not as granular as quantifying uncertainty in the effect size.

#### 4 Results

In the previous section we modified the decision procedure to account for uncertainty. In Section 4.1 we illustrate this amended procedure using example plays. Then, in Section 4.2 we consider the extent to which the traditional decision procedure was overconfident in its fourth-down recommendations.

#### 4.1 Example plays

Now, we discuss example plays. To compare decision recommendations to the decisions that actual football coaches tend to make, we model the probability that a coach chooses a decision in {Go, FG, Punt} as a function of game-state. We detail the specification of this *baseline coach model* in Appendix D and include the model's predictions in our decision figures.

Example play 1. First, recall example play 1 from Section 2.2 in which the Patriots had the ball against the Colts in Week 10 of 2023. In Figure 5 we knit uncertainty quantification into decision making. Although the point estimate (the blue column in Figure 5a) suggests that Go provides a 1.5% gain in win probability over FG, 40% of the bootstrapped models view FG as better than Go (the orange column in Figure 5a), reflecting substantial uncertainty in the optimal fourth-down decision. Also, the 90% confidence interval is [-6%, 6%], and the histogram of bootstrapped win probability gain estimates in Figure 5b is centered near zero and has a large spread. These suggest that Go could either be a good or a bad decision.

**Example play 2.** Next, recall example play 2 from Section 2.2 in which the Eagles had the ball against the 49ers in the 2023 NFC Championship game. We visualize fourth-down decision recommendations in Figure 6. The pink dot in Figure 6a lies in a moderately dark green region, indicating a moderate estimated gain in win probability by going for it. Being far from the decision boundary, however, does not imply it the best decision with certainty. Also, it is not obvious how far from the boundary is "far enough." Hence, in Figure 6b we provide an additional chart that illustrates uncertainty in the estimated optimal decision. Here, the color intensity indicates the proportion of bootstrapped models that make the estimated optimal decision. Much of the figure consists of dark colors, specifically dark green in the bottom-left and middle and dark red in the top-right. For those combinations of yardline and yards to go, we are confident in the estimated optimal decision. For example play 2 (the pink dot), **boot**% is high (dark green), so we are confident that **Go** is the best

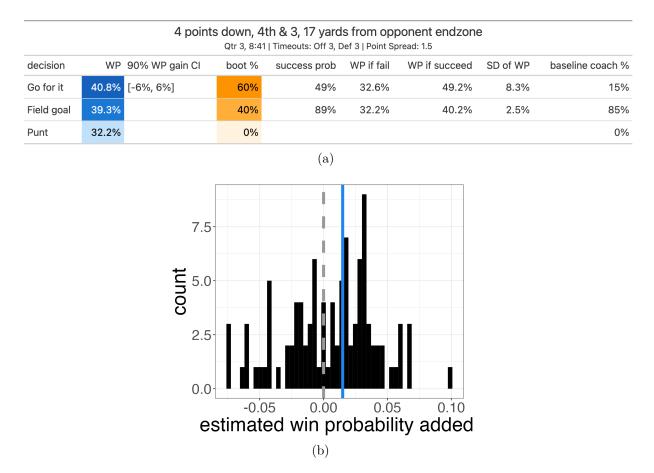


Figure 5: Decision charts for example play 1. Figure (a) shows the models' outputs, including the point estimate (blue column), WP gain confidence interval, **boot**% (orange column), and other metrics. Figure (b) is the histogram of bootstrapped win probability gain estimates. The gray dashed line is zero and the blue solid line is the point estimate.

decision. Other combinations of yardline and yards to go feature lighter colors, reflecting higher uncertainty. For those game-states, we are less confident in the estimated optimal decision.

We include more examples of this fourth-down decision procedure in Appendix E. We also include an interactive Shiny App that visualizes the decision procedure for any game-state on Github.<sup>5</sup>

<sup>&</sup>lt;sup>5</sup>To run the Shiny app, download the Github repository at https://github.com/snoopryan123/fourth\_down and run 3\_shiny/app.R.

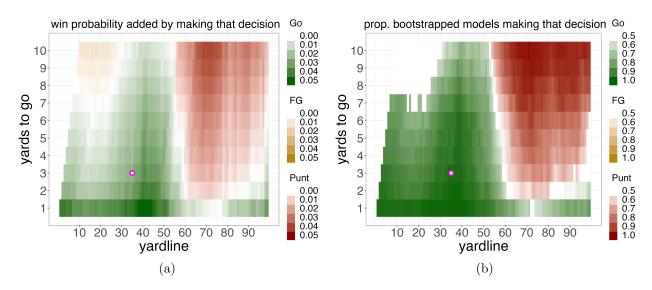


Figure 6: Decision boundary charts for example play 2. Figure (a) visualizes the estimated optimal decision (color) according to effect size (color intensity, where darker colors indicate larger values) as a function of yardline (x-axis) and yards to go (y-axis), holding the other game-state variables constant. The pink dot represents the actual play's yardline and yards to go. Figure (b) is similar except color intensity reflects bootstrap percentage.

#### 4.2 Quantifying overconfidence in win probability point estimates

In Figure 7 we visualize the distributions of effect size and uncertainty across all fourthdown plays from 2018-2022. Effect size is the estimated gain in win probability and uncertainty is proportional to bootstrap percentage. To facilitate easier communication to a non-technical football coach, we bin decision confidence levels into three buckets: confident (boot%  $\in [90\%, 100\%]$ ), lean (boot%  $\in [75\%, 90\%)$ ), and uncertain (boot%  $\in [0\%, 75\%]$ ).

We are confident in the vast majority of decisions that have an effect size above 4%. Most decisions with an effect size under 1% are uncertain, and decisions with an effect size between 1% and 4% are a healthy split between confident, lean, and uncertain. Many plays (45%) have an effect size under 1% and most plays (87%) have an effect size under 4%. So, most fourth-down plays feature an effect size that is subject to considerable uncertainty. In particular, we are confident in just 30% of all fourth-down decisions from 2018 to 2022 and 44% of them are uncertain. This analysis reflects substantial overconfidence in win probability point estimates; far fewer fourth-down decisions are as obvious as traditional analyses suggest.

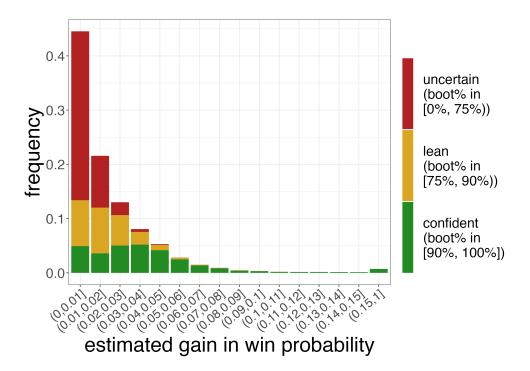


Figure 7: The distribution of effect size, and uncertainty given effect size, across all fourthdown plays from 2018-2022. The height of a bar reflects the proportion of plays that lie in its associated effect size bin (x-axis). The color distribution within a bar reflects the distribution of decision confidence (confident in green, lean in yellow, and uncertain in red) among those plays.

Interestingly, we are confident in about 10% of decisions with effect size under 1% and in about 20% of decisions with effect size between 1% and 2%. Although decision confidence is correlated with estimated gain in win probability, they are fundamentally different: we can be confident in plays that provide small edges. Over the course of a season, these edges can accumulate into a large advantage that coaches should take advantage of.

Furthermore, a football analyst shouldn't penalize a coach for making a decision that has high uncertainty regardless of the effect size because the estimated edge may be due to noise. Accordingly, we should evaluate coaches only on plays for which we are confident (and perhaps also plays in which we lean towards a decision). In Figure 8 we rank coaches by the proportion of fourth-down decisions they made in accordance with our model from 2018 to 2022 among fourth-down plays we are confident in. The top of this list has coaches like John Harbaugh from "analytics bent" organizations but also coaches who are considered more traditional on fourth down such as Ron Rivera, Sean McVay, and Mike Vrabel. While "analytics bent" coaches tend to follow fourth-down recommendations from win probability point estimates, which include recommendations on confident plays, some of the more traditional coaches seem to have a good feel for obvious fourth downs.

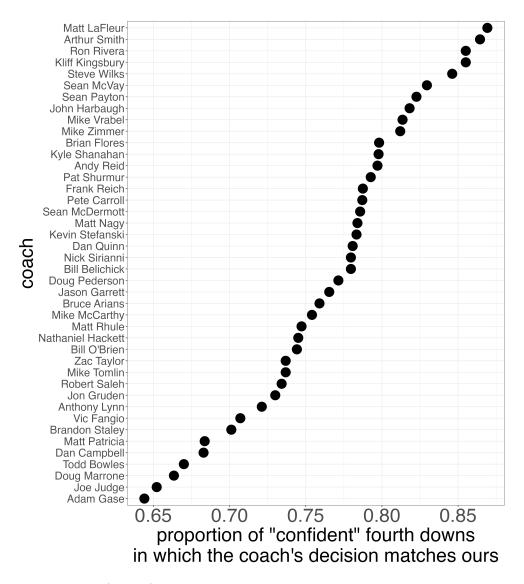


Figure 8: NFL coach (y-axis) versus the proportion of confident fourth-down decisions he made in agreement with our model from 2018 to 2022 (x-axis).

Despite overconfidence in win probability point estimates, analysts have been largely correct that NFL coaches do not go for it enough on fourth down. Across all fourth-down plays from 2018-2022 that we are confident in, the coach made the right decision for 90% of plays where they should have kicked but just 57% of plays where they should have gone for it. Play calling in the NFL is still far too conservative: coaches consistently make wrong

decisions, particularly when they should go for it.

## 5 Discussion

Win probability models are commonly used across sports analytics. Fourth-down decision making is a prominent example. There has been little reflection on the high-variance nature of win probability estimators and no substantial attempt to quantify uncertainty in these models. In this study, we argue it is imperative to knit uncertainty quantification into win probability-based decision making. Using fourth-downs as our case study, we in particular recommend a fourth-down decision when we are confident it has higher win probability than all other decisions. If we are not confident in a recommendation because it is subject to substantial uncertainty, we should not penalize a coach who doesn't follow it. Similarly, we do not think it is right for a football analyst to recommend an uncertain fourth-down recommendation, regardless of the effect size. Despite analysts' overconfidence in win probability point estimates, after accounting for uncertainty we still find that NFL coaches are too conservative: they don't go for it enough on fourth down.

Our analysis is not without limitations and there are many avenues for future work. To begin, in this study, we used bootstrapping to quantify uncertainty in win probability estimates. Although our bootstrap procedure produces wide confidence intervals, it underestimates uncertainty since it quantifies sampling uncertainty but not model uncertainty. The former is uncertainty resulting from fitting a model on a finite dataset ("variance") and the latter is uncertainty caused by our model being wrong or biased ("bias"). Our models are subject to several sources of model uncertainty. We made several simplyfing assumptions in modeling fourth-down win probability, such as swapping the expectation with first-down win probability. Furthermore, "true" win probability is a function of unobserved confounders. For example, how well Tom Brady slept the previous night could affect his team's win probability. A more elaborate analysis would capture model uncertainty.

In this study, we found that statistical win probability models produce uncertain estimates at many game-states. In future work we suggest exploring probabilistic state-space models to estimate win probability. As discussed in Section 2.4, probabilistic models simplify the game of football into a series of transitions between game-states. Transition probabilities are estimated from play-level data and win probability is calculated by simulating games. The effective sample size (ESS) of transition probability models is the number of plays because they are fit from independent play-level observations. Some analysts in industry have created proprietary probabilistic models, which they believe are more accurate than statistical models due to the larger ESS. But, state-space models have higher bias than statistical models. Whereas both classes of models have similar levels of hidden bias (due to not adjusting for unobserved confounders), state-space models have more model bias as they make stronger simplifying assumptions. See Appendix F for a further discussion of the difficulty of formulating probabilistic state-space win probability models. We look forward to a public facing exploration of those models in the future.

Finally, if teams follow our fourth-down recommendations, their behavior will change and win probability will change accordingly. Statistical win probability models that learn from the game outcomes defining the recent history of football do not account for this distribution shift. State-space models, on the other hand, can account for these changes by altering the probability that a team goes for in on fourth down as a function of game-state. A more elaborate analysis would account for this distribution shift.

## Acknowledgments

The authors thank the many football analysts who contributed to the development of the fourth down problem. In particular, we thank Brian Burke for providing helpful feedback. The authors acknowledge the High Performance Computing Center (HPCC) at The Wharton School, University of Pennsylvania for providing computational resources that have contributed to the research results reported within this paper.

#### References

Baldwin, B. (2021). NFL win probability from scratch using xgboost in R.

Biro, P. and Walker, S. (2023a). Parametric modeling and analysis of nfl run plays. *Journal of Sports Analytics*, 9:1–16.

- Biro, P. and Walker, S. (2023b). Play call strategies and modeling for target outcomes in football. *The American Statistician*, 78:1–14.
- Breiman, L. (2001). Random forests. *Mach. Learn.*, 45(1):5–32.
- Brill, R. S. and Wyner, A. J. (2024). Exploring the difficulty of estimating win probability: a simulation study.
- Burke, B. (2009). The 4th Down Study Part 3. http://www.advancedfootballanalytics.com/2009/09/4th-down-study-part-3. html.
- Carl, S. and Baldwin, B. (2022). *nflfastR: Functions to Efficiently Access NFL Play by Play Data.* https://www.nflfastr.com/.
- Chen, T. and Guestrin, C. (2016). XGBoost: A scalable tree boosting system. In Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '16, pages 785–794, New York, NY, USA. ACM.
- de Boor, C. (1978). A Practical Guide to Spline, volume Volume 27.
- Friedman, N., Goldszmidt, M., and Wyner, A. (1999). Data analysis with bayesian networks: A bootstrap approach. In *Proceedings of the Fifteenth Conference on Uncertainty* in Artificial Intelligence, UAI'99, page 196–205, San Francisco, CA, USA. Morgan Kaufmann Publishers Inc.
- Hastie, T. and Tibshirani, R. (1986). Generalized Additive Models. *Statistical Science*, 1(3):297 310.
- Lock, D. and Nettleton, D. (2014). Using random forests to estimate win probability before each play of an nfl game. *Journal of Quantitative Analysis in Sports*, 10.
- Romer, D. (2006). Do Firms Maximize? Evidence from Professional Football. Journal of Political Economy, pages 340–365.
- Yurko, R., Ventura, S., and Horowitz, M. (2018). nflWAR: A Reproducible Method for Offensive Player Evaluation in Football.

#### SUPPLEMENTARY MATERIAL

## A Data details

variable	variable description
win/loss	1 if the possession team wins the game, else 0
game seconds remaining	num. seconds remaining in the game in $\{3600,, 1\}$
score differential	point differential between the offensive and defensive
1	team at the start of this play
total score	total points scored during this game prior to this play
posteam spread	pre-game point spread relative to the possession team
yardline	num. yards from the opponent's endzone in
	$\{0, 1,, 99, 100\}$ (0 is touchdown and 100 is safety)
ydstogo	the number of yards the offense has left to gain
	before achieving a first down or a touchdown
down	a number in $\{1, 2, 3, 4\}$ denoting the down of the play
posteam timeouts remaining	num. timeouts in $\{3, 2, 1, 0\}$ the offensive team has
defteam timeouts remaining	num. timeouts in $\{3, 2, 1, 0\}$ the defensive team has
receive 2h ko	1 if the possession team receives the $2^{nd}$ half kickoff, else 0
home	1 if the offensive team is at home, else $0$
era	categorical variable grouping the year into
	$\{1999 - 2005, 2006 - 2013, 2014 - 2017, 2018 - 2022\}$
roof	categorical variable grouping the roof of the stadium into
	{closed, dome, open, outdoors}
game id	unique identifier of this game
drive id	unique identifier of this drive
posteam coach	name of the coach of the possession team

Table 2: Game-state variables relevant to estimating win probability that describe the context at the start of a play.

## **B** Estimating player / team quality

**Punter quality.** We define a punter's quality by a weighted sum of his punt yards over expected over all his previous punts in his career. To begin, we fit a simple expected next yardline after punting model  $\mathbb{E}_{Punt}^{(0)}$  on a held-out dataset of all punts from 1999 to 2005. We

fit  $\mathbb{E}_{\mathsf{Punt}}^{(0)}$  using linear regression as a function of yardline (specifically, a cubic polynomial in yardline). Then, we define the *punt yards over expected* (PYOE) of the  $n^{th}$  punt by

$$\mathsf{PYOE}_n := \text{actual yardline after the } n^{th} \text{ punt} - \mathbb{E}^{(0)}_{\mathsf{Punt}}(\text{yardline prior to the } n^{th} \text{ punt}).$$
 (21)

Now we define punter quality using Rams' punter Johnny Hekker for concreteness. Index all of Hekker's punts from 2006 to 2021 by n. We define Hekker's punter quality prior to punt n by a weighted sum of the punt yards over expected from his previous kicks,

$$\mathsf{pq}_n := \alpha \cdot \mathsf{pq}_{n-1} + \mathsf{PYOE}_{n-1},\tag{22}$$

where  $pq_0 := 0$  and  $PYOE_0 := 0$ . We use an exponential decay weight  $\alpha = 0.995$  to upweight more recent punts. For instance, a play which occurred 138 plays ago is weighted half as much as the previous play since  $0.995^{138} = 0.5$ . Also, a play which occurred 459 plays ago is weighted one-tenth as much as the previous play since  $0.995^{459} = 0.1$ . Finally, we standardize the punter quality column to have mean zero and standard deviation 1/2. In Figure 9a we plot the career mean punter quality of each punter with over 250 punt attempts from 2006 to 2021. As expected, Johnny Hekker has the highest punter quality.

**Kicker quality.** We define a kicker's quality by a weighted sum of his field goal probability added over all his previous kicks in his career. To begin, we fit a simple field goal probability model  $P_{\mathsf{FG}}^{(0)}$  on a held-out dataset of all field goals from 1999 to 2005. We fit  $P_{\mathsf{FG}}^{(0)}$  using logistic regression as a function of yardline (specifically, a cubic spline with five degrees of freedom on the yardline). Then, we define the *field goal probability added* (**FGPA**) of the  $n^{th}$  field goal by

$$\mathsf{FGPA}_n := \mathbb{I}\left(n^{th} \text{ field goal is made}\right) - P_{\mathsf{FG}}^{(0)}(\text{yardline of the } n^{th} \text{ field goal}).$$
(23)

Now we define kicker quality using the Ravens' kicker Justin Tucker for concreteness. Index all of Tucker's field goals from 2006 to 2021 by n. We define Tucker's kicker quality prior to field goal n by a weighted sum of the field goal probability added in his previous kicks,

$$\mathsf{kq}_n := \alpha \cdot \mathsf{kq}_{n-1} + \mathsf{FGPA}_{n-1},\tag{24}$$

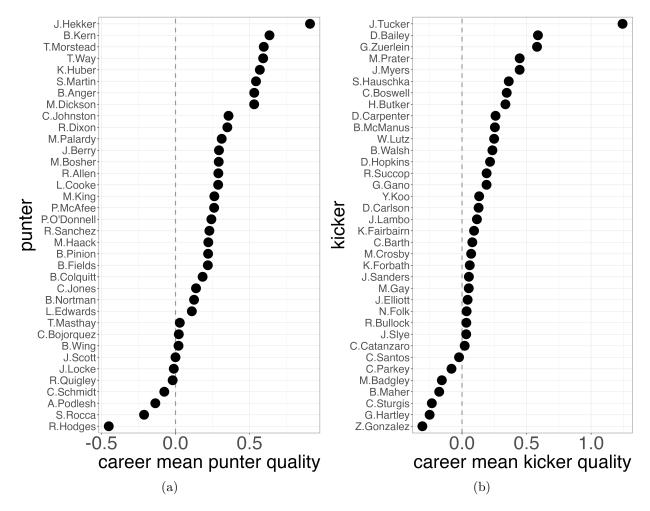


Figure 9: (a) The career mean punter quality (x-axis) of each punter (y-axis) with over 250 punts from 2006 to 2021. (b) The career mean kicker quality (x-axis) of each kicker (y-axis) with over 100 field goal attempts from 2006 to 2021.

where  $kq_0 := 0$  and  $FGPA_0 := 0$ . As before, we use an exponential decay weight  $\alpha = 0.995$  to upweight more recent kicks. Finally, we standardize the kicker quality column to have mean zero and standard deviation 1/2. In Figure 9b we plot the career mean kicker quality of each kicker with over 100 field goal attempts from 2006 to 2021. As expected, Justin Tucker has by far the highest kicker quality.

**Team quality.** We create measures of offensive and defensive quality using the result of each previous play. A common and good way of quantifying play success is *expected* points added (EPA) (Yurko et al., 2018). The EPA of play n is the difference in expected

points (EP) between the end and the beginning of the play,

$$\mathsf{EPA}_n = \mathsf{EP}_n - \mathsf{EP}_{n-1}.\tag{25}$$

We remove all plays from 1999 to 2005 from our play-by-play dataset and fit an expected points model  $EP^{(0)}$  to this held-out data. In fitting this model, the outcome variable is the observed net points of the next score, a real number in  $\{7, 3, 2, 0, -2, -3, -7\}$ . We model expected net points as a linear function of yardline, log yards to go, and one combined indicator for third and fourth down.

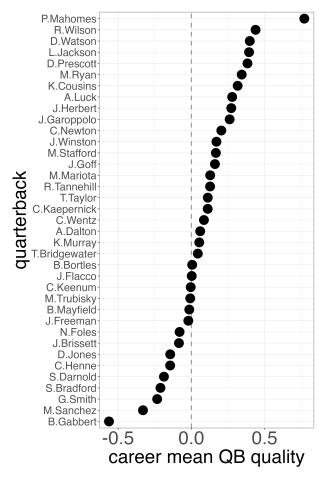


Figure 10: The career mean quarterback quality (x-axis) of each quarterback (y-axis) with over 1750 attempts and whose rookie season came after 2006.

Then we use  $\mathsf{EPA}^{(0)}$  ( $\mathsf{EPA}$  derived from  $\mathsf{EP}^{(0)}$ ) to craft our team and player quality metrics. For concreteness, consider deriving the quarterback quality of Patrick Mahomes. Index all the plays from 2006 to 2021 in which Mahomes passes or runs the ball by n. We define Mahomes' quarterback quality prior to play n by a weighted sum of the EPA<sup>(0)</sup> of his previous plays,

$$q_n := \gamma_n \cdot \alpha \cdot q_{n-1} + \mathsf{EPA}^{(0)}{}_{n-1}, \tag{26}$$

where  $q_0 := 0$  and  $\mathsf{EPA}^{(0)}_0 := 0$ . We use an exponential decay weight  $\alpha$  to upweight more recent plays. We set  $\alpha = 0.995$  for each of our team and player quality metrics to upweight more recent plays. Additionally, at the start of each season, we shrink by a multiplicative factor  $\gamma$ . So, the shrinkage weight  $\gamma_n$  of play n is  $\gamma$  if this is Mahomes' first play of the season, otherwise it is 1. We use different shrinkage values  $\gamma$  for each team and player quality metric, shown in Table 3. We tuned these  $\gamma$  values to optimize predictive performance on a held-out validation set. A smaller  $\gamma$  reflects a quantity that is noisier from year to year. Finally, we standardize each offensive and defensive quality metric to have mean zero and standard deviation 1/2. In Figure 10 we plot the career mean quarterback quality of each quarterback with over 1750 attempts and whose rookie season came after 2006. As expected, Patrick Mahomes has by far the highest quarterback quality. We construct the other team quality metrics described in Table 3 in a similar fashion, via Formula (26).

variable	$\gamma$
quarterback quality	3/4
non-quarterback offensive quality	1/2
defensive quality against the pass	1/3
defensive quality against the run	1/3

Table 3: Summary of team quality metrics computed via Formula (26) and their start-ofseason shrinkage parameters  $\gamma$ .

## C Tuning the number of bootstrapped datasets

We use **boot**% to measure uncertainty in the estimated optimal decision, but we cannot necessarily rely on a non-technical football coach to fully process how **boot**% maps to the strength of a recommendation. To facilitate easier communication to a coach, we bin decision recommendations into three buckets: confident (**boot**%  $\in$  [90%, 100%]), lean (**boot**%  $\in$  [75%, 90%)), and uncertain (**boot**%  $\in$  [0%, 75%]). Since we ultimately bucket decision recommendations into these three bins (see Section 4.2), we want the number of bootstrapped models B to be large enough to stably categorize decisions into one of these three bins. We also want B to be as small as possible in order to quickly evaluate a fourthdown recommendation during a football game. Hence, we conduct a stability analysis to choose B.

Across M = 100 draws of B bootstrapped decision models in each, we categorize each observed fourth-down play from 2018 to 2022 into one of the three bins. Let i index all the observed fourth-down plays from 2018 to 2022, let  $m \in \{1, ..., M\}$  index the draw of the bootstrap, and in each draw of the bootstrap we generate B fourth-down decision models. Given **boot** $\%_{im}^{(B)}$ , the **boot**% of the estimated optimal decision for play i in draw m of the bootstrap, we calculate

$$\begin{cases} p_{i}^{\text{confident, }(B)} = \frac{1}{M} \sum_{m=1}^{M} \mathbb{I} \left( \text{boot} \%_{im}^{(B)} \in [90\%, 100\%] \right), \\ p_{i}^{\text{lean, }(B)} = \frac{1}{M} \sum_{m=1}^{M} \mathbb{I} \left( \text{boot} \%_{im}^{(B)} \in [75\%, 90\%) \right), \\ p_{i}^{\text{uncertain, }(B)} = \frac{1}{M} \sum_{m=1}^{M} \mathbb{I} \left( \text{boot} \%_{im}^{(B)} \in [0\%, 75\%) \right), \\ p_{i}^{(B)} = \max\{ p_{i}^{\text{confident, }(B)}, \ p_{i}^{\text{lean, }(B)}, \ p_{i}^{\text{uncertain, }(B)} \}. \end{cases}$$
(27)

For each category,  $p_i^{\text{category, }(B)}$  is the proportion of the M bootstrap draws that play i is put in that category. For our procedure with B bootstrapped models to be stable, we want  $p_i^{\text{category, }(B)}$  to be close to 1 for each category, which means that a play's categorization is not dependent on the randomness inherent in generating B bootstrapped models. Hence, we want  $p_i^{(B)}$ , the maximum  $p_i^{\text{category, }(B)}$  across the three categories, to be close to 1. Hence, we want the mean across all plays  $\overline{p}^{(B)} = \frac{1}{n} \sum_{i=1}^{n} p_i^{(B)}$  to be close to 1. In Figure 11 we see that for B = 101,  $\overline{p}^{(B)} = 0.9$  and the vast majority of plays i have  $p_i^{(B)} = 1$ . Some plays have  $p_i^{(B)}$  lower than 1 since they lie near the border of two categories. We believe  $\overline{p}^{(B)} = 0.9$ is sufficiently large and hence use B = 101 in our fourth-down decision procedure.

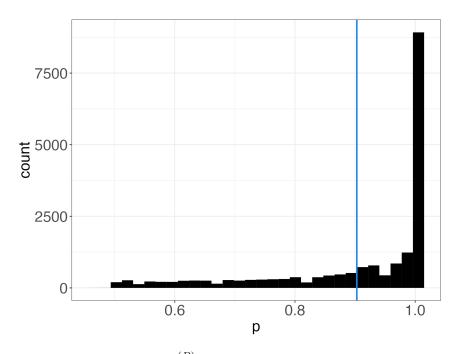


Figure 11: This is a histogram of  $\{p_i^{(B)}\}_i$ . The blue line is the mean. Since most of the values equal 1 and the mean is high enough, B = 101 is large enough.

## D Baseline coaches' decision model

To compare our decision-making procedure to the decisions that actual football coaches tend to make, we model the probability that a coach chooses a decision in {Go, FG, Punt} as a function of game-state. We use XGBoost to fit these coach probabilities. XGBoost works well here because we have 94,786 fourth-down plays in our full dataset of plays since 1999, and each play is a reasonably approximate independent observation of a coach's decision. In particular, we fit these coach probabilities as a function of yardline, yards to go, game seconds remaining, score differential, point spread, and era (1999-2001, 2002-2005, 2006-2013, 2014-2017, and 2018-present). In Figure 12 we visualize these coach decision models, and the results make intuitive sense. For the most part, coaches punt deep in their own territory and kick field goals near the opponent's endzone, except for with one and sometimes two yards to go. Also, at the end of the game, coaches' decision-making changes depending on the number of points they need to score to win the game.

In Figure 13 we visualize the variable importance (via gain) of our XGBoost model. Interestingly, point spread has an extremely small impact on coaches' fourth-down decisions.

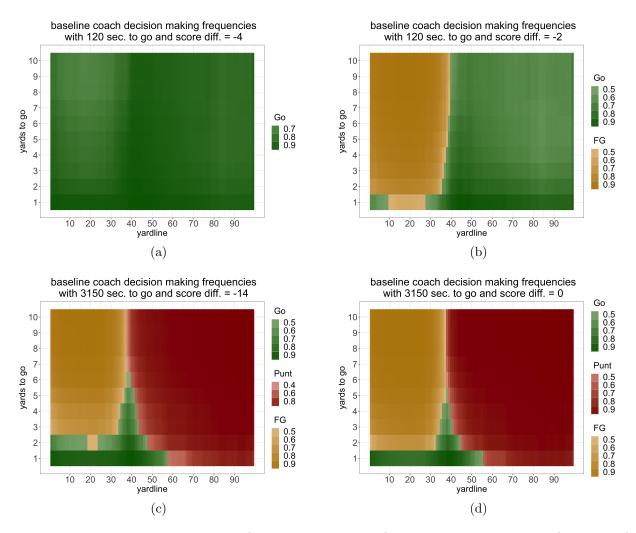


Figure 12: Visualizing our model of the typical coach's fourth-down decision as a function of yardline and yards to go, for various values of time remaining and score differential. Green, yellow, and red indicate that Go, FG, and Punt is the most likely decision, respectively. The color intensity reflects the likelihood that a coach makes that decision.

We find, however, that point spread should impact fourth-down decision making. For instance, in certain game-states, it is advantageous for the favorites to be more aggressive (e.g., late in close games).

## E Additional example plays

**Example play 3.** In Figure 14 we visualize the decision procedure for a fourth-down play in which the Bears had the ball against the Jets in Week 12 of 2022. FG provides an edge

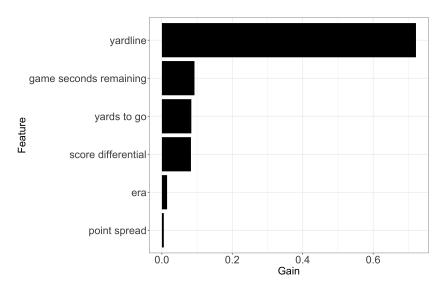


Figure 13: Variable importance (gain) for the typical coach's decision probability model.

over Go according to the WP point estimate (+1.3% WP). But, the 90% confidence interval of the estimated gain in win probability by attempting a field goal is [-4%, 5%], indicating that FG could either be a good or a bad decision. Also, about half of the bootstrapped models say Go is better. In other words, we do not have enough data to be confident in the win probability point estimates, and we don't know the optimal fourth-down decision at this game-state. Further, in the bottom right plot, notice how most of the colors are light. This indicates that the optimal decision is uncertain at most other combinations of yardline and yards to go at this game-state.

**Example play 4.** In Figure 15 we visualize the decision procedure for a fourth-down play in which the Ravens had the ball against the Jets in Week 1 of 2022. Punt provides a slight edge over Go according to the WP point estimate (+0.08% WP). But most of the bootstrapped models say Punt is better and the 90% confidence interval of the estimated gain in win probability by punting is [-1%, 3%], which is largely positive. So, even if the edge is small, we are confident in this edge and recommend that the Ravens should Punt. Further, in the bottom right plot, notice how most of the colors are dark outside of a large white boundary region. This indicates that we have higher certainty in the estimated optimal decision at this game-state.

**Example play 5.** In Figure 16 we visualize the decision procedure for an infamous fourth-down play in which the Raiders had the ball against the Rams in Week 14 of 2022. Go

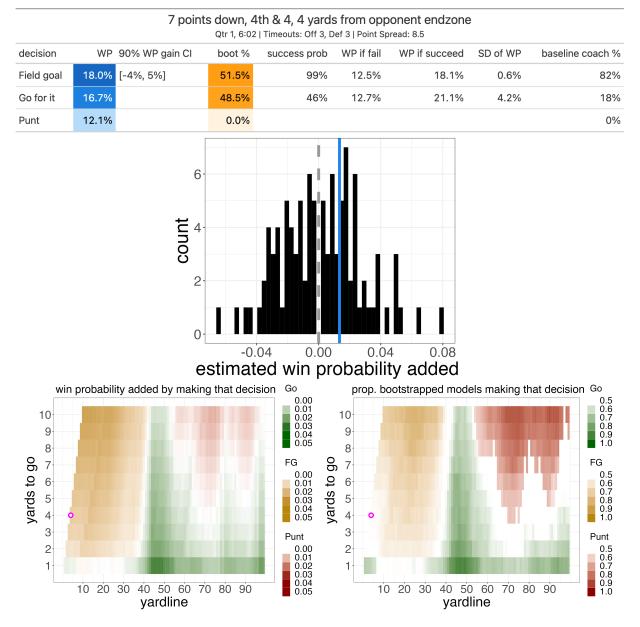


Figure 14: Decision charts for example play 3.

provides a strong edge over Punt according to the WP point estimate (+4.1% WP). Further, many of the bootstrapped models say Go is better and the 90% confidence interval of the estimated gain in win probability by going for it is [-1%, 5%], which is largely positive. Thus, we recommend that the Raiders should Go.<sup>6</sup>

 $<sup>^{6}\</sup>mathrm{In}$  real life, the Raiders punted. Then, Rams quarter back Baker Mayfield countered with a successful 98-yard drive to win the game.

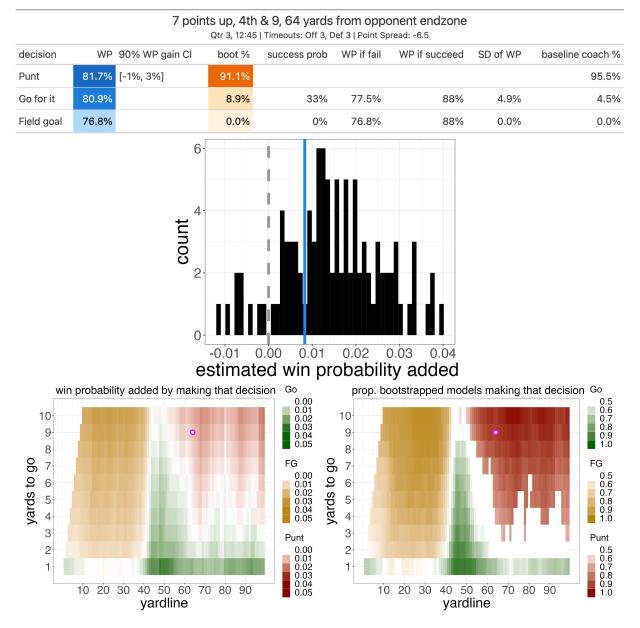


Figure 15: Decision charts for example play 4.

# F The difficulty of formulating a probabilistic statespace win probability model

Proprietors of probabilistic models believe that introducing bias in order to reduce variance improves the overall accuracy of the resulting win probability estimator. Nevertheless, these models are subject to their own set of issues, and we believe they aren't as low-variance as some analysts claim. Properly modeling the distribution of the outcome of a play is

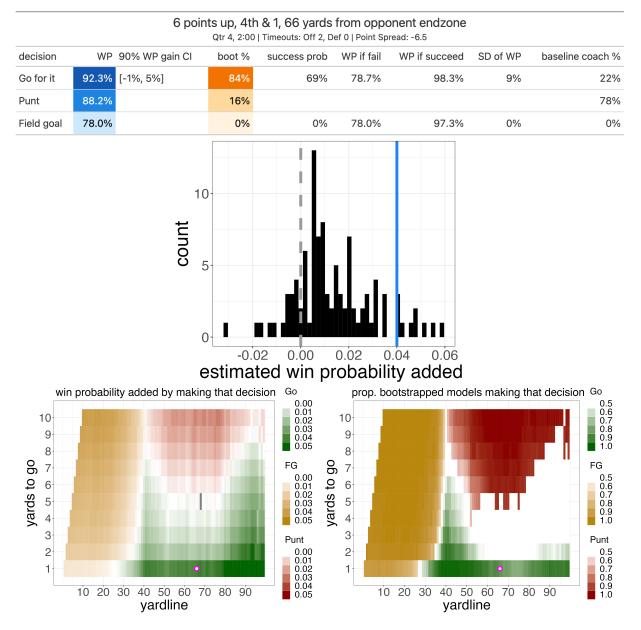


Figure 16: Decision charts for example play 5.

nontrivial. In contrast to the simple binary win/loss outcome of statistical win probability models, the outcome variable of a transition probability model is the next game-state, which could include a change in yardline, score, time, or timeouts. This distribution is quite complex: there is a spike at gaining 0 yards for incompletions, a spike for a touchdown, spikes for penalties, and other smooth possibly multimodal distributions for the outcome of run or pass plays, each of which change as a function of team quality and other confounders Biro and Walker (2023a,b). Typical transition probability models are riddled with selection bias, as a coach generally chooses play calls that work for his specific players and don't generalize to an "average" team. Further, uncertainty in these transition probabilities may, after being properly propagated through a state-space model, result in just as much (if not more) uncertainty in estimated win probability than estimates from statistical models. Additionally, one must take great care to carefully encode all the subtle rules of football into her model, and one needs sufficient computing power to simulate enough games to estimate win probability with enough granularity. We look forward to a public facing exploration of probabilistic win probability models in the future.