

The optimal resolution level of a protein is an emergent property of its structure and dynamics

Raffaele Fiorentini,^{1,2} Thomas Tarenzi,^{1,2,3} Giovanni Mattiotti,^{1,2} and Raffaello Potestio^{1,2}

¹*Physics Department, University of Trento, via Sommarive, 14 I-38123 Trento, Italy*

²*INFN-TIFPA, Trento Institute for Fundamental Physics and Applications, I-38123 Trento, Italy*

³*School of Chemistry, University of Birmingham, B15 2TT Birmingham, UK*

(Dated: December 7, 2023)

Molecular dynamics simulations provide a wealth of data whose in-depth analysis can be computationally demanding and, sometimes, even unnecessary. Dimensionality reduction techniques are thus routinely employed to simplify and improve the interpretation of trajectories focusing on specific subsets of the system's atoms; a key issue, in this context, is to determine the optimal resolution level, i.e. the smallest number of atoms needed to preserve the largest information content from the full atomistic trajectory. Here, we introduce the protein optimal resolution identification method (PROPRED), an unsupervised approach built on information theory principles that determines the smallest number of atoms that need to be retained to attain a synthetic yet informative description of a protein. By applying the method to a protein dataset and two particular case studies, we show that this number is typically between 1.5 and 2 times the number of residues in a protein; nonetheless, the degree of conformational variability of the system influences the specific number importantly, in that a broader range of large-scale conformations correlates with fewer retained sites. The PROPRED method is implemented in efficient and user-friendly python scripts, which are made available for download on a github repository.

I. INTRODUCTION

The *in silico* investigation of proteins enables researchers to disclose a wealth of information and insights in their biological function that is complementary to what experiments can provide. In particular, the high level of detail that is inherent in a computer model of a protein is largely out of reach for state-of-the-art experimental methods.

The highest resolution achievable in a computer model is atomistic, that is, each atom of the molecule is explicitly accounted for in the description; this is the case irrespective of the strategy employed to compute the interactions among particles, which can range from quantum mechanical methods [1, 2] to classical force fields [3, 4]. In any case, the outcome of a simulation is a sequence of snapshots providing the instantaneous positions of the protein's atoms one time step after the other.

This high level of accuracy is strictly necessary to enable the calculation of forces and, consequently, the determination of the system's time evolution in the correct manner (at least as correct as possible compatibly with the model employed). It is often the case, however, that the *analysis* of the trajectory does not need to focus on each and all atoms. In general, for example, hydrogen atoms are excluded from the analysis unless specific processes take place that involve them explicitly, e.g. hydrogen bond formation.

In most cases, the study of a molecular dynamics (MD) trajectory can return useful, intelligible information if one is capable of identifying a few *collective variables* [5, 6] that describe, in a parsimonious and interpretable manner, the behaviour of the system. It is thus of paramount importance to perform a *dimensionality reduction* that projects the high-dimensional configuration

of the molecule onto a lower-dimensional space of few, possibly nonlinear effective coordinates.

In recent years, a dimensionality reduction strategy that is gaining growing attention is the identification of optimal *mappings* [7–10]. A mapping is, in general, a linear transformation that takes an atomistic configuration in input and returns the coordinates of fewer effective sites; a prototypical example of this is the mapping from the positions of all a protein's atoms to those of the amino acid centres of mass. Another mapping strategy – which is the one we will focus on in this work – is the decimation mapping, whereby only a subset of the molecule's atoms is retained, while the rest is ignored (see Fig. 1).

By inspecting the MD trajectory of a protein in terms of a subset of the molecule's atoms, one can highlight selected features of the system; a trivial yet illustrative example of this is the difference between a picture where only the alpha carbon are kept, and one where all atoms of a specific domain are retained: in the first case one gets the jist of the whole molecule's fluctuations at a coarse level of description, in the second case only a specific portion of the molecule, possibly a functionally crucial one, is inspected with the highest detail, while the rest is simply ignored.

A large body of work has been carried out in the past few years to investigate the properties of mappings and their relation with the features of the underlying system that can be highlighted through them [10–16]. Most importantly, a key idea is gaining ground, that a relation exists between the low-resolution description employed to inspect a system and the amount and type of useful information that can emerge [7, 8, 10, 15].

In this context, a crucial question pertains the *level of resolution*, loosely defined as the fraction of atoms retained in the coarse representation over the total; one can

in fact wonder whether an optimal resolution level exists, at which it is particularly sensible, appropriate, and useful to study a molecular dynamics trajectory. This issue precedes the identification of the most informative mapping [7, 17], in that the latter implies a selection of *which* atoms it makes sense to look at, but first one has to figure out *how many* atoms, in general, it makes sense to preserve.

In this work we address this relevant issue. Specifically, we present and discuss an algorithmic, unsupervised procedure to process an MD trajectory of a protein (even though the approach is rather general) aimed at identifying the optimal number of atoms in terms of which it is most useful to describe and/or model the molecule. The notion of *optimality* is here made rigorous through the usage of an information-theoretical approach, which allows one to define information in a quantitative manner.

The method presented here is dubbed protein optimal resolution identification method, or PROPRES. In the rest of the paper we illustrated the theoretical foundations of the algorithm, its technical workflow, and its application to nontrivial case studies that showcase its usage and results. The method is implemented in an agile and user-friendly python script that is made freely available for download and usage in the repository <https://github.com/potestiolab/propre>.

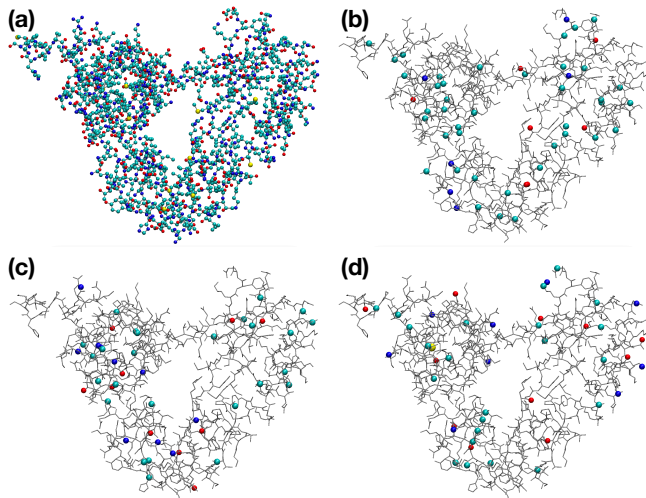


FIG. 1: Example of different decimation mappings of a protein. Panel (a) shows a protein with $N_{ha} = 2027$ heavy atoms. In panels (b), (c), and (d) 3 different decimation mappings of the same protein are shown, selecting a subset of $N_{CG} = 100$ atoms out of N_{ha} .

II. THE PROPRES METHOD: THEORETICAL BACKGROUND AND ALGORITHMIC ASPECTS

The PROPRES approach consists in a protocol for the analysis of an atomistic trajectory of a biomolecule, aimed at identifying the optimal number N_{opt} of heavy

atoms to build a synthetic yet informative description of the system. In other words, the method allows the determination of the *optimal level of resolution* to capture the essential features of the biomolecule’s dynamics, retaining the smallest amount of detail while preserving the largest amount of information.

In the following sections, the notions of *amount of detail* and *amount of information* will be made clearer and quantitative, and we will describe the theoretical foundations of PROPRES and its workflow. The software implementing the method, including the program itself and examples of input files, are freely available at the repository <https://github.com/potestiolab/propre>. The repository includes three python scripts: the first one removes all hydrogen atoms from both the molecule configuration file and the trajectory file; the second script computes the level of informativeness of various low-resolution representations as a function of the number of retained atoms, making use of two quantities, resolution and relevance, that are discussed in detail in the next subsection; the third script employs the results of the second to pinpoint the optimal number of sites; lastly, the script outputs plots of the processed data and files containing the relevant information. A more detailed description of the scripts usage and several examples of input files are available as readme files in the repository itself.

A. Resolution and relevance

The theoretical heart of PROPRES is the information extracted from the analysis of two quantities, namely *resolution* and *relevance*. The interested reader is referred to a number of papers, e.g. [9, 18–21], where the topic is discussed in thorough detail; hereafter we just define these quantities and provide heuristic and qualitative arguments to motivate their usage in the present context.

Given a dataset of M elements, one can group, or *cluster* them, according to different labelling schemes. Each labelling (and hence clustering) strategy produces a coarse representation of the dataset, whose level of detail and informativeness can vary. Resolution and relevance are both, each in its own way, measures of the information *lost* or *gained* in the aforementioned process of clustering. In this work, we make use of them to identify an optimal trade-off between two quantities: the detail that is lost when the structure of a molecule is looked at only in terms of a fraction of its atoms; and the information that is gained when configurations are clustered based on the positions of the retained atoms. Such strategy, in fact, allows one to assign a statistical weight – given by the cluster size – to a group of configurations.

Consider a sample of M elements (in our case, the MD frames). Each element in the sample can be labelled in such a way as to have one or more elements with the same label. This labelling induces a *clustering*, that is, we can group elements based on their label s . The resolution is

defined as the entropy H_{res} of the given clustering:

$$H_{res}[s] := - \sum_s p_s \cdot \log_2(p_s) \quad (1)$$

$$p_s := \frac{k_s}{M}$$

where k_s represents the count of dataset elements assigned to the cluster labelled by s . It is proven [19] that H_{res} exhibits a continuous growth with an increasing number of clusters; this is consistent with the idea that as we reduce the number of clusters we lose information, which is quantified by H_{res} .

It is also true, though, that a very detailed labelling that allows us to distinguish each dataset element from the other is not really useful. In fact, in absence of prior knowledge, each element is just as informative as any other, and no statistics - but the trivial, uniform one - is available to infer or reconstruct the generative process underlying the sample. If, on the other hand, we cluster elements, we gain insight in that different clusters are, in general, differently populated, and their relative size is a proxy for the statistical weight of the dataset elements they contain. Losing detail thus allows structure and information to emerge.

This qualitative picture is made quantitative by the relevance H_{rel} , which is defined as [18, 20]:

$$H_{rel}[k] := - \sum_k \frac{k \cdot m_k}{M} \cdot \log_2 \left(\frac{k \cdot m_k}{M} \right) \quad (2)$$

where m_k denotes the number of clusters encompassing the same amount $k = 0, \dots, M$ of data points, for a given clustering process.

The relevance vs. resolution curve is bell-shaped: normalising these quantities by $\ln M$, which is the largest value of both, they range between zero and unity, and while resolution grows from one extreme to the other, relevance goes from zero to a maximum and then back again to zero. A typical behaviour of this curve is reported in Fig. 3. A zero relevance at the extremes is a signal of the fact that having a perfectly detailed labelling, which allows one to tell an element apart from any other, is just as useless as a clustering that lumps all elements in a single bucket.

A special point in the plot is the one where the slope of the curve is $\mu = -1$ [18, 20]; at this point, a loss of resolution by one unit is balanced by a gain in informativeness (as quantified by the relevance) of the same amount. For resolutions lower than that, the information gain is lower than the detail loss; this point is thus identified as the optimal compression point, where the reduction of resolution and the informativeness gain is optimally balanced.

In what follows, we will employ this mathematical framework to pinpoint the number of atoms of a protein that retains, on average, the largest amount of information about its behaviour in a molecular dynamics trajectory while, at the same time, reducing as much as possible the level of detail.

B. Calculation of the resolution-relevance curves

The objective of this part of the workflow is to scan a range of numbers of retained (heavy) atoms and compute, for each of them, the values of resolution and relevance over a sample of randomly generated mappings. In this manner, we can construct a resolution-relevance curve in which the optimal resolution value, associated to the point of slope -1 , can be identified. A schematic illustration of the whole workflow is provided in Fig. 2.

As anticipated, the starting point of the PROPRE algorithm is the molecular dynamics trajectory of a biomolecule, containing all atoms of the system of interest but not those of the solvent. Denoting with N_{at} the number of atoms in the molecule, the atomistic trajectory $\mathbf{X}_{aa}(t)$ consists in a collection of T vectors of dimension $3N_{at}$, each labeled with the time index t associated to the given time frame. By filtering out the positions of N_H hydrogen atoms from it, one obtains the trajectory $\mathbf{X}_{ha}(t)$ of vectors of dimension $3N_{ha}$, where $N_{ha} := N_{at} - N_H$.

The UPGMA [22] hierarchical clustering algorithm is then applied to cluster the configurations of $\mathbf{X}_{ha}(t)$. The metric employed to measure the distance between two configurations \mathbf{X}^a and \mathbf{X}^b is the root squared distance (RSD), defined as:

$$RSD = \sqrt{\sum_{i=1}^N |\mathbf{X}_i^a - \mathbf{X}_i^b|^2} \quad (3)$$

which is proportional to the more common root mean squared distance, $RSD = \sqrt{N} RMSD$, but generalises it in a way that is more useful in the present context [7, 21]. We employ the dendrogram emerging from the trajectory clustering to identify the RSD distance threshold \tilde{C} below which all configurations are distinguishable, i.e. each frame is representative of a cluster on its own.

The threshold \tilde{C} is then employed in the next step of the workflow; here we consider a number $N_{CG}^{(i)} = N_{ha} - i$ of retained atoms for $i \in [2, N_{ha}]$. A number \mathcal{N}_M of different mappings is generated, that is, a random selection of $N_{CG}^{(i)}$ heavy atoms out of the N_{ha} available ones. For each of the \mathcal{N}_M mappings, the trajectory $\mathbf{X}_{ha}(t)$ is processed to obtain the configuration $\mathbf{X}_{CG}^{(m,i)}(t)$ of the sole atoms that are included in the mapping, the index m labelling the specific mapping and i indicating the retained atom number $N_{CG}^{(i)}$. The frames of this trajectory are clustered with the UPGMA algorithm, and the dendrogram is cut at the threshold value \tilde{C} : in this way, we group together those configurations that would be considered indistinguishable according to the criterion previously employed to separate the all-atom trajectory configurations; complementarily, two low-resolution configurations are treated as distinguishable if also the all-atom frames they derive from would be deemed distinct.

The clusters so obtained are then used to calculate one (H_{res}, H_{rel}) point, see Eqs. 2 and 1; this procedure is re-

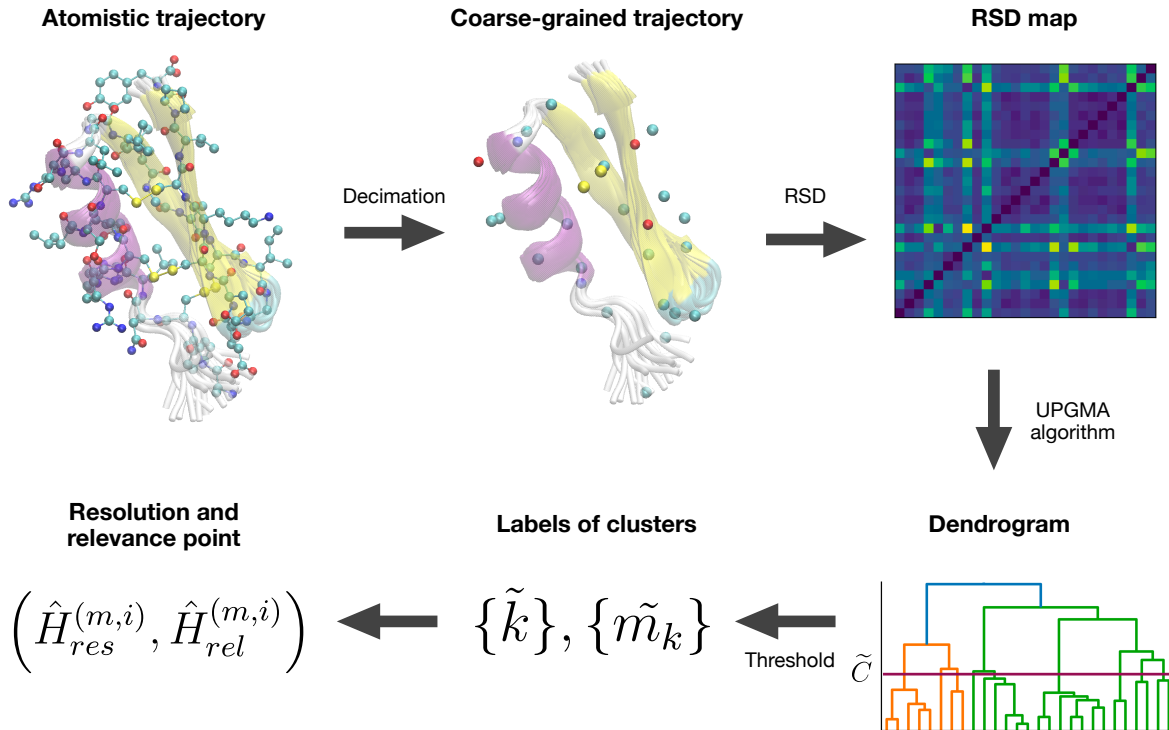


FIG. 2: Infographic that illustrates the steps of the first part of the PROPRES protocol: the construction of the H_{res}, H_{rel} scatter plot. After filtering the atomistic trajectory (by choosing a random decimation mapping of the heavy atoms), the RSD map is built, in order to perform a clustering of the filtered configurations. Each mapping corresponds to a point in the H_{res}, H_{rel} plane; by varying the retained atoms selection as well as the number of retained atoms one can reconstruct the curve as a scatter plot.

peated for each choice of the number of retained atoms $N_{CG}^{(i)}$ and for each random mapping m generated retaining $N_{CG}^{(i)}$ atoms. The resulting points draw a curve in the resolution-relevance plane as the one shown in Fig. 3 for the protein *adenylate kinase*.

C. Identification of the optimal number of retained sites

Once the relevance-resolution plot is constructed, the next step consists in identifying the point where the curve has slope $\mu = -1$, that is the point of optimal trade-off between detail parsimony and information gain [20]. This is a tricky step in that we do not have a smooth, differentiable curve, but rather a scatter plot of points distributed on a range both in resolution and relevance.

In order to identify this soft spot, and find the number of retained atoms that best corresponds to it, one can proceed in at least two particularly intuitive ways: the *uniform density* and the *uniform spacing* averaging protocols. Each of the two consists in a rule to group the points that fall into the same, predefined resolution

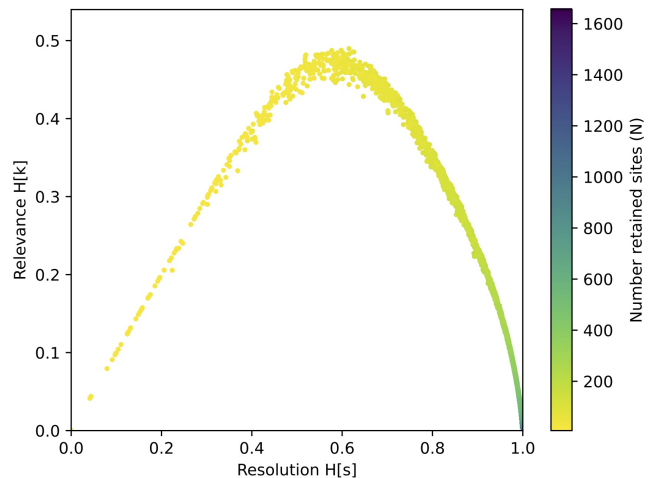


FIG. 3: Plot of resolution ($H_{res}[s]$) vs. relevance ($H_{rel}[k]$) obtained for a trajectory of the enzyme adenylate kinase. Points are coloured according to the number of atoms retained in the corresponding mapping, transitioning from yellow to blue as the number increases.

interval, and associate a single value of the relevance to each bin.

In the *uniform density* protocol, points are grouped so that every resolution interval contains the same number D of (H_{res}, H_{rel}) points: in this way, a uniform distribution of points is promoted by construction, and the value of the relevance, obtained averaging over the points in the bin, has a statistical weight comparable to that of the others. The default value of D is set to 100, but can be changed by the user. In Fig. 4 we illustrate the outcome of this procedure applied to a dataset of 30 points that we built *ad hoc* for a pictorial representation; here, we chose to set the number of points per bin $D = 5$ in order to have a sufficient number of both points and bins.

In contrast, in the *uniform spacing* protocol the x axis is subdivided in W intervals of width $1/W$, in order to promote a uniformly-distributed coverage of the resolution range. The default value of W is 100. Its application is illustrated in Fig. 5, where the number of windows has been set so as to have the same number of bins as in the previous case.

The choice of the method might depend on the specific necessity; in the applications explored in this work, the uniform density protocol is preferable as it returns a finer distribution of points in the region of interest to the PROPRE protocol, *i.e.* on the right of the maximum of H_{res} . We thus chose to implement this binning strategy in the algorithm, with a choice of $D = 100$. The outcome of this smoothing procedure is a sequence of representative points, whose resolution value is given by the midpoint of the bins, and the relevance is given by the average of the points in the bin. Such representative points are indicated with red circles in Figs. 4 and 5.

Then, the program computes the numerical derivative of the curve of representative points. The method employed is the simple Newton's difference quotient. Once the derivative is known, the algorithm highlights the points that correspond to a slope in the interval $[-1.1, -0.9]$ (as pictorially represented in Fig. 6b), a reasonable compromise between being accurately close to -1 and accounting for a function defined by a small and finite number of points. If more than one point falls into this region, the one with the highest resolution is kept. Finally, a histogram is built that counts the occurrence of a specific number of retained sites in the group of points belonging to the selected bin, see Fig. 6bc,d: the number with the highest occurrence is returned as the optimal number of retained heavy atoms N_{opt} .

The number of random mappings \mathcal{N}_m that the program explores is very small compared to the number of possible selections of N_{CG} atoms out of $N_{AT} > N_{CG}$ available ones. In fact, as it was discussed in depth in a previous work by some of us [8], a complete, exhaustive coverage of the mapping space would be impossible in a time scale adequate to the practical needs we face here. However, the distribution of mappings at a given number of retained sites N_{CG} is very narrow; this allows us to compute resolution and relevance on a relatively small

number of mappings with the statistical guarantee that they will return a good estimate of the average.

III. MATERIALS AND METHODS

A. Protein selection

A dataset of 11 proteins distinct in size, structure and function was built starting from a larger dataset of 107 proteins, after clusterization based on their dynamics. The initial, large dataset was based on the one employed in reference [23], from which proteins with too high sequence/structure similarity were removed. The proteins are categorized monomeric by the protein quaternary structure file server (PQS), have a resolution higher than 1.8Å, no ligands larger than six atoms, and no presence of metals other than Mg^{2+} , Ca^{2+} , K^+ , Na^+ , Zn^+ . Further requirements included a structure deposition date after 1987 and absence of gaps larger than one amino acid. The structures were downloaded from the Protein Data Bank, and the coordinate files were cleaned-up from heteroatoms, from copies of the protein in the crystallographic cell, and from residue-configurations with low occupancy. The position of missing atoms was rebuilt and the protein conformations were optimized using the software FoldX[24]. The procedure of dynamics-based clustering applied on this dataset reflects the one developed by us in [25], and already applied in [9]. Specifically, for each protein of the larger dataset, the first 10 normal modes of fluctuation were analysed using an elastic network model, and superimposed by means of the ALADYN protocol [26], which performs a hybrid structural/dynamical alignment. The similarity between the essential spaces spanned by the first 10 normal modes was quantified by means of the root mean square inner product (RMSIP) [27]. The distance between the essential dynamics of two aligned proteins was defined as $d_{ij} = 1 - RMSIP_{ij}$; this distance was employed to perform a hierarchical clustering. The 11 proteins used in this work are the centroids of the resulting clusters, and their PDB codes are: 1DSL, 1NOA, 1SNO, 1UNE, 1XWL, 1IGD, 1HYP, 1KNT, 1QKE, 2EXO, 1KOE.

Two additional systems were employed to study the dependence of the optimal number of retained atoms on the protein conformational state, namely the enzyme adenylylate kinase and the IgG4 therapeutic antibody pembrolizumab. These systems were chosen because of their large conformational variability, which can be sampled on timescales accessible to standard atomistic MD simulation. The starting structures for the MD simulations of these systems correspond to the crystallographic structure of ADK in the open form (PDB ID: 4AKE) and the full-length crystallographic structure of pembrolizumab (PDB ID: 5DK3). The residues missing from the antibody coordinate file were modelled as described in [28]. The antibody has been simulated in two different conditions, namely in the presence and in the absence of

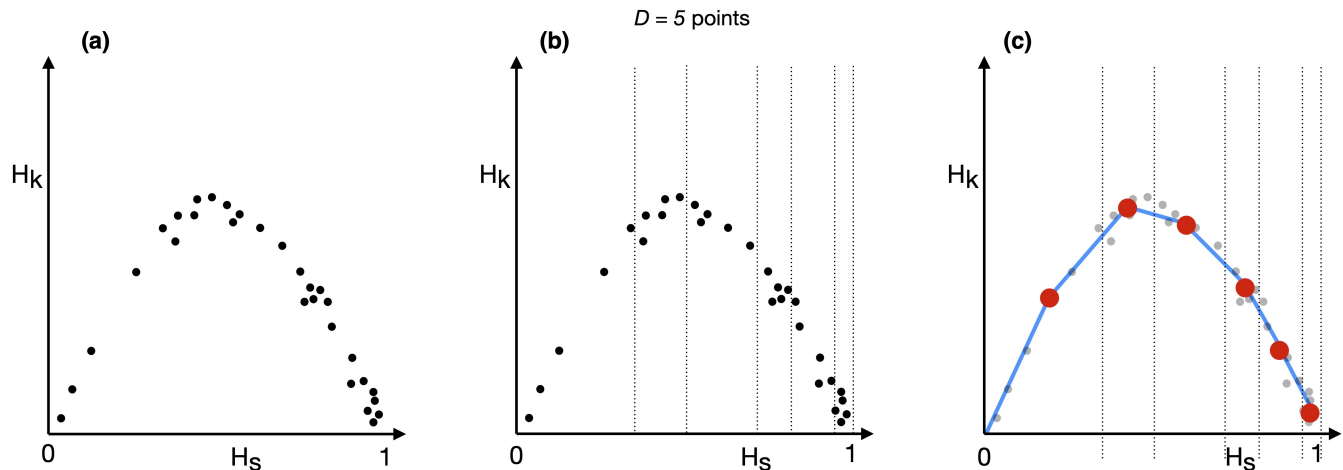


FIG. 4: Uniform density approach to binning resolution-relevance curves. (a) pictorial representation of 30 relevance and resolution points that we built *ad hoc* for a pictorial representation; (b) subdivision of the x axis into intervals of variable width, each one containing 5 points ($D = 5$); (c) average curve of relevance and resolution (red circles and blue lines).

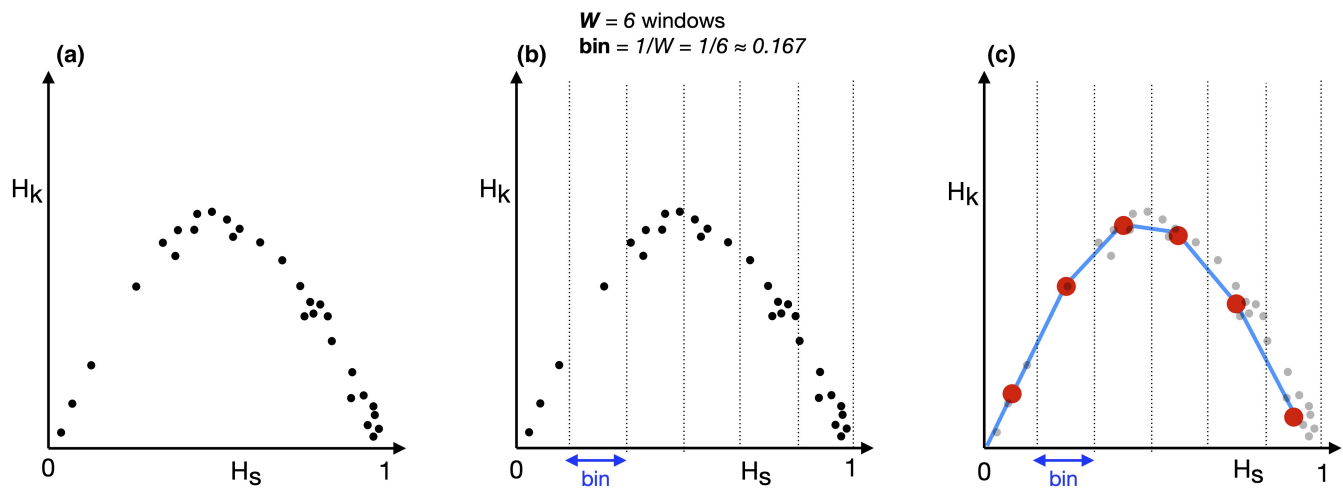


FIG. 5: Uniform spacing approach to binning resolution-relevance curves. (a) pictorial representation of 30 relevance and resolution points that we built *ad hoc* for a pictorial representation; (b) subdivision of the x axis into 6 intervals of same length ($W = 6$, bin width $1/W$), each one containing a variable number of points; (c) average curve of relevance and resolution (red circles and blue lines).

the two glycans that are covalently bound to the Fc domain. To model the glycosylated pembrolizumab, the software doGlycans was employed [29]. Firstly, the glycan structures were defined by a sequence that comprises information on the type of sugar moieties and their connectivity; the employed glycans are composed by 4 N-acetylglucosamines, 3 mannoses, and 1 fucose (GlcNAc4Man3Fuc). Secondly, the topology of the sugar is generated and it is included in the topology of the global system that contains all the parameters of the pro-

tein, the sugars, and the solvent. Residues N297 of both heavy chains were glycosylated, as reported in the work of Scapin et al. [30]. The structure of the glycosylated antibody was visually checked, and torsional angles of the carbohydrates were adjusted to avoid steric clashes between the sugar chains as well as between the sugar and the protein atoms.

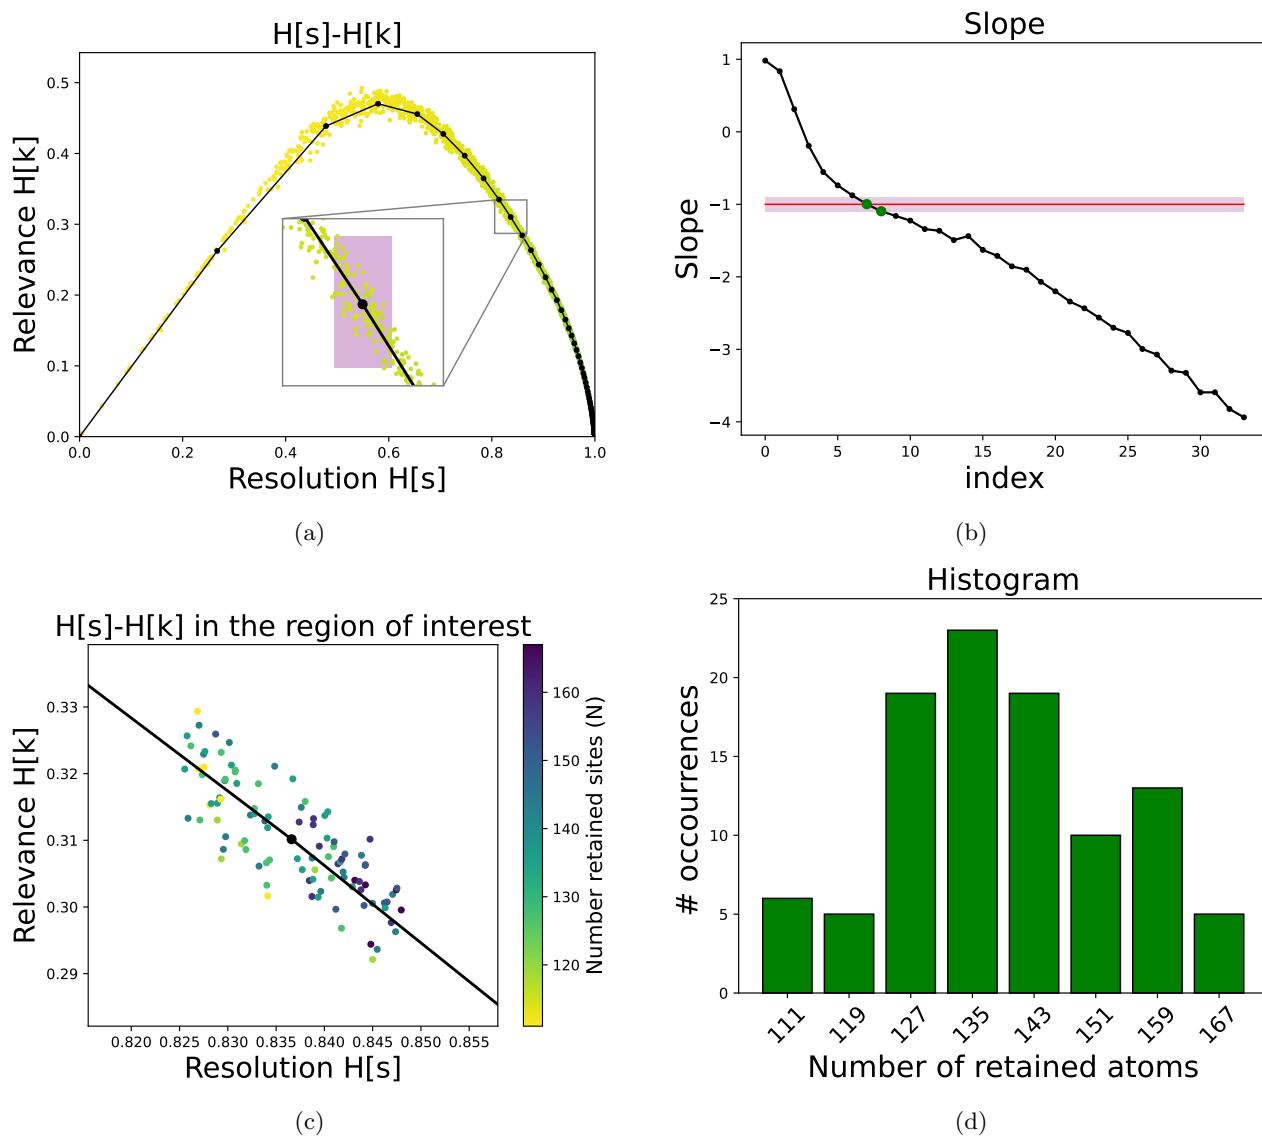


FIG. 6: Summary output plots of the PROPRE workflow, applied to a 500 ns-long simulation of the adenylate kinase enzyme (discussed in detail in the Results section). **(a)** The production of the resolution-relevance scatter plot, with a zoom on the representative point identified by the slope $\tilde{\mu} \in [-1.1, -0.9]$. **(b)** Plot of the numerical slope $\tilde{\mu}$ as a function of the point index, highlighting in red the region $[-1.1, -0.9]$; here, two points are identified that fall in the highlighted region, however the approach outputs only the one corresponding to the largest number of occurrences, see panel (d). **(c)** Zoom on the points belonging to the bin highlighted in pink in (a). **(d)** Histogram of the occurrence of the various numbers of retained sites $N_{CG}^{(i)}$ in this bin; the output of the algorithm, N_{opt} , is the value of retained atoms with the largest number of occurrences.

B. Simulation details

All simulations were performed with the Gromacs 2018 software [31]. The protein topology was defined through the AMBER99SB-ILDN force field [32], and the TIP3P model was employed for the description of water molecules [33]. Sodium and chloride ions were added at the physiological concentration of 150 mM, neutralising the global electric charge in the simulation box. After

energy minimisation, NVT and NPT equilibrations were performed using the velocity-rescale thermostat [34] and the Parrinello–Rahman barostat [35]. A cut-off of 1.2 nm was used for van der Waals interaction and for the short-range component of the Coulomb one. The long-range component of the Coulomb force, instead, was computed with the Particle Mesh Ewald algorithm. The LINCS [36] algorithm was employed to define the constraints on the hydrogen-containing bonds. An integration time step of 2 fs was used. For each protein of the dataset, a trajec-

tory of 500 ns was collected; of these, the first 100 ns are considered as equilibration and therefore discarded from the following analysis. Adenylate kinase was simulated for 500 ns as well, while the antibody pembrolizumab was simulated for 2 μ s, in 4 independent replicas of 500 ns each. In the case of ADK and pembrolizumab, the trajectory frames were assigned to different conformational basins on the basis of the root-mean-square deviation between structures, as described in [37] for ADK and [28] for pembrolizumab.

C. PROPRE parameters

For each simulation, 1000 frames, equally spaced along the trajectory, are used for the PROPRE analysis. In accordance with the default software parameters, the number of random mappings for a fixed number of CG sites is 50, while the number of retained atoms itself is progressively decreased with a step corresponding to 0.5% of the total number of protein heavy atoms. From the computed relevance-resolution curves, the uniform density protocol is applied for smoothing, using a value of 100 points per resolution bin.

D. Analysis

Analysis of the trajectories was performed with Gromacs tools and in-house scripts. Protein residue fluctuations were calculated with *gmx rmsf*, while the clustering and the identification of the representative conformations was performed with *gmx cluster*. The rendering of protein structures was performed with VMD [38] and with TCL scripts.

IV. RESULTS AND DISCUSSION

A. Optimal number of sites vs number of protein residues

The PROPRE algorithm allows the identification of the optimal resolution for a specific protein, where the optimal resolution is intended as the fraction of the total number of sites (namely, of the protein heavy atoms) that has to be retained in order to minimize the information loss upon coarse-graining. It is natural to think that the optimal number of sites N_{opt} depends on the specific system under investigation and its features, e.g. the protein size, architecture, and flexibility. To assess the possible presence of a general trend, we first applied the PROPRE pipeline to 500 ns-long MD trajectories of a set of 11 different proteins (Fig. 7), ranging from a molecular weight of 7 kDa (1IGD) to 66 kDa (1XWL). The systems were selected from a larger protein dataset in order to maximize the differences in tertiary structure and dynamical

features (see Methods section). Despite the large differences in structure, size and dynamics, the analysis on the trajectories of the 11 proteins of the dataset suggests a relation between the optimal number of retained sites and the total number of protein residues. The plot in Fig. 8 shows indeed a linear trend between these two quantities, with a correlation coefficient $R^2 = 0.81$. The slope of the curve is 1.82, meaning that, in general, the optimal number of retained atoms is between 1.5 and twice the number of protein residues.

The general trend just discussed, however, is accompanied by nontrivial deviations observed in the case of the largest proteins of the dataset, namely 1KOE, 2EXO, and 1XWL. In fact, the first two have a larger optimal number of retained atoms than expected, while the third one turns out to be aptly described by fewer sites. A more detailed inspection of these cases shows that proteins 1KOE and 2EXO have a fairly stiff structure and a rather limited range of fluctuations, as it can be seen from the RMSD-based colouring in Fig. 7; in contrast, protein 1XWL is not only the largest of the dataset, but also a very mobile one. This suggests that the optimal fraction of retained atoms might be affected by other factors in addition to the protein size, such as the degree of flexibility and the diversity of conformational states explored during the MD simulation. To put this idea at test, in the following we discuss the case of two very flexible molecules, namely the enzyme adenylate kinase and the antibody pembrolizumab.

B. Optimal number of sites vs protein conformational state

The enzyme adenylate kinase

To investigate the dependence of N_{opt} on the conformations of the biomolecules, the PROPRE analysis has been performed on a 500 ns-long simulation of the adenylate kinase (ADK) enzyme, sampling both the open and the partially closed states of the protein (Fig. 9). In the partially closed conformation, the distance between the LID and NMP domains is substantially reduced with respect to the open one. We do not observe a complete transition between the open and fully closed states, as expected from the absence of the substrate and from the long time scale of the process [39]; this partially closed conformation of ADK in the apo state was already observed both experimentally [40] and in previous MD simulation studies [41, 42] performed in similar conditions. On the basis of the different RMSD between the two conformational states, we grouped the all-atom frames from the full trajectory in two clusters, corresponding to the open and closed conformation; we then applied PROPRE to compute the optimal number of retained atoms on the full trajectory and on the two individual clusters. The values of N_{opt} in these three cases is plotted in Fig. 10 as a function of the mean square displacement (MSD) of the

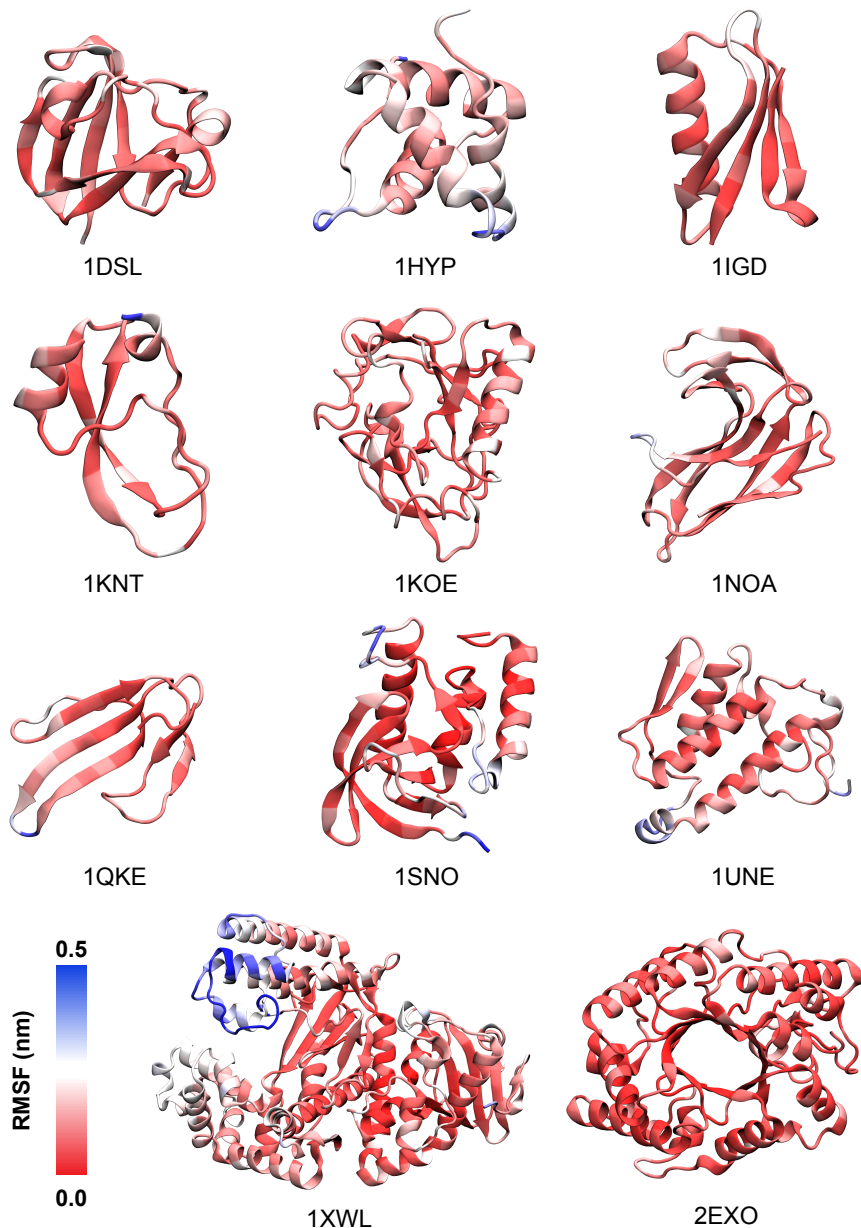


FIG. 7: Graphical representation of the proteins comprising the dataset, colored according to the per-residue value of root-mean-square fluctuations as computed from the MD simulations.

C_{α} atom, averaged over the residues and the trajectory frames.

The results show that each of the three cases corresponds to a different optimal number of retained atoms, although the system (and therefore the total number of protein atoms) is the same. In particular, N_{opt} decreases with the occurrence of large-scale fluctuations along the simulation. In the case of the full trajectory, where large-scale transitions between the open and compact states are sampled and the MSD (averaged on the protein residues) is the largest, the fraction of retained atoms is only the 8%; in the cluster of the open state, where the fluctua-

tions are reduced but a good degree of flexibility is still present, the percentage is 14%; and in the cluster of the compact state, where the conformation of the protein is such that all large-scale fluctuations are hindered, the percentage increases to 26%. Incidentally, applying the criterion obtained in Section IV A for the calculation of N_{opt} using only the number of residue as input, the resulting N_{opt}/N_{at} value is 23.5%, which is very close to the result obtained for the closed conformational cluster. Once again, this suggests that this criterion applies only to the cases of compact and rigid proteins, while the system-specific flexibility and configurational variability

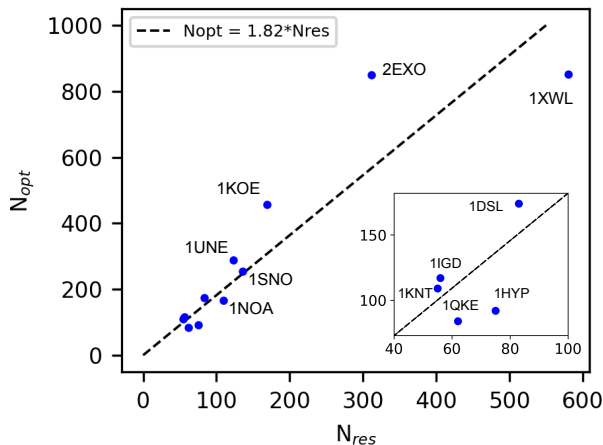


FIG. 8: Scatter plot of the number of optimal sites identified by PROPRES for each protein of the dataset, in relation to the number of residues.

must be taken into account in more general cases.

The IgG4 antibody pembrolizumab

Antibodies are highly flexible molecules, and as such they represent a perfect test-case for the calculation of N_{opt} in relation to the protein’s conformational state. We focused on the IgG4 antibody pembrolizumab, here investigated in two different forms: the non-glycosylated and the glycosylated ones. In both cases, the antibody is simulated in the apo form, without the presence of the antigen.

For both the non-glycosylated and the glycosylated states, four 500 ns-long simulations of the full-length antibody pembrolizumab were collected, and the resulting configurations clustered according to the similarity in the protein’s conformations. The resulting clusters are ordered according to the increasing average radius of gyration, and labelled from 0A to 5A for the non-glycosylated state (Fig. 11) and from 0G to 3G for the glycosylated state (Fig. 12). Calculation of the optimal number of sites were performed on each conformational clusters. The results for the non-glycosylated systems are plotted in Fig. 13.a. Also in this case, larger protein fluctuations lead to a lower percentage of retained atoms, although this trend is less well-defined for the low-MSD clusters. Such behaviour is even clearer in the case of the antibody in the glycosylated state (Fig. 13.b), where there is an evident relation between the degree of flexibility within a conformational basin and the optimal number of representative sites.

It is worth noticing that the fraction of N_{opt} , as predicted following the rule of thumb in Section IV A, amounts to the 23% of the total number of heavy atoms

in the protein, a value almost double than those plotted in Fig. 13; this observation further corroborates the idea that the discrepancy between the two optimal fractions of retained atoms can be explained on the basis of the high flexibility of the protein structure, even within those conformational clusters displaying the lowest fluctuation intensities.

V. CONCLUSIONS

The resolution at which one inspects a system is not a neutral or irrelevant parameter. Indeed, whatever the level of detail employed to *model* the system (quantum, classical, atomistic, coarse-grained...), the choice of how much of it to look at is in the hand of the observer; such choice is inevitable (we can’t process all $3N$ coordinates of a large molecule at once) and fraught with consequences, as it is any decision to keep something and discard something else.

The selection of what to preserve is subjected to the identification of the right *amount* of detail to keep, in our case being the number of heavy atoms of a protein that it makes sense to retain in order to have a sufficiently compact and yet informative picture of the molecule.

In this work we have illustrated an algorithmic, unsupervised strategy that, taking the moves from general concepts of information theory, allows one to process a molecular dynamics trajectory (or any other collection of configurations, irrespectively of their origin) and identify the optimal fraction of heavy atoms to employ in a coarse-grained description of the system. The resulting optimal number of atoms to keep turns out to range between 1.5 and 2 times the number of amino acids of the protein (or of alpha carbons, equivalently), suggesting that typical *one-bead-per-amino acid* coarse-grained models might be at risk of missing important structural and dynamical features unless these are not encoded adequately in the effective interaction potentials [7, 10]. Furthermore, the optimal number of retained atoms is found to have a strong dependence on the structural variability of the conformational basin explored in the course of the simulation. More specifically, a broader range of distinct configurations explored correlates with a lower optimal number of retained atoms (and vice versa); this is suggestive of the fact that a small number of reference atoms suffices to grasp the structural variability of a molecule that “breathes a lot”, while many more atoms are needed to distinguish configurations that differ by small, quasi-random fluctuations.

The approach presented here is general and easy to employ; the outcome of its application to a sample of conformations of a protein does not only consist in a number of atoms to retain, but rather in a quantitative assessment of the amount of informative detail that one can extract out of this sample. In particular in the context of multi-scale modelling, the identification of the smallest number of atoms that return a minimal yet informative picture

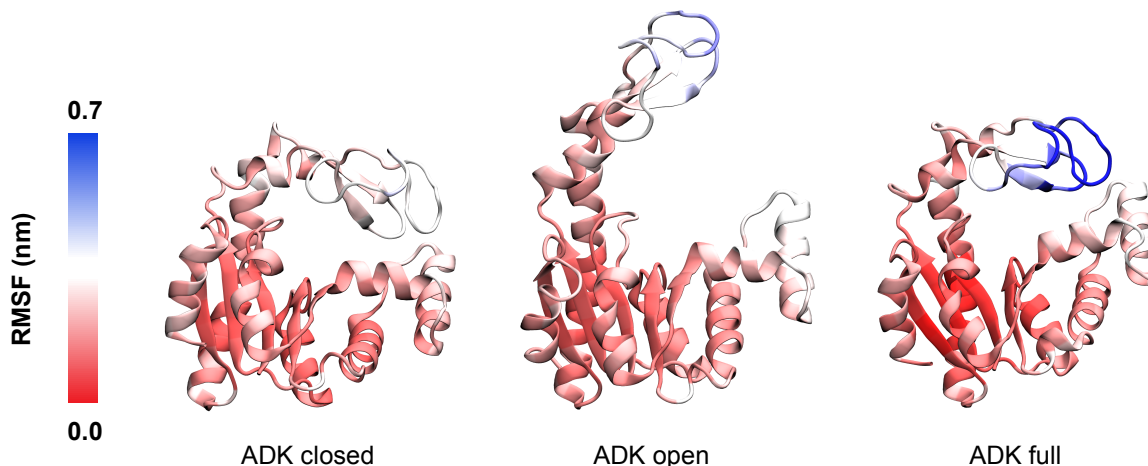


FIG. 9: Representative structures of the ADK enzyme in the compact and open conformations, and representative structure of the protein as extracted from the full trajectory. Each structure is colored according to the per-residue value of root-mean-square fluctuations.

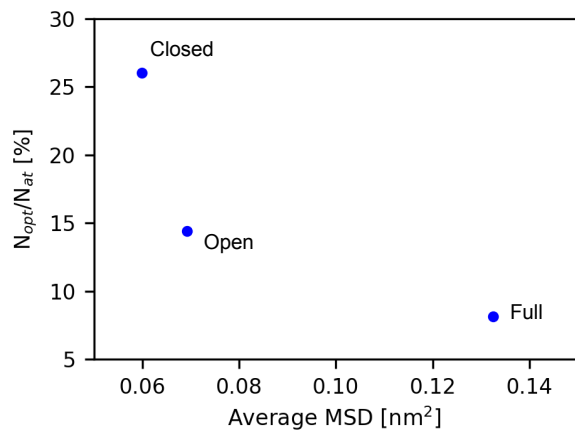


FIG. 10: Scatter plot of the fraction of the number of optimal sites computed on the full ADK trajectory, and on the subsets of configurations obtained after clustering the simulation in the open and closed states, as a function of the mean square displacement within each trajectory.

of the molecule can serve a dual purpose. On the one hand, it can be used for an *a posteriori* analysis, which enables one to gain insights into the dynamic behavior of the molecule within the trajectory itself. The optimal atom subset allows an in-depth inspection of the system without having to account for all its degrees of freedom, thereby preserving key but subtle details while making the quantitative study easier and computation-

ally lighter. The same trajectory can be investigated in function of its length, of the conformational basins it explores, and the biological state of the molecule. The efficient workflow of PROPRE is ideally suited for large-scale, dataset-wide analyses. On the other hand, a complementary usage of the PROPRE method is the construction of a coarse-grained/multiscale model: once the optimal number of heavy atoms that best describe the molecule is determined, this number provides the basis to explore the mapping space at fixed coarse-grained site number. A few methods have been developed for this goal, e.g. the mapping entropy optimisation workflow [7]. One can thus pinpoint specific atoms that are crucial and should be retained in a coarse-grained model, e.g. employing a multiple-resolution modelling strategy such as the recently developed CANVAS approach [37].

The PROPRE approach thus represents a useful tool to shed new light on otherwise rather hidden features of a protein, helping researchers to build a quantitative, direct path between the properties of the system and the way one looks at it.

VI. ACKNOWLEDGMENTS

The authors are indebted with R. Menichetti and L. Tubiana for an insightful reading of the manuscript and useful comments. RP acknowledges support from the Italian Ministry of Education, University and Research (MIUR) through the FARE grant for the project HAM-MOCK (grant R18ZHWY3NC). RP acknowledges support from ICSC - Centro Nazionale di Ricerca in HPC, Big Data and Quantum Computing, funded by the European Union under NextGenerationEU. Views and opin-

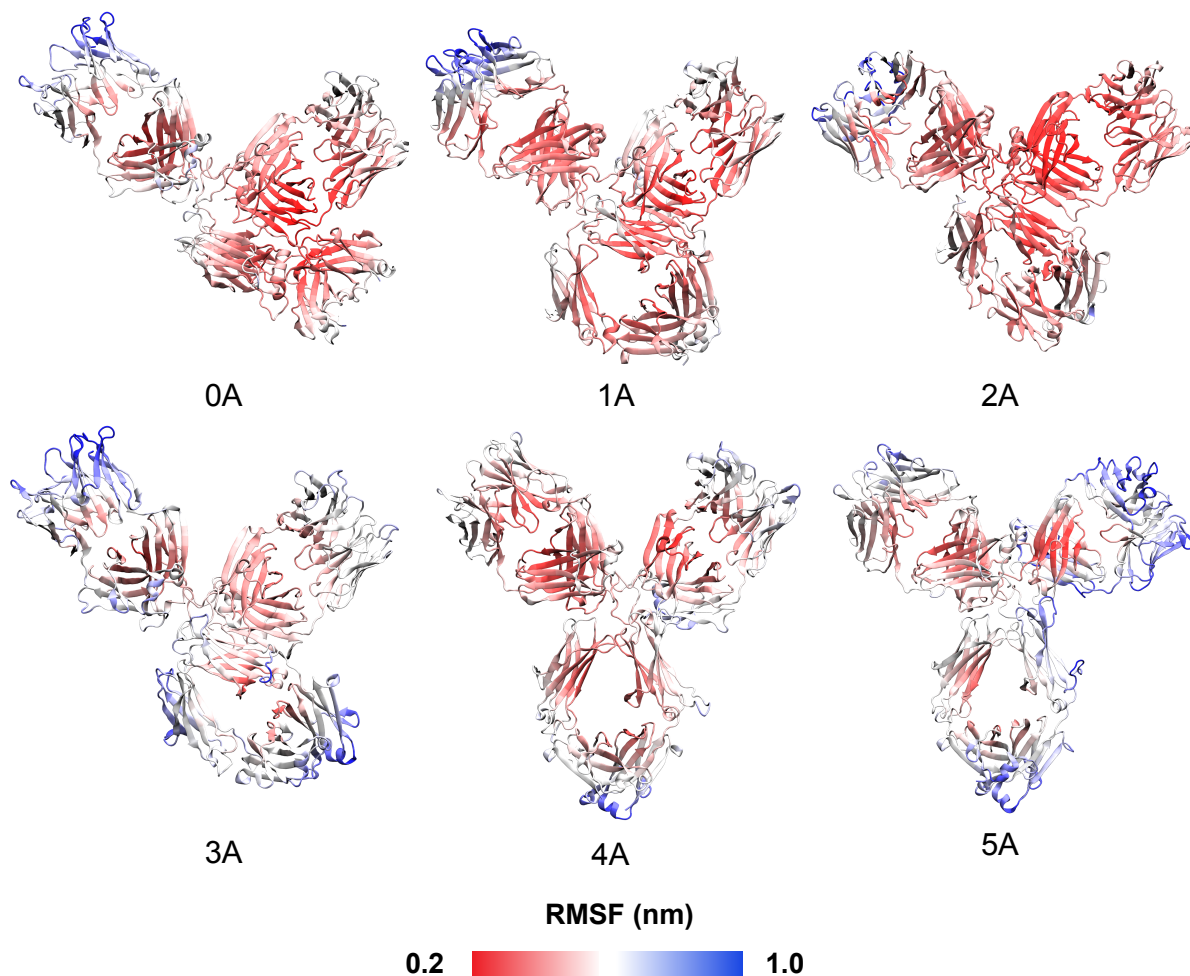


FIG. 11: Representative structure of each conformational cluster obtained from the trajectories of the antibody pembrolizumab in the apo form, colored according to the per-residue value of root-mean-square fluctuations as computed from the MD simulations.

ions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union or The European Research Executive Agency. Neither the European Union nor the granting authority can be held responsible for them.

VII. AUTHOR CONTRIBUTIONS

RP conceived the study and proposed the method. RF and GM wrote the software. RF and TT ran the MD simulations and performed the analysis. All authors contributed to the analysis and interpretation of the data. All authors drafted the paper, reviewed the results, and approved the final version of the manuscript.

VIII. DATA AVAILABILITY

The raw data associated with this work are freely available on github at <https://github.com/potestiolab/propre> and on the MaterialsCloud Archive at <https://doi.org/10.24435/materialscloud:a7-r8>.

[1] R. E. Amaro and A. J. Mulholland, *Nature Reviews Chemistry* **2**, 0148 (2018).

[2] in *Quantum Mechanics in Drug Discovery*, *Methods in Molecular Biology*, Vol. 2114, edited by A. Heifetz (2020)

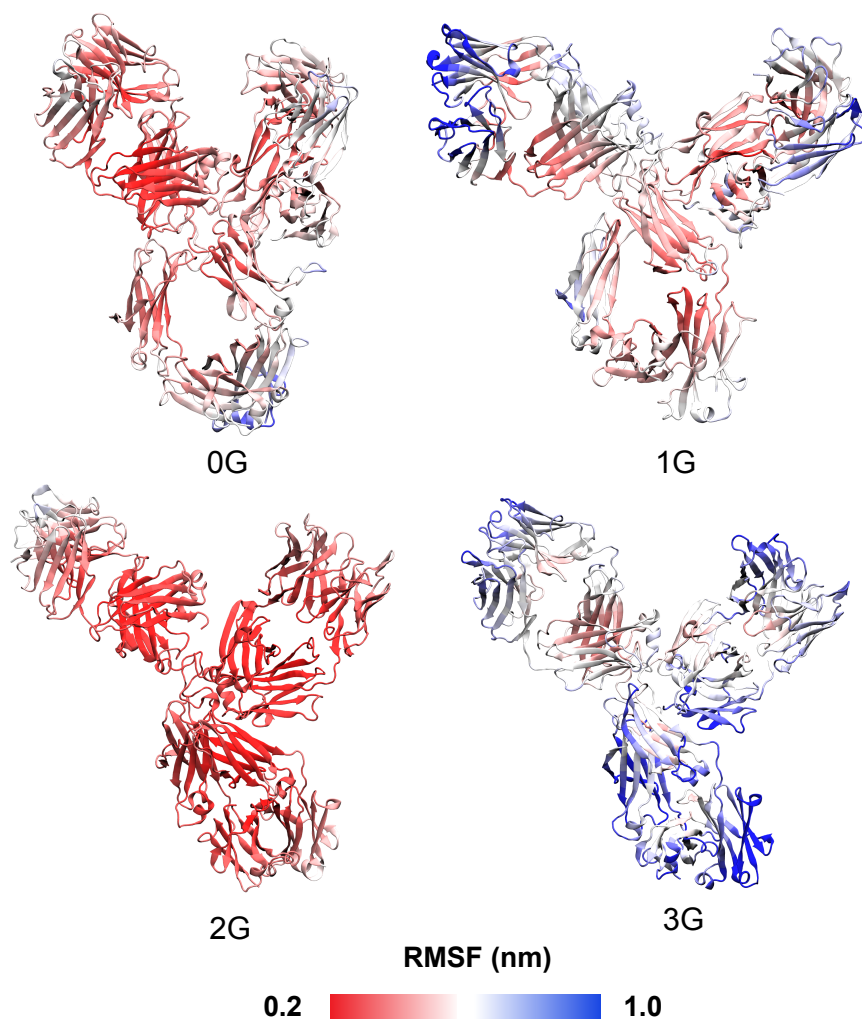


FIG. 12: Representative structure of each conformational cluster obtained from the trajectories of the antibody pembrolizumab in the glycosylated form, colored according to the per-residue value of root-mean-square fluctuations as computed from the MD simulations.

- pp. 1–360.
- [3] J. Huang, S. Rauscher, G. Nawrocki, T. Ran, M. Feig, B. L. De Groot, H. Grubmüller, and A. D. MacKerell Jr, *Nature methods* **14**, 71 (2017).
- [4] C. Tian, K. Kasavajhala, K. A. Belfon, L. Raguette, H. Huang, A. N. Migués, J. Bickel, Y. Wang, J. Pincay, Q. Wu, *et al.*, *Journal of chemical theory and computation* **16**, 528 (2019).
- [5] L. Van Der Maaten, E. Postma, J. Van den Herik, *et al.*, *J Mach Learn Res* **10**, 13 (2009).
- [6] G. A. Tribello and P. Gasparotto, *Frontiers in molecular biosciences* **6**, 46 (2019).
- [7] M. Giuliani, R. Menichetti, M. S. Shell, and R. Potestio, *Journal of chemical theory and computation* **16**, 6795 (2020).
- [8] R. Menichetti, M. Giuliani, and R. Potestio, *The European Physical Journal B* **94**, 1 (2021).
- [9] M. Mele, R. Covino, and R. Potestio, *Soft Matter* **18**, 7064 (2022).
- [10] W. G. Noid, *The Journal of Physical Chemistry B* **127**, 4174 (2023).
- [11] M. S. Shell, *The Journal of chemical physics* **129**, 144108 (2008).
- [12] J. F. Rudzinski and W. Noid, *The Journal of chemical physics* **135**, 214101 (2011).
- [13] T. T. Foley and M. S. Shell, *The Journal of chemical physics* **143** (2015).
- [14] M. Giuliani, M. Rigoli, G. Mattiotti, R. Menichetti, T. Tarenzi, R. Fiorentini, and R. Potestio, *Frontiers in Molecular Biosciences* **8**, 676976 (2021).
- [15] T. T. Foley, K. M. Kidder, M. S. Shell, and W. Noid, *Proceedings of the National Academy of Sciences* **117**, 24061 (2020).
- [16] K. M. Kidder, R. J. Szukalo, and W. Noid, *The European Physical Journal B* **94**, 1 (2021).
- [17] P. Diggins IV, C. Liu, M. Deserno, and R. Potestio, *Journal of chemical theory and computation* **15**, 648 (2018).

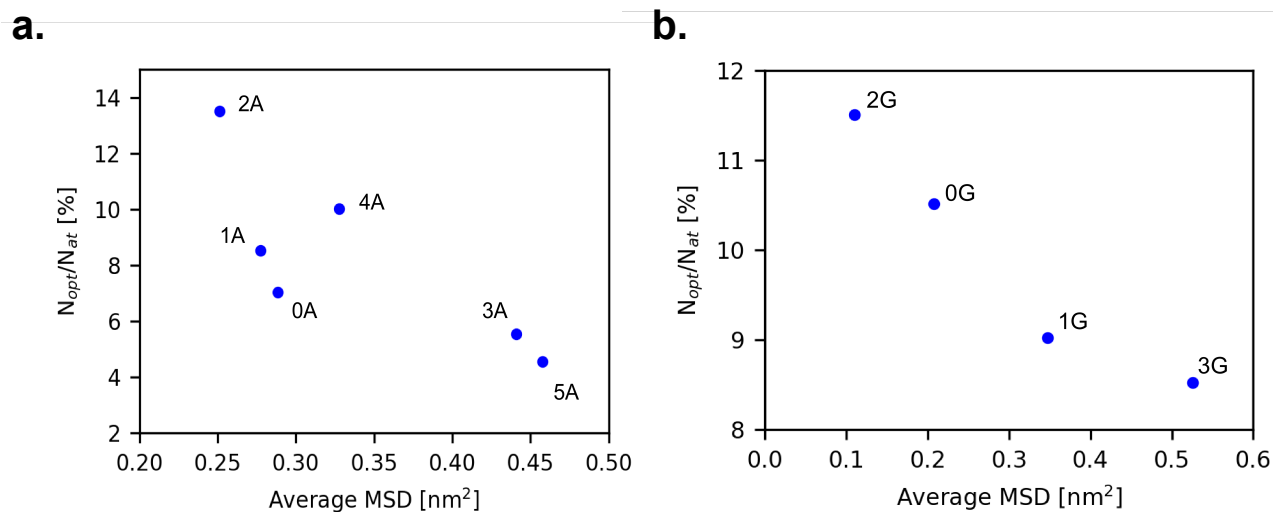


FIG. 13: Scatter plot of the fraction of the number of optimal sites computed on each conformational cluster extracted from the non-glycosylated (a) and glycosylated (b) antibody trajectories, as a function of the average mean square displacement within each cluster.

- [18] M. Marsili, I. Mastromatteo, and Y. Roudi, *Journal of Statistical Mechanics: Theory and Experiment* **2013**, P09003 (2013).
- [19] R. J. Cubero, J. Jo, M. Marsili, Y. Roudi, and J. Song, *Journal of Statistical Mechanics: Theory and Experiment* **2019**, 063402 (2019).
- [20] M. Marsili and Y. Roudi, *Physics Reports* **963**, 1 (2022).
- [21] R. Holtzman, M. Giuliani, and R. Potestio, *Physical Review E* **106**, 044101 (2022).
- [22] R. R. Sokal, *Univ. Kansas, Sci. Bull.* **38**, 1409 (1958).
- [23] U. Hensen, T. Meyer, J. Haas, R. Rex, G. Vriend, and H. Grubmüller, *PLoS one* **7**, e33931 (2012).
- [24] J. Schymkowitz, J. Borg, F. Stricher, R. Nys, F. Rousseau, and L. Serrano, *Nucleic acids research* **33**, W382 (2005).
- [25] T. Tarenzi, G. Mattiotti, M. Rigoli, and R. Potestio, *Applied Sciences* **12**, 7157 (2022).
- [26] R. Potestio, T. Aleksiev, F. Pontiggia, S. Cozzini, and C. Micheletti, *Nucleic acids research* **38**, W41 (2010).
- [27] C. C. David and D. J. Jacobs, *Journal of Molecular Graphics and Modelling* **31**, 41 (2011).
- [28] T. Tarenzi, M. Rigoli, and R. Potestio, *Scientific Reports* **11**, 23197 (2021).
- [29] R. Danne, C. Poojari, H. Martinez-Seara, S. Rissanen, F. Lolicato, T. Róg, and I. Vattulainen, *Journal of chemical information and modeling* **57**, 2401 (2017).
- [30] G. Scapin, X. Yang, W. W. Prorise, M. McCoy, P. Reichert, J. M. Johnston, R. S. Kashi, and C. Strickland, *Nature structural & molecular biology* **22**, 953 (2015).
- [31] M. J. Abraham, T. Murtola, R. Schulz, S. Páll, J. C. Smith, B. Hess, and E. Lindahl, *SoftwareX* **1**, 19 (2015).
- [32] K. Lindorff-Larsen, S. Piana, K. Palmo, P. Maragakis, J. L. Klepeis, R. O. Dror, and D. E. Shaw, *Proteins: Structure, Function, and Bioinformatics* **78**, 1950 (2010).
- [33] W. L. Jorgensen, J. Chandrasekhar, J. D. Madura, R. W. Impey, and M. L. Klein, *The Journal of chemical physics* **79**, 926 (1983).
- [34] G. Bussi, D. Donadio, and M. Parrinello, *The Journal of chemical physics* **126**, 014101 (2007).
- [35] M. Parrinello and A. Rahman, *Journal of Applied physics* **52**, 7182 (1981).
- [36] B. Hess, H. Bekker, H. J. Berendsen, and J. G. Fraaije, *Journal of computational chemistry* **18**, 1463 (1997).
- [37] R. Fiorentini, T. Tarenzi, and R. Potestio, *Journal of Chemical Information and Modeling* **63**, 1260 (2023).
- [38] W. Humphrey, A. Dalke, and K. Schulten, *J. Mol. Graph.* **14**, 27 (1996).
- [39] Y. Zheng and Q. Cui, *Journal of Chemical Theory and Computation* **14**, 1716 (2018).
- [40] K. A. Henzler-Wildman, V. Thai, M. Lei, M. Ott, M. Wolf-Watz, T. Fenn, E. Pozharski, M. A. Wilson, G. A. Petsko, M. Karplus, *et al.*, *Nature* **450**, 838 (2007).
- [41] D. Li, M. S. Liu, and B. Ji, *Biophysical journal* **109**, 647 (2015).
- [42] J. Wang, C. Peng, Y. Yu, Z. Chen, Z. Xu, T. Cai, Q. Shao, J. Shi, and W. Zhu, *Biophysical Journal* **118**, 1009 (2020).