

---

# Advancements and Trends in Ultra-High-Resolution Image Processing: An Overview

---

Zhuoran Zheng<sup>1</sup> Boxue Xiao<sup>2</sup>

<sup>1</sup>CSE, Nanjing University of Science and Technology <sup>2</sup>Hong Kong Polytechnic University  
zhengzr@njjust.edu.cn

## Abstract

Currently, to further improve visual enjoyment, Ultra-High-Definition (UHD) images are catching wide attention. Here, UHD images are usually referred to as having a resolution greater than or equal to  $3840 \times 2160$ . However, since the imaging equipment is subject to environmental noise or equipment jitter, UHD images are prone to contrast degradation, blurring, low dynamic range, etc. To address these issues, a large number of algorithms for UHD image enhancement have been proposed. In this paper, we introduce the current state of UHD image enhancement from two perspectives, one is the application field and the other is the technology. In addition, we briefly explore its trends.

## 1 Application Field

Here, we introduce several algorithms for implementing image enhancement on UHD image degradation scenarios. Notably, most of these methods are implemented to run on a single GPU shader (RTX3090 or V100) in real-time ( $>30$ fps).

**Image dehazing.** UHD image dehazing started with [37], which employs a bilateral learning approach to enhance 4K images. After that, Xiao et al. [23] propose a pyramid model to enhance the dehazing effect of 4K images. Recently, Zhuang et al. [40] proposed a novel Mixer model to conduct real-time dehazing of 4K images. In addition to the above methods, AODNet [9] can also achieve the dehazing of 4K images in real-time. It is worth noting that the way of dividing the patches is not suitable for the image-dehazing task, it can suffer from the grid effect [37].

**HDR enhancement.** HDRNet [4] is a very well-known network that enhances a UHD degraded image in real-time. HDRNet introduces bilateral filters to deep learning to reconstruct degraded images of arbitrary resolution. Later, Zheng et al. [38] improved the algorithm to make it more efficient in reconstructing a low dynamic range UHD image. Currently, a large number of algorithms [28, 32] are focused on solving the problem of UHD HDR video. In addition, exposure correction on UHD images is also a concern [39, 19, 14, 31, 26, 34, 27, 7, 18].

**Low light image enhancement.** The enhancement of UHD low-light images begins with [13], which employs a bilateral learning approach to enhance a dim image. Subsequently, a large number of methods and benchmarks have been proposed for UHD low-light image enhancement. For example, wang et al. [20] propose a Transformer-based approach to spatial domains. Li et al. [10] propose to solve the problem of contrast degradation of UHD images in the frequency domain.

**Underwater image enhancement.** Wei et al. [21] propose a two-domain learning method to enhance the visibility of underwater images. Jiang et al. [6] propose a lightweight network that can run a UHD water image on a single GPU.

**Image super-resolution.** Zhang et al. [33] first propose a benchmark for 4K image super-resolution. Currently, this task has seen the emergence of a professional competition to evaluate the performance of 4K image super-resolution algorithms [30, 1, 3].

**Denosing and demosaicing.** Guan et al. [5] propose a convolution with a memory architecture to achieve the denosing of UHD images. Yu et al. [29] have accomplished the demosaicing of 4K images.

**Image deblurring.** Zheng et al. [35] propose for the first time an algorithm for deblurring UHD images in real-time. In addition, there is an algorithm [2] for deblurring UHD videos.

**Others.** 4K image matting [17], inpainting [16], UDC [15, 36] is also starting to come into its own.

## 2 Method

Up to now, the processing methods for UHD images are mainly categorized into 3 groups, bilateral learning [37, 4, 38, 18, 13, 25, 22, 24, 39], LUT [27, 7, 34, 26, 14, 19, 11, 8], and pyramid [23, 6, 12]. As shown in Figure 1, overall, all of the above methods require downsampling the UHD image and feeding it into a model of higher complexity to learn an attention-like tensor. Finally, this tensor is upsampled (bilinear interpolation or subpixel convolution) to the same resolution as the original image acting on the original input signal. It is worth noting that the model can run in real-time thanks to the low flops rather than the optimization of the operators.

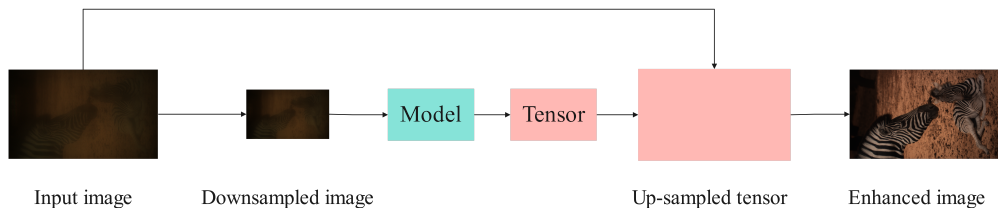


Figure 1: A flow diagram of popular UHD image enhancement algorithms. It is worth noting that some tensors may be splashed in using human a priori knowledge, such as the LUT model. Some tensors are progressively upsampled such as the pyramid model. In general, none of the existing methods can avoid the paradigm where the input image is downsampled.

## 3 Discussion and Future Work

So far, tasks such as image de-rain, image de-reflection, and image de-dropping have not been addressed. This may be due to the difficulty in constructing the dataset. In this paper, we note that there are 3 hard to overcome problems with existing UHD image enhancement tasks. 1) The training process of pairs of UHD images inevitably requires downsampling of the images, which can result in the trained model receiving “knowledge” that may differ from the real 4K images. 2) For now, common convolutional and MLP operators are not tailor-made to address UHD image enhancement efficiently. 3) UHD synthetic datasets are expensive to build, for example, dehazing 10,000 pairs of 4K images takes 1 week of rendering on a single GPU.

In the future, one of the first issues we will address is to change the learning paradigm shown in Figure 1. This is due to the inevitable loss of information that comes with downsampled images. Second, facing this single hyperscale example, we may need to refer to some fine-tuning scheme of the larger model to alleviate this problem. Predictably, UHD images are a worthwhile direction to think about in the field of image enhancement.

## References

- [1] Marcos V Conde, Eduard Zamfir, Radu Timofte, Daniel Motilla, Cen Liu, Zexin Zhang, Yunbo Peng, Yue Lin, Jiaming Guo, Xueyi Zou, et al. Efficient deep models for real-time 4k image super-resolution. ntire 2023 benchmark and report. In *CVPR*, 2023.

- [2] Senyou Deng, Wenqi Ren, Yanyang Yan, Tao Wang, Fenglong Song, and Xiaochun Cao. Multi-scale separable network for ultra-high-definition video deblurring. In *ICCV*, 2021.
- [3] Ganzorig Gankhuyag, Kihwan Yoon, Jinman Park, Haeng Seon Son, and Kyoungwon Min. Lightweight real-time image super-resolution network for 4k images. In *CVPR*, 2023.
- [4] Michaël Gharbi, Jiawen Chen, Jonathan T Barron, Samuel W Hasinoff, and Frédo Durand. Deep bilateral learning for real-time image enhancement. *TOG*, 36(4):1–12, 2017.
- [5] Juntao Guan, Rui Lai, Yang Lu, Yangang Li, Huanan Li, Lichen Feng, Yintang Yang, and Lin Gu. Memory-efficient deformable convolution based joint denoising and demosaicing for uhd images. *IEEE Transactions on Circuits and Systems for Video Technology*, 32(11):7346–7358, 2022.
- [6] Jingxia Jiang, Tian Ye, Jinbin Bai, Sixiang Chen, Wenhao Chai, Shi Jun, Yun Liu, and Erkang Chen. Five a+ network: You only need 9k parameters for underwater image enhancement. In *BMVC*, 2023.
- [7] Ting Jiang, Chuan Wang, Xinpeng Li, Ru Li, Haoqiang Fan, and Shuaicheng Liu. Meflut: Unsupervised 1d lookup tables for multi-exposure image fusion. In *ICCV*, 2023.
- [8] Younghyun Jo and Seon Joo Kim. Practical single-image super-resolution using look-up table. In *CVPR*, 2021.
- [9] Boyi Li, Xiulian Peng, Zhangyang Wang, Jizheng Xu, and Dan Feng. An all-in-one network for dehazing and beyond. *arXiv preprint arXiv:1707.06543*, 2017.
- [10] Chongyi Li, Chun-Le Guo, Man Zhou, Zhexin Liang, Shangchen Zhou, Ruicheng Feng, and Chen Change Loy. Embedding fourier for ultra-high-definition low-light image enhancement. In *ICLR*, 2023.
- [11] Jiacheng Li, Chang Chen, Zhen Cheng, and Zhiwei Xiong. Mulut: Cooperating multiple look-up tables for efficient image super-resolution. In *ECCV*, 2022.
- [12] Jie Liang, Hui Zeng, and Lei Zhang. High-resolution photorealistic image translation in real-time: A laplacian pyramid translation network. In *CVPR*, 2021.
- [13] Qiaowanni Lin, Zhuoran Zheng, and Xiuyi Jia. Uhd low-light image enhancement via interpretable bilateral learning. *Information Sciences*, 608:1401–1415, 2022.
- [14] Chengxu Liu, Huan Yang, Jianlong Fu, and Xueming Qian. 4d lut: learnable context-aware 4d lookup table for image enhancement. *IEEE Transactions on Image Processing*, 32:4742–4756, 2023.
- [15] Jun Luo, Wenqi Ren, Tao Wang, Chongyi Li, and Xiaochun Cao. Under-display camera image enhancement via cascaded curve estimation. *IEEE Transactions on Image Processing*, 31:4856–4868, 2022.
- [16] Karl Schrader, Pascal Peter, Niklas Kämper, and Joachim Weickert. Efficient neural generation of 4k masks for homogeneous diffusion inpainting. In *International Conference on Scale Space and Variational Methods in Computer Vision*, 2023.
- [17] Yanan Sun, Chi-Keung Tang, and Yu-Wing Tai. Ultrahigh resolution image/video matting with spatio-temporal sparsity. In *CVPR*, 2023.
- [18] Di Wang, Zhuoran Zheng, Weiping Ding, and Xiuyi Jia. Lgabl: Uhd multi-exposure image fusion via local and global aware bilateral learning. *IEEE Transactions on Emerging Topics in Computational Intelligence*, 2023.
- [19] Tao Wang, Yong Li, Jingyang Peng, Yipeng Ma, Xian Wang, Fenglong Song, and Youliang Yan. Real-time image enhancer via learnable spatial-aware 3d lookup tables. In *CVPR*, 2021.
- [20] Tao Wang, Kaihao Zhang, Tianrun Shen, Wenhan Luo, Bjorn Stenger, and Tong Lu. Ultra-high-definition low-light image enhancement: A benchmark and transformer-based method. In *AAAI*, 2023.
- [21] Yiwen Wei, Zhuoran Zheng, and Xiuyi Jia. Uhd underwater image enhancement via frequency-spatial domain aware network. In *ACCV*, 2022.
- [22] Xide Xia, Meng Zhang, Tianfan Xue, Zheng Sun, Hui Fang, Brian Kulis, and Jiawen Chen. Joint bilateral learning for real-time universal photorealistic style transfer. In *ECCV*, 2020.

- [23] Boxue Xiao, Zhuoran Zheng, Yunliang Zhuang, Chen Lyu, and Xiuyi Jia. Single uhd image dehazing via interpretable pyramid network. *Signal Processing*, 214:109225, 2024.
- [24] Bin Xu, Yuhua Xu, Xiaoli Yang, Wei Jia, and Yulan Guo. Bilateral grid learning for stereo matching networks. In *CVPR*, 2021.
- [25] Shuning Xu, Binbin Song, Xiangyu Chen, and Jiantao Zhou. Direction-aware video demoiréing with temporal-guided bilateral learning. *arXiv preprint arXiv:2308.13388*, 2023.
- [26] Canqian Yang, Meiguang Jin, Xu Jia, Yi Xu, and Ying Chen. Adaint: Learning adaptive intervals for 3d lookup tables on real-time image enhancement. In *CVPR*, 2022.
- [27] Canqian Yang, Meiguang Jin, Yi Xu, Rui Zhang, Ying Chen, and Huaida Liu. Seplut: Separable image-adaptive lookup tables for real-time image enhancement. In *ECCV*, 2022.
- [28] Mingde Yao, Dongliang He, Xin Li, Zhihong Pan, and Zhiwei Xiong. Bidirectional translation between uhd-hdr and hd-sdr videos. *IEEE Transactions on Multimedia*, 2023.
- [29] Xin Yu, Peng Dai, Wenbo Li, Lan Ma, Jiajun Shen, Jia Li, and Xiaojuan Qi. Towards efficient and scale-robust ultra-high-definition image demoiréing. In *ECCV*, 2022.
- [30] Eduard Zamfir, Marcos V Conde, and Radu Timofte. Towards real-time 4k image super-resolution. In *CVPR*, 2023.
- [31] Hui Zeng, Jianrui Cai, Lida Li, Zisheng Cao, and Lei Zhang. Learning image-adaptive 3d lookup tables for high performance photo enhancement in real-time. *TPAMI*, 44(4):2058–2073, 2020.
- [32] Hengsheng Zhang, Li Song, Wenyao Gan, and Rong Xie. Multi-scale-based joint super-resolution and inverse tone-mapping with data synthesis for uhd hdr video. *Displays*, 79:102492, 2023.
- [33] Kaihao Zhang, Dongxu Li, Wenhan Luo, Wenqi Ren, Björn Stenger, Wei Liu, Hongdong Li, and Ming-Hsuan Yang. Benchmarking ultra-high-definition image super-resolution. In *ICCV*, 2021.
- [34] Xiang Zhang, Chengzhe Lu, Dawei Yan, Wei Dong, and Qingsen Yan. Dualbln: Dual branch lut-aware network for real-time image retouching. In *ACCV*, 2022.
- [35] Zhuoran Zheng and Xiuyi Jia. Uhd image deblurring via multi-scale cubic-mixer. *arXiv preprint arXiv:2206.03678*, 2022.
- [36] Zhuoran Zheng and Xiuyi Jia. Image restoration via uavformer for under-display camera of uav. In *IROS*, 2023.
- [37] Zhuoran Zheng, Wenqi Ren, Xiaochun Cao, Xiaobin Hu, Tao Wang, Fenglong Song, and Xiuyi Jia. Ultra-high-definition image dehazing via multi-guided bilateral learning. In *CVPR*, 2021.
- [38] Zhuoran Zheng, Wenqi Ren, Xiaochun Cao, Tao Wang, and Xiuyi Jia. Ultra-high-definition image hdr reconstruction via collaborative bilateral learning. In *CVPR*, 2021.
- [39] Yijie Zhou, Chao Li, Jin Liang, Tianyi Xu, Xin Liu, and Jun Xu. 4k-resolution photo exposure correction at 125 fps with  $\sim 8k$  parameters. *arXiv preprint arXiv:2311.08759*, 2023.
- [40] Yunliang Zhuang, Zhuoran Zheng, Yuang Zhang, Lei Lyu, Xiuyi Jia, and Chen Lyu. Dimensional transformation mixer for ultra-high-definition industrial camera dehazing. *IEEE Transactions on Industrial Informatics*, 2023.