OpenStereo: A Comprehensive Benchmark for Stereo Matching and Strong Baseline

Xianda Guo¹ Chenming Zhang^{2*} Juntao Lu^{2*} Yiqi Wang², Yiqun Duan² Tian Yang³ Zheng Zhu³ Long Chen^{2,4,†}

¹ School of Computer Science, Wuhan University ²Waytous ³ GigaAI ⁴ Institute of Automation, Chinese Academy of Sciences

Abstract

Stereo matching aims to estimate the disparity between matching pixels in a stereo image pair, which is important to robotics, autonomous driving, and other computer vision tasks. Despite the development of numerous impressive methods in recent years, determining the most suitable architecture for practical application remains challenging. Addressing this gap, our paper introduces a comprehensive benchmark focusing on practical applicability rather than solely on individual models for optimized performance. Specifically, we develop a flexible and efficient stereo matching codebase, called OpenStereo. OpenStereo includes training and inference codes of more than 10 network models, making it, to our knowledge, the most complete stereo matching toolbox available. Based on OpenStereo, we conducted experiments and have achieved or surpassed the performance metrics reported in the original paper. Additionally, we conduct an exhaustive analysis and deconstruction of recent developments in stereo matching through comprehensive ablative experiments. These investigations inspired the creation of **StereoBase**, a strong baseline model. Our StereoBase ranks 1st on SceneFlow, KITTI 2015, 2012 (Reflective) among published methods and performs best across all metrics. In addition, StereoBase has strong cross-dataset generalization. Code is available at https://github.com/XiandaGuo/OpenStereo.

1 Introduction

Stereo matching is a fundamental topic in the field of computer vision, aiming to compute the disparity between a pair of rectified stereo images. It plays a crucial role in numerous applications such as robotics [72], autonomous driving [37, 46], and augmented reality [64], as it enables depth perception and 3D reconstruction of the observed scene.

Traditional stereo-matching algorithms typically rely on matching corresponding image regions between the left and right views based on their similarity measures. Several techniques have been proposed in the literature for stereo matching, including methods based on gray-level information [3, 29, 68], region-based approaches [73, 39], and energy optimization methods [44, 21]. With the support of large synthetic datasets [35, 43, 45, 14, 36, 66], CNNs-based stereo matching methods [24, 6, 70, 18, 61, 33, 10, 52, 60, 53, 8, 30, 32] has achieved impressive results. As shown in Figure 1, based on the network pipeline of stereo matching, CNNs-based stereo matching methods can be roughly grouped into two categories [52], including the encoder-decoder network with 2D convolution (ED-Conv2D) [35, 40, 65, 41, 51, 52, 61, 49, 31, 33, 46, 28, 56, 30, 16] and the cost volume matching with 3D convolution (CVM-Conv3D) [24, 6, 67, 55, 70, 18, 71, 12, 74, 15, 1, 10, 2, 47, 59, 60, 54, 9, 62].

^{*}Joint second authors.

[†]Corresponding authors:long.chen@ia.ac.cn

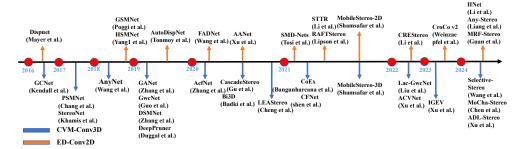


Figure 1: Timeline of Stereo Matching Models. The top part shows ED-conv2D-based models, while the bottom part shows CVM-conv3D-based models. Each model is labeled with its name and authors.

However, we find that different studies often employ varying data augmentation strategies, learning rates, learning rate optimization methods, and backbone architectures. This inconsistency makes it difficult to evaluate and compare various methods' performance accurately. This inconsistency in experimental setups and methodologies makes it difficult to derive conclusive insights and hampers the objective assessment of advancements in stereo matching. Without a standardized benchmark, researchers struggle to identify the true impact of individual components and innovations. There is a lack of clear conclusions and exploration regarding data augmentation strategies, backbone selection, and cost construction methods in stereo matching.

Moreover, not all datasets are accompanied by official evaluation tools. For example, the Driving-Stereo [66] dataset does not provide specific evaluation scripts, making comparative assessments challenging. The SceneFlow [35] dataset, with its finalpass and cleanpass data varieties, complicates fair model comparisons. Generalization experiments for stereo matching algorithms typically train on the SceneFlow dataset and evaluate on KITTI2012 [14], KITTI2015 [36], ETH3D [45], and Middlebury [43]. However, due to the absence of a standard protocol for generalization experiments, different papers may yield inconsistent results for the same method. For instance, discussions on the generalization performance of IGEV [60] across works [60, 53, 17] exemplify this issue.

Hence, there's a pressing need for a comprehensive benchmark study within the stereo-matching community to enhance practicality and ensure consistent comparisons. To achieve this objective, we introduce a versatile stereo-matching codebase: OpenStereo. To promote scalability and adaptability, OpenStereo offers the following features: (1) **Modual design**, researchers can define a new model without the need to alter the model code itself by simply modifying a yaml configuration file. (2)**Various frameworks**, including Concatenation-based [6, 70], Correlation-based [61, 51, 52, 2], Interlaced-based [46], Group-wise-correlation-based [60], Combine-based methods [18], and Difference-based [26]. (3)**Various datasets**, including SceneFlow [35], KITTI2012 [14], KITTI2015 [36], Middlebury [43], ETH3D [45] and DrivingStereo [66] dataset. (4) **State-of-the-art methods**, including PSMNet [6], GwcNet [18], AANet [61], FADNet++ [52], CFNet [47], STTR [31], CoEx [2], CascadeStereo [15], MobileStereoNet [46] and IGEV [60].

Leveraging OpenStereo, we rigorously reassess various officially stated conclusions by meticulously re-implementing the ablation studies, including data augmentation, backbone architectures, cost construction, disparity regression, and refinement processes. Based on the insights gleaned from these ablation experiments, we introduce StereoBase, a model that sets a new benchmark, surpassing recently proposed methods in terms of performance. StereoBase is powerful and serves as an empirically robust baseline model for stereo matching, demonstrating exceptional efficacy and resilience across diverse testing scenarios.

Our contributions are summarized as follows:

- We introduce OpenStereo, a unified and extensible platform, which enables researchers to conduct comprehensive stereo matching studies.
- We conduct a profound revisitation and thorough deconstruction of recent stereo-matching methodologies.
- We introduce **StereoBase**, which sets a new benchmark with EPE of 0.34 on SceneFlow [35] and ranks 1st on KITTI2015 [36] and 2012(Reflective)[14] leaderboards among published methods.

2 Related Work

2.1 Stereo Matching

With the rapid development of CNNs, significant progress has been made in stereo matching. Based on the network pipeline of stereo matching, stereo matching methods can be roughly grouped into two categories [52], including the encoder-decoder network with 2D convolution (ED-Conv2D) and the cost volume matching with 3D convolution (CVM-Conv3D).

Stereo Matching with CVM-Conv3D The CVM-Conv3D methods are proposed to improve the performance of depth estimation [24, 6, 67, 55, 70, 18, 71, 12, 74, 15, 1, 10, 2, 47, 59, 60, 54, 9, 62]. These methods learn disparities from a 4D cost volume, mainly constructed by concatenating left feature maps with their corresponding right counterparts across each disparity level [6]. GCNet [24] firstly introduced a novel approach that combines 3D encoder-decoder architecture with a 2D convolutional network to obtain a dense feature representation, which is used to regularize a 4D concatenation volume. Following GCNet [24], PSMNet [6] proposes an approach for regularizing the concatenation volume by leveraging a stacked hourglass 3D convolutional neural network in tandem with intermediate supervision. To enhance the expressiveness of the cost volume and ultimately improve performance in ambiguous regions, GwcNet [70] proposes the group-wise correlation volume and ACVNet [59] proposes the attention concatenation volume. GANet [70] proposes a semi-global aggregation layer and local guided aggregation layer to capture local and the whole-image cost dependencies respectively. Based on GANet [70], DSMNet [71] constructs a robust "domain normalization" method to overcome the challenges in cross-domain generalization. CoEx [2] proposes a novel approach called Guided Cost volume Excitation (GCE), which leverages image guidance to construct a simple channel excitation of the cost volume. IGEV-Stereo [60] leverages an iterative geometry encoding volume to capture local and non-local geometry information, outperforming existing methods on KITTI benchmarks and achieving cross-dataset generalization and high inference efficiency. Besides, as a potential solution to reduce the need for humans to design a good volumetric method, Neural Architecture Search (NAS) [20, 34, 4] has been employed in stereo matching [10].

However, these CVM-Conv3D methods still suffer from low time efficiency and high memory requirements, which are far from real-time inference even on server GPUs. Therefore, it is essential to address the accuracy and efficiency problems for real-world applications.

Stereo Matching with ED-Conv2D The ED-Conv2D methods [35, 40, 65, 41, 51, 52, 61, 49, 31, 33, 46, 28, 56, 30, 16], which adopt networks with 2D convolutions to predict disparity, has been driven by the need for improved accuracy, computational efficiency, and real-time performance. One of the early deep learning-based stereo matching methods, MC-CNN (Matching Cost CNN) [69], was proposed to learn a matching cost function for improving performance in the cost aggregation and optimization stages. Subsequently, Mayer et al [35] present end-to-end networks for the estimation of disparity, called DispNet, which is pure 2D CNN architectures. However, the model still faces challenges in capturing the matching features, resulting in poor estimation results. To overcome this challenge, the correlation layer is introduced in the end-to-end architecture [35, 11, 22, 23] to better capture the relationship between the left and right images. By incorporating this layer, the accuracy of the model is significantly improved. Furthermore, FADNet++ [52] proposes an innovative approach to efficient disparity refinement using residual learning [19] in a coarse-to-fine manner. AutoDispNet [41] applied neural architecture search to automatically design stereo matching network structures. More recently, Croco-Stereo [56] shows that large-scale pre-training can be successful for stereo matching through well-adapted pretext tasks. This method can achieve state-of-the-art performance without using task-specific designs, like correlation volume or iterative estimation.

These works represent the significant progress that has been made in the field of stereo matching, highlighting the diverse range of methods and architectures that have been proposed to address the challenges associated with this problem.

2.2 Codebase

Numerous infrastructure code platforms have been developed in the deep learning research community, with the aim of facilitating research in specific fields. One such platform is OpenGait [13], a gait recognition library. OpenGait thoroughly examines the latest advancements in gait recognition, providing novel perspectives for subsequent research in this domain. In object detection,

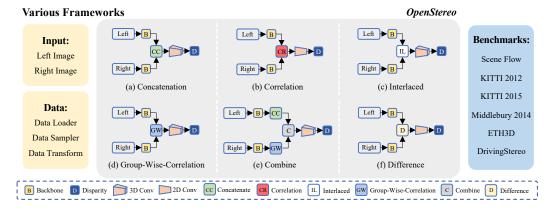


Figure 2: The design principles of proposed codebase OpenStereo.

MMDetection [7] and Detectron2 [58] have emerged as an all-encompassing resource for several favored detection techniques. In pose estimation, OpenPose [5] has developed the first open-source system that operates in real-time for detecting the 2D pose of multiple individuals, including the detection of key points for the body, feet, hands, and face. In stereo matching, it is noteworthy that not all datasets are accompanied by official evaluation tools. For instance, the DrivingStereo [66] dataset does not have official evaluation codes, and there is a lack of unified tools for assessing the model generalization across different domains. This absence of standardized evaluation resources contributes to the observed discrepancies in cross-domain evaluations of the same model as reported in different studies. Therefore, it is time to build a benchmark for stereo matching.

3 OpenStereo

In recent years, there has been a proliferation of new frameworks and evaluation datasets for stereo matching. However, the lack of a unified and fair evaluation platform in this field is a significant issue that cannot be ignored. To address this challenge and promote academic research and practical application we have developed **OpenStereo**, a pyTorch-based [38] toolbox that provides a reliable and standardized evaluation framework for stereo matching.


3.1 Design Principles of OpenStereo

As shown in Figure 2, our developed OpenStereo covers the following highlight features.

Modular Design. OpenStereo adopts a modular design, greatly facilitating researchers in exploring new networks. By simply modifying a YAML configuration file, researchers can define a new model without the need to alter the model code itself. This design significantly lowers the barriers for researchers to extend or integrate additional algorithms and modules within the framework. This approach empowers researchers to freely combine and customize their algorithms with minimal code composition, enhancing the framework's usability and adaptability.

Compatibility with various frameworks. Currently, more and more stereo matching methods have emerged, such as Concatenation-based [24, 6, 70, 10], Correlation-based [61, 51, 52, 2], Group-wise-correlation-based [60], Difference-based [26], Interlaced-based [46], and Combine-based methods [18, 47]. As mentioned above, many open-source methods have a narrow focus on their specific models, making it challenging to extend to multiple frameworks. However, OpenStereo provides a solution to this problem by supporting all of the aforementioned frameworks. With OpenStereo, researchers and practitioners can easily compare and evaluate different stereo matching models under a standardized evaluation protocol.

Support for various evaluation datasets. OpenStereo is a comprehensive tool that not only supports synthetic stereo datasets such as SceneFlow [35], but also five real-world datasets: KITTI2012 [14], KITTI2015 [36], ETH3D [45], Middlebury [43], and DrivingStereo [66]. We introduce a suite of bespoke functions, meticulously crafted for each dataset, encompassing everything from initial data

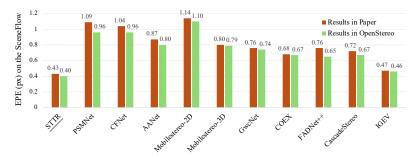




Figure 3: Quantitative evaluation on the SceneFlow [35] test and KITTI2015 [36] leadboard. For each model, the specific category on the SceneFlow used is consistent with the original paper. Underline refers to evaluation in the non-occluded regions only STTR [31].

preprocessing to the final stages of evaluation. The evaluation module includes the submission of the results to KITTI2012 [14] and KITTI2015 [36] leadboards.

Support for state-of-the-arts. In our work, we have successfully replicated various state-of-the-art stereo matching methods, including PSMNet [6], GwcNet [18], AANet [61], FADNet++ [52], CFNet [47], STTR [31], CoEx [2], CascadeStereo [15], MobileStereoNet [46] and IGEV [60]. As shown in Figure 3, the performance metrics we achieved, in most cases, surpass those reported in their original publications.

3.2 Main Modules

Technically, we follow the design of most PyTorch deep learning projects and divide OpenStereo into three modules, *data*, *modeling*, and *evaluation*.

Data module includes three key components: data loader, which is responsible for loading and preprocessing the data; data sampler, which is used to select a subset of data for each iteration; and data transform, which applies various transformations to the data to increase the diversity and complexity of the training set.

Modeling module is built upon the BaseModel base class, which predefines many behaviors of the stereo matching during both training and testing phases. This module consists of four essential components, namely the Feature Extraction, Cost Calculation, Cost Aggregation, and Disparity Processor, which are critical to current stereo matching algorithms.

Evaluation module is utilized to assess the performance of the obtained model. Recognizing that different datasets require distinct evaluation protocols, we have incorporated these varied protocols directly into OpenStereo, significantly simplifying the evaluation process.

4 Revisit Deep Stereo Matching

4.1 Recheck on Previous Methods

For benchmarking, it is critical to ensure that the results are reliable and trustworthy. To achieve this, we conducted our experiments on SceneFlow [35] and KITTI2015 [36] datasets. As shown in Figure 3, the reproduced performances of OpenStereo are better than the results reported by the original papers. Regarding the KITTI2015 dataset, submission constraints led us to limit our leaderboard contributions to reproductions of the widely recognized PSMNet [6] and the latest state-of-the-art IGEV [60]. OpenStereo is designed to offer the research community in stereo matching a standardized, comprehensive platform for method assessment. This facility enables meaningful and comparative analyses across various models, thereby serving as an valuable tool for the innovation and scrutiny of emerging algorithms.

4.2 Denoising Stereo Matching

With the support of OpenStereo, a comprehensive reevaluation of various stereo-matching methods is conducted, including data augmentation, feature extraction, cost construction, disparity prediction, and refinement. Our ablation studies have revealed some new insights.

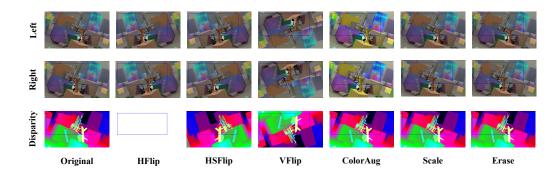


Figure 4: The visualization of stereo images and disparity with different data augmentation. The blue box represents the area where random cropping occurs during training. Notably, when the views are horizontally flipped, the disparity are multiplied by -1, making the disparity map appear pure white.

Table 1: The model undergoes training and evaluation on the finalpass of the SceneFlow [35] training and test sets. KITTI2015 [36] training set, consisting of 200 images, is only employed to evaluate the generalizability of models. RC stands for RandomCrop. HFlip denotes both images of a stereo and disparity are horizontally flipped. HSFlip horizontally flips both images in the stereo pair and then swaps them. VFlip involves vertically flipping both images in the stereo pair along with the disparity, inverting their top-bottom orientation. CES represents ColorAug, Erase, and Scale. Settings used in our final model are underlined.

Data Augmentation	LR scheduler	SceneFlow	KITTI15		
Data Augmentation	LK_schedulei	EPE(px)	EPE(px)	D1_all	
RC(320×736)	MultiStepLR	0.6839	2.91	15.73	
RC(320×736)	OneCycleLR	0.6155	2.34	11.86	
RC(256×512)	OneCycleLR	0.6470	3.02	14.95	
$RC(320 \times 736)$	OneCycleLR	0.6155	2.34	11.86	
$RC(320\times736)+Scale$	OneCycleLR	0.6867	2.88	12.91	
$RC(320\times736)+HFlip$	OneCycleLR	0.6612	2.22	12.27	
$RC(320\times736)+ColorAug$	OneCycleLR	0.6529	1.68	7.89	
RC(320×736)+VFlip	OneCycleLR	0.6367	2.09	10.11	
$RC(320\times736)$ +Erase	OneCycleLR	0.6167	2.68	12.64	
$RC(320\times736)+HSFlip$	OneCycleLR	0.6076	2.74	13.99	
RC(320×736)+CE	OneCycleLR	0.6486	1.65	8.15	
$RC(320\times736)+CES+HSFlip$	OneCycleLR	0.7165	1.71	8.40	
RC(320×736)+CES	OneCycleLR	0.7240	1.56	7.64	

4.2.1 LR_scheduler and Data Augmentation

As shown in Table 1, MultiStepLR yields an EPE of 0.6839, while OneCycleLR achieves a lower EPE of 0.6155. This substantial difference underscores the crucial role of selecting an appropriate learning rate scheduler for stereo matching. The superior performance of OneCycleLR indicates its potential to improve model accuracy and robustness, making it a preferable choice over MultiStepLR for training stereo-matching models. Although five data augmentation techniques—random crop, color augmentation, eraser transform, flip, and spatial transform—are commonly used in stereo matching [33, 60], their empirical efficacy specifically for stereo matching has not been thoroughly explored. This study investigated these data augmentation strategies to address this gap. Visualizations of these augmentations are provided in Figure 4 for further insight. As shown in Table 1, most data augmentation strategies, except for the combined use of HSFlip and random crop, lead to a decline in the model's EPE metric of SceneFlow. This is because stereo matching involves pixel-level matching, and these data augmentations (color augmentation and spatial transform) can affect the alignment of pixels. The combination of ColorAug, Erase, and Scale (CES) shows the best generalization performance on KITTI2015, with the lowest EPE of 1.56 and D1 all of 7.64, although it increases the EPE on SceneFlow to 0.7240. These findings underscore the importance of selecting appropriate data augmentation methods to enhance model accuracy and robustness.

Table 2: Ablation study of different backbones on the finalpass of SceneFlow test datasets [35]. Flops and Params represent the computational complexity and parameters within the whole model, respectively. FLOPs are calculated at a resolution of 544×960 .

Backbone	Type	Pretrain	Flops	Params	EPE
MobilenetV2 100 [42]	CNN		70.58G	2.78M	0.7737
MobilenetV2 100 [42]	CNN	\checkmark	70.58G	2.78M	0.6155
MobilenetV2 100 [42]	CNN	√	70.58G	2.78M	0.6155
MobilenetV2 120d [42]	CNN	\checkmark	85.93G	5.21M	0.5573
EfficientNetV2 [48]	CNN	\checkmark	157.52G	24.92M	0.5207
RepViT [50]	Trans.	\checkmark	101.35G	5.64M	0.5858
MPViT [27]	CNN&Trans.	\checkmark	283.35G	13.33M	0.5113

Table 3: Ablation study of cost volume on the finalpass of SceneFlow test datasets [35]. Gwc represents Group-wise correlation volume [18]. Cat stands for Concatenation volume [6]. G8-C16, G16-C24, and G32-C48 combine Gwc volume and Cat volume [18]. Channel and Dims represent the channel and dimensions of the cost volume, respectively. FLOPs are calculated at a resolution of 544×960 .

Cost Volume	Dims	Channel	Flops	Params	EPE
Difference	3D	-	38.68G	2.40M	1.02
Correlation	3D	-	54.99G	4.01M	0.81
Interlaced8	4D	8	288.52G	2.83M	0.70
Gwc8	4D	8	70.58G	2.78M	0.72
Gwc16	4D	16	166.92G	3.89M	0.66
Gwc24	4D	24	327.13G	5.75M	0.63
Gwc32	4D	32	551.23G	8.34M	0.62
Gwc48	4D	48	1191.07G	15.73M	0.60
Cat24	4D	24	328.97G	5.78M	0.65
Cat48	4D	48	1192.93G	15.76M	0.61
Cat64	4D	64	2088.31G	26.09M	0.60
G8-C16	4D	24	328.96G	5.78M	0.62
G16-C24	4D	40	841.05G	11.69M	0.60
G32-C48	4D	80	3239.17G	39.37M	0.60

4.2.2 Feature Extraction

As shown in Table 2, pretraining the backbone is crucial for stereo matching as it enhances the model's ability to extract robust and informative features. Furthermore, the choice of backbone significantly influences the model's performance and computational efficiency. MobilenetV2 [42] and EfficientNetV2 [48] are lightweight CNNs that are particularly efficient in extracting local features, which are crucial for stereo matching. Their designs allow them to perform well with relatively low computational complexity. RepViT [50] is a Transformer-based architecture, which excels in capturing long-range dependencies and global context. While RepViT captures global features well, it might struggle with the fine-grained, pixel-level accuracy required for precise stereo matching. MPViT [27] combines the strengths of both CNNs and Transformers. The CNN components effectively capture local features, while the Transformer components excel in modeling global context. This hybrid approach allows MPViT to leverage the advantages of both architectures, resulting in the lowest EPE. In summary, MobilenetV2 [42] offers a good balance for applications with limited computational resources, while more complex architectures like EfficientNetV2 and MPViT provide superior accuracy at the cost of higher computational requirements. To the best of our knowledge, our work is the first to explore the transformer-based feature extraction and the combination of CNN and transformer feature extraction for stereo matching.

Table 4: Ablation study of disparity regression and refinement on the finalpass of SceneFlow test datasets [35]. ArgMin refers to Differentiable ArMin. Context stands for ContextUpasmple [33, 60].

Regression	Refinement	Flops	Params	EPE
ArgMin	None	58.47G	2.69M	0.76
ArgMin	RGBRefine [61]	117.85G	2.81M	0.72
ArgMin	Context	70.58G	2.78M	0.71
ArgMin	Context+RGBRefine [61]	129.95G	2.89M	0.69
ArgMin	Context+DRNetRefine [61]	129.88G	2.89M	0.69
ArgMin	ConvGRU [33, 60]	3023.88G	12.51M	0.46

4.2.3 Cost Construction

In Table 3, an ablation study on various cost volume strategies for stereo matching is presented. For these experiments, one-quarter of stereo image features are used to construct the cost volume. The study begins with simpler 3D cost volume methods: Difference [26] and Correlation [52], yielding higher EPE of 1.02 and 0.81, respectively, at lower computational costs. This suggests that while efficient, these methods may lack the nuanced disparity capture necessary for complex scenes. The Interlaced8 model, introduced by MobileStereoNet [46], achieves the same EPE comparable to the Gwc8 model. However, its computational expense is substantially higher, with a flop count of 288.52G, significantly larger than that of the Gwc8 model. The group-wise correlation and concatenation models demonstrate a clear trend: as the channel depth increases, the EPE improves, indicating improved disparity estimations through richer feature capture. The combined volume (G8-C16) offers a more optimal balance between computational load and disparity estimation accuracy, which achieves an EPE of 0.62. G16-C24 and G32-C48 do not significantly improve EPE, despite a dramatic increase in computational load, especially for G32-C48, which demands 3239.17Gflops and has 39.37M parameters. These results highlight the delicate balance between accuracy and computational efficiency in designing cost volumes for disparity estimation. While deeper and combined volumes reduce the EPE, the gains might be marginal compared to the significant increase in computational requirements, raising questions about the practicality of these approaches in resourceconstrained environments.

4.2.4 Disparity Regression and Refinement

The Differentiable ArgMin [25, 6, 18, 47, 59, 15, 70, 46, 52] introduced by GCNet [25], calculates initial disparity by converting matching costs into probabilities via softmax and then computing a weighted sum of these probabilities across all disparity levels. As shown in Table 4, various strategies show differing impacts on model performance in this ablation study on disparity refinement for the SceneFlow test datasets. Without refinement, the model has an EPE of 0.76. RGBRefine and Context methods slightly improve EPE to 0.72 and 0.71, respectively, with a modest increase in computational resources. Combining these methods further reduces EPE to 0.69, indicating marginal benefits from their integration. However, employing ConvGRU refinement substantially improves EPE 0.46, albeit at a significant cost in computational complexity (3023.88 Gflops) and model size (12.51M). This highlights a trade-off between accuracy improvements and increased computational demands.

4.3 Analysis and Discussion

4.3.1 Necessity of Comprehensive Ablation Study

In the evolving landscape of deep stereo matching, comprehensive ablation studies play a pivotal role in deciphering the effectiveness of different components and strategies. A thorough ablation study goes beyond mere performance metrics; it uncovers the underlying mechanics of different algorithms, revealing their strengths and weaknesses in various scenarios. For instance, different data augmentation techniques may yield contrasting effects on the model's ability to match stereo images accurately. Similarly, the impact of varying backbones, cost volume configurations, and disparity regression methods on the overall performance can be profound. Understanding the specific contributions of each component is crucial for building more efficient and effective stereo-matching systems.

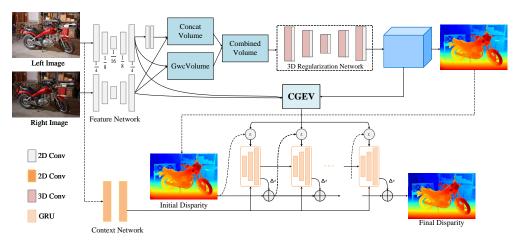


Figure 5: Overview of our proposed StereoBase. GwcVolume represents Group-wise correlation volume [18]. CGEV refers to Combined Geometry Encoding Volume [60].

4.3.2 Necessity of A Strong Baseline

A strong baseline in deep stereo-matching research is critical for several key reasons. First, it serves as a vital reference point, enabling a clear assessment of new methods against an established standard. Second, a strong baseline allows for precise evaluation of the impact of specific changes, whether they are new data augmentation methods, different network architectures, or innovative disparity estimation techniques. This helps in isolating and understanding the contribution of each component to the overall performance. Additionally, a solid baseline ensures fair and meaningful comparisons across studies, providing a common ground for evaluating different research outcomes. This is crucial for maintaining consistency and validity in comparative analyses. In summary, a strong baseline is essential for meaningful advancements in deep stereo matching, ensuring that new developments are substantial, accurately assessed, and broadly applicable.

5 A Strong Pipeline: StereoBase

5.1 Pipeline

In light of our comprehensive analysis, the goal of this section is to establish a strong baseline model that surpasses existing standards in performance. StereoBase embodies this objective. As shown in Figure 5, given the left and the right images, the pre-trained MobileNetV2 [57] networks are used as our foundational backbone, extracting features at a reduced scale of 1/4th the original size to form the cost volume. The G8-C16 cost volume is utilized to achieve an optimal balance between computational load and disparity estimation accuracy. Hourglass networks [60] were implemented for cost aggregation, while convGRU [60] strategies were applied for the final disparity regression.

5.2 Comparison with State-of-the-art Methods

In our comprehensive evaluation, we benchmarked StereoBase against current state-of-the-art methods on SceneFlow [35], KITTI2012 [14], 2015 [36], and DrivingStereo [66]. On the SceneFlow [35] test set, we achieve a new SOTA EPE of 0.34. The quantitative comparisons, as summarized in Table 5, clearly illustrate the edge of StereoBase in handling complex stereo-matching scenarios with greater precision. Further, we submitted our results to the KITTI2012 [14] and 2015 [36] leaderboards, where StereoBase outperformed all published methods across all metrics. On KITTI2015 [36], our StereoBase outperforms IGEV [60] by 9.43% on D1-all metric, respectively. In addition, we evaluate the generalization performance of StereoBase. As shown in Table 6, StereoBase exhibited exceptional performance in a zero-shot setting. This evaluation further validates the adaptability and potential of StereoBase in handling diverse and challenging stereo vision tasks.

Table 5: Results on SceneFlow [35], KITTI 2012 [14], KITTI 2015 [36] leaderboard, and Driving-Stereo [66]. All results on DrivingStereo [66] are derived using the OpenStereo. Underline refers to evaluation in the non-occluded regions only STTR [31]. **Bold**: Best.

Method	SceneFlow	KITTI	2012	KITTI 2015			DrivingStereo	
Method	EPE	3-noc	3-noc 3-all		D1-fg	D1-all	EPE	D1-all
STTR [31]	0.43	-	-	1.70	3.61	2.01	OOM	OOM
PSMNet [6]	1.09	1.49	1.89	1.86	4.62	2.32	1.19	2.26
GwcNet [18]	0.76	1.32	1.70	1.74	3.93	2.11	0.99	1.36
CFNet [47]	1.04	1.23	1.58	1.54	3.56	1.88	0.98	1.46
AANet [61]	0.87	1.91	2.42	1.65	3.96	2.03	2.91	15.16
Mobilestereo-3D [46]	0.80	-	-	1.75	3.87	2.10	1.06	1.61
COEX [2]	0.68	1.55	1.93	1.74	3.41	2.02	1.34	2.70
FADNet++ [52]	0.76	-	-	1.99	3.18	2.19	1.44	5.15
CascadeStereo [15]	0.72	-	-	1.59	4.03	2.00	1.31	2.84
IGEV-Stereo [60]	0.47	1.12	1.44	1.38	2.67	1.59	1.06	1.50
GANet+ADL [63]	0.50	0.98	1.29	1.38	2.38	1.55	-	-
NMRF-Stereo [17]	0.45	1.01	1.35	1.28	3.13	1.59	-	-
Selective-IGEV [53]	0.44	1.07	1.38	1.33	2.61	1.55	-	-
MoCha-Stereo [8]	0.41	1.06	1.35	1.36	2.43	1.53	-	-
StereoBase(Ours)	0.34	1.00	1.26	1.28	2.26	1.44	1.15	2.19

Table 6: Cross-domain evaluation on Middlebury, ETH3D, and KITTI all training sets. All methods are only trained on the Scene Flow datatest. Middlebury is tested on half-resolution. The model with † indicates the implementation of OpenStereo. **Bold**: Best.

Mathad	KITTI2012		KITTI2015		Middlebury	ETH3D
Method	D1-all(%)	EPE	D1-all(%)	EPE	bad 2.0(%)	bad 1.0(%)
STTR [†]	49.72	6.80	40.26	6.16	OOM	38.89
PSMNet [†]	30.51	4.68	32.15	5.99	33.53	18.02
CFNet [†]	13.64	2.27	12.09	2.89	23.91	7.67
AANet [†]	7.23	1.27	7.72	1.41	22.45	18.77
Mobilestereo-2D [†]	18.34	2.45	21.21	2.78	34.04	13.89
Mobilestereo-3D [†]	18.96	2.79	19.69	3.40	29.32	13.71
GwcNet [†]	23.05	2.76	25.19	3.58	29.87	14.54
$COEX^{\dagger}$	12.08	1.80	11.00	2.48	25.17	11.43
FADNet++ [†]	11.31	1.77	13.23	2.97	24.17	25.53
CascadeStereo†	11.83	1.83	12.03	2.69	27.27	11.68
$IGEV^{\dagger}$	4.88	0.98	5.16	1.18	8.47	3.53
StereoBase [†]	4.85	0.99	5.35	1.18	9.76	3.12

6 Conclusion

This paper introduces OpenStereo, a benchmark designed for deep stereo matching. Our initial endeavor involved re-implementing the most state-of-the-art methods within the OpenStereo framework. This comprehensive tool facilitates the extensive reevaluation of various aspects of stereo-matching methodologies. Drawing on the insights gained from our exhaustive ablation studies, we proposed StereoBase. Our StereoBase ranks 1st on SceneFlow, KITTI 2015, 2012 (Reflective) among published methods and performs best across all metrics. In addition, StereoBase has strong cross-dataset generalization. StereoBase not only demonstrates the capabilities of our platform but also sets a new standard in the field for future research and development. Through OpenStereo and StereoBase, we aim to contribute a substantial and versatile resource to the stereo-matching community, fostering innovation and facilitating more effective and efficient research.

Acknowledgements. This work was supported by the National Natural Science Foundation of China under Grant 62373356 and the Open Projects Program of State Key Laboratory of Multimodal Artificial Intelligence Systems.

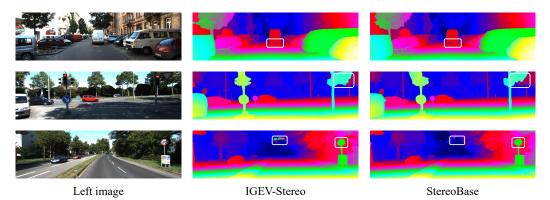


Figure 6: Visualization results on KITTI2015 dataset.

References

- [1] Abhishek Badki, Alejandro Troccoli, Kihwan Kim, Jan Kautz, Pradeep Sen, and Orazio Gallo. Bi3d: Stereo depth estimation via binary classifications. In *CVPR*, 2020.
- [2] Antyanta Bangunharcana, Jae Won Cho, Seokju Lee, In So Kweon, Kyung-Soo Kim, and Soohyun Kim. Correlate-and-excite: Real-time stereo matching via guided cost volume excitation. In *IROS*, 2021.
- [3] Stan Birchfield and Carlo Tomasi. A pixel dissimilarity measure that is insensitive to image sampling. *TPAMI*, 1999.
- [4] Han Cai, Chuang Gan, Tianzhe Wang, Zhekai Zhang, and Song Han. Once for all: Train one network and specialize it for efficient deployment. In *ICLR*, 2020.
- [5] Z. Cao, G. Hidalgo Martinez, T. Simon, S. Wei, and Y. A. Sheikh. Openpose: Realtime multi-person 2d pose estimation using part affinity fields. *TPAMI*, 2019.
- [6] Jia-Ren Chang and Yong-Sheng Chen. Pyramid stereo matching network. In CVPR, 2018.
- [7] Kai Chen, Jiaqi Wang, Jiangmiao Pang, Yuhang Cao, Yu Xiong, Xiaoxiao Li, Shuyang Sun, Wansen Feng, Ziwei Liu, Jiarui Xu, Zheng Zhang, Dazhi Cheng, Chenchen Zhu, Tianheng Cheng, Qijie Zhao, Buyu Li, Xin Lu, Rui Zhu, Yue Wu, Jifeng Dai, Jingdong Wang, Jianping Shi, Wanli Ouyang, Chen Change Loy, and Dahua Lin. MMDetection: Open mmlab detection toolbox and benchmark. *arXiv preprint arXiv:1906.07155*, 2019.
- [8] Ziyang Chen, Wei Long, He Yao, Yongjun Zhang, Bingshu Wang, Yongbin Qin, and Jia Wu. Mocha-stereo: Motif channel attention network for stereo matching. In *CVPR*, 2024.
- [9] Ziyang Chen, Wei Long, He Yao, Yongjun Zhang, Bingshu Wang, Yongbin Qin, and Jia Wu. Mocha-stereo: Motif channel attention network for stereo matching. In *CVPR*, 2024.
- [10] Xuelian Cheng, Yiran Zhong, Mehrtash Harandi, Yuchao Dai, Xiaojun Chang, Hongdong Li, Tom Drummond, and Zongyuan Ge. Hierarchical neural architecture search for deep stereo matching. In NeurIPS, 2020.
- [11] Alexey Dosovitskiy, Philipp Fischer, Eddy Ilg, Philip Hausser, Caner Hazirbas, Vladimir Golkov, Patrick van der Smagt, Daniel Cremers, and Thomas Brox. Flownet: Learning optical flow with convolutional networks. In *ICCV*, 2015.
- [12] Shivam Duggal, Shenlong Wang, Wei-Chiu Ma, Rui Hu, and Raquel Urtasun. Deeppruner: Learning efficient stereo matching via differentiable patchmatch. In *ICCV*, 2019.
- [13] Chao Fan, Junhao Liang, Chuanfu Shen, Saihui Hou, Yongzhen Huang, and Shiqi Yu. Opengait: Revisiting gait recognition toward better practicality. In CVPR, 2023.
- [14] Andreas Geiger, Philip Lenz, and Raquel Urtasun. Are we ready for autonomous driving? the kitti vision benchmark suite. In *CVPR*, 2012.
- [15] Xiaodong Gu, Zhiwen Fan, Siyu Zhu, Zuozhuo Dai, Feitong Tan, and Ping Tan. Cascade cost volume for high-resolution multi-view stereo and stereo matching. In CVPR, 2020.
- [16] Tongfan Guan, Chen Wang, and Yun-Hui Liu. Neural markov random field for stereo matching. In CVPR, 2024.
- [17] Tongfan Guan, Chen Wang, and Yun-Hui Liu. Neural markov random field for stereo matching. In CVPR, 2024
- [18] Xiaoyang Guo, Kai Yang, Wukui Yang, Xiaogang Wang, and Hongsheng Li. Group-wise correlation stereo network. In CVPR, 2019.

- [19] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In CVPR, 2016.
- [20] Xin He, Kaiyong Zhao, and Xiaowen Chu. Automl: A survey of the state-of-the-art. arXiv preprint arXiv:1908.00709, 2019.
- [21] Heiko Hirschmuller. Stereo processing by semiglobal matching and mutual information. TPAMI, 2007.
- [22] Eddy Ilg, Nikolaus Mayer, Tonmoy Saikia, Margret Keuper, Alexey Dosovitskiy, and Thomas Brox. Flownet 2.0: Evolution of optical flow estimation with deep networks. In *CVPR*, 2017.
- [23] Eddy Ilg, Tonmoy Saikia, Margret Keuper, and Thomas Brox. Occlusions, motion and depth boundaries with a generic network for disparity, optical flow or scene flow estimation. In ECCV, 2018.
- [24] Alex Kendall, Hayk Martirosyan, Saumitro Dasgupta, Peter Henry, Ryan Kennedy, Abraham Bachrach, and Adam Bry. End-to-end learning of geometry and context for deep stereo regression. In ICCV, 2017.
- [25] Alex Kendall, Hayk Martirosyan, Saumitro Dasgupta, Peter Henry, Ryan Kennedy, Abraham Bachrach, and Adam Bry. End-to-end learning of geometry and context for deep stereo regression. In ICCV, 2017.
- [26] Sameh Khamis, Sean Fanello, Christoph Rhemann, Adarsh Kowdle, Julien Valentin, and Shahram Izadi. Stereonet: Guided hierarchical refinement for real-time edge-aware depth prediction. In ECCV, 2018.
- [27] Youngwan Lee, Jonghee Kim, Jeffrey Willette, and Sung Ju Hwang. Mpvit: Multi-path vision transformer for dense prediction. In CVPR, 2022.
- [28] Jiankun Li, Peisen Wang, Pengfei Xiong, Tao Cai, Ziwei Yan, Lei Yang, Jiangyu Liu, Haoqiang Fan, and Shuaicheng Liu. Practical stereo matching via cascaded recurrent network with adaptive correlation. In CVPR, 2022.
- [29] Rui Li and Xiaolin Wu. Efficient dense stereo matching using adaptive window and census transform. TIP, 2013.
- [30] Ximeng Li, Chen Zhang, Wanjuan Su, and Wenbing Tao. Iinet: Implicit intra-inter information fusion for real-time stereo matching. In AAAI, 2024.
- [31] Zhaoshuo Li, Xingtong Liu, Nathan Drenkow, Andy Ding, Francis X. Creighton, Russell H. Taylor, and Mathias Unberath. Revisiting stereo depth estimation from a sequence-to-sequence perspective with transformers. In ICCV, 2021.
- [32] Zhaohuai Liang and Changhe Li. Any-stereo: Arbitrary scale disparity estimation for iterative stereo matching. In AAAI, 2024.
- [33] Lahav Lipson, Zachary Teed, and Jia Deng. Raft-stereo: Multilevel recurrent field transforms for stereo matching. In 3DV, 2021.
- [34] Hanxiao Liu, Karen Simonyan, and Yiming Yang. Darts: Differentiable architecture search. In ICLR, 2018
- [35] Nikolaus Mayer, Eddy Ilg, Philip Hausser, Philipp Fischer, Daniel Cremers, Alexey Dosovitskiy, and Thomas Brox. A large dataset to train convolutional networks for disparity, optical flow, and scene flow estimation. In CVPR, 2016.
- [36] Moritz Menze and Andreas Geiger. Object scene flow for autonomous vehicles. In CVPR, 2015.
- [37] Raúl Mur-Artal and Juan D. Tardós. Orb-slam2: An open-source slam system for monocular, stereo, and rgb-d cameras. *IEEE Transactions on Robotics*, 2017.
- [38] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. *NeurIPS*, 2019.
- [39] Peter Pinggera, Thomas Pock, and Horst Bischof. Efficient graph-based segmentation for stereo matching. IJCV, 2015.
- [40] Matteo Poggi, Davide Pallotti, Fabio Tosi, and Stefano Mattoccia. Guided stereo matching. In CVPR, 2019.
- [41] Tonmoy Saikia, Yassine Marrakchi, Arber Zela, Frank Hutter, and Thomas Brox. Autodispnet: Improving disparity estimation with automl. In *ICCV*, 2019.
- [42] Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. Mobilenetv2: Inverted residuals and linear bottlenecks. In *CVPR*, 2018.
- [43] Daniel Scharstein, Heiko Hirschmüller, York Kitajima, Greg Krathwohl, Nera Nešić, Xi Wang, and Porter Westling. High-resolution stereo datasets with subpixel-accurate ground truth. In *GCPR*, 2014.
- [44] Daniel Scharstein and Richard Szeliski. A taxonomy and evaluation of dense two-frame stereo correspondence algorithms. IJCV, 2002.

- [45] Thomas Schops, Johannes L Schonberger, Silvano Galliani, Torsten Sattler, Konrad Schindler, Marc Pollefeys, and Andreas Geiger. A multi-view stereo benchmark with high-resolution images and multicamera videos. In CVPR, 2017.
- [46] Faranak Shamsafar, Samuel Woerz, Rafia Rahim, and Andreas Zell. Mobilestereonet: Towards lightweight deep networks for stereo matching. In WACV, 2022.
- [47] Zhelun Shen, Yuchao Dai, and Zhibo Rao. Cfnet: Cascade and fused cost volume for robust stereo matching. arXiv preprint arXiv:2104.04314, 2021.
- [48] Mingxing Tan and Quoc Le. Efficientnetv2: Smaller models and faster training. In ICML, 2021.
- [49] Fabio Tosi, Yiyi Liao, Carolin Schmitt, and Andreas Geiger. Smd-nets: Stereo mixture density networks. In CVPR, 2021.
- [50] Ao Wang, Hui Chen, Zijia Lin, Hengjun Pu, and Guiguang Ding. Repvit: Revisiting mobile cnn from vit perspective. CVPR, 2024.
- [51] Qiang Wang, Shaohuai Shi, Shizhen Zheng, Kaiyong Zhao, and Xiaowen Chu. FADNet: A fast and accurate network for disparity estimation. In *ICRA*, 2020.
- [52] Qiang Wang, Shaohuai Shi, Shizhen Zheng, Kaiyong Zhao, and Xiaowen Chu. Fadnet++: Real-time and accurate disparity estimation with configurable networks. *arXiv preprint arXiv:2110.02582*, 2021.
- [53] Xianqi Wang, Gangwei Xu, Hao Jia, and Xin Yang. Selective-stereo: Adaptive frequency information selection for stereo matching. In CVPR, 2024.
- [54] Xianqi Wang, Gangwei Xu, Hao Jia, and Xin Yang. Selective-stereo: Adaptive frequency information selection for stereo matching. In *CVPR*, 2024.
- [55] Yan Wang, Zihang Lai, Gao Huang, Brian H. Wang, Laurens van der Maaten, Mark Campbell, and Kilian Q. Weinberger. Anytime stereo image depth estimation on mobile devices. In ICRA, 2019.
- [56] Philippe Weinzaepfel, Thomas Lucas, Vincent Leroy, Yohann Cabon, Vaibhav Arora, Romain Brégier, Gabriela Csurka, Leonid Antsfeld, Boris Chidlovskii, and Jérôme Revaud. CroCo v2: Improved Cross-view Completion Pre-training for Stereo Matching and Optical Flow. In ICCV, 2023.
- [57] Ross Wightman. Pytorch image models. https://github.com/rwightman/pytorch-image-models, 2019.
- [58] Yuxin Wu, Alexander Kirillov, Francisco Massa, Wan-Yen Lo, and Ross Girshick. Detectron2. https://github.com/facebookresearch/detectron2, 2019.
- [59] Gangwei Xu, Junda Cheng, Peng Guo, and Xin Yang. Attention concatenation volume for accurate and efficient stereo matching. In CVPR, 2022.
- [60] Gangwei Xu, Xianqi Wang, Xiaohuan Ding, and Xin Yang. Iterative geometry encoding volume for stereo matching. In CVPR, 2023.
- [61] Haofei Xu and Juyong Zhang. Aanet: Adaptive aggregation network for efficient stereo matching. In CVPR, 2020.
- [62] Peng Xu, Zhiyu Xiang, Chengyu Qiao, Jingyun Fu, and Tianyu Pu. Adaptive multi-modal cross-entropy loss for stereo matching. In CVPR, 2024.
- [63] Peng Xu, Zhiyu Xiang, Chenyu Qiao, Jingyun Fu, and Xijun Zhao. Adaptive multi-modal cross-entropy loss for stereo matching. In CVPR, 2023.
- [64] Aimin Yang, Chunying Zhang, Yongjie Chen, Yunxi Zhuansun, and Huixiang Liu. Security and privacy of smart home systems based on the internet of things and stereo matching algorithms. ISO4, 2020.
- [65] Gengshan Yang, Joshua Manela, Michael Happold, and Deva Ramanan. Hierarchical deep stereo matching on high-resolution images. In CVPR, 2019.
- [66] Guorun Yang, Xiao Song, Chaoqin Huang, Zhidong Deng, Jianping Shi, and Bolei Zhou. Drivingstereo: A large-scale dataset for stereo matching in autonomous driving scenarios. In CVPR, 2019.
- [67] Guorun Yang, Hengshuang Zhao, Jianping Shi, Zhidong Deng, and Jiaya Jia. Segstereo: Exploiting semantic information for disparity estimation. In ECCV, 2018.
- [68] Qingxiong Yang, Liang Wang, Rui Gan, Minglun Gong, and Yunde Jia. Adaptive support-weight approach for correspondence search with outlier rejection. TPAMI, 2010.
- [69] Jure Zbontar, Yann LeCun, et al. Stereo matching by training a convolutional neural network to compare image patches. *Journal of Machine Learning Research*, 2016.
- [70] Feihu Zhang, Victor Prisacariu, Ruigang Yang, and Philip H.S. Torr. Ga-net: Guided aggregation net for end-to-end stereo matching. In CVPR, 2019.
- [71] Feihu Zhang, Xiaojuan Qi, Ruigang Yang, Victor Prisacariu, Benjamin Wah, and Philip Torr. Domaininvariant stereo matching networks. In ECCV, 2020.

- [72] Guoxuan Zhang, Jin Han Lee, Jongwoo Lim, and Il Hong Suh. Building a 3-d line-based map using stereo slam. *IEEE Transactions on Robotics*, 2015.
- [73] Kai Zhang and Janusz Kosecka. Surface patch similarity for near-duplicate 3d model retrieval. IJCV, 2005.
- [74] Youmin Zhang, Yimin Chen, Xiao Bai, Jun Zhou, Kun Yu, Zhiwei Li, and Kuiyuan Yang. Adaptive unimodal cost volume filtering for deep stereo matching. *AAAI*, 2020.