

Explanatory Argument Extraction of Correct Answers in Resident Medical Exams

Iakes Goenaga, Aitziber Atutxa, Koldo Gojenola, Maite Oronoz, Rodrigo
Agerri

HiTZ Center - Ixa, University of the Basque Country UPV/EHU
{*iakes.goenaga, aitziber.atutxa, koldo.gojenola,*
maite.oronoz, rodrigo.agerri}@ehu.eus

Abstract

Developing the required technology to assist medical experts in their everyday activities is currently a hot topic in the Artificial Intelligence research field. Thus, a number of large language models (LLMs) and automated benchmarks have recently been proposed with the aim of facilitating information extraction in Evidence-Based Medicine (EBM) using natural language as a tool for mediating in human-AI interaction. The most representative benchmarks are based on a question answering setting, where the objective is for the models to provide answers to medical questions. Although interesting, these benchmarks are limited to either multiple-choice or long-form answers and are available only in English. In order to address these shortcomings, in this paper we present a new dataset which, unlike previous work: (i) includes not only explanatory arguments for the correct answer, but also arguments to reason why the incorrect answers are not correct; (ii) the explanations are written originally by medical doctors to answer questions from the Spanish Residency Medical Exams. Furthermore, this new benchmark allows us to setup a novel extractive task which consists of *identifying the explanation of the correct answer written by medical doctors*. An additional benefit of our setting is that we can leverage the extractive QA paradigm to automatically evaluate performance of LLMs without resorting to costly manual evaluation by medical experts. Comprehensive experimentation with language models for Spanish shows that sometimes multilingual models fare better than monolingual ones, even outperforming models which have been adapted to the medical domain. Furthermore, results across the monolingual models are mixed, with supposedly smaller and inferior models performing competitively. In any case, the obtained results show that our novel dataset and approach can be an effective technique to help medical practitioners in identifying relevant evidence-based explanations for medical questions.

Keywords: Explainable Artificial Intelligence, Argumentation, Question Answering, Resident Medical Exams, Natural Language Processing, Deep Learning

1. Introduction

There is an increasing interest in the medical domain to apply Artificial Intelligence (AI) techniques to assist medical experts in their everyday activities. These include automatic information extraction methods to obtain, from large amounts of unstructured text, relevant and timely information to facilitate the medical experts’ deliberation and decision processes as part of the Evidence-Based Medicine (EBM) practice. In other words, the goal is to help in EBM which is understood as the “conscientious, explicit, and judicious use of current best evidence” [1] to guide clinical decision-making with scientific information extracted from systematic reviews of previous work.

However, devising algorithms to help in clinical decision-making, in which the medical expert needs to identify and diagnose a disease and prescribe a treatment based on the available evidence, is far from trivial. First, doing so requires for the systems to automatically identify, access and correctly leverage the relevant medical knowledge. Second, the acquired medical knowledge needs to be adequately used to help disambiguate between the variety of symptoms, each of which may be indicative of multiple diseases. Finally, the system must interact with the medical experts in a natural manner, ideally using natural language.

Recently, a number of works have been proposed in this line of research using natural language as a tool for mediating in AI-human interactions. These efforts have been focused on: (i) argumentation and explanation-based approaches to detect, classify and assess the quality of previously given argumentative structures in medical texts [2]. The general idea is that such argumentative structures constitute the basis of Evidence-Based Medicine; (ii) the development of Large Language Models (LLMs) adapted, via a variety of techniques, to the medical domain. These include encoder models such as SciBERT, BioBERT or PubMedBERT [3, 4, 5] for discriminative modelling. These models, although they established new state-of-the-art results in classification tasks, are typically smaller in scale and scope with respect to decoder and autoregressive models such as GPT-3 or PALM [6, 7] and their biomedical counterparts BioGPT [8], SciFive [9], and Med-PaLM [7], designed for generative language modelling; (iii) the creation of automated benchmarks with the aim of facilitating information access in EBM. The most popular benchmarks are based on a question answering (QA) scenario, in which the aim is for the models to classify or generate answers to medical questions. Among others, it is worth mentioning MultiMedQA, a multi-task, seven multiple-choice dataset [7] and TruthfulQA, a dataset to measure the trustworthiness of LLMs [10].

While interesting, previous work presents the following limitations. First, the large majority of the proposed benchmarks and LLMs have been developed for English. Second, most of the medical QA datasets consist of Yes/No or long-form single answers to multiple-choice questions. Third, despite huge progress in LLMs, learning to generate answers in the medical domain remains notoriously difficult, as it requires knowledge about medical concepts and the capacity to retrieve accurate and reliable information from medical literature, guidelines

and other data sources [7]. This means that medical QA benchmarks remain extremely challenging due to the complexity and diversity of medical language and the vast amount of available medical information [7, 10, 9]. Fourth, evaluating generative tasks requires expensive manual effort by medical experts.

In order to address these challenges, in this work we present a new dataset which, in contrast to previous work, includes not only explanatory arguments for the correct answer but also arguments to explain why the remaining possible answers are incorrect. Additionally, the dataset is entirely written in Spanish by medical doctors.

This new dataset is leveraged in order to formulate a novel extractive task which, taking into account the explanations written for both correct and incorrect answers, consists of *identifying the explanation of the correct answer*. In other words, the models should respond to medical questions regarding the correct answer in a multiple-choice setting, by providing the piece of text in the context which explains why a given answer is correct. Furthermore, our new benchmark profits from harnessing the extractive QA paradigm to automatically assess the performance of Language Model-based Systems (LLMs), effectively eliminating the need for costly manual evaluation conducted by medical experts.

The data source for our new dataset consists of the Resident Medical Intern exams, or *Médico Interno Residente* (MIR) in Spanish, similar to exams for medical specialists in other countries such as the United States Medical Licensing Examination (USMLE). The aim of the MIR exam is to assess medical students' knowledge by means of a multiple-choice questionnaire contextualized by a short clinical case. Answering the MIR exam questions requires applying evidence-based decision making and critical thinking according to the available evidence present in the case. The process implies forming hypotheses compatible with the evidence and discarding some of those hypotheses as new evidence is collected. During this deliberation it is specially relevant to provide arguments in favour or against each decision, namely, to offer explanations to support or attack a given hypothesis.

Thus, the MIR-based dataset introduced in this paper includes the clinical case, the correct answer, the multiple-choice questions and the annotated explanations result of the deliberation process outlined above. These explanations have been written by native Spanish medical doctors and offer a unique resource to set up a novel dataset and task for EBM consisting of extracting, from the argumentative structure, the explanation which corresponds to the correct answer. Summarizing, the main contributions of this work are the following:

- The first dataset for benchmarking LLMs in the medical domain which contains argumentative structure to provide explanations for both correct and incorrect answers in a multiple-choice questionnaire.
- A novel task based on extractive QA to *identify the explanations of the correct answer in commented* medical exams, thereby helping medical doctors to automatically retrieve relevant evidence from existing resources.

- The first dataset for medical QA in a language other than English, facilitating future research on multilingual approaches.
- By formulating this task in an extractive setting, we can objectively and automatically evaluate the performance of LLMs without requiring any manual annotation by medical experts.
- Comprehensive experimentation with LLMs for Spanish demonstrates that sometimes multilingual models fare better than monolingual models, even outperforming those which have been adapted to the medical domain. We show that results across the monolingual models are mixed, with supposedly smaller and inferior models performing competitively.
- Our reported results suggest that our approach can be an effective technique to help medical practitioners in identifying relevant evidence-based explanations for medical questions.
- Data and code are publicly available to encourage research on this research topic and to guarantee reproducibility of results¹.

Finally, we believe that our work can be a stepping stone for other interesting tasks based on generative modelling and explainable AI in Evidence-Based Medicine, for example, to predict not only the correct answer but also to generate an explanation associated to it.

In the rest of the paper, we first discuss the related work, while in Section 3 we describe the dataset creation and annotation. Section 4 introduces the methodology and experimental setup. Results are reported in Section 5 and discussed and analyzed in Section 6. To wrap up, section 7 offers some concluding remarks and future work.

2. Related work

Due to the unique characteristics of our new dataset and task, there is not directly comparable work in the literature. However, by casting our new task in an extractive Question Answering (QA) setting, we can review related work on QA both from an extractive and abstractive/generative approaches.

In abstractive QA, generative models are not restricted to the input context to create the answer of the question as they can generate answers word by word employing the entire vocabulary in an auto-regressive manner [11]. However, although the answers obtained by the models following this approach are apparently good, they are not always factually reliable. Thus, the TruthfulQA benchmark [10] tested large pre-trained generative models in order to find out whether the answers given to the questions are truthful. The main conclusion drawn by the authors was that the models generated many false answers that

¹<https://github.com/ixa-ehu/antidote-casimedicos>

mimic popular misconceptions and have the potential to deceive humans. In fact, an interesting result from that paper was that the larger model, the least truthful it was.

In extractive Question Answering the objective is, given a textual context, to extract a span from the context which constitutes the answer to the given question [12, 13]. This type of QA is a very popular setting which has seen a high activity in the development of both datasets specifically about QA [12, 14, 15, 16], about reading comprehension [17, 18, 19], and on techniques specific to this task [11, 20, 21, 22, 23, 24].

A number of interesting works on QA for the medical domain can be found in the literature. Many datasets of various characteristics have been developed [25, 26, 27, 28, 29, 7, 30] and workshops and shared tasks such as the *Question Answering in the medical domain* [31] & BioASQ Challenge [32, 33, 34] have been organized. As it has been the case for most NLP tasks, Transformer-based Pre-trained Language Models (PLMs) have facilitated huge improvements in the state-of-the-art for medical QA [29, 35, 36, 30]. The most popular approaches are those that use PLMs pre-trained on medical corpora such as SciBERT [3], BioBERT [4] or PubMedBERT [37]. Furthermore, approaches harnessing general purpose datasets such as the Stanford Question Answering Dataset (SQuAD) [12] or the Spanish Question Answering Corpus (SQAC) [38] as intermediate fine-tuning dataset before training on domain-specific medical datasets have also been shown to be effective [39, 40].

Nevertheless, despite the extensive efforts of the research community, question answering for medical exams remains a formidable challenge, largely due to the scarcity of suitable datasets that must be annotated by medical specialists. Although there are several datasets in which doctors' explanations of the correct answer to the question are included such as, MultiMedQA [7], MedQA [30], PubMedQA [25], LiveQA [26] or MedicationQA [31], most of them consist of Yes/No or long-form single answers to multiple-choice questions.

However, unlike the MIR-based dataset that we present in this work, none of them include explanations justifying both the right answer and arguing about the incorrect ones. Our new dataset not only enables the application of Extractive QA on explanations given by medical specialists, but it may also open the door to create clinical argumentative models as they allow to identify the piece of argument supporting the right answer among arguments explaining why the remaining answers are incorrect.

3. Datasets

As mentioned in the introduction, one of the most important contributions of this work is the release of a dataset based on MIR exams commented by medical doctors. We identified two data sources to build our dataset, namely, the *CasiMedicos* and the *MIR Asturias* projects.

Table 1 shows an example document from our dataset. It should be noted that the original data is written in Spanish, but for illustrative purposes we

Example of a document from the CasiMedicos Dataset	
C	A 30-year-old woman comes to your surgery because she notices a recent lump in her right breast. Her grandmother had breast cancer. On examination, a 2.5 cm nodule with regular borders was palpated in the upper outer quadrant. She has no previous imaging tests.
Q	Mark the correct answer:
P	<ul style="list-style-type: none"> (1) You request a breast ultrasound given the patient’s age. (2) You order a mammogram because it is the "gold standard" diagnostic test. (3) You order an MRI given the patient’s age and family history. (4) Explains that, as she is 30 years old, it is probably a cyst and will opt for a clinical check-up in 6-12 months. If it persists, then he will order an imaging test.
E	We are presented with a 30 year old female patient presenting with a 2.5 cm nodule with regular borders. The clinical suspicion is of a benign lesion. The imaging test to be performed depends on the age of the patient, the clinical suspicion and the time elapsed since the last examination. In patients <35 years of age it is recommended to start the breast study with ultrasound, adding mammography if there are criteria for malignancy. MRI is reserved for patients with BRCA, breast prostheses, a history of neoadjuvant or conservative surgery. In the case of a palpable lesion of recent appearance and in the absence of any previous imaging test, an ultrasound study is recommended rather than a check-up in 6-12 months.
A	In patients <35 years of age it is recommended to start the breast study with ultrasound, adding mammography if there are criteria for malignancy.

Table 1: Example of a document in the CasiMedicos dataset with the correct explanation span manually annotated. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers; **A**: Correct Answer Explanation. The *Clinical Case*, *Question*, and *Possible Answers* sections are generated for the MIR exams by the Spanish Ministry of Health. The medical doctors’ explanations (**E**) and the manually annotated span identifying the explanation of the correct answer (**A**) are contributions of this work.

offer a translation into English obtained with DeepL². This particular example is taken from the *CasiMedicos* set, although both resources are structured in the same manner.

The first three parts of the example document, clinical case (**C**), question (**Q**), possible answers (**P**), plus the solution (out of 4 options), are made public every year by the Spanish Ministry of Health. The last two parts, namely, the comments or medical doctor’s explanations (**E**) and the annotation of the span identifying the correct answer explanation (**A** and in bold in the **E** component) are the contribution of this work. More specifically, the explanatory argumentation (**E**) has been written by Spanish medical doctors on top of which we manually annotated the *span corresponding to the explanation of the correct answer*.

For each of the questions in both data sources, CasiMedicos and MIR Asturias, we gathered the year, a unique identifier, whether it had been canceled in the official exam, the specialty related to the question (digestive, surgery, pediatrics...), the question itself (**Q**), the possible answers (**P**), the correct answer and the explanations written in the commentary given by a medical doctor indicating the reasons for choosing or excluding the answers (**E**).

The MIR exams contain three types of questions: (i) those associated with an

²<https://www.deepl.com/en/translator>

image (usually a radiography) which needs to be interpreted in order to answer the question; (ii) questions including a short clinical case as contextual information previous to the question; (iii) questions about general medical knowledge without any specific context.

For this work we selected questions of type (ii), namely, those that include a clinical case (**C** in the example) to contextualize the question, possible answers and the explanations given.

The process of manually annotating the corpus consisted of specifying where the explanation of the correct answer (**A**) begins and ends (marked in bold in the **E** part). In order to obtain grammatically complete correct answer explanations, annotating full sentences or subordinate clauses was preferred over shorter spans. The annotation took the equivalent of a person's month work (4 weeks, 160 hours). In the following we provide a description for each of the data sources used to build our datasets.

CasiMedicos is a community of medical professionals who collaboratively, voluntarily, and free of charge, publishes written explanations about the possible answers included in the MIR exams. The aim is to generate a resource that helps future medical doctors to study towards the MIR examinations. The commented MIR exams, including the explanations, are published in the *CasiMedicos Project MIR 2.0* website³.

After crawling, cleaning, and organizing the data, we obtained 1,561 commented questions corresponding to the years 2011-2014, 2016, and 2018-2022. Selecting those questions which included *clinical cases* reduced the number of documents from 1,561 to 575. The next step was to create three splits for training, development and testing (70%, 15% and 15%, respectively). Table 2 provides some statistics regarding the final dataset where it can be observed that pediatrics is the most common specialty and that clinical case entries are longer (185 words wrt to the overall average of 163).

MIR Asturias is a well-known private academy in Spain which offers courses to prepare for the MIR exams. They produce a number of interesting material, including textbooks consisting of the commented exams for the MIR exam of the previous year. We collected 10 books (from 2010 and between 2012-2020) which were publicly available in their website⁴. They contained a total of 2,243 questions with associated explanations written by specialist doctors. Being a professionally produced resource, the explanations are written following a clear structural and focused pattern.

After cleaning and pre-processing the data, selecting the questions including clinical cases left a total of 778 documents. Table 2 shows that that the number of words per entry is slightly higher in MIR Asturias (250 words vs. 185 in *CasiMedicos*) and that the most repeated specialty is, in this case, Digestive.

Some issues worth mentioning which differentiate the datasets obtained from *CasiMedicos* and *MIR Asturias*. First, the writing style is slightly more sponta-

³<https://www.casimedicos.com/mir-2-0/>

⁴<https://www.curso-mir.com>

CasiMedicos	Full	Clinical Cases
#docs	1,561	575
#words	254,655	108,497
#word avg. in docs	163	185
#docs top speciality	Pediatrics (42)	Pediatrics (41)
MIR Asturias	Full	Clinical Cases
#docs	1,971	778
#words	450,495	199,161
#word avg. in docs	228	258
#docs top speciality	Digestive (157)	Digestive (72)

Table 2: Statistics of the *CasiMedicos* and *MIR Asturias* datasets. The *Clinical Cases* subset includes our annotations to identify the spans referring to the explanation of the correct answer.

neous and heterogeneous in *CasiMedicos*. This is because, unlike *MIR Asturias*, *CasiMedicos* is the result of a voluntary effort by medical doctors in Spain to provide the comments to the yearly *MIR* exams. Thus, the length of the explanations can vary across questions, as well as the structure of the explanation itself, which does not obey a clear writing pattern or predefined methodology. In contrast, the comments given for the *MIR Asturias* data are much more structured, often with explicit clues as to which of the possible answers the explanation is referring to. This may also explain why the average length of the *MIR Asturias* documents is higher than in *CasiMedicos*. Second, the set of questions included in each of the datasets is different. As a community-based voluntary effort, and unlike *MIR Asturias*, *CasiMedicos* does not include comments for every question in the *MIR* exams published every year by the Spanish Ministry of Health. Third, contrary to the data obtained from *CasiMedicos* dataset, we did not manage to obtain permission to share the *MIR Asturias* data, not even for research purposes. Hence, only *CasiMedicos* is made publicly available⁵.

4. Materials and Methods

Since the apparition of Pre-trained Language Models (PLMs) [23], a commonly used approach to solve many NLP tasks has been to adapt a PLM to the task at hand by fine-tuning it using a task specific dataset. Pre-trained Language Models encode information about language syntax and semantics, and the fine-tuning phase provides the model with additional information specific to the final target task. By adopting this approach, it is possible to generate

⁵We repeatedly contacted *MIR Asturias* without any success.

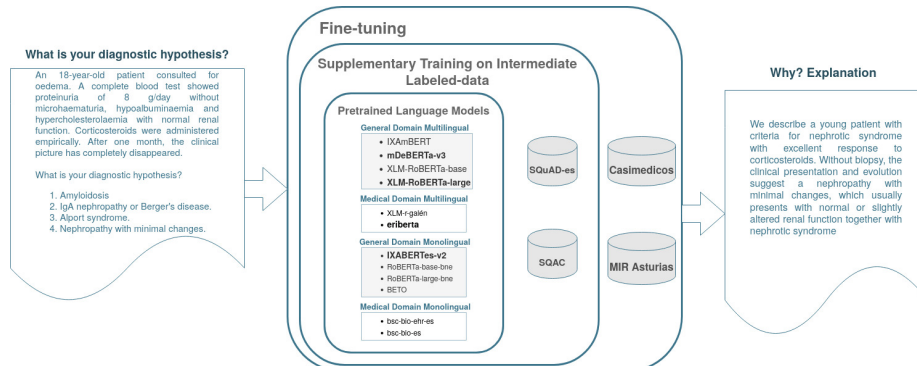


Figure 1: General overview of the system

models that are customized for a particular task while simultaneously leveraging the benefits of an already-existing, task-agnostic Language Model.

Supplementary Training on Intermediate Labeled-data Tasks (STILT) [41] is a variation of the fine-tuning approach, whereby the pre-trained Language Model (PLM) undergoes an initial fine-tuning on an intermediate task prior to being fine-tuned on the final downstream target task. In this case the intermediate task will be extractive QA where the goal is, given a question, to correctly extract the textual span corresponding to the right answer.

Figure 1 presents a general overview of the system. We first fine-tune various PLMs on intermediate labeled data, consisting of general QA Spanish datasets (SQuAD-es and SQAC). This intermediate step may consist of fine-tuning on either SQuAD-es or SQAC or on their concatenation. The final step is to then fine-tune the model on the downstream final task, namely, on either the *CasiMedicos* or the *MIR Asturias* datasets. In the rest of this section we provide an account of the *fine-tuning datasets used for STILT* and of the *PLMs* used in the experimentation.

4.1. Intermediate Fine-tuning Datasets for Extractive QA

The Intermediate Fine-tuning Datasets are based on the English SQuAD extractive Question Answering setting. While there are other interesting datasets [15], SQuAD has been and remains the main benchmark for Reading Comprehension, which is perhaps the reason for it being translated into multiple languages, including Spanish, the target language in this paper.

SQuAD [12, 14] is a general domain reading comprehension dataset, consisting of more than 100,000 questions posed by crowdworkers on a set of Wikipedia articles, where the answer to every question is either a segment of text, or span, from the corresponding reading passage, also known as the *context*. While in SQuADv1 [12] every question had an associated textual span as an answer, SQuADv2 [14] included an answer for 66% of the questions while the remaining 33% were unanswerable.

Question	In which R&B group was she the lead singer?
Context	Beyoncé Giselle Knowles-Carter (born 4 September 1981) is an American singer, songwriter, producer and actress. Born and raised in Houston, Texas, she performed in several singing and dancing competitions as a child, and rose to fame in the late 1990s as the lead singer of the all-female R&B group Destiny 's Child . Led by her father, Mathew Knowles, the group became one of the best-selling girl groups of all time. Her hiatus saw the release of Beyoncé's debut album, <i>Dangerously in Love</i> (2003), which established her as a worldwide solo artist, won five Grammy Awards and featured the Billboard Hot 100 number one single "Crazy in Love".
Answer	text: Destiny 's Child, answer_start: 306

Table 3: An example of SQuAD-es dataset document translated to English.

Table 3 presents an example of the most relevant parts of a SQuAD document, namely, the Question, Context and Answer. It can also be observed that the answer's length is 3 words. In fact, the extracted answers in SQuAD are in general very short spans and quite to the point, averaging 3.2 words per answer of which 35.9% correspond to named entities, 25% to noun phrases and 16.5% to numerical expressions [15].

As shown by Table 1, in this work we aim to solve the novel task of extracting, from a context including also explanations about the wrong answers, the textual span corresponding to the supporting explanatory argument of the right answer. Thus, although we cast our task in an extractive QA setting, our final objective is to extract the explanation for the right answer. Therefore, in addition to the domain of our datasets and SQuAD (based on Wikipedia text), perhaps the main difference between CasiMedicos and MIR Asturias with respect to SQuAD is the length of the answers.

In fact, the answer spans in SQuAD are typically much shorter than in CasiMedicos and MIR Asturias. As it can be seen in the SQuAD example given by Table 3, answers in SQuAD are very short, averaging 3.2 words per answer, compared to 32.02 words average per *explanation of the correct answer* in CasiMedicos. This is illustrated by the example in Table 3 where the answer, *Destiny's Child*, a named entity, is much shorter than most of the explanations to the correct answer annotated in CasiMedicos (e.g., Table 1 which consists of 24 words). Thus, while in SQuAD the answers are mostly named entities, short noun phrases or numerical expressions, in CasiMedicos the explanations span usually correspond to one or more full sentences (or at least a full subordinate clause), making it a much more challenging task than extracting very short answers, as in SQuAD.

In this paper we use two extractive Spanish QA datasets as intermediate fine-tuning datasets in a STILT approach, namely, SQuAD-es and SQAC.

The SQuAD-es dataset [42] is the Spanish version of SQuAD [12, 14]. In order to create the Spanish version of the dataset, Casimiro Pio et al. [42] developed the Translate Align Retrieve (TAR) method to automatically translate

SQuAD into Spanish.

The Spanish Question Answering Corpus (SQAC) [38] is a general domain corpus built for extractive QA with only answerable questions, as in SQuAD v1. It was created from texts extracted from the Spanish Wikipedia, encyclopedic articles, newswire articles from Wikinews, and the Spanish section of the AnCora corpus [43]. It consists of 18,817 questions with the annotation of their answer spans from 6,247 textual contexts, following the guidelines originally developed to built SQuAD v1.1.

4.2. Model Building

For the experimentation various PLMs have been selected following certain criteria such as: domain (medical vs general), size (base vs large) or multilinguality (multilingual vs monolingual). The choice of models from the general domain, both multilingual and monolingual is based on previously published results on the evaluation of Spanish language models [44]. With respect to the PLMs fine-tuned or pre-trained for the medical domain, we picked all the models available (up to our knowledge). The final selection of PLMs consists of the following 12 models:

- **General Domain Multilingual:** IXAmBERT [45], mDeBERTa-v3-base [46], XLM-RoBERTa (XLM-R) base and large [47].
- **Medical Domain Multilingual:** XML-R-Galén [48], eriBERTa [49]
- **General Domain Monolingual:** IXABERTes-v2 (IXAes)⁶, RoBERTa-base-bne (MarIA-base) and RoBERTa-large-bne (MarIA-large) [38], and BETO [50].
- **Medical Domain Monolingual:** bsc-bio-ehr-es and bsc-bio-es [51].

Table 4 provides the main characteristics of the PLMs used in this paper, including the corpus type and size on which they were trained, and technical pre-training details such as the number of layers, the hidden size, number of attention heads, the vocabulary and the number of parameters.

With respect to the *general domain PLMs*, BETO and IXAmBERT are BERT-base models pre-trained with both Masked Language Modeling (MLM) and Next Sentence Prediction (NSP) [23]. BETO was trained for 2M steps in two different stages: 900K steps with a batch size of 2048 and maximum sequence length of 128, and the rest of the training with batch size of 256 and maximum sequence length of 512. IXAmBERT was trained by executing 1M steps with 256 batch size and 512 sequence length.

IXAes and the MarIA models (base and large) are based on the BERT architecture but following the RoBERTa procedure [52]: (i) trained only on the MLM task, (ii) on larger batches (iii) on longer sequences and (iv), with

⁶<http://www.deeptext.eus/resources/ixabertes-v2.zip>

Model	corpus	#words	L	H	A	V	#params
IXAmBERT	Wiki	0.7B	12	768	12	119K	110M
mDeBERTa-v3	CC-100	9.3B	12	768	12	250K	198M
XLM-R-base	CC-100	9.3B	12	768	12	250K	270M
XLM-R-large	CC-100	9.3B	24	1024	16	250K	550M
XLM-R-Galén	CC-100 + EHRSp	9.3B + 64.4M	12	768	12	250K	270M
eriBERTa	MedSpEn	900M	12	768	12	50K	125M
IXAes	OSCAR	25B	12	768	12	50K	125M
MarIA-base	BNE	135B	12	768	12	50K	125M
MarIA-large	BNE	135B	24	1024	16	50K	350M
BETO	Opus, Wiki	3B	12	768	12	30K	110M
bsc-bio-ehr	EHRMedSp	1.2B	12	768	12	50K	125M
bsc-bio	MedSp	1.1B	12	768	12	50K	125M

Table 4: Language Models used in this paper. L: layer size; H: hidden size; A: attention heads; V: vocabulary. Wiki: Wikipedia; CC-100: Common Crawl; OSCAR: Open Super-large Crawled Aggregated coRpus; EHRSp: Spanish Electronic Health Records (EHR); MedSpEn: Spanish and English Medical Corpus; EHRMedSp: Spanish EHR and Medical Corpus; MedSp: Spanish Medical Corpus.

dynamic mask generation. IXAes performed 120.500 steps with 2048 batch size and sequence length 512. However, the MarIA models opted instead for a batch of 2048 and 512 sequence length, but reducing the training to one epoch without dropout [53].

Moving on to the multilingual models, XLM-R base and large were trained over 1.5M steps with batch 8192 and sequences of 512 length, while mDeBERTa [46] is also based on RoBERTa but incorporating disentangled attention, gradient-disentangled embedding sharing and, most importantly, replacing the MLM task with replaced token detection [54]; mDeBERTa was trained following the XLM-RoBERTa procedure but reducing the steps from 1.5M to 500K.

Finally, the *PLMs adapted to the medical domain*: XLM-R-galén was further pre-trained following the XLM-R method described above on a corpus of unlabeled oncology clinical texts [48]. The bsc-bio and bsc-bio-ehr monolingual models were pre-trained following the RoBERTa method, running the training for 48 hours using Adam optimizer with a peak learning rate of 0.0005, 10,000 warm-up steps and a batch size of 2,048 sentences.

Thus, while the specific pre-training details and the corpora used to generate the PLMs are substantially different the fine-tuning performed to evaluate the models on the intermediate and final downstream task will follow the same methodology.

4.3. Evaluation

For evaluation we use the standard measures of precision, recall, and F1-score used for the SQuAD benchmark as defined in formulae (1), where $TPS = \text{correctly identified sections}$, $FPS = \text{incorrectly identified sections}$ (marked

Variant	SQuAD	CasiMedicos
CQ#E	Question Context Answer	Clinical Case + Question Doctor’s Explanations Correct Answer Explanation
CQP#E	Question Context Answer	Clinical Case + Question + Possible Answers Doctor’s Explanations Correct Answer Explanation
Q#CE	Question Context Answer	Question Clinical Case + Doctor’s Explanations Correct Answer Explanation
QP#CE	Question Context Answer	Question + Possible Answers Clinical Case + Doctor’s Explanations Correct Answer Explanation

Table 5: Experimental variants with *CasiMedicos* and *MIR Asturias*. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

by system and not present in the annotated gold standard) and $FNS = false\ negatives$, namely, present in the gold standard and not detected by system.

$$\begin{aligned}
 Precision &= \frac{TPS}{TPS + FPS} \\
 Recall &= \frac{TPS}{TPS + FNS} \\
 F-score &= \frac{2 * Precision * Recall}{Precision + Recall}
 \end{aligned}
 \tag{1}$$

In a QA extractive setting such as SQuAD, these metrics are computed over the individual words in the prediction against those in the correct answer. Precision corresponds to the ratio of the number of shared words to the total number of words in the prediction, and recall is the ratio of the number of shared words to the total number of words in the correct answer.

5. Experimental Results

As explained in Section 4.2, we have experimented with twelve pre-trained Transformer-based language models using the SQuAD and SQAC as intermediate datasets and *CasiMedicos* and *MIR Asturias* as the final downstream task. In our experimental setup, the first experiment involves directly fine-tuning the PLMs on *CasiMedicos* and *MIR Asturias*. Additionally, three other approaches were explored which involved using STILT prior to the final target task: using either SQAC or SQuAD-es as intermediate tasks, or the combination of both datasets. Details of the experimental settings are provided in the next section.

5.1. Experimental Setup

In the SQuAD extractive Question Answering (QA) setting, the input to fine-tune the PLMs contains at least the following document elements: the

CQ#E	
Question	An 18-year-old patient consulted for oedema. A complete blood test showed proteinuria of 8 g/day without microhaematuria, hypoalbuminaemia and hypercholesterolaemia with normal renal function. Corticosteroids were administered empirically. After one month, the clinical picture has completely disappeared. WHAT IS YOUR DIAGNOSTIC HYPOTHESIS?
CQP#E	
Question	An 18-year-old patient consulted for oedema. A complete blood test showed proteinuria of 8 g/day without microhaematuria, hypoalbuminaemia and hypercholesterolaemia with normal renal function. Corticosteroids were administered empirically. After one month, the clinical picture has completely disappeared. WHAT IS YOUR DIAGNOSTIC HYPOTHESIS? <i>Amyloidosis. @@ IgA nephropathy or Berger's disease. @@ Alport syndrome. @@ Nephropathy with minimal changes.</i>
Context	We describe a young patient with criteria for nephrotic syndrome with excellent response to corticosteroids. Without biopsy, the clinical presentation and evolution suggest a nephropathy with minimal changes, which usually presents with normal or slightly altered renal function together with nephrotic syndrome, and which in 85-90% of cases resolves with steroid treatment. The age is the only data that is a bit of a problem, since although it is the most common cause of idiopathic nephrotic syndrome in children and adolescents, it is usually recommended to perform a biopsy prior to treatment in those over 16 years of age, and in any case there is little discussion.
Answer	We describe a young patient with criteria for nephrotic syndrome with excellent response to corticosteroids. Without biopsy, the clinical presentation and evolution suggest a nephropathy with minimal changes, which usually presents with normal or slightly altered renal function together with nephrotic syndrome

Table 6: *CasiMedicos* variants in which the clinical case is included within the question. The clinical case is marked in **bold**, the question in SMALL CAPITALS, and the possible answers are in *italics*.

Question, the *Context* and *Answer*. In order to cast our *correct answer explanation extraction* task as an extractive QA task, we simply experiment by placing the document parts depicted in Table 1 (*Clinical Case, Question, Possible Answers and Doctor's Explanations*) as the *Question, Context* and *Answer* fields used in the SQuAD setting.

In this sense, we try 4 different combinations to use the clinical case (**C**), question (**Q**), possible answers (**P**) and the explanations (**E**) as Question and Context (the correct answer explanation **A** is always the answer) in a SQuAD sense. These variants are described in Table 5. Thus, in the first variant the question in the SQuAD scenario consists of the clinical case (**C**) and the question (**Q**). In the second one, we add the possible answers (**P**), while for the 4th we remove the clinical case (**C**); finally, in the third variant we leave just the question (**Q**). Regarding the context from which to extract the explanation of the correct answers, in the first two variants it includes only the full explanations given in the comment written by the medical doctors (**E**) while for the last two we also add the clinical case (**C**).

For illustration purposes, Table 6 provides an example of the variants CQ#E and CQP#E in which the clinical case (**C**) is added together with the question (**Q**) for CQ#E and also with the possible answers (**P**) in CQP#E. In both cases the context consists of the doctor's explanations (**E**) which includes the *correct*

answer explanation (**A**) to be extracted.

Putting together the 12 PLMs, 4 datasets (SQuAD-es, SQAC, CasiMedicos and MIR Asturias) and the 4 experimental variants just presented, we fine-tune the models using the following procedure. We truncate the maximum total input sequence length to 384 and the maximum length of an answer that could be generated to 512. We fine-tuned the models for 20 epochs, set the random seed for initialization to 42, and kept the default QA values for the other hyperparameters [23]. Adding up all the hours needed to train all the models using a NVIDIA GPU V100 32GB, we get approximately 77 hours, leaving a carbon footprint of 34.81 (lbs CO2e). The evaluation results are reported in the next section.

5.2. Results

As we use the SQuAD-es and SQAC data to perform STILT for each of the models, the final number of experimental results was too large (~400) to present it here. Thus, in this section we report the results from the best two multilingual (base and large versions) and monolingual models⁷ (from the general and the medical domain, respectively). While Tables 7 and 8 provide the results obtained on the *CasiMedicos* and *MIR Asturias* datasets, respectively, all the results using all twelve models can be found in Appendix A.

		CM	SQAC+CM	SQES+CM	ALL	Avg.
IXAes	CQ#E	68.18	67.15	65.90	69.74	67.74
	CQP#E	66.95	67.74	68.50	64.96	67.04
	Q#CE	62.34	67.93	64.53	60.43	63.80
	QP#CE	60.81	64.93	60.35	62.85	62.23
eriBERTa	CQ#E	67.56	70.01	70.49	67.58	68.91
	CQP#E	67.61	65.55	67.90	68.61	67.41
	Q#CE	65.53	70.46	65.58	71.39	68.24
	QP#CE	67.34	64.43	64.51	70.14	66.60
mDeBERTa-v3	CQ#E	66.76	69.65	68.92	66.67	68.00
	CQP#E	58.16	68.32	66.33	66.10	64.72
	Q#CE	65.94	66.45	68.14	69.91	67.61
	QP#CE	57.55	65.15	65.50	70.18	64.59
XLM-R-large	CQ#E	<u>71.74</u>	74.47	72.97	<u>71.84</u>	72.75
	CQP#E	69.49	71.95	<u>73.08</u>	71.76	71.57
	Q#CE	62.39	66.55	67.86	70.18	66.74
	QP#CE	57.49	69.48	73.80	70.09	67.71

Table 7: F1-scores (partial match) on the *CasiMedicos* (CM) dataset variants defined in Table 5. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation. **Scores in bold**: Best overall result; scores underlined: best result per dataset used for fine-tuning. SQES: SQUAD-es.

⁷There is not a large version of the models adapted to the medical domain for Spanish.

		MA	SQAC+MA	SQES+MA	ALL	Avg.
IXAes	CQ#E	82.37	86.56	<u>86.34</u>	84.69	84.99
	CQP#E	79.98	<u>86.85</u>	84.39	84.80	84.00
	Q#CE	81.69	83.34	81.58	79.11	81.43
	QP#CE	79.14	78.02	81.15	78.95	79.31
eriBERTa	CQ#E	<u>84.92</u>	85.89	85.25	84.50	85.14
	CQP#E	82.66	85.45	84.33	85.42	84.46
	Q#CE	82.08	83.70	84.14	87.03	84.23
	QP#CE	80.27	82.56	84.29	83.08	82.55
mDeBERTa-v3	CQ#E	79.36	82.57	79.40	82.23	80.89
	CQP#E	77.82	81.51	77.32	80.80	79.36
	Q#CE	78.26	79.51	79.99	79.87	79.40
	QP#CE	71.49	72.19	74.39	73.72	72.94
XLM-R-large	CQ#E	82.20	84.30	85.92	82.27	83.67
	CQP#E	81.25	83.63	79.68	82.78	81.83
	Q#CE	81.03	80.66	82.89	80.07	81.16
	QP#CE	74.49	77.15	77.46	79.36	77.11

Table 8: F1-scores (partial match) on the *MIR Asturias* (MA) dataset variants defined in Table 5. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation. **Scores in bold**: Best overall result; scores underlined: best result per dataset used for fine-tuning. SQES: SQUAD-es.

By looking at the results on *CasiMedicos*, reported in Table 7, the first interesting piece of information is that the best overall performance is obtained by a multilingual model not adapted to the medical domain, namely, XLM-RoBERTa-large (almost 4 points F1-score averaged across the 4 fine-tuning settings over the second best model, eriBERTa, specifically developed for the medical domain). Second, while eriBERTa is slightly better than IXAes and mDeBERTa-v3-base, differences are relatively small. Third, the best setting for this task in *CasiMedicos* is CQ#E, in which the question includes both the clinical case and the question (the context corresponds to the explanations written by the medical doctors). In general, including the clinical case as part of the question seems to be beneficial. Fourth, there is not a pattern in the effect of the different intermediate fine-tunings (SQAC, SQuAD-es or SQAC+SQuAD-es); while using STILT by means of general domain QA datasets always helps for the downstream task, results are not conclusive as to which of the datasets provides the largest gains.

The results obtained with *MIR Asturias* leave a different picture. Thus, by looking at Table 8, we can see that the model obtaining the best average score is eriBERTa, although perhaps the most surprising result is the strong performance of IXAes, a relatively small general domain model for Spanish. Both eriBERTa and IXAes are slightly better than XLM-RoBERTa-large (~ 1.4 points in F-score) while clearly outperforming mDeBERTa-v3-base (~ 4 points in F-score).

As for *CasiMedicos*, the best dataset variant on average remains CQ#E and

it also helps including the clinical case in the question. Finally, as it was also the case in *CasiMedicos*, while a previous fine-tune with SQAC, SQuAD-es or their combination is beneficial, there is not a systematic winner as to which QA dataset is the best for the majority of the cases. If we were to choose one, we would probably choose SQAC, as it produces the largest gains with the best dataset variant (CQ#E) for most of the models.

To conclude, it is worth noting that the results are substantially better for *MIR Asturias*. Several possible explanations are discussed in the next section.

6. Discussion

In this section we discuss and analyze the main results reported in the previous section. More specifically, we will first analyze the possible reasons to explain the large difference in performance when we compare the results on the *CasiMedicos* and *MIR Asturias* datasets. Furthermore, in Section 6.2 we will discuss the most difficult cases we encountered in the datasets.

6.1. *CasiMedicos* vs *MIR Asturias*

As illustrated by the results reported in Section 5, the models we fine-tuned and evaluated in the same setting obtain substantially better results for *MIR Asturias*. For example, if we average the results of the 4 best systems discussed, for *MIR Asturias* the models obtain an average F-score of 81.40 while for *CasiMedicos* the score corresponds to 67.23, namely, 14.17 points lower. After a manual inspection of the *CasiMedicos* and *MIR Asturias* training data, we formulate two hypotheses to explain this phenomenon: (1) the length of the explanations of the correct answer, our task objective, is longer in the *CasiMedicos* dataset, making the task more difficult to learn; (2) the explanations in the *MIR Asturias* dataset are generated following a much more structured method, which makes it easier to identify the explanation of the correct answer.

In order to test the first hypothesis, we calculated the average length of the explanations of the correct answers for both datasets. Table 9 shows that the correct answers’ explanations are in fact shorter in *CasiMedicos*, which means that this hypothesis is not valid.

Explanation length	CasiMedicos	MIR Asturias
1	51.13%	35.89%
2	38.63%	31.62%
3	4.54%	13.67%
more than 3	5.68%	18.80%

Table 9: Length of explanations of correct answers, in number of sentences, for the *CasiMedicos* and *MIR Asturias* datasets.

With respect to our second hypothesis, that the explanations in the *MIR Asturias* dataset might be written in a more structured manner, the analysis

of the two datasets has led us to conclude that this is indeed the case. If we examine Table 10, which provides different explanations to the same question, one given in the *MIR Asturias* and the other one in the *CasiMedicos* dataset, it is possible to observe that *MIR Asturias* follows a rather clear structured pattern where the spans of the explanations are systematically marked and linked to their corresponding possible answers (expressions marked in bold in the explanations in Table 10).

CasiMedicos	
E	We describe a young patient with criteria for nephrotic syndrome with excellent response to corticosteroids. Without biopsy, the clinical presentation and evolution suggest a nephropathy with minimal changes, which usually presents with normal or slightly altered renal function together with nephrotic syndrome, and which in 85-90% of cases resolves with steroid treatment. The age is the only data that is a bit of a problem, since although it is the most common cause of idiopathic nephrotic syndrome in children and adolescents, it is usually recommended to perform a biopsy prior to treatment in those over 16 years of age, and in any case there is little discussion.
A	We describe a young patient with criteria for nephrotic syndrome with excellent response to corticosteroids. Without biopsy, the clinical presentation and evolution suggest a nephropathy with minimal changes, which usually presents with normal or slightly altered renal function together with nephrotic syndrome.
MIR Asturias	
E	Patient with a nephrotic syndrome that responds to corticosteroids, characteristic of minimal change disease (answer 4 correct). The only data that can make us doubt is the age of the patient since minimal change disease is characteristic of children from 2 to 6 years old. However, it occurs in other age groups including the elderly. Although amyloidosis produces nephrotic syndrome, it does not respond to corticosteroids (incorrect answer 1), and there is no data in the clinical case that makes us suspect primary amyloidosis (plasma cell dyscrasia) or secondary amyloidosis (uncontrolled chronic inflammatory disease). IgA nephropathy or Alport syndrome are not characterized by producing nephrotic syndrome or responding to treatment with corticosteroids (answer 2 and 3 incorrect).
A	Patient with a nephrotic syndrome that responds to corticosteroids, characteristic of minimal change disease (answer 4 correct).

Table 10: Comparing the explanations given for the same question (Table 6) in both the *CasiMedicos* and *MIR Asturias* datasets.

In order to find out whether these structural patterns appearing in *MIR Asturias* are actually influencing the results obtained by the models for this dataset, we performed the following experiment. First, we manually removed every expression such as “(**answer 4 correct**)” and so on appearing in the *MIR Asturias* dataset. Second, we fine-tuned and evaluated the models with this new *MIR Asturias* version (*unstructured*) and compared the results with those reported in Table 8. Thus, in Table 11 we can see the averaged results of the models for both versions of *MIR Asturias* and for *CasiMedicos*. It is quite clear that by removing the patterns from the explanations in the *MIR Asturias* data the results obtained are similar to those of *CasiMedicos*. This suggests that models were somehow being helped by such patterns in order to learn how to extract the explanation of the correct answer.

	MIR Asturias	MIR Asturias (u)	CasiMedicos
IXAes	84.99	66.56	67.74
eriBERTa	85.14	70.97	68.91
mDeBERTa-v3	80.89	62.84	68.00
XLM-R-large	83.67	67.10	72.75

Table 11: Comparison in terms of averaged results (across MA, SQAC+MA, SQuADES+MA, SQAC+SQuADES+MA) for the CQ#E variant as described in Table 7. MIR Asturias (u): unstructured.

Motivated by these results, we performed an error analysis and found out that those language models fine-tuned on the *MIR Asturias - Structured* data suffer to extract the correct explanations in the following two cases:

1. When pointers to explicit patterns are absent in the context from which to extract the correct explanation. After all, not every single document in the *MIR Asturias* dataset is structured in this manner. For these cases the model does not provide any answer, it just returns either the entire context or some random text between brackets.
2. When more than one explanation is marked as correct because the question is about which of the possible answers is FALSE (as illustrated by Table 12), the models often return the fragment of the explanations in which the word *correct* appears.

Q	A 45-year-old man, previously healthy, develops a fever and acute gastroenteritis with severe liquid diarrhoea. Blood tests show sodium 140 mmol/L, potassium 3.2 mmol/L, chlorine 85 mmol/L and bicarbonate 38 mmol/L. Arterial pH is 7.60 and arterial pCO2 42 mmHg. Arterial pH is 7.60 and arterial pCO2 42 mmHg. <i>Which of the following statements is FALSE?</i>
E	Given the elevated pH, with elevated bicarbonate, and normal pCO2, the patient has metabolic alkalosis (answer 1 correct). The anion GAP (140 - 85 - 38) is 17 and therefore elevated (answer 3 correct), and the picture is accompanied by low chloride and potassium due to digestive losses from diarrhoea (answer 4 correct). The difficulty with this question is that most patients with diarrhoea have metabolic acidosis and hypokalaemia, yet this patient has metabolic alkalosis. This is because some forms of diarrhoea, especially ionic diarrhoea, produce isotonic losses with chlorine content (chlorine-losing diarrhoea) and this induces metabolic alkalosis through chlorine loss, and through volume loss with secondary aldosterone activation. The loss of chlorine explains why the GAP anion is increased. Apart from this detail, the patient has a normal pCO2 (between 35 and 45) and therefore does not have any form of compensation, let alone an acidosis in which pCO2 should be elevated (answer 2 incorrect).
A	The loss of chlorine explains why the GAP anion is increased. Apart from this detail, the patient has a normal pCO2 (between 35 and 45) and therefore does not have any form of compensation, let alone an acidosis in which pCO2 should be elevated (answer 2 incorrect).

Table 12: An example of *MIR Asturias* dataset where the task is to extract the explanation of the incorrect answer.

These results led us to conclude that learning extractive QA in our setting using the *unstructured* version of the datasets is the most interesting strategy to learn models able to generalize for the *explanation extraction* task. In other words, the explicit pointers about where the explanation of the correct answer is located provide spurious clues to the language models, with the additional undesired effect of artificially inflating the results.

6.2. Impact of Intermediate Fine-tuning with QA Datasets from the General Domain

In a final exercise of error analysis, we wanted to provide a qualitative explanation of the kind of improvements derived from performing an intermediate fine-tuning using the general domain QA datasets, namely, SQAC or SQuAD-es. By analyzing the predictions of the models trained with or without SQAC before the final fine-tuning step on *MIR Asturias*, we observed the following points. If fine-tuned with SQAC (summarized in Table 13):

1. IXAes: fewer *empty* answers and more *exact* matches.
2. eriBERTa: fewer *incomplete*⁸ answers and more *exact* matches.
3. mDeBERTa-v3-base: fewer *empty* and *incomplete* answers.
4. XLM-R-large: fewer *empty* answers and more *exact* matches.

	Less Empty	Less Incomplete	More Exact
IXAes	✓		✓
eriBERTa		✓	✓
mDeBERTa-v3	✓	✓	
XLM-R-large	✓		✓

Table 13: Improvements on the MIR Asturias data when SQAC is used for intermediate fine-tuning for the CQ#E variant.

Summarizing, in order to generalize better in the *correct answer’s explanation extraction* task it is better to avoid explicit clues that the models focus on. In this sense, this turns out to be a good result for *CasiMedicos*, as it is written in a more spontaneous and unstructured manner than MIR Asturias. Furthermore, results show that using SQAC or SQuAD-es in a STILT setting helps to systematically improve the results, in particular by making the models better in avoiding empty and incomplete answers and boosting the number of exact matches.

⁸We consider an answer incomplete when it is too short. For instance: *correct*), *the*, or *some*.

7. Concluding Remarks

In this paper we present a novel dataset based on Spanish MIR exams which exhibit characteristics not available in any previous work. More specifically, it includes explanatory arguments for the correct answer and also argumentative structure to explaining why the remaining answers are incorrect. Furthermore, while most of the QA-related datasets in the medical domain are written in English, in our case it has been written in Spanish by medical doctors.

The MIR-based datasets (*CasiMedicos* and *MIR Asturias*) introduced in this paper include the clinical case, the correct answer, the multiple-choice questions and the annotated explanations result of an evidence-based deliberation process. We publicly release the annotated *CasiMedicos* set to encourage research on this topic and facilitate reproducibility of results⁹.

The MIR-based datasets allow us to propose a novel extractive task which, taking into account the explanations written for both correct and incorrect answers, consists of *identifying the explanation of the correct answer*. In other words, the models should respond to medical questions regarding the correct answer in a multiple-choice setting, by providing the piece of text in the context which explains why a given answer is correct. Experimentally our new benchmark casts this novel task within the extractive QA, SQuAD-style, paradigm. By doing so we are able to automatically evaluate the performance of Pre-trained Language Models while avoiding any costly manual evaluation that may require medical experts.

Experimental results demonstrate that, compared to SQuAD, our task is more complex, especially due to the long length of the spans of text to be extracted (explanations for the correct answer in *CasiMedicos* averaging 32.02 words length vs 3.2 words per answer in SQuAD). A comprehensive evaluation of Spanish language models shows that often multilingual non-specialized models outperform monolingual ones, even those which have been pre-trained with large amounts of medical texts. Still, reported results show that our novel dataset and approach can be an effective technique to help medical practitioners in identifying relevant evidence-based explanations for medical questions.

Finally, the unique characteristics of the *CasiMedicos* dataset released with this work may facilitate a number of research lines involving discriminative and generative work on argumentation, explainability and truthfulness, to name but a few. Furthermore, by harnessing recent advances in label projection for sequence labelling tasks [55, 56] future work may be addressed both from a monolingual and multilingual point of view.

Acknowledgements

We thank the *CasiMedicos* Proyecto MIR 2.0 for their permission to share their data for research purposes. This work has been partially supported by the

⁹<https://github.com/ixa-ehu/antidote-casimedicos>

HiTZ center and the Basque Government (Research group funding IT-1805-22). We also acknowledge the funding from the following MCIN/AEI/10.13039/501100011033 projects: (i) Antidote (PCI2020-120717-2), and by European Union NextGenerationEU/PRTR; (ii) DeepKnowledge (PID2021-127777OB-C21) and ERDF A way of making Europe; (iii) Disargue (TED2021-130810B-C21) and European Union NextGenerationEU/PRTR. Rodrigo Agerri currently holds the RYC-2017-23647 fellowship (MCIN/AEI/10.13039/501100011033 and by ESF Investing in your future).

References

- [1] D. L. Sackett, W. M. C. Rosenberg, J. A. M. Gray, R. B. Haynes, W. S. Richardson, Evidence based medicine: what it is and what it isn't, *BMJ* 312 (1996) 71 – 72.
- [2] T. Mayer, S. Marro, E. Cabrio, S. Villata, Enhancing evidence-based medicine with natural language argumentative analysis of clinical trials, *Artificial Intelligence in Medicine* 118 (2021) 102098.
- [3] I. Beltagy, K. Lo, A. Cohan, SciBERT: A Pretrained Language Model for Scientific Text, in: *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, Association for Computational Linguistics, Hong Kong, China, 2019, pp. 3615–3620.
- [4] J. Lee, W. Yoon, S. Kim, D. Kim, S. Kim, C. H. So, J. Kang, BioBERT: a pre-trained biomedical language representation model for biomedical text mining, *Bioinformatics* 36 (2020) 1234–1240.
- [5] Y. Gu, R. Tinn, H. Cheng, M. R. Lucas, N. Usuyama, X. Liu, T. Naumann, J. Gao, H. Poon, Domain-Specific Language Model Pretraining for Biomedical Natural Language Processing, *ACM Transactions on Computing for Healthcare (HEALTH)* 3 (2021) 1 – 23.
- [6] T. Brown, B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, et al., Language models are few-shot learners, *Advances in neural information processing systems* 33 (2020) 1877–1901.
- [7] K. Singhal, S. Azizi, T. Tu, S. S. Mahdavi, J. Wei, H. W. Chung, N. Scales, A. Tanwani, H. Cole-Lewis, S. Pfohl, et al., Large Language Models Encode Clinical Knowledge, *arXiv preprint arXiv:2212.13138* (2022).
- [8] R. Luo, L. Sun, Y. Xia, T. Qin, S. Zhang, H. Poon, T.-Y. Liu, BioGPT: Generative Pre-trained Transformer for Biomedical Text Generation and Mining, *Briefings in bioinformatics* (2022).

- [9] L. Phan, J. T. Anibal, H. T. Tran, S. Chanana, E. Bahadroglu, A. Peltekian, G. Altan-Bonnet, SciFive: a text-to-text transformer model for biomedical literature, *ArXiv abs/2106.03598* (2021).
- [10] S. Lin, J. Hilton, O. Evans, TruthfulQA: Measuring How Models Mimic Human Falsehoods, in: *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Association for Computational Linguistics, Dublin, Ireland, 2022, pp. 3214–3252.
- [11] C. Raffel, N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, P. J. Liu, Exploring the limits of transfer learning with a unified text-to-text transformer, *The Journal of Machine Learning Research* 21 (2020) 5485–5551.
- [12] P. Rajpurkar, J. Zhang, K. Lopyrev, P. Liang, SQuAD: 100,000+ Questions for Machine Comprehension of Text, in: *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pp. 2383–2392.
- [13] A. Fisch, A. Talmor, R. Jia, M. Seo, E. Choi, D. Chen, MRQA 2019 Shared Task: Evaluating Generalization in Reading Comprehension, in: *Proceedings of the 2nd Workshop on Machine Reading for Question Answering*, Association for Computational Linguistics, Hong Kong, China, 2019, pp. 1–13.
- [14] P. Rajpurkar, R. Jia, P. Liang, Know what you don’t know: Unanswerable questions for SQuAD, in: *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp. 784–789.
- [15] S. Reddy, D. Chen, C. D. Manning, CoQA: A Conversational Question Answering Challenge, *Transactions of the Association for Computational Linguistics* 7 (2019) 249–266.
- [16] T. Kwiatkowski, J. Palomaki, O. Redfield, M. Collins, A. Parikh, C. Alberti, D. Epstein, I. Polosukhin, J. Devlin, K. Lee, et al., Natural Questions: A Benchmark for Question Answering Research, *Transactions of the Association for Computational Linguistics* 7 (2019) 453–466.
- [17] Y. Yang, W.-t. Yih, C. Meek, WIKIQA: A Challenge Dataset for Open-Domain Question Answering, in: *Proceedings of the 2015 conference on empirical methods in natural language processing*, pp. 2013–2018.
- [18] G. Lai, Q. Xie, H. Liu, Y. Yang, E. Hovy, RACE: Large-scale ReAding Comprehension Dataset From Examinations, in: *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, Association for Computational Linguistics, Copenhagen, Denmark, 2017, pp. 785–794.

- [19] R. Zellers, Y. Bisk, R. Schwartz, Y. Choi, SWAG: A Large-Scale Adversarial Dataset for Grounded Commonsense Inference, in: Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics, Brussels, Belgium, 2018, pp. 93–104.
- [20] E. H. Hovy, L. Gerber, U. Hermjakob, M. Junk, C.-Y. Lin, Question Answering in Webclopedia, in: TREC, volume 52, pp. 53–56.
- [21] P. Moreda, H. Llorens, E. Saquete, M. Palomar, Combining semantic information in question answering systems, *Information Processing & Management* 47 (2011) 870–885.
- [22] A. Bordes, S. Chopra, J. Weston, Question Answering with Subgraph Embeddings, in: Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP), Association for Computational Linguistics, Doha, Qatar, 2014, pp. 615–620.
- [23] J. Devlin, M.-W. Chang, K. Lee, K. Toutanova, BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding, in: Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers), Association for Computational Linguistics, Minneapolis, Minnesota, 2019, pp. 4171–4186.
- [24] T. Shao, Y. Guo, H. Chen, Z. Hao, Transformer-Based Neural Network for Answer Selection in Question Answering, *IEEE Access* 7 (2019) 26146–26156.
- [25] Q. Jin, B. Dhingra, Z. Liu, W. Cohen, X. Lu, PubMedQA: A Dataset for Biomedical Research Question Answering, in: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), Association for Computational Linguistics, Hong Kong, China, 2019, pp. 2567–2577.
- [26] A. B. Abacha, E. Agichtein, Y. Pinter, D. Demner-Fushman, Overview of the medical question answering task at TREC 2017 LiveQA., in: TREC, pp. 1–12.
- [27] D. Vilares, C. Gómez-Rodríguez, HEAD-QA: A Healthcare Dataset for Complex Reasoning, in: Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics, Association for Computational Linguistics, Florence, Italy, 2019, pp. 960–966.
- [28] A. B. Abacha, Y. Mrabet, M. Sharp, T. R. Goodwin, S. E. Shooshan, D. Demner-Fushman, Bridging the Gap Between Consumers’ Medication Questions and Trusted Answers., in: MedInfo, pp. 25–29.

- [29] D. Jin, E. Pan, N. Oufattole, W.-H. Weng, H. Fang, P. Szolovits, What disease does this patient have? a large-scale open domain question answering dataset from medical exams, *Applied Sciences* 11 (2021) 6421.
- [30] A. Pal, L. K. Umapathi, M. Sankarasubbu, MedMCQA: A large-scale multi-subject multi-choice dataset for medical domain question answering, in: *Conference on Health, Inference, and Learning*, PMLR, pp. 248–260.
- [31] A. B. Abacha, C. Shivade, D. Demner-Fushman, Overview of the MEDIQA 2019 Shared Task on Textual Inference, Question Entailment and Question Answering, in: *Proceedings of the 18th BioNLP Workshop and Shared Task*, pp. 370–379.
- [32] A. Nentidis, K. Bougiatiotis, A. Krithara, G. Paliouras, Results of the seventh edition of the BioASQ Challenge, in: *Machine Learning and Knowledge Discovery in Databases: International Workshops of ECML PKDD 2019, Würzburg, Germany, September 16–20, 2019, Proceedings, Part II*, Springer, pp. 553–568.
- [33] A. Nentidis, A. Krithara, K. Bougiatiotis, M. Krallinger, C. Rodriguez-Penagos, M. Villegas, G. Paliouras, Overview of BioASQ 2020: The eighth BioASQ challenge on large-scale biomedical semantic indexing and question answering, in: *Experimental IR Meets Multilinguality, Multimodality, and Interaction: 11th International Conference of the CLEF Association, CLEF 2020, Thessaloniki, Greece, September 22–25, 2020, Proceedings 11*, Springer, pp. 194–214.
- [34] A. Nentidis, G. Katsimpras, E. Vandorou, A. Krithara, L. Gasco, M. Krallinger, G. Paliouras, Overview of BioASQ 2021: the ninth BioASQ challenge on large-scale biomedical semantic indexing and question answering, in: *Experimental IR Meets Multilinguality, Multimodality, and Interaction: 12th International Conference of the CLEF Association, CLEF 2021, Virtual Event, September 21–24, 2021, Proceedings 12*, Springer, pp. 239–263.
- [35] H. Ngai, Y. Park, J. Chen, M. Parsapoor, Transformer-based models for question answering on COVID19, *arXiv preprint arXiv:2101.11432* (2021).
- [36] W. Yoon, R. Jackson, A. Lagerberg, J. Kang, Sequence tagging for biomedical extractive question answering, *Bioinformatics* 38 (2022) 3794–3801.
- [37] Y. Gu, R. Tinn, H. Cheng, M. Lucas, N. Usuyama, X. Liu, T. Naumann, J. Gao, H. Poon, Domain-specific language model pretraining for biomedical natural language processing, *ACM Transactions on Computing for Healthcare (HEALTH)* 3 (2021) 1–23.
- [38] A. Gutiérrez-Fandiño, J. Armengol-Estapé, M. Pàmies, J. Llop-Palao, J. Silveira-Ocampo, C. P. Carrino, A. Gonzalez-Agirre, C. Armentano-Oller, C. Rodriguez-Penagos, M. Villegas, Maria: Spanish language models, *Procesamiento del Lenguaje Natural, Revista n^o 68* (2022) 39–60.

- [39] S. Máximo, Supervised domain adaptation for extractive question answering in Spanish, in: Proceedings of the Iberian Languages Evaluation Forum (IberLEF 2022), A Coruña, Spain, September 20, 2022.
- [40] A. Rosá, L. Chiruzzo, L. Bouza, A. Dragonetti, S. Castro, M. Etcheverry, S. Góngora, S. Goycochea, J. Machado, G. Moncecchi, et al., Overview of QuALES at IberLEF 2022: Question Answering Learning from Examples in Spanish (2022).
- [41] J. Phang, T. Févry, S. R. Bowman, Sentence Encoders on STILTs: Supplementary Training on Intermediate Labeled-data Tasks, ArXiv abs/1811.01088 (2018).
- [42] C. Casimiro Pio, C.-j. Marta R., F. Jose A. R., Automatic Spanish Translation of the SQuAD Dataset for Multilingual Question Answering, in: Proceedings of the 12th Conference on Language Resources and Evaluation, pp. 5115–5523.
- [43] M. Taulé, M. A. Martí, M. Recasens, Ancora: Multilevel annotated corpora for Catalan and Spanish., in: Lrec.
- [44] R. Agerri, E. Agirre, Lessons learned from the evaluation of Spanish Language Models, *Proces. del Leng. Natural* 70 (2023) 157–170.
- [45] A. Otegi, A. Agirre, J. A. Campos, A. Soroa, E. Agirre, Conversational Question Answering in Low Resource Scenarios: A Dataset and Case Study for Basque, in: Proceedings of the Twelfth Language Resources and Evaluation Conference, pp. 436–442.
- [46] P. He, J. Gao, W. Chen, DeBERTaV3: Improving DeBERTa using ELECTRA-Style Pre-Training with Gradient-Disentangled Embedding Sharing, 2021.
- [47] A. Conneau, K. Khandelwal, N. Goyal, V. Chaudhary, G. Wenzek, F. Guzmán, E. Grave, M. Ott, L. Zettlemoyer, V. Stoyanov, Unsupervised Cross-lingual Representation Learning at Scale, *CoRR* abs/1911.02116 (2019).
- [48] G. López-García, J. M. Jerez, N. Ribelles, E. Alba, F. J. Veredas, Transformers for Clinical Coding in Spanish, *IEEE Access* 9 (2021) 72387–72397.
- [49] I. de la Iglesia, A. Atutxa, K. Gojenola, A. Barrena, Eriberta: A bilingual pre-trained language model for clinical natural language processing, arXiv 2306.07373 (2023).
- [50] J. Cañete, G. Chaperon, R. Fuentes, J.-H. Ho, H. Kang, J. Pérez, Spanish Pre-Trained BERT Model and Evaluation Data, in: PML4DC at ICLR 2020.

- [51] C. P. Carrino, J. Llop, M. Pàmies, A. Gutiérrez-Fandiño, J. Armengol-Estapé, J. Silveira-Ocampo, A. Valencia, A. Gonzalez-Agirre, M. Villegas, Pretrained Biomedical Language Models for Clinical NLP in Spanish, in: Proceedings of the 21st Workshop on Biomedical Language Processing, Association for Computational Linguistics, Dublin, Ireland, 2022, pp. 193–199.
- [52] Y. Liu, M. Ott, N. Goyal, J. Du, M. Joshi, D. Chen, O. Levy, M. Lewis, L. Zettlemoyer, V. Stoyanov, RoBERTa: A Robustly Optimized BERT Pretraining Approach, in: ArXiv, volume abs/1907.11692.
- [53] A. Komatsuzaki, One Epoch Is All You Need, in: ArXiv.
- [54] K. Clark, M.-T. Luong, Q. V. Le, C. D. Manning, ELECTRA: Pre-training Text Encoders as Discriminators Rather Than Generators, in: ICLR.
- [55] I. García-Ferrero, R. Agerri, G. Rigau, Model and Data Transfer for Cross-Lingual Sequence Labelling in Zero-Resource Settings, in: Findings of the Association for Computational Linguistics: EMNLP 2022, pp. 6403–6416.
- [56] A. Yeginbergenova, R. Agerri, Cross-lingual Argument Mining in the Medical Domain, ArXiv abs/2301.10527 (2023).

Appendix A.

In this appendix the results with every pre-trained language model (PLM) are presented.

		CM	SQAC+CM	SQES+CM	ALL	Avg.
mDeBERTa-v3	CQ#E	66.76	69.65	68.92	66.67	68.00
	CQP#E	58.16	68.32	66.33	66.10	64.72
	Q#CE	65.94	66.45	68.14	69.91	67.61
	QP#CE	57.55	65.15	65.50	70.18	64.59
XLM-R-base	CQ#E	63.94	71.62	65.62	67.91	67.27
	CQP#E	64.25	72.99	71.59	69.24	69.51
	Q#CE	62.39	66.55	67.86	70.18	66.74
	QP#CE	56.55	68.23	65.04	64.22	63.51
XLM-R-large	CQ#E	71.74	74.47	72.97	71.84	72.75
	CQP#E	69.49	71.95	73.08	71.76	71.57
	Q#CE	62.39	66.55	67.86	70.18	66.74
	QP#CE	57.49	69.48	73.80	70.09	67.71
XLM-R-GALEN	CQ#E	64.47	70.27	67.08	70.65	68.11
	CQP#E	60.37	63.49	64.79	70.22	64.71
	Q#CE	56.65	52.65	59.87	60.98	57.53
	QP#CE	53.67	54.97	60.74	58.12	56.87
eriBERTa	CQ#E	67.56	70.01	70.49	67.58	68.91
	CQP#E	67.61	65.55	67.90	68.61	67.41
	Q#CE	65.53	70.46	65.58	71.39	68.24
	QP#CE	67.34	64.43	64.51	70.14	66.60

Table A.14: F1-score results of the multilingual models on different *CasiMedicos* dataset variants where **CM** = Fine-tuning on *CasiMedicos* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation. SQES: SQUAD-es.

		CM	SQAC+CM	SQES+CM	ALL	Avg.
mDeBERTa-v3	CQ#E	32.53	39.75	36.14	36.14	36.14
	CQP#E	27.58	35.63	31.03	37.93	33.04
	Q#CE	28.73	27.58	29.88	35.63	30.45
	QP#CE	25.28	32.18	33.33	34.48	31.31
XLM-R-base	CQ#E	25.30	42.16	28.91	33.73	32.52
	CQP#E	26.43	43.67	33.33	34.48	34.47
	Q#CE	27.58	32.18	29.88	35.63	31.31
	QP#CE	28.73	33.33	29.88	32.18	31.03
XLM-R-large	CQ#E	37.34	40.96	40.96	40.96	40.05
	CQP#E	32.18	39.08	41.37	37.93	37.64
	Q#CE	27.58	32.18	29.88	35.63	31.31
	QP#CE	26.43	35.63	39.08	33.33	33.61
XLM-R-GALEN	CQ#E	27.71	30.12	26.50	31.32	28.91
	CQP#E	25.28	27.58	22.98	28.73	26.14
	Q#CE	18.39	17.24	21.83	26.43	20.97
	QP#CE	19.54	22.98	24.13	21.83	22.12
eriBERTa	CQ#E	34.93	34.93	37.34	33.73	35.23
	CQP#E	27.58	29.88	28.73	32.18	29.59
	Q#CE	29.88	39.08	28.73	41.37	34.76
	QP#CE	33.33	33.33	28.73	33.33	32.18

Table A.15: Exact match results of the multilingual models on different *CasiMedicos* dataset variants where **CM** = Fine-tuning on *CasiMedicos* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		CM	SQAC+CM	SQES+CM	ALL	Avg.
IXAmBERT	CQ#E	64.47	64.89	67.40	66.11	65.71
	CQP#E	64.37	67.28	63.42	67.81	65.72
	Q#CE	64.69	68.49	61.91	64.13	64.80
	QP#CE	64.88	67.69	66.57	65.39	66.13
MarIA-base	CQ#E	53.51	66.11	70.25	67.47	64.33
	CQP#E	53.04	67.37	73.82	65.94	65.04
	Q#CE	40.65	63.08	67.24	66.51	59.37
	QP#CE	38.80	59.51	66.68	66.82	57.95
MarIA-large	CQ#E	59.18	68.75	67.69	67.21	65.70
	CQP#E	58.64	68.08	64.16	70.46	65.33
	Q#CE	50.40	67.74	69.24	63.55	62.73
	QP#CE	52.59	63.13	66.71	63.40	61.45
beto	CQ#E	67.34	66.08	69.27	68.58	67.81
	CQP#E	65.71	67.22	69.75	69.33	68.00
	Q#CE	61.36	60.71	68.85	67.26	64.54
	QP#CE	62.92	62.55	67.36	66.13	64.74
IXAes	CQ#E	68.18	67.15	65.90	69.74	67.74
	CQP#E	66.95	67.74	68.50	64.96	67.03
	Q#CE	62.34	67.93	64.53	60.43	63.80
	QP#CE	60.81	64.93	60.35	62.85	62.23
BSC-BIO-EHR	CQ#E	61.99	66.18	72.05	69.64	67.46
	CQP#E	58.27	67.15	69.43	70.28	66.28
	Q#CE	60.55	66.11	65.42	66.29	64.59
	QP#CE	61.69	63.47	66.04	68.93	65.03
BSC-BIO	CQ#E	63.87	66.66	69.84	72.30	68.16
	CQP#E	64.11	66.91	66.28	71.46	67.19
	Q#CE	65.44	66.53	69.79	68.66	67.60
	QP#CE	61.22	63.37	69.82	63.99	64.60

Table A.16: F1-score results of Spanish monolingual models on different *CasiMedicos* dataset variants where **CM** = Fine-tuning on *CasiMedicos* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		CM	SQAC+CM	SQES+CM	ALL	Avg.
IXAmBERT	CQ#E	27.71	30.12	34.93	33.73	31.62
	CQP#E	33.33	28.73	27.58	36.78	31.60
	Q#CE	26.43	33.33	22.98	25.28	27.00
	QP#CE	27.56	32.18	29.88	31.03	30.16
MarIA-base	CQ#E	26.50	26.50	37.34	34.93	31.31
	CQP#E	22.98	27.58	40.22	29.88	30.16
	Q#CE	11.49	25.28	33.33	33.33	25.85
	QP#CE	14.94	19.54	28.73	32.18	23.84
MarIA-large	CQ#E	24.09	32.53	32.53	33.73	30.72
	CQP#E	22.98	37.93	31.03	33.33	31.31
	Q#CE	14.94	32.18	32.18	33.33	28.15
	QP#CE	20.68	31.03	34.48	28.73	28.73
beto	CQ#E	30.12	27.71	36.14	32.53	31.62
	CQP#E	26.43	31.03	35.63	34.48	31.89
	Q#CE	22.98	25.28	32.18	32.18	28.15
	QP#CE	22.98	25.28	34.48	27.58	27.58
IXAes	CQ#E	28.91	31.32	28.91	33.73	30.71
	CQP#E	31.03	31.03	28.73	25.28	29.01
	Q#CE	27.58	27.58	27.58	26.43	27.29
	QP#CE	28.73	29.88	24.13	26.43	27.29
BSC-BIO-EHR	CQ#E	33.73	30.12	40.49	32.53	34.21
	CQP#E	28.73	32.18	39.08	32.18	33.04
	Q#CE	29.88	32.18	31.03	29.88	31.03
	QP#CE	26.43	28.73	25.28	31.03	27.86
BSC-BIO	CQ#E	31.32	31.32	33.73	38.55	33.73
	CQP#E	33.33	35.63	36.78	37.93	35.91
	Q#CE	31.03	31.03	34.48	35.63	33.04
	QP#CE	27.58	29.88	32.18	31.03	30.16

Table A.17: Exact match results of Spanish monolingual models on different *CasiMedicos* dataset variants where **CM** = Fine-tuning on *CasiMedicos* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		MA	SQAC+MA	SQES+MA	ALL	Avg.
mDeBERTa-v3	CQ#E	79.36	82.57	79.40	82.23	80.89
	CQP#E	77.82	81.51	77.32	80.80	79.36
	Q#CE	78.26	79.51	79.99	79.87	79.40
	QP#CE	71.49	72.19	74.39	73.72	72.94
XLM-R-base	CQ#E	78.39	83.52	81.98	83.83	81.93
	CQP#E	82.23	81.89	82.90	77.84	81.21
	Q#CE	81.03	80.66	82.89	80.07	81.16
	QP#CE	74.25	76.39	77.73	77.95	76.58
XLM-R-large	CQ#E	82.20	84.30	85.92	82.27	83.67
	CQP#E	81.25	83.63	79.68	82.78	81.83
	Q#CE	81.03	80.66	82.89	80.07	81.16
	QP#CE	74.49	77.15	77.46	79.36	77.11
XLM-R-GALEN	CQ#E	74.08	72.72	79.85	79.89	76.63
	CQP#E	71.72	76.47	78.42	82.02	77.15
	Q#CE	66.88	67.55	73.42	74.84	70.67
	QP#CE	70.19	68.92	74.91	71.50	71.38
eriBERTa	CQ#E	84.92	85.89	85.25	84.50	85.14
	CQP#E	82.66	85.45	84.33	85.42	84.46
	Q#CE	82.08	83.70	84.14	87.03	84.23
	QP#CE	80.27	82.56	84.29	83.08	82.55

Table A.18: F1-score results of the multilingual models on different *MIR Asturias* dataset variants where **MA** = Fine-tuning on *MIR Asturias* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		MA	SQAC+MA	SQES+MA	ALL	Avg.
mDeBERTa-v3	CQ#E	67.52	70.08	65.81	68.37	67.94
	CQP#E	65.81	67.52	65.81	65.81	66.23
	Q#CE	63.24	66.66	68.37	66.66	66.23
	QP#CE	59.82	60.68	59.82	58.11	59.60
XLM-R-base	CQ#E	62.39	67.52	65.81	70.08	66.45
	CQP#E	64.95	68.37	67.52	63.24	66.02
	Q#CE	64.10	66.66	67.52	65.81	66.02
	QP#CE	59.82	63.24	59.82	61.53	61.10
XLM-R-large	CQ#E	68.37	70.94	71.79	69.23	70.08
	CQP#E	65.81	70.94	65.81	68.37	67.73
	Q#CE	64.10	66.66	67.52	65.81	66.02
	QP#CE	59.82	63.24	62.39	62.39	61.96
XLM-R-GALEN	CQ#E	52.13	53.84	60.68	59.82	56.61
	CQP#E	47.86	54.70	58.11	63.24	55.97
	Q#CE	37.60	45.29	52.99	53.84	47.43
	QP#CE	41.02	43.58	54.70	50.42	47.43
eriBERTa	CQ#E	69.23	71.79	71.79	66.66	69.86
	CQP#E	69.23	68.37	69.23	70.94	69.44
	Q#CE	64.95	63.24	67.52	72.64	67.08
	QP#CE	64.95	67.52	69.23	65.81	66.87

Table A.19: Exact match results of the multilingual models on different *MIR Asturias* dataset variants where **MA** = Fine-tuning on *MIR Asturias* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		MA	SQAC+MA	SQES+MA	ALL	Avg.
IXAmBERT	CQ#E	82.66	86.14	83.86	83.54	84.05
	CQP#E	82.41	86.14	82.73	83.84	83.78
	Q#CE	78.83	82.32	79.30	80.84	80.32
	QP#CE	77.56	80.18	78.89	75.03	77.91
MarIA-base	CQ#E	70.85	82.53	82.71	82.01	79.52
	CQP#E	75.52	83.79	81.97	81.47	80.68
	Q#CE	47.80	79.05	80.94	76.18	70.99
	QP#CE	52.95	76.09	75.87	74.93	69.96
MarIA-large	CQ#E	79.98	83.66	84.80	82.26	82.67
	CQP#E	80.54	82.90	83.94	80.73	82.02
	Q#CE	76.26	80.94	75.18	81.13	78.37
	QP#CE	72.55	75.77	77.59	77.11	75.75
beto	CQ#E	82.00	82.69	84.92	82.24	82.96
	CQP#E	82.03	83.39	83.32	83.25	82.99
	Q#CE	81.89	82.18	79.15	78.83	80.51
	QP#CE	76.73	80.55	79.93	80.24	79.36
IXAes	CQ#E	82.37	86.56	86.34	84.69	84.99
	CQP#E	79.98	86.85	84.39	84.80	84.00
	Q#CE	81.69	83.34	81.58	79.11	81.43
	QP#CE	79.14	78.02	81.15	78.95	79.31
BSC-BIO-EHR	CQ#E	79.47	83.82	83.17	81.61	82.01
	CQP#E	75.48	84.58	84.73	85.87	82.66
	Q#CE	73.99	81.17	79.18	84.37	79.67
	QP#CE	74.89	80.62	80.80	82.13	79.61
BSC-BIO	CQ#E	82.74	81.56	83.56	83.47	82.83
	CQP#E	82.61	83.68	82.61	84.31	83.30
	Q#CE	79.92	82.78	82.40	82.42	81.88
	QP#CE	78.57	81.61	82.46	83.26	81.47

Table A.20: F1-score results of Spanish monolingual models on different *MIR Asturias* dataset variants where **MA** = Fine-tuning on *MIR Asturias* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.

		MA	SQAC+MA	SQES+MA	ALL	Avg.
IXAmBERT	CQ#E	61.53	70.08	64.95	62.39	64.73
	CQP#E	65.81	67.52	64.95	67.52	66.45
	Q#CE	58.11	61.53	58.11	58.11	58.96
	QP#CE	60.68	59.82	60.68	50.42	57.90
MarIA-base	CQ#E	55.55	63.24	64.10	65.81	62.17
	CQP#E	58.97	64.95	61.53	62.39	61.96
	Q#CE	31.62	55.55	62.39	53.84	50.85
	QP#CE	36.75	56.41	54.70	53.84	50.42
MarIA-large	CQ#E	61.53	70.08	72.64	68.37	68.15
	CQP#E	60.68	65.81	65.81	66.66	64.74
	Q#CE	46.15	58.11	54.70	61.53	55.12
	QP#CE	43.58	58.11	60.68	63.24	56.40
beto	CQ#E	66.66	64.95	68.37	65.81	66.44
	CQP#E	64.10	62.39	65.81	67.52	64.95
	Q#CE	64.95	64.95	63.24	58.97	63.02
	QP#CE	59.82	64.95	63.24	58.97	61.74
IXAes	CQ#E	66.66	71.79	70.94	67.52	69.22
	CQP#E	58.97	69.23	69.23	67.52	66.23
	Q#CE	64.95	67.52	60.68	60.68	63.45
	QP#CE	60.68	58.97	63.24	62.39	61.32
BSC-BIO-EHR	CQ#E	61.53	67.52	69.23	60.68	64.74
	CQP#E	59.82	66.66	70.08	67.52	66.02
	Q#CE	56.41	62.39	63.24	62.39	61.10
	QP#CE	58.11	61.53	62.39	60.68	60.67
BSC-BIO	CQ#E	64.95	64.10	64.95	66.66	65.16
	CQP#E	68.37	64.95	66.66	67.52	66.87
	Q#CE	64.10	64.95	64.95	63.24	64.31
	QP#CE	59.82	62.39	60.68	61.53	61.10

Table A.21: Exact match results of Spanish monolingual models on different *MIR Asturias* dataset variants where **MA** = Fine-tuning on *MIR Asturias* dataset, **SQAC** = Fine-tuning on SQAC dataset, **SQES** = Fine-tuning on SQuAD-es dataset. **C**: Clinical Case; **Q**: Question; **E**: Medical Doctor’s Explanations; **P**: Possible Answers. **Fragment before #**: generated question; **after #**: generated context from which to extract the correct explanation.