

CLIP in medical imaging: A comprehensive survey

Zihao Zhao^{a,1}, Yuxiao Liu^{a,b,1}, Han Wu^{a,1}, Yonghao Li^a, Sheng Wang^{a,c}, Lin Teng^a, Disheng Liu^a, Zhiming Cui^{a,*}, Qian Wang^{a,*}, Dinggang Shen^{a,d,e,*}

^aSchool of Biomedical Engineering & State Key Laboratory of Advanced Medical Materials and Devices, ShanghaiTech University, Shanghai, China

^bLingang Laboratory, Shanghai, China

^cSchool of Biomedical Engineering, Shanghai Jiao Tong University, Shanghai, China

^dDepartment of Research and Development, Shanghai United Imaging Intelligence Co., Ltd., Shanghai, China

^eShanghai Clinical Research and Trial Center, Shanghai, China

ARTICLE INFO

Article history:

Keywords:

Contrastive language-image pre-training

Medical image analysis

Image-text alignment

Vision language model

ABSTRACT

Contrastive Language-Image Pre-training (CLIP), a simple yet effective pre-training paradigm, successfully introduces text supervision to vision models. It has shown promising results across various tasks due to its generalizability and interpretability. The use of CLIP has recently gained increasing interest in the medical imaging domain, serving as a pre-training paradigm for image-text alignment, or a critical component in diverse clinical tasks. With the aim of facilitating a deeper understanding of this promising direction, this survey offers an in-depth exploration of the CLIP within the domain of medical imaging, regarding both refined CLIP pre-training and CLIP-driven applications. In this paper, (1) we first start with a brief introduction to the fundamentals of CLIP methodology; (2) then we investigate the adaptation of CLIP pre-training in the medical imaging domain, focusing on how to optimize CLIP given characteristics of medical images and reports; (3) furthermore, we explore practical utilization of CLIP pre-trained models in various tasks, including classification, dense prediction, and cross-modal tasks; (4) finally, we discuss existing limitations of CLIP in the context of medical imaging, and propose forward-looking directions to address the demands of medical imaging domain. Studies featuring technical and practical value are both investigated. We expect this comprehensive survey will provide researchers with a holistic understanding of the CLIP paradigm and its potential implications. The project page of this survey can also be found on Github.

1. Introduction

Despite substantial progress in vision intelligence over the last decade (He et al., 2016; Tarvainen and Valpola, 2017; Dosovitskiy et al., 2020; Liu et al., 2021, 2022b), vision models were often trained only on vision-modality annotations and tasks (Ronneberger et al., 2015; He et al., 2017; Isensee et al., 2021; He et al., 2021). Although some of these methods have achieved human-level performance, their out-of-distribution performance is still far from satisfaction due to lack of alignment with human cognition (Peterson et al., 2019; Battleday et al., 2020; Geirhos et al., 2020; Peters and Kriegeskorte, 2021). In contrast, the form of text supervision is naturally

rich in semantics, and the corresponding language models, especially today's large language models (Touvron et al., 2023; Xiong et al., 2023; Zhang et al., 2023a), typically contain a huge amount of human-level knowledge. Hence, it is intuitive to integrate text supervision into vision tasks.

Drawing inspiration from contrastive pre-training, Radford et al. (2021) propose Contrastive Language Image Pre-training (CLIP), which learns interpretable visual representations from text supervision. Unlike most vision-only contrastive pre-training methods (Chen et al., 2020a; Caron et al., 2021; Zbontar et al., 2021), CLIP leverages both vision and language information. Specifically, it considers the text caption as a linguistic view of the image and expects it to be inherently consistent with the image. Hence, it pulls paired image and text representations as close as possible in the latent space. In this manner, the image-text pair is aligned through CLIP's vision and text encoders, and thus extensive knowledge has been encoded within the vision encoder. Benefitting from image-text alignment, CLIP has learned extensive knowledge from text su-

*Corresponding author: Zhiming Cui, Qian Wang, Dinggang Shen
e-mail: cuizhm@shanghaitech.edu.cn (Zhiming Cui),

qianwang@shanghaitech.edu.cn (Qian Wang),

dgshen@shanghaitech.edu.cn (Dinggang Shen)

¹These authors contributed equally to this paper

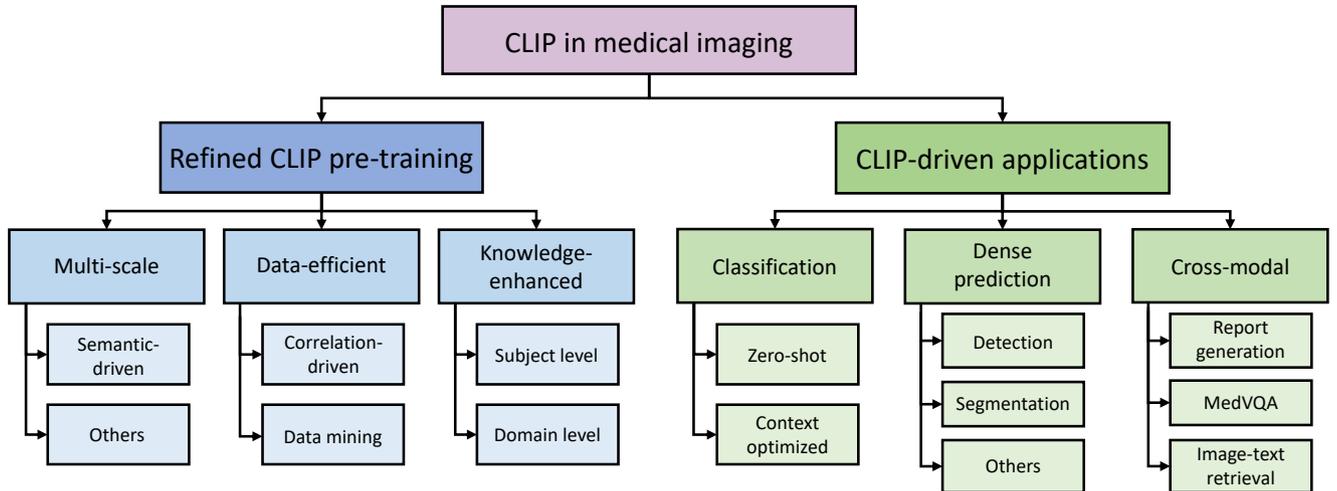


Fig. 1. Taxonomy of studies focusing on CLIP in the field of medical imaging.

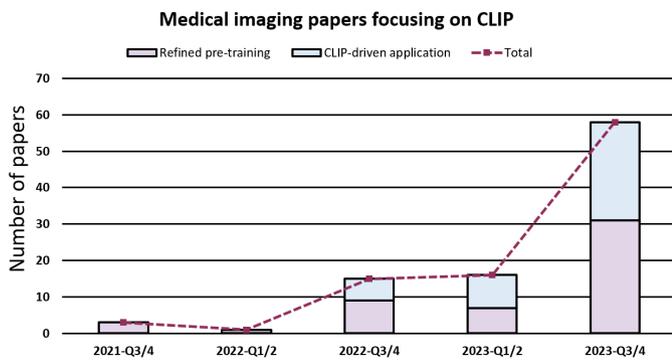


Fig. 2. Rapid increase of the number of medical imaging papers focusing on CLIP. Refined pre-training and CLIP-driven application are the two main taxonomy categories introduced in this survey.

pervision and proven useful in a wide variety of areas, including image generation (Vinker *et al.*, 2022; Ramesh *et al.*, 2022; Yu *et al.*, 2022; Rombach *et al.*, 2022), segmentation (Li *et al.*, 2022a; Rao *et al.*, 2022; Luo *et al.*, 2023), detection (Bangalath *et al.*, 2022; Lin and Gong, 2023), and classification (Zhou *et al.*, 2022c,d; Wang *et al.*, 2023b).

Recently, CLIP has also gained increasing attention in the field of medical imaging (Eslami *et al.*, 2021; Wang *et al.*, 2022e; Kim *et al.*, 2023a). Fig. 2 illustrates the growing trend of CLIP-related papers in the medical imaging domain, showing a several-fold increase from the second half year of 2021 to the second half of 2023, particularly with a booming trend in 2023. This can be attributed to its capability to align neural networks with human cognition, which meets the demands of interpretability for AI in healthcare (Lauritsen *et al.*, 2020; Tjoa and Guan, 2020; Xie *et al.*, 2021). Although previous studies have attempted to improve interpretability via additional expert-level annotations, such as bounding boxes (Luo *et al.*, 2022; Ouyang *et al.*, 2020; Tanida *et al.*, 2023; Müller *et al.*, 2023) and segmentation masks (Mehta *et al.*, 2018; Zhou *et al.*, 2019), collecting these annotations is laborious and time-consuming (Rahimi *et al.*, 2021; Wang *et al.*, 2022b; Qu *et al.*, 2023), which makes

them challenging to scale. On the contrary, text reports, routinely produced and collected in clinical practice by medical professionals in clinical practice (Huang *et al.*, 2021; Wang *et al.*, 2022a; Xie *et al.*, 2023) offer valuable expert-level knowledge with few additional costs, which positions CLIP as a more promising solution.

Motivation. Although many studies have been devoted to customizing CLIP for medical image analysis, this customization raised new challenges that remain unsolved. To encourage and facilitate CLIP-based research in medical imaging domain, a survey of the existing literature would be beneficial. Thus, we extensively review more than 90 existing methods in the field for providing a comprehensive survey.

Search strategy. For the consideration of both technical and practical values, the scope of papers surveyed in this study includes the refined CLIP pre-training and the CLIP-driven applications. The former investigates how to improve the quality of CLIP pre-training technically, while the latter explores the application of pre-trained CLIP to real-world clinical tasks. We expect the content covered in this study can address the needs of various readers and become more comprehensive. In particular, we initiate our search across academic platforms, including Google Scholar, DBLP, ArXiv, and IEEE Xplore. Utilizing keywords including CLIP, image-text alignment, and medical imaging, our initial exploration covers a diverse range of sources, such as high-impact journal papers, conference/workshop papers, and preprints still under review. To enhance searching precision, we further implement filters to exclude false-positives, i.e., unrelated papers on applications of CLIP in ultrasound and endoscopy video. Additionally, papers that just mention CLIP but primarily concentrate on diffusion models or SAM are also falsely retrieved, given that CLIP serves as a basic component in these models. Following this query-based filtering, we further manually re-filter the papers to ensure precise and complete coverage of related papers. The subsequent selection process entails a thorough evaluation of papers based on their motivation, contribution, and influence on subsequent studies. By applying these search criteria, e.g.,

relevance, innovation, and impact, we finally select several papers from each taxonomy as defined in Fig. 1 for deep analysis in order to better understand the current status and future direction of this evolving field.

Taxonomy. To streamline our discussion on CLIP-related work in medical imaging domain, we taxonomize them into two categories in this survey, i.e., (1) refined CLIP pre-training and (2) CLIP-driven applications, as illustrated in Fig. 1. This first category of studies focuses on adapting the pre-training paradigm of CLIP from web-crawled image-caption pairs to medical images and their respective reports. The second category of studies tends to directly adopt pre-trained CLIP models to improve the interpretability and robustness of deep learning models in various clinical tasks e.g., thoracic disease diagnosis and multi-organ segmentation (Tiu et al., 2022; Pellegrini et al., 2023; Liu et al., 2023i).

Relevant surveys. There are some concurrent surveys sharing similar scope as ours. For example, a survey paper by (Shrestha et al., 2023) focuses on medical vision language pre-training. The differences between their survey and our survey are: 1) They mainly explore various vision language pre-training architectures, including masked prediction (Khare et al., 2021), contrastive (Huang et al., 2021), matching prediction (Moon et al., 2022), and hybrid architectures (Wang et al., 2021a), with less emphasis on CLIP-style contrastive pre-training; 2) Their primary focus is on large-scale pre-training, lacking discussions on clinical tasks. Due to scarcity of large public medical image-text datasets, the impact of their survey may be limited. In contrast, our survey delves into CLIP-driven applications, which are more feasible in real-world settings due to lower data requirements and more values for real-world clinical tasks. Additionally, Azad et al. (2023) explore foundational models in medical imaging, with CLIP also included in their survey paper. The main difference from our survey paper is that they mainly cover vision-only, language-only, and vision-language foundational models, whereas we focus exclusively on CLIP, a vision-language foundational model. Furthermore, their survey also lacks discussions on clinical applications, for which we cover extensively. Accordingly, our survey (compared to the above two survey papers) will provide more comprehensive and deeper survey, in terms of both techniques and clinical applications.

Contribution. In summary, our main contributions are as follows:

- To the best of our knowledge, this paper is the first comprehensive review of CLIP in medical imaging, aiming to provide a timely summary and insight for potential studies in this rapidly evolving area.
- We provide thorough coverage of existing studies and also a multi-level taxonomy to serve different needs of readers.
- Furthermore, we discuss the issues and open questions in this field. We also pinpoint new trends and propose future directions for further exploration.

Paper organization. The rest of the paper is organized as follows. Section 2 provides preliminary knowledge of CLIP

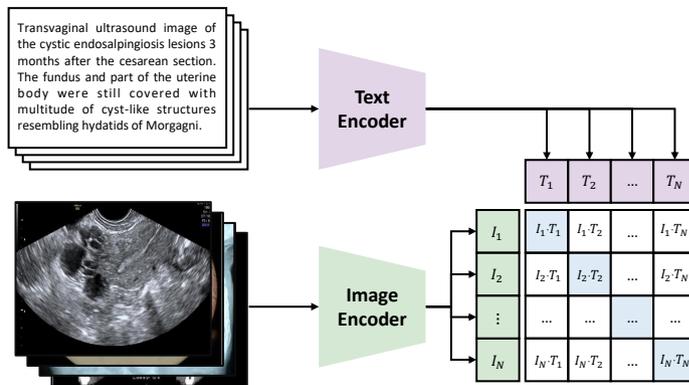


Fig. 3. Illustration of CLIP in medical imaging, with an example from the PMC-OA dataset.

and its variants. In Section 3, we present a systematic analysis of how to adapt CLIP to the medical imaging field, from the perspectives of key challenges and corresponding solutions. Section 4 covers various clinical applications of pre-trained CLIP and compares CLIP-driven methods with early methods/solutions. Section 5 further discusses existing limitations, as well as potential research directions. We finally conclude this paper in Section 6.

2. Background

CLIP-related research has advanced rapidly in recent years. In this section, we provide a brief overview of CLIP, as well as its generalizability and multiple variants. Additionally, we summarize datasets of medical image-text pairs that are publicly available and usable to CLIP.

2.1. Contrastive Language-Image Pre-training

CLIP (Contrastive Language-Image Pre-training) is a pre-training method developed by OpenAI, designed to bridge the gap between images and texts. It jointly optimizes a vision encoder and a text encoder, ensuring that image-text pairs are closely aligned in a shared latent space. Unlike other methods that rely on extensive manual supervision or complex structures, CLIP follows the principle of Occam’s Razor (Blumer et al., 1987), favoring simplicity for effective results.

Architecture. In terms of its architecture, CLIP seamlessly integrates a vision model with a language model. The visual component can be based on either ResNet (He et al., 2016) or Vision Transformer (ViT) (Dosovitskiy et al., 2020), while the language encoder is rooted in a transformer-based model like BERT (Kenton and Toutanova, 2019). As illustrated in Fig. 3, it receives a batch of images and their corresponding text descriptions as input in each iteration. Following the encoding process, the embeddings are normalized and mapped to a joint image-text latent space. That is, the input images and texts are encoded into $I \in \mathbb{R}^{N \times D}$ and $T \in \mathbb{R}^{N \times D}$, respectively, where N denotes batch size and D represents embedding dimensionality.

Contrastive pre-training. In CLIP, contrastive pre-training plays a crucial role in aligning image-text pairs. Diverging from



Fig. 4. Illustration of CLIP’s generalizability via domain identification.

conventional models that are sculpted for a singular and pre-defined task, CLIP’s learning trajectory revolves around contrastive pre-training between paired image-text information. In particular, N^2 image-text pairs can be constructed given a batch size of N , among which there are N matched image-text pairs (positive pairs, as highlighted in blue in Fig. 3) and $(N^2 - N)$ unmatched image-text pairs (negative pairs). The pre-training objective for the image encoder is hence denoted as

$$\mathcal{L}_{\text{img}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\Phi(I_i, T_i)/\tau)}{\sum_{j=1}^N \exp(\Phi(I_i, T_j)/\tau)}, \quad (1)$$

where $\Phi(\cdot, \cdot)$ indicates cosine similarity, τ is a learnable temperature parameter, I_i and T_i represent the i th image embedding and text embedding, respectively. The objective for the text encoder is defined symmetrically:

$$\mathcal{L}_{\text{txt}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\Phi(T_i, I_i)/\tau)}{\sum_{j=1}^N \exp(\Phi(T_i, I_j)/\tau)}. \quad (2)$$

The total optimization objective of CLIP is hence calculated via the average of (1) and (2):

$$\mathcal{L}_{\text{total}} = \frac{\mathcal{L}_{\text{img}} + \mathcal{L}_{\text{txt}}}{2}. \quad (3)$$

Zero-shot capability and generalizability. Since CLIP is pre-trained to predict whether an image matches a textual description, it naturally lends itself to zero-shot recognition. This process is accomplished by comparing image embeddings with text embeddings, which correspond to textual descriptions specifying certain classes of interest. Let I represent the image features extracted by the image encoder for a given image x , and let $\{W_i\}_{i=1}^K$ be the set of class embeddings generated by the text encoder. Here, K denotes the number of classes, and each W_i is derived from a text prompt resembling “a photo of a [CLASS]”, where the class token is substituted with the specific class name. The probability of prediction is then calculated as follows:

$$p(y = i|I) = \frac{\exp(\Phi(I, W_i)/\tau)}{\sum_{j=1}^K \exp(\Phi(I, W_j)/\tau)}, \quad (4)$$

where τ is a temperature parameter learned during pre-training, and $\Phi(\cdot, \cdot)$ represents the cosine similarity. In contrast with traditional classifier learning methods where closed-set visual concepts are learned from scratch, CLIP pre-training allows

for the exploration of open-set visual concepts through the text encoder. This leads to a broader semantic space and, consequently, makes the learned representations more transferable to downstream tasks.

The generalizability of the CLIP pre-trained model become evident when applied to specialized areas such as medical imaging. Although originally trained on internet images and their textual captions, CLIP has demonstrated the capability to recognize and categorize medical images. Fig. 4 illustrates the generalizability of CLIP via domain identification, where the class token in the text prompt is substituted with the specific class name, such as “Chest X-ray”, “Mammography”, “Knee X-ray”, or “Dental X-ray”. Its zero-shot inference capability allows it to identify the domain of a given medical image without explicit prior training on such datasets. While further studies and validations are necessary, the preliminary findings suggest that the zero-shot capability of a pre-trained CLIP could reduce the dependency on extensive labeled medical datasets and pave the way for more efficient and generalizable AI-driven diagnostic tools.

2.2. Variants of CLIP

After providing a concise overview of CLIP in the above, we hereby introduce several variants of CLIP with practical applications in the area of medical imaging, which takes a step further by *not only* recognizing items in images *but also* understanding their specific details and descriptions.

Following the philosophy of CLIP, GLIP (Li et al., 2022b) reformulates detection as a grounding task by aligning each region or bounding box with corresponding text phrases. It simultaneously trains both an image encoder and a language encoder to accurately predict the associations between regions and words. A fusion module is further proposed to enhance the alignment between image and text information, improving the model’s ability to learn a language-aware visual representation. Pre-trained specifically at the object level, GLIP has demonstrated remarkable performance, even comparable to fully supervised methods in zero-shot object detection and phrase grounding tasks.

Meanwhile, CLIPSeg (Lüdecke and Ecker, 2022) and CRIS (Wang et al., 2022c) extend CLIP to the area of segmentation. CLIPSeg has fixed the pre-trained CLIP image encoder and text encoder while introducing a trainable decoder for the segmentation task. The encoded image and text prompt are fused, and then input into the trainable decoder to generate the predicted segmentation mask. Conceptually aligned, a similar paradigm is proposed in CRIS. These representative variants have been favored by generalizability, further showcasing the adaptability of CLIP.

The potential of these variants lies in their attention to content details. They could combine visual and textual information to provide a more nuanced understanding of medical images. For medical imaging, it is critical to identify subtle features, e.g., related to tumors or bone fractures. Such techniques could offer significant benefits, potentially being able to spatially locate clinical findings given the provided prompt, like “malignant mass” or “calcification.”

Table 1. Summary of publicly available medical image-text datasets.

Dataset	Domain	Image	Text	Source	Language	Pre-trained CLIP
ROCO (Pelka et al., 2018)	Multiple	87K	87K	Research papers	English	PubMedCLIP
MediCaT (Subramanian et al., 2020)	Multiple	217K	217K	Research papers	English	/
PMC-OA (Lin et al., 2023b)	Multiple	1.6M	1.6M	Research papers	English	PMC-CLIP
ChiMed-VL (Liu et al., 2023h)	Multiple	580K	580K	Research papers	English & Chinese	/
FFA-IR (Li et al., 2021)	Fundus	1M	10K	Medical reports	English & Chinese	/
PadChest (Bustos et al., 2020)	Chest X-ray	160K	109K	Medical reports	Spanish	/
MIMIC-CXR (Johnson et al., 2019)	Chest X-ray	377K	227K	Medical reports	English	BioViL& BioViL-T
OpenPath (Huang et al., 2023a)	Histology	208K	208K	Social media	English	PLIP
Quilt-1M (Ikezogwo et al., 2023)	Histology	1M	1M	Research papers & Social media	English	QuiltNet

2.3. Medical image-text dataset

Large-scale datasets are essential to ensure the quality of pre-training in medical imaging (Azizi et al., 2021; Cherti et al., 2023; Huang et al., 2023b; Wang et al., 2023c). Therefore, we summarize those publicly available medical datasets in Table 1. These datasets encompass various medical domains and data sources. For each of them, we also signify whether there is a publicly available CLIP model pre-trained on this dataset. ROCO (Pelka et al., 2018), MediCaT (Subramanian et al., 2020), PMC-OA (Lin et al., 2023b), and ChiMed-VL (Liu et al., 2023h) are the four large-scale datasets sourced from research papers. They collect and filter biomedical figure-caption pairs from open-access research papers via PubMed Central². Since research papers could cover a wide range of topics, the resulting datasets are composed of diverse medical images, including X-ray, PET, MRI, etc. FFA-IR (Li et al., 2021), PadChest (Bustos et al., 2020), and MIMIC-CXR (Johnson et al., 2019) are collected from daily medical reports. In clinical practice, a diagnostic report is often derived from multiple images. Therefore, the number of image samples and text samples shows a significant disparity, especially in the case of the FFA-IR dataset. OpenPath (Huang et al., 2023a) obtain histology images and their paired captions from Twitter, a social media platform. The proposed histology foundation model, PLIP, has shown impressive performance, illuminating significance of social media-derived data. Following OpenPath, Quilt-1M (Ikezogwo et al., 2023) extracts image-text pairs from both research papers and social media platforms like YouTube. As of December 2023, Quilt-1M stands as the largest image-text dataset for histology images. Note that not all of these datasets are in English. PadChest is provided in Spanish, while FFA-IR and ChiMed-VL have their respective Chinese versions. The discrepancy between different languages may introduce language bias (Zhou et al., 2021) when pre-training on a combination of datasets from various language communities, which has recently motivated the study on cross-lingual pre-training in medical imaging community (Wan et al., 2023).

3. CLIP in medical image-text pre-training

Most of CLIP models are trained on web-crawled data (Radford et al., 2021; Cherti et al., 2023; Sun et al., 2023), without

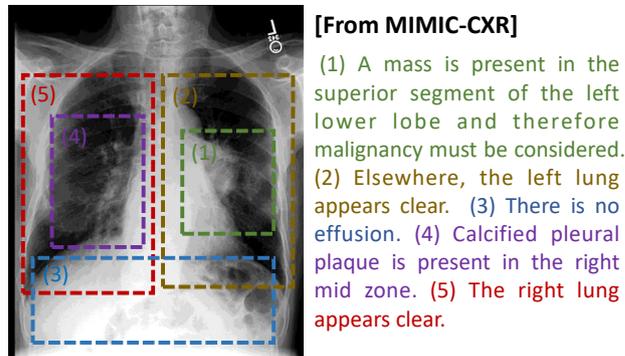


Fig. 5. Demonstration of multi-scale features of medical image-text pairs. The medical report is composed of several sentences, with each sentence focusing on region-level features instead of global-level features. Sentences are generally independent of each other, and hold different levels of significance.

much consideration on special characteristics of medical imaging and reports. To satisfy the needs of specialized foundational models (Zhang and Metaxas, 2023), several efforts have been made to adapt the paradigm of CLIP to a specific medical imaging domain, e.g., Chest X-ray, Brain MRI, etc.

In this section, we describe specific challenges of medical image-text pre-training, and provide a taxonomy of existing studies given their solutions. Representative methods included in this section are shown in Table 2. Their pre-trained imaging domains, specific taxonomy, evaluation tasks, and noteworthy issues are demonstrated. Evaluation tasks here mean that the quality of pre-trained vision model and text model are evaluated by directly observing their performance on targeting tasks without much modification, which is different from CLIP-driven applications to be mentioned in Section 4.

3.1. Challenges of CLIP pre-training

CLIP is initially proposed on natural image datasets, which may lead to suboptimal performance on medical imaging due to three key challenges.

- **Multi-scale features.** One main difference between medical images and natural images is the significance of multi-scale features. Besides global-level vision features, local-level vision features also matter in the interpretation of medical images (Huang et al., 2021; Lv et al., 2023; Chaitanya et al., 2020; Dubey et al., 2015). For example, some

²<https://www.ncbi.nlm.nih.gov/pmc/tools/ftp/>

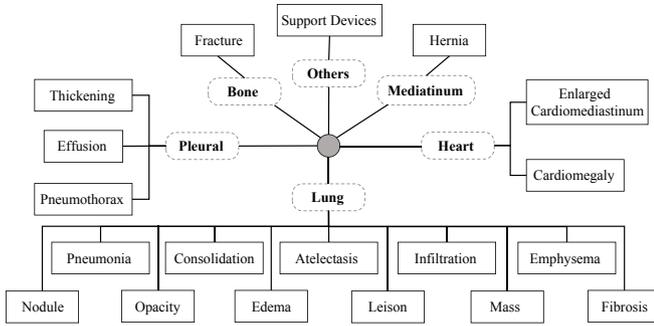


Fig. 6. An illustration of hierarchical dependencies among clinical findings in chest X-rays (sourced from Huang et al. (2023c)). Solid boxes indicate clinical findings while dotted boxes represent organs or tissues.

abnormalities or lesions such as lung nodule may only occupy small proportions in a chest radiograph, yet their crucial visual cues can significantly influence diagnostic results (Austin et al., 1992; Lo et al., 1995; Samei et al., 2003; Li et al., 2020). Besides image information, the corresponding text information is also characterized by multi-scale text features (Morid et al., 2016; Luo et al., 2020; Yang et al., 2021; Tanida et al., 2023). Medical reports tend to be more complex than natural image captions (Chen et al., 2020b; Miura et al., 2021). For example, natural image captions are typically concise and provide an overview of global features of the image. In contrast, as depicted in Fig. 5, medical reports consist of multiple sentences, with each sentence describing image findings in a specific region. For instance, the first sentence (highlighted in green) in Fig. 5 describes the presence of a mass, which is essential for accurate diagnosis. Generally speaking, besides global-level image-text contrast, both local-level image features and local-level text features should be taken into consideration during the pre-training, posing challenges to the baseline CLIP pre-training, where image and text information are aligned solely at the global level.

- **Data scarcity.** Unlike natural image-text datasets, which can easily reach billion-scale (Schuhmann et al., 2022; Zhai et al., 2022; Zhu et al., 2023), medical datasets with paired images and reports (Johnson et al., 2019; Ikezogwo et al., 2023) hold a relatively limited scale. As the scale of datasets can have a significant impact on CLIP-style pre-training according to scaling laws (Cherti et al., 2023), limited medical data can hinder its performance in medical imaging domain.
- **High demands for specialized knowledge.** The hierarchical dependencies among various clinical concepts can be intricate and highly specialized (Zhang et al., 2020; Jain et al., 2021). As depicted in Fig. 6, the graph is constructed based on the expert viewpoint of chest X-rays, considering correlations, characteristics, and occurrence locations of clinical findings (Huang et al., 2023c). Lack of in-depth understanding of medical concepts may lead to degraded performance when facing data from shifted distributions, or even shortcut solutions (Geirhos et al., 2020). Hence,

in order to improve the reliability and robustness, explicitly incorporating knowledge during the process of pre-training may provide a viable solution.

These challenges highlight the impracticality of directly applying CLIP pre-training on medical image-text datasets, motivating related work to improve CLIP-style pre-training in the medical imaging domain.

3.2. Multi-scale contrast

Although some early-stage studies (Zhang et al., 2022b; Zhou et al., 2022a) attempt to extend CLIP pre-training to the medical imaging domain, they still follow the global-level contrast proposed in Radford et al. (2021) and hence show sub-optimal performance on tasks such as semantic segmentation and object detection. To address the issue, several studies have tried to perform multi-scale contrast in pre-training.

Huang et al. (2021) made a pioneering contribution in this domain by introducing the concept of semantic-driven multi-scale contrast. The proposed GLoRIA follows a similar paradigm as CLIP to implement global-level contrast, yet it distinguishes itself by implementing local-level contrast between each word representation and its semantically similar visual counterparts. As illustrated in Fig. 7(a), GLoRIA defines each word and each image sub-region as local text and image features, respectively. To perform local-level contrast, it calculates semantic similarity between word-wise text features and sub-region-wise image features. After obtaining semantic similarity, GLoRIA leverages it to compute weighted summation over all local image features and hence gets an attention-weighted local image representation for each word representation, where “attention” used in their paper denotes semantic similarity. The word representation and the weighted image representation are semantically similar and hence are pulled closer in the latent space via localized contrastive loss. Since local-level contrast is implemented at the word level, GLoRIA would accumulate all localized contrastive loss as the total local-level contrast objective for medical report. Fig. 7(b) demonstrates the effectiveness of semantic affinity learned by GLoRIA. The text-to-image semantic affinity, visualized as a heatmap, is able to correctly identify related image sub-regions for a given word. For instance, the semantic affinity based on the word “Pneumonia” correctly localizes regions of the right lower lobe containing heterogenous consolidative opacities indicative of pneumonia. Additionally, attention weights associated with “Pneumothorax” accurately emphasize lucency in the right lung apex, indicative of pneumothorax. Analogous results can be also observed for “Edema” and “Opacity”, highlighting the effectiveness of local-level alignment.

The semantic-driven multi-scale contrast proposed by Huang et al. (2021) is intuitive, but it still has some apparent weakness. (1) The local-level contrast is designed asymmetrically. Its contrastive objective is optimized between text and attention-weighted sub-region features. This only guarantees alignment from text to image, dismissing alignment from image to text. (2) While computing text-to-image local features through weighted summation of local image features is intuitive, it may

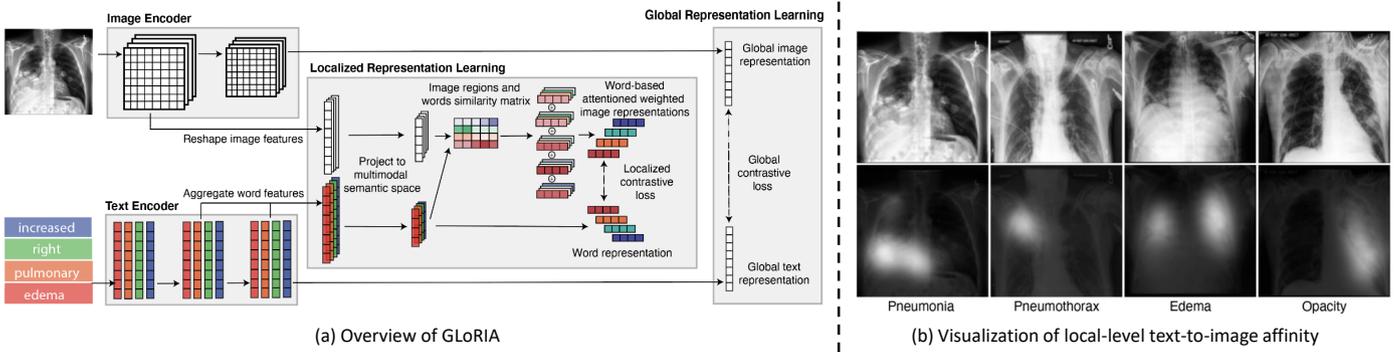


Fig. 7. Illustration of the semantic-driven contrast proposed by GLoRIA (Huang et al., 2021). (a) Overview of GLoRIA, which performs multi-scale image-text alignment based on cross-modal semantic affinity. (b) Visualization of the semantic affinity learned by GLoRIA.

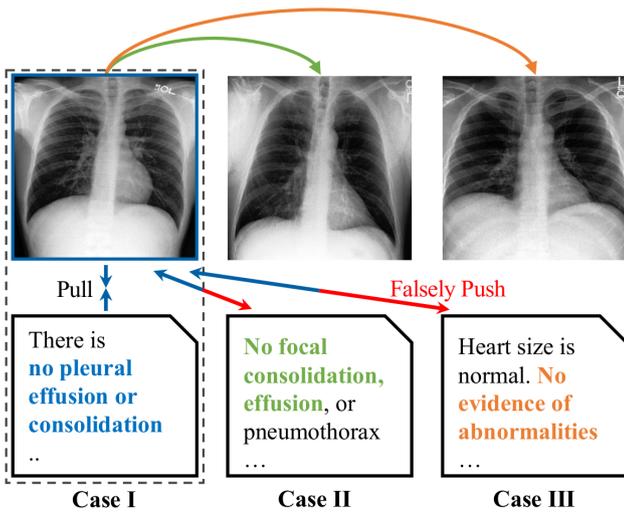


Fig. 8. Illustration of false-negative pairs (Liu et al., 2023a). In CLIP pre-training, a positive pair is defined as an image and its corresponding report, whereas all other reports are considered negatives. This can result in false negatives, where semantically similar reports from different subjects are mistakenly considered as negative pairs.

struggle to capture implicit semantic correlations between image and text features. (3) The total local-level objective simply accumulates all localized contrastive losses, implying each local text feature to be treated equally. However, different sentences within medical reports hold varying levels of importance for diagnosis as illustrated in Fig. 5.

Motivated by the above-mentioned limitations, Müller et al. (2022b) proposed an improved semantic-driven contrastive method, LoVT, covering both text-to-image local alignment and image-to-text local alignment. It still takes image sub-region features as local image features but divides medical reports into sentences instead of words. To better capture the implicit semantic features, both text-to-image local features and image-to-text local features are learned by transformer layers instead of weighted summation. Moreover, the weight for each word’s localized contrastive loss is assigned adaptively via transformer’s attention map (Dosovitskiy et al., 2020). Cheng et al. (2023) extend the LoVT by incorporating a conditional reconstruction task for image and text representations. This extension facil-

itates cross-modality feature interaction and learns more fine-grained scale alignment. Additionally, they propose a prototype memory bank for sentence-level embeddings, expecting to learn high-level text features in the joint image-text space. In a parallel study (Zhang et al., 2023b), a similar methodology is also employed. However, it focuses on reconstructing raw text reports instead of using a prototype memory bank.

Besides this line of research, there are many other studies focusing on multi-scale contrast. Liao et al. (2021) optimize the estimated mutual information between local image features and sentence-level text representations to implement local feature alignment. Seibold et al. (2022) assume that each sentence could convey distinct information for diagnosis, and proposed to perform image-sentence alignment. Further, Palepu and Beam (2023) propose to penalize the entropy of the text-token to image-patch similarity scores.

3.3. Data-efficient contrast

Large-scale medical imaging datasets with paired reports are hard to obtain due to ethical concerns, which adversely influences effectiveness of CLIP pre-training due to its data-thirsty nature (Zhai et al., 2022; Cherti et al., 2023). To tackle this challenge, various studies have endeavored to implement contrastive image-text pre-training in a more efficient manner, which broadly falls into two categories, i.e., correlation-driven contrast and data mining.

Correlation-driven contrast. Several studies manage to boost the efficiency of contrastive pre-training based on semantic correlation. One notable distinction between medical reports and image captions lies in the fact that medical reports are written with a clear diagnostic purpose. Since a small proportion of diseases or findings typically cover most cases (Bustos et al., 2020; Zhang and Metaxas, 2023), the semantic overlap between medical reports can be significant, especially for normal cases as shown in Fig. 8. As a result, simply treating unpaired images and reports as negative pairs can lead to issues of false-negative and degrade the efficacy of pre-training. Motivated by this observation, Wang et al. (2022e) construct a correlation matrix for all medical reports within the training set following the practice of NegBio (Peng et al., 2018). The pre-computed correlation is then employed as a soft optimization target, instead of the original one-hot optimization target, for image-text alignment,

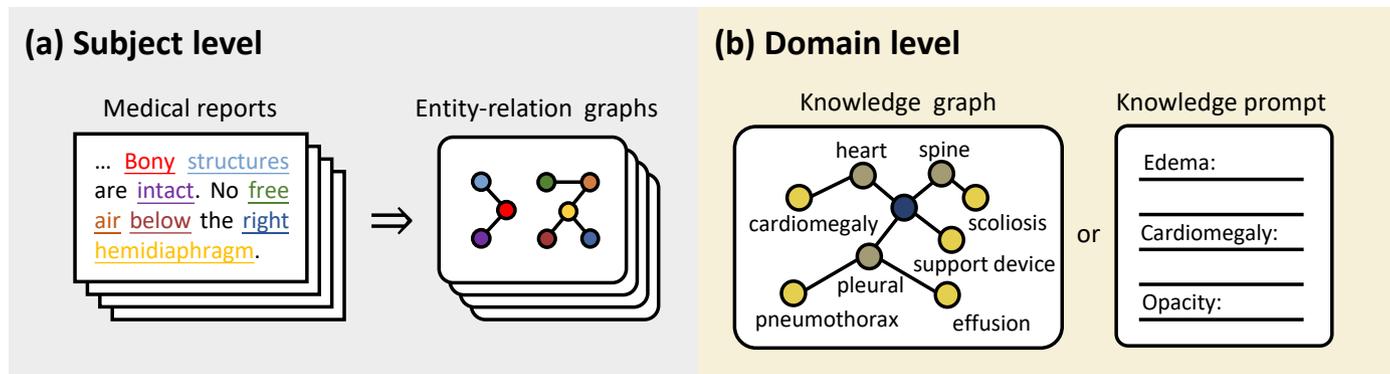


Fig. 9. Illustration of knowledge enhancement at different levels (with the chest X-ray as an example). (a) At the subject level, external knowledge aids in converting medical reports into entity-relation graphs, which elucidate the causal relationships among medical entities in the report. (b) At the domain level, the domain knowledge is presented as a knowledge graph or descriptive knowledge prompt, directly providing human prior guidance for pre-training.

enabling the effective utilization of unpaired false-negative reports. Under conditions where medical reports are not available, Wang (2023) construct multi-hot optimization targets for contrastive pre-training by measuring the correlation between ground-truth labels of different samples. SDA-CLIP (Li et al., 2023) extends this method to surgical video data. It selects the Kullback-Leibler (KL) divergence to evaluate the correlation, and the predicted correlation distribution should approach the ground-truth annotation distribution. In a recent study, Liu et al. (2023a) further categorized all image-text pairs into positive, negative, and neutral pairs based on inter-report correlation. This improved categorization of sample pairs allows for a more precise mining of false-negative pairs. MGCA (Wang et al., 2022a) focuses on the disease-level inter-sample correlation, a level of abstraction higher than that of image-level semantics. It has designed a novel cross-modal disease-level alignment framework to serve samples with the same diseases. The semantic correlation can also be extended to the imaging modality level. For multi-modal brain MRI and corresponding modality-wise reports, UniBrain (Lei et al., 2023b) aligns the modality-wise image-text features and then concatenates these features together to realize subject-wise image-text alignment.

Data mining. Simultaneously, many other studies try to boost training efficiency by mining supplementary information. Within a diagnostic report, the *Findings* section provides a detailed description of clinical observations, while the *Impression* section typically encapsulates these findings and offers an overall assessment (Wallis and McCoubrie, 2011; Ganeshan et al., 2018). While previous studies primarily focused on extracting the *Findings* section from raw diagnostic reports, often overlooking the *Impression* section, Boecking et al. (2022) incorporate the latter section to enrich the information available for image-text alignment. In addition, since the dependency between sentences is weak (see Fig. 5), they also propose to randomly shuffle sentences within each section. CXR-CLIP (You et al., 2023) has explored and utilized uncertainty annotations (Irvin et al., 2019). It generates prompts based on uncertainty annotations to provide supplementary information for image-text alignment.

3.4. Explicit knowledge enhancement

While studies in Section 3.2 and Section 3.3 in nature still focus on internal information of the dataset, some researchers have investigated the integration of external medical knowledge to enhance the pre-training process.

Employing the unified medical language system (UMLS) as the external knowledge base (Bodenreider, 2004) for medical concepts, existing studies typically incorporate knowledge enhancement at both the subject level and the domain level as shown in Fig. 9. At the **subject level**, ScispaCy (Neumann et al., 2019), a named entity recognition tool, is commonly adopted to extract medical entities from each report and link them to the corresponding medical concepts in the UMLS for entity disambiguation. Then, an entity-relation graph is built based on relations defined in UMLS or RadGraph (Jain et al., 2021), where the former establishes relations for general medical concepts and the latter is tailored to the practice of chest X-ray. These relations, including causal, positional, and modifying relationships, can provide an illustration of the image’s visual structures and the process of human reasoning, enhancing the alignment within each image-text pair. For **domain-level** enhancement, knowledge is typically represented as a domain-specific knowledge graph or a descriptive knowledge prompt for the targeted medical imaging domain (e.g., chest X-ray, and brain MRI), covering related organs, tissues, or clinical findings. The domain-specific knowledge graph can either be defined as a trainable symbolic graph, or a set of top- K most common entity triplets (Wu et al., 2023a). The descriptive knowledge prompt usually provides detailed observations or explanations for encompassed entities.

To incorporate external knowledge into the pre-training phase, an auxiliary **knowledge encoder** is usually involved. It serves to convert knowledge information into knowledge embeddings that can be interpreted by neural networks. The choice of the knowledge encoder may involve the selection of a graph neural network (Chen et al., 2022a; Zhang et al., 2023e) or a pre-trained BERT model (Lin et al., 2023a; Zhang et al., 2023e).

ARL (Chen et al., 2022a) is the representative study of subject-level knowledge enhancement. It adopts TransE (Bordes et al., 2013) algorithm to train a graph attention net-

Table 2. Overview of representative studies focusing on improving CLIP pre-training framework. CLS: classification; ZSC: zero-shot classification; SEG: segmentation; DET: detection; ITR: image-text retrieval; VQA: visual question answering; PG: phrase grounding; RG: report generation; ITC: image-text classification.

Method	Domain	Taxonomy	Evaluation tasks	Highlights
GLoRIA (Huang et al., 2021)	Chest X-ray	Multi-scale	CLS, SEG, ZSC, ITR	GLoRIA jointly learned global and local image-text representations by contrasting attention-weighted image regions with words in the paired reports.
LocalMI (Liao et al., 2021)	Chest X-ray	Multi-scale	CLS	This study proposed to estimate and optimize mutual information between local image representation and sentence-level text representation.
LoVT (Müller et al., 2022b)	Chest X-ray	Multi-scale	DET, SEG	LoVT leveraged self-attention to align sentence-level text representation and patch-level image representation. It adaptively weighed local representations via transformer’s attention map.
Seibold et al. (2022)	Chest X-ray	Multi-scale	CLS	It proposed to align the image with each sentence in the report simultaneously.
PRIOR (Cheng et al., 2023)	Chest X-ray	Multi-scale	CLS, SEG, DET, ZSC, ITR	To realize more fine-grained alignment, a cross-modality conditional reconstruction module was proposed for masked image modeling and sentence prototype generation.
TIER (Palepu and Beam, 2023)	Chest X-ray	Multi-scale	CLS	A regularization strategy focusing on local image-text similarity was proposed to improve localization performance.
Müller et al. (2022a)	Chest X-ray	Multi-scale	DET, SEG	It analyzed from the view of distribution prior and argued that global-level and local-level alignment act complementarily. A local uniformity loss was hence proposed to replace local alignment.
MRM (Zhou et al., 2022b)	Chest X-ray	Multi-scale	CLS, SEG	Masked image reconstruction and report completion acted as two complementary objectives during pre-training.
Pan et al. (2022)	Placenta	Multi-scale	CLS	To address the issue of feature suppression during contrastive alignment, this study proposed a NegLogCosh similarity to replace cosine similarity.
Pan et al. (2023)	Placenta	Multi-scale	CLS	A Distributional Feature Recomposition (DFR) module was proposed to estimate the significance of each local text feature in a distribution-aware manner.
TCSA (Lei et al., 2023a)	Chest X-ray	Multi-scale Data-efficient	CLS, ZSC, ITR	Besides global-local image-text contrast, TCSA learned view-specific latent space for multi-view samples and then projected them to a common latent space, which enabled the effective utilization of multi-view information.
MedCLIP (Wang et al., 2022e)	Chest X-ray	Data-efficient	CLS, ZSC, ITR	It employed inter-report semantical correlation as the soft optimization target for the alignment between image and text.
SAT (Liu et al., 2023a)	Chest X-ray	Multi-scale Data-efficient	CLS, SEG, ZSC, ITR	SAT categorized image-text pairs into positive/neutral/negative pairs given inter-report similarity and expected to more precisely alleviate false-negative problems. This technique can serve as a plug-and-play module for fine-grained contrast methods.
UMCL (Wang, 2023)	Chest X-ray	Data-efficient	CLS, ZSC, ITR	It constructed positive/negative pairs through the multi-hot annotation to eliminate false negative pairs.
CXR-CLIP (You et al., 2023)	Chest X-ray	Data-efficient	CLS, ZSC, ITR	CXR-CLIP generated prompts based on ground-truth labels to provide supplementary information for alignment.
Jang et al. (2022)	Chest X-ray	Data-efficient	ZSC	This study introduced a sentence-level text augmentation technique and proposed a novel similarity function to compel the model to concentrate on perfectly negative samples instead of false-negative pairs.
IMITATE (Liu et al., 2023c)	Chest X-ray	Data-efficient	CLS, SEG, DET, ZSC	Feature maps derived from different stages of the vision model were aligned with <i>Findings</i> and <i>Impression</i> sections of medical reports simultaneously.
MGCA (Wang et al., 2022a)	Chest X-ray	Data-efficient	CLS, DET, SEG	MGCA sought to leverage disease-level semantic information to cluster samples with high semantic correlation.
BioViL (Boecking et al., 2022)	Chest X-ray	Data-efficient	CLS, SEG, ZSC, PG	Text data augmentation was adopted to boost training efficiency. Optimized using global alignment alone, BioViL still showed impressive phrase grounding performance, compared with the methods adopting multi-scale contrast.
BioViL-T (Bannur et al., 2023)	Chest X-ray	Data-efficient	CLS, PG, RG	It leveraged the temporal connectivity commonly present in diagnostic reports, which were usually discarded in previous studies.

work (Veličković et al., 2018) as the knowledge encoder. All medical reports in the training set are pre-processed to construct subject-specific entity-relation graphs according to relations defined in the UMLS (Bodenreider, 2004). In contrast, KoBo (Zhang et al., 2023e) and FLAIR (Wang et al., 2023c) prioritize domain-level enhancement. KoBo extracts a knowledge graph containing radiological medical concepts from UMLS and utilizes CompGCN (Zhang et al., 2022c) as the knowledge encoder. It has proposed a knowledge semantic enhancement module and a knowledge semantic guidance module to mitigate negative sample noise and adjust semantic shifting, respectively. Similarly, FLAIR leverages ClinicalBERT (Alsentzer

et al., 2019) to interpret human-refined knowledge descriptions for the domain of fundus imaging, including detailed descriptions of visual features and inter-concept relationships.

In addition to the studies mentioned above, there are also studies adopting both subject-level and domain-level knowledge enhancements. MedKLIP (Wu et al., 2023a) has pre-processed and extracted entity triplets from each raw text report, constituting subject-level knowledge. Then, the top- K most frequently occurring entities, i.e., $K=75$ in practical implementation, are identified to form an entity query set, functioning as the domain-level knowledge graph. The ClinicalBERT (Alsentzer et al., 2019) is adopted for subject-level and

Table 2. (continued)

Method	Domain	Taxonomy	Evaluation tasks	Highlights
SDA-CLIP (Li et al., 2023)	Surgical video	Data-efficient	CLS	It leveraged the Kullback-Leibler divergence to evaluate the correlation.
UniBrain (Lei et al., 2023b)	Brain MRI	Knowledge Data-efficient	CLS, ZSC	<ul style="list-style-type: none"> • Knowledge encoder: MedKEBERT (Gu et al., 2021) • Multiple pre-defined knowledge prompts served as the query for the diagnosis of brain disease
FLAIR (Wang et al., 2023c)	Retina	Knowledge	CLS, ZSC	<ul style="list-style-type: none"> • Knowledge encoder: ClinicalBERT (Alsentzer et al., 2019) • It incorporated domain knowledge explicitly through descriptive textual prompts during both pre-training and zero-shot inference.
ARL (Chen et al., 2022a)	Chest X-ray	Knowledge	VQA, ITR, ITC	<ul style="list-style-type: none"> • Knowledge encoder: Graph Attention Network (Veličković et al., 2018). • ARL extracted the entity-relation graph of each medical report as subject-level knowledge. Both image and text embeddings were aligned with knowledge embeddings.
MedKLIP (Wu et al., 2023a)	Chest X-ray	Knowledge	CLS, SEG, ZSC, RG	<ul style="list-style-type: none"> • Knowledge encoder: ClinicalBERT (Alsentzer et al., 2019). • MedKLIP pre-processed raw reports and extracted medical-related triplets as the subject-level knowledge. Top-<i>K</i> most commonly appearing triplets were leveraged as the domain-level knowledge.
KAD (Zhang et al., 2023e)	Chest X-ray	Knowledge	ZSC	<ul style="list-style-type: none"> • Knowledge encoder: Fine-tuned PubMedBERT (Gu et al., 2021). • A set of disease descriptions was pre-defined as knowledge queries, allowing for the diagnosis of unseen diseases.
KoBo (Zhang et al., 2023e)	Chest X-ray	Knowledge Data-efficient	CLS, ZSC, SEG	<ul style="list-style-type: none"> • Knowledge encoder: CompGCN with LTE (Zhang et al., 2022c) • Medical knowledge was incorporated to distinguish noisy negative samples.
MOTOR (Lin et al., 2023a)	Chest X-ray	Knowledge	CLS, RG, ITR, VQA	<ul style="list-style-type: none"> • Knowledge encoder: SciBERT (Beltagy et al., 2019) • The image embedding was first fused with knowledge embedding and then aligned with text embeddings.
PathOmics (Ding et al., 2023)	Pathology image	Others	SP	PathOmics explored genotype-phenotype interactions in complex cancer data. It aligned omics tabular data and image patches in a joint latent space via mean squared error instead of commonly adopted cosine similarity.
CMTA (Zhou and Chen, 2023)	Pathology image	Others	SP	CMTA focused on the intrinsic cross-modal correlations between genomic profile and pathology image.
SCA-Net (Chen et al., 2023b)	Surgical video	Others	RG	SCA-Net mutually aligned image and text representations with prototype representations of the other modality.
M-FLAG (Liu et al., 2023b)	Chest X-ray	Others	CLS, DET, SEG	M-FLAG kept the text encoder fixed during pre-training to alleviate the collapsed solution problem. It explicitly optimized the latent geometry towards orthogonality using the proposed optimization objective.
Liu et al. (2023d)	Chest X-ray	Others	CLS, DET, SEG	It claimed to be the first to implement CLIP pre-training completely based on real radiology reports and synthetic chest radiographs. The experimental results supported its viability.

domain-level knowledge enhancements, simultaneously. This paradigm is also adopted in KAD (Zhang et al., 2023e), revealing its robustness. MOTOR (Lin et al., 2023a) adopts a symbolic graph regarding key clinical findings as the domain-level knowledge and also extracts entity-relation graphs for subject-level enhancement. The pre-trained SciBERT (Beltagy et al., 2019) is adopted as the knowledge encoder of MOTOR. The improved performance indicates the rationality of explicit knowledge enhancement in CLIP-style pre-training.

3.5. Others

While existing methods can generally be categorized according to the taxonomy previously outlined, exceptions still exist. These exceptions may provide insight for potential research. M-FLAG (Liu et al., 2023b) focuses on the issue of collapse solution (Grill et al., 2020; Chen and He, 2021), which means that image and text information are falsely encoded into constant feature embeddings to ensure a near-zero distance in the latent space. To address this issue, they propose to keep the text encoder frozen during pre-training, and adopt an orthogonality loss to encourage the orthogonality of visual representations. Liu et al. (2023d) report to be the first attempt to implement CLIP pre-training based on synthetic chest x-rays and paired real radiology reports. Their experimental results

revealed the potential value of domain-specific generative models (Chambon et al., 2022) in the medical imaging community. CMTA (Zhou and Chen, 2023) and PathOmics (Ding et al., 2023) investigate the alignment between omics tabular data and pathology images, which could potentially inspire the exploration of aligning other forms of data with images beyond diagnostic reports.

3.6. Summary

In this section, we provide an overview of adapting CLIP pre-training for medical imaging, which is taxonomized into three categories. Despite their categorization, these methods are inherently the same – they all attempt to explore and utilize the inherent consistency relationships within paired images and text. The multi-scale contrast approach focuses on consistency between local image features and text features, enabling more detailed interpretation. Simultaneously, the data-efficient contrast approach emphasizes the efficient use of data, maintaining consistency across different samples by leveraging inter-sample correlations. Lastly, the knowledge-enhanced methods utilize expert-level knowledge to explicitly interpret the inherent relationships between medical entities, going beyond basic image-text matching to ensure that the learned image and text representations are in line with the nuanced and complex knowledge

Table 3. Overview of representative classification applications.

Method	Organ	Imaging modality	Test dataset	Pre-trained CLIP
CheXzero (Tiu et al., 2022)	Chest	X-ray	CheXpert (Irvin et al., 2019) PadChest (Bustos et al., 2020)	Fine-tuned CLIP (Radford et al., 2021)
Seibold et al. (2022)	Chest	X-ray	CheXpert (Irvin et al., 2019) PadChest (Bustos et al., 2020) ChestX-ray14 Wang et al. (2017)	Fine-tuned CLIP (Radford et al., 2021)
Xplainer (Pellegrini et al., 2023)	Chest	X-ray	CheXpert (Irvin et al., 2019) ChestX-ray14 Wang et al. (2017)	BioViL (Boecking et al., 2022)
Kumar et al. (2022)	Chest	X-ray	MIMIC-CXR (Johnson et al., 2019)	Fine-tuned BioViL (Boecking et al., 2022)
Pham et al. (2023)	Chest	X-ray	EGD-CXR (Karargyris et al., 2021)	BiomedCLIP (Zhang et al., 2023c)
Mishra et al. (2023)	Chest	X-ray	VinDr-CXR (Nguyen et al., 2022)	Fine-tuned CLIP (Radford et al., 2021)
ETP (Liu et al., 2023e)	Heart	ECG	PTB-XL (Wagner et al., 2020) CPSC2018 (Liu et al., 2018)	An ECG CLIP trained from scratch
CITE (Zhang et al., 2023g)	Stomach	Histology	PatchGastric (Tsuneki and Kanavati, 2022)	CLIP (Radford et al., 2021)
CLIP-Lung (Lei et al., 2023c)	Lung	CT	LIDC-IDRI (Armato III et al., 2011)	CLIP (Radford et al., 2021)
Kim et al. (2023b)	Skin	Dermatology	HAM10000 (Tschandl et al., 2018)	CLIP (Radford et al., 2021)
DCPL (Cao et al., 2023)	Brain, Colorectal	MRI, Histology	BTMRI (Nickparvar, 2021) CHMNIST (Kather et al., 2016)	CLIP (Radford et al., 2021)
CoOPLVT (Baliah et al., 2023)	Eye	Fundus	EyePACS (Emma et al., 2015) APTOS (Karthik, 2019) Messidor (Decencière et al., 2014)	CLIP (Radford et al., 2021)
Byra et al. (2023)	Chest, Breast	X-ray, Ultrasound	Pneumonia (Kermany et al., 2018) UDIAT (Yap et al., 2017)	CLIP (Radford et al., 2021)

of medical experts. Each of these methods contributes uniquely to the medical imaging domain, showcasing the adaptability and potential of CLIP pre-training to *not only* enhance traditional image-text relationships *but also* introduce a new depth and precision in medical image analysis.

4. CLIP-driven applications

Leveraging large-scale text supervision, the pre-trained CLIP model effectively aligns visual features with human language, a capability that extends to medical images (referring to Fig. 4). This capability is particularly significant in clinical settings where interpretability is of importance (Lauritsen et al., 2020; Tjoa and Guan, 2020). Meanwhile, the rich human knowledge embedded in CLIP can also act as an external supervision for annotation-demanding tasks, such as tumor segmentation (Liu et al., 2023i). These strengths of CLIP explain the growing adoption of CLIP in various clinical applications.

4.1. Classification

The pre-training of CLIP involves image-text alignment, making it a natural fit for medical image classification (Xian et al., 2016; Radford et al., 2021). This task typically requires a global assessment of the image (e.g., determining whether it is benign or malignant or identifying specific diseases). In Table 3, we present existing studies that employ CLIP for image classification, which can generally be categorized into two approaches: zero-shot classification and context optimization. **Zero-shot classification** focuses on leveraging the diagnostic potential of a domain-specific CLIP model through prompt engineering. **Context optimization**, on the other hand, aims to

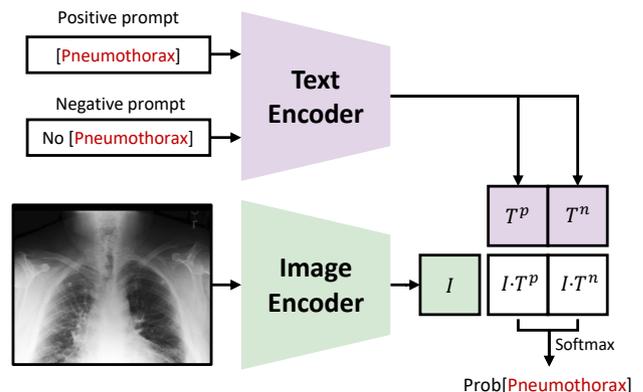


Fig. 10. Illustration of the positive/negative prompt engineering for zero-shot disease diagnosis. The diagnosis of Pneumothorax is demonstrated here, while other potential diseases can also be diagnosed in this way.

fine-tune a non-domain-specific CLIP model to the medical domain in a manner that is both parameter-efficient and data-efficient.

4.1.1. Zero-shot classification

This research avenue attempts to fully leverage the potential of pre-trained CLIP models without fine-tuning on downstream datasets. Hence, the diagnostic performance would largely depend on the built-in knowledge, which influences the choice of domain-specific CLIP. In existing studies, a domain-specific CLIP is typically obtained by either fine-tuning the original CLIP on the target medical imaging domain (Tiu et al., 2022; Seibold et al., 2022; Mishra et al., 2023; Kumar et al., 2022) or by adopting an open-source specialized CLIP model (Boecking et al., 2022; Pham et al., 2023). For unique cases like electro-

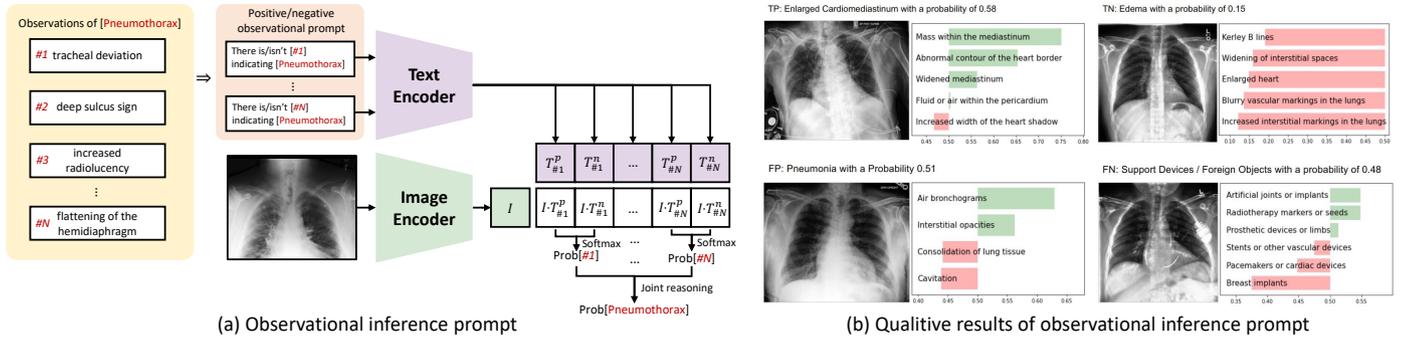


Fig. 11. Overview of Xplainer. (a) Illustration of the observational inference prompt proposed by Xplainer. The diagnosis of Pneumothorax is demonstrated here, while other potential diseases can also be implemented in this way. (b) The qualitative results of Xplainer.

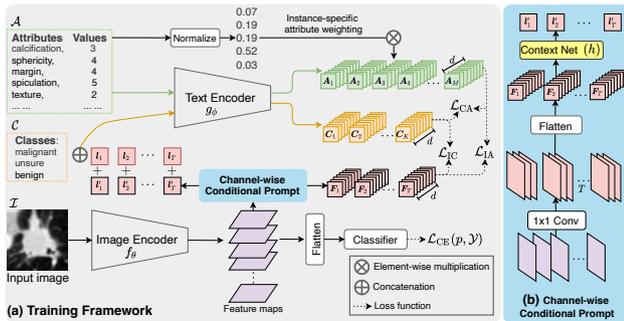


Fig. 12. Context optimization for lung nodule classification (from Lei et al. (2023c)).

cardiogram (ECG) (Liu et al., 2023e), where the data exists in the form of one-dimensional multi-channel signals, researchers often train ECG-specific CLIP models from scratch.

Besides the choice of pre-trained CLIP, the other key point of zero-shot classification lies in prompt engineering (Wei et al., 2022; Wang et al., 2023a; Gu et al., 2023). While the standard zero-shot prompt described in Section 2.1 is effective for tasks like BI-RADS grading (Liberman and Menell, 2002) or OA assessment (Kellgren and Lawrence, 1957), it falls short in disease diagnosis (Tiu et al., 2022). The shortfall is attributed to the softmax operations in the probability calculations (see Eq. 4), which treat each class as mutually exclusive. This does not align with the reality of disease diagnosis, as patients may simultaneously suffer from multiple diseases. To address this issue, CheXzero (Tiu et al., 2022) defines the positive and negative prompts (such as ‘Pneumothorax’ versus ‘no Pneumothorax’) to implement zero-shot disease diagnosis for different potential diseases in a compatible manner (see Fig. 10).

However, the diagnosis provided by CheXzero lacks explainability. To alleviate this issue, several methods have tried to incorporate detailed descriptions of the image in the prompt design, including texture, shape, and location. (Byra et al., 2023; Kim et al., 2023b; Yan et al., 2023; Liu et al., 2023g; Pellegrini et al., 2023). Among them, Pellegrini et al. (2023) introduce Xplainer, a representative method for explainable zero-shot diagnosis. Specifically, instead of directly predicting a diagnosis, they prompt the model to classify the existence of descriptive observations, for which a radiologist would look for on an X-

ray scan, and use the joint probabilities of all observations to estimate the overall probability. These descriptive prompts are originally generated by ChatGPT by querying observations that may indicate specific diseases on a Chest X-ray. To improve the reliability of these prompts, radiologists are asked to further refine them based on their experience. During the diagnosis of a specific disease (e.g., Pneumothorax), all related observations would be fed into the CLIP text encoder in the form of positive/negative prompt, as shown in Fig. 11(a). According to the probability of each observation (from Prob[#1] to Prob[#N]), a joint probability can be estimated as the final result. Fig. 11(b) gives a qualitative demonstration of Xplainer’s explainable diagnosis. It can be observed that Xplainer can correctly detect true positive and true negative cases. Although it fails to always make correct decisions in false positive and false negative cases, both of them show contradictory findings (e.g., bronchogram tends to co-occur with consolidation), which means they can be easily detected and corrected by radiologists. The illustration of underlying reasons in Xplainer would no doubt improve the explainability of zero-shot diagnosis.

4.1.2. Context optimization

While the concept of zero-shot disease diagnosis appears impressive and promising, its broader application in the medical imaging community is unfortunately constrained by the limited availability of domain-specific CLIP models (Zhang et al., 2023c). Consequently, this line of studies has turned to non-domain-specific CLIP models, aiming to efficiently adapt these models to the context of medical imaging domains with optimal use of trainable parameters.

Although parameter-efficient tuning studies (Zhou et al., 2022d,c; Khattak et al., 2023) have been proposed to adapt CLIP to out-of-distribution natural image datasets, none of them considers the medical imaging domain. The lack of consideration of domain characteristics may lead to suboptimal performance. To tackle this issue, several studies focusing on context optimization (Cao et al., 2023; Zheng et al.; Baliah et al., 2023; Lei et al., 2023c) have been proposed. CLIP-Lung (Lei et al., 2023c) has proposed the channel-wise conditional prompt (CCP) for lung nodule malignancy prediction as shown in Fig. 12 shows. Different from CoCoOp (Zhou et al., 2022c), it constructs learnable prompts based on channel-level

Table 4. Overview of representative dense prediction applications.

Method	Task	Organ	Imaging modality	Pre-trained CLIP
Guo <i>et al.</i> (2023)	Detection	Skin lesion, Polyp, Cell	Endoscopy, Cytology	GLIP (Li <i>et al.</i> , 2022b)
VLPMPuD (Wu <i>et al.</i> , 2023c)	Detection	Nuclei	Cytology images	GLIP (Li <i>et al.</i> , 2022b)
AnomalyCLIP (Zhou <i>et al.</i> , 2023)	Anomaly Detection	Skin, Colon, Thyroid, Chest, etc.	CT, MRI, Ultrasound, X-ray, Colonoscopy	CLIP (Radford <i>et al.</i> , 2021)
Anand <i>et al.</i> (2023)	Segmentation	Spleen, Liver, Kidney, Shoulder, etc.	CT, MRI, Ultrasound	Fine-tuned CLIP (Radford <i>et al.</i> , 2021)
MedVLSM (Poudel <i>et al.</i> , 2023)	Segmentation	Colon, Skin, Chest, etc.	X-ray, Ultrasound, Endoscopy,	Fine-tuned CLIPSeg (Lüddecke and Ecker, 2022) Fine-tuned CRIS (Wang <i>et al.</i> , 2022c)
SyntheticBoost (Adhikari <i>et al.</i> , 2023)	Segmentation	Heart	Ultrasound	Fine-tuned CLIPSeg (Lüddecke and Ecker, 2022) Fine-tuned CRIS (Wang <i>et al.</i> , 2022c)
Liu <i>et al.</i> (2023i)	Segmentation	Multi-organ	CT, MRI	CLIP (Radford <i>et al.</i> , 2021)
Zhang <i>et al.</i> (2023h)	Segmentation	Multi-organ	CT	CLIP (Radford <i>et al.</i> , 2021)
TPRO (Zhang <i>et al.</i> , 2023d)	Segmentation	Breast, Lung	Histology	MedCLIP (Madhawa, 2021)
TCEIP (Yang <i>et al.</i> , 2023)	Keypoints Localization	Tooth	Tooth crown images	CLIP (Radford <i>et al.</i> , 2021)

information of feature maps. This adaptively learnable prompt successfully leads to improved results.

4.2. Dense prediction

Dense prediction (Zuo *et al.*, 2022; Rao *et al.*, 2022; Wang *et al.*, 2021b) involves generating outputs for every pixel or subset of pixels in an image. This task contrasts with classification, where a single label is assigned to the entire image. Owing to its capability to align with human cognition, CLIP as well as its variants have been applied to a wide variety of dense prediction tasks in medical imaging. Methods involved in this line of study typically function as an auxiliary tool, providing clinicians with valuable information (e.g., regions of target organs, potential lesion regions) to support their decision-making.

4.2.1. Detection

Detection is a crucial prerequisite in many clinical scenarios, such as surgical planning (Bouget *et al.*, 2017), pathological diagnosis (Wang *et al.*, 2020; Ribli *et al.*, 2018), and post-operative assessment (López-Linares *et al.*, 2018). Previous approaches (Baumgartner *et al.*, 2021; Ickler *et al.*, 2023; Wittmann *et al.*, 2022; Yüksel *et al.*, 2021) in medical image detection typically focus on leveraging image-based features extracted through various convolutional neural networks or with transformer-based architectures. These methods, while effective to a certain extent, often struggle with the nuanced and complex nature of medical images, especially in pathology cases where visual cues are subtle or absent (Wittmann *et al.*, 2022). The pipeline for detection tasks in medical images has been significantly influenced by the advancements and integration of visual-language models, such as directly using CLIP (Müller *et al.*, 2022c) or its extension GLIP (Li *et al.*, 2022b). Guo *et al.* (2023) propose a prompt-ensemble technique for the amalgamation of diverse textual descriptions,

which fully leverages GLIP’s proficiency in interpreting complex medical scenarios. Moreover, VLPMPuD (Wu *et al.*, 2023c) introduces GLIP for zero-shot nuclei detection in H&E stained images. It has proposed an automated prompt design method and adopted a self-training framework to polish the predicted boxes iteratively.

While object detection focuses on identifying and localizing specific and pre-defined items, such as tumors or fractures, anomaly detection is also a crucial application (Fernando *et al.*, 2021; Tschuchnig and Gadermayr, 2022) in medical imaging, which aims to identify deviations from the norm. Anomaly-CLIP (Zhou *et al.*, 2023) showcases CLIP’s capabilities in zero-shot anomaly detection across medical domains. AnomalyCLIP employs object-agnostic text prompts to capture the essence of normality and abnormality across various images. This has forced CLIP to pay more attention to abnormal regions rather than to the main objects shown in the image, thereby facilitating more generalized recognition of anomalies compared with previous methods (Zhou *et al.*, 2022c; Sun *et al.*, 2022; Chen *et al.*, 2023a).

4.2.2. 2D medical image segmentation

CLIP is originally pre-trained on the 2D image domain via text supervision. Therefore, it can be easily integrated into 2D medical image segmentation with fine-tuning. Following this idea, Müller *et al.* (2022c); Anand *et al.* (2023) apply the CLIP pre-trained image encoder across various medical imaging modalities, including X-rays, ultrasound, and CT/MR (by taking 3D data as 2D slices). Their works demonstrate that CLIP’s image encoder, originally trained on natural images, can also deliver impressive performance in medical image segmentation tasks. Furthermore, Poudel *et al.* (2023) and Adhikari *et al.* (2023) employ both pre-trained CLIP image and text encoders to construct a vision-language segmentation model, and

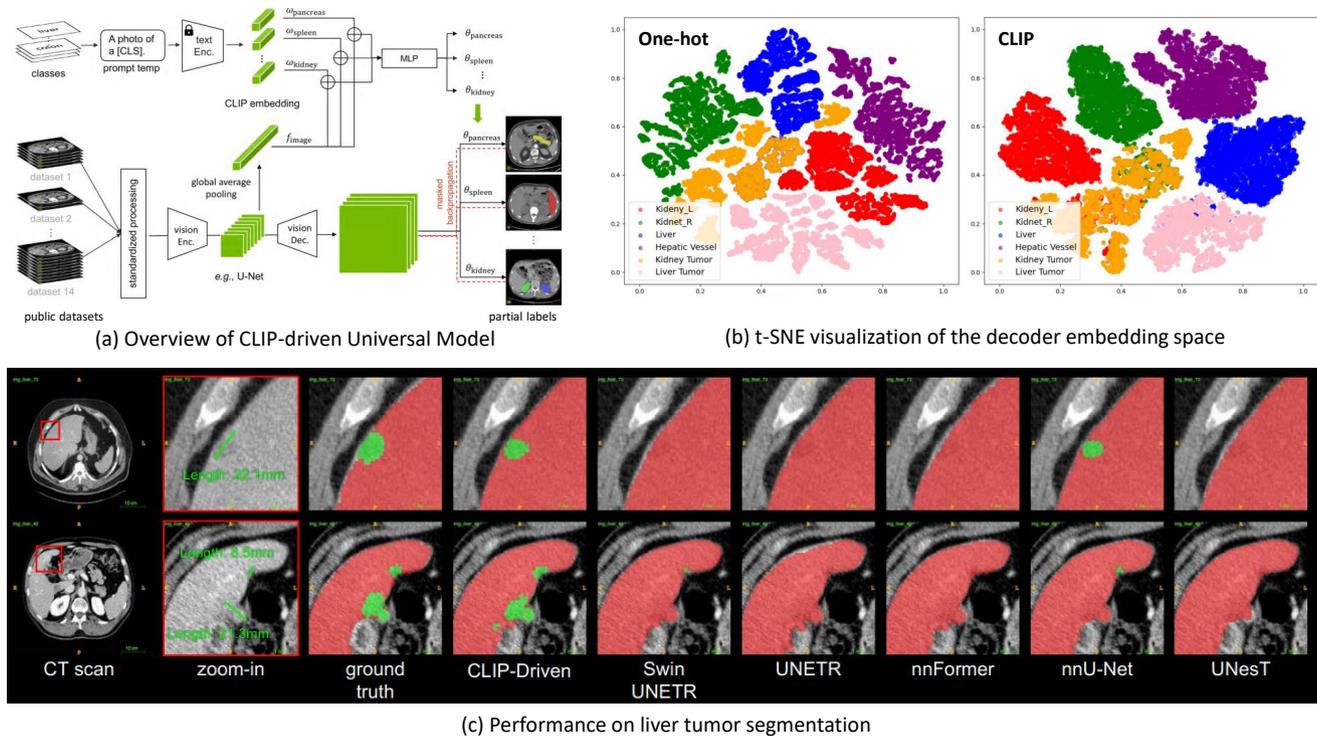


Fig. 13. (a) Overview of CLIP-driven segmentation model for universal segmentation (Liu et al., 2023i). (b) t-SNE visualization of the decoder embedding space between one-shot task encoding and CLIP label encoding. (c) Performance on liver tumor segmentation (green for tumor and red for organ).

finetune it to serve 2D medical image segmentation tasks.

4.2.3. 3D medical image segmentation

A growing number of publicly available datasets (Simpson et al., 2019; Heller et al., 2019; Liu et al., 2020; Bilic et al., 2023) have allowed researchers to train 3D segmentation models for segmenting anatomical structures and lesions from volumetric imaging data. However, most of these datasets typically only focus on certain organs or anatomical structures while all task-irrelevant organs and tumors are treated as the background, leading to the issue of partial label (Yan et al., 2020; Lyu et al., 2021). Consequently, it remains a constraint on how to break the barrier of individual datasets and fully leverage existing data cohorts to expand capabilities of segmentation models.

DoDNet (Zhang et al., 2021) is the first segmentation model to tackle such partially-labeled problems in medical images, which provides *not only* superior performance against previous multi-head networks (Chen et al., 2019; Fang and Yan, 2020; Shi et al., 2021), *but also* a flexible solution to extend to a newly labeled task. DoDNet introduces a dynamic segmentation head (Tian et al., 2020) tailored to specific tasks, with the task represented as a one-hot embedding. However, such label orthogonality encoding ignores the natural semantic relationship between organs and tumors. In DoDNet, tasks like liver segmentation and liver tumor segmentation are treated as orthogonal tasks, even though they clearly exhibit a strong correlation. This limitation is exacerbated as the number of distinct segmentation tasks increases. Hence, label orthogonality encoding fails to generalize effectively when the diversity of tasks grows more complex. To tackle the aforementioned challenges

and limitations, Liu et al. (2023i) propose a CLIP-Driven Universal Segmentation Model (see Fig. 13(a)) by introducing the text embedding learned from CLIP to replace the one-hot encoding used in DoDNet (Zhang et al., 2021). Specifically, they have utilized the pre-trained CLIP text encoder to encode task prompts like 'liver', 'liver tumor', 'left kidney', 'right kidney', 'hepatic vessel', 'kidney tumor' etc. Such embeddings are then concatenated with the pooled image features to generate the dynamic segmentation head, which is utilized to refine segmentation results after the vision decoder. The advantage of CLIP text encoder over DoDNet's one-hot label encoding is shown in Fig. 13(b). Correlations between organs and tumors are better established with the fixed CLIP label embedding, i.e., the relationship between liver and liver tumor, and the relationship between kidney and kidney tumor. This method provides superior performance *not only* in organ segmentation *but also* in more challenging tumor segmentation tasks, surpassing other image-only segmentation models as shown in Fig. 13(c). The CLIP-Driven Universal Model is compared with five vision-only SOTA segmentation methods. By reviewing the segmentation of tumors, the CLIP-Driven segmentation model succeeds in detecting small tumors, even in the cases with multiple tiny tumors, which are ignored by most image-only methods.

Following Liu et al. (2023i), Zhang et al. (2023h) extend this framework into continual learning by leveraging additional heads and text prompts to tackle new tasks. As previous studies (Ozdemir et al., 2018; Ozdemir and Goksel, 2019; Liu et al., 2022a) have focused on developing novel loss functions as additional constraints, or memory modules to preserve patterns from the original data, Zhang et al. (2023h) leverage text

prompts to represent the correlation between current task and previously learned tasks. The semantic correlation contained in text prompts enables the proposed model to filter and reserve task-specific information with superior performance.

4.2.4. Others

Different from fully supervised segmentation, weakly supervised segmentation aims to utilize weak annotations, e.g., points (Bearman et al., 2016), scribbles (Lin et al., 2016; Vernaza and Chandraker, 2017), bounding boxes (Dai et al., 2015; Khoreva et al., 2017), and text or description for image-level labels (Kolesnikov and Lampert, 2016; Ahn and Kwak, 2018), as supervision for training. Class activation map (CAM) (Zhou et al., 2016) is a commonly-used solution for this task, which equipped the convolutional neural network (CNN) with the ability for attention localization and pseudo-label generation. Yet CAM only focuses on the most distinctive parts of the object and often leads to low-quality pseudo labels due to boundary neglect, especially in medical cases where the boundary between target foreground and background is ambiguous (Chen et al., 2022b). Despite recent attempts to broaden CAM’s coverage (Lee et al., 2021; Han et al., 2022; Li et al., 2022c; Zhang et al., 2022a), this fundamental problem persists. Notably, Zhang et al. (2023d) propose to integrate language prior knowledge into weakly supervised learning to provide reliable assistance in finding object structures. Specifically, they introduce a text-prompting-based weakly supervised segmentation method (TPRO) by employing a pre-trained MedCLIP (Madhawa, 2021) to convert semantic labels into class-level embedding. An additional BioBERT (Lee et al., 2020) is also adopted to extract detailed information about the label’s corresponding text descriptions. These additional text supervisions are then fused with the image features, effectively improving the quality of pseudo labels and thus providing superior performance compared to other CAM-based methods.

Considering keypoint localization, various methods (O’Neil et al., 2018; Payer et al., 2020; Wu et al., 2023b) have been developed for challenges in the medical imaging domain. While these methods have demonstrated solid performance in many cases, they still struggle to handle complex localization environments, i.e., with incomplete structures (Lessmann et al., 2019). TCEIP (Yang et al., 2023) integrates the instructional text embedding of the target region into a regression network to guide the prediction of implant position. By leveraging CLIP, TCEIP is able to interpret and process instructions such as ‘left’, ‘middle’, and ‘right’ alongside visual data, ensuring more precise and context-aware results. Its performance has surpassed the capabilities of previous image-only detection methods, especially in the challenging cases with multiple missing teeth or sparse teeth.

4.3. Cross-modal tasks

In addition to the previously mentioned pure vision tasks, CLIP has also propelled the development of cross-modal tasks. Here cross-modal task refers to the interaction between image and text modalities. Representative studies are shown in Table 5.

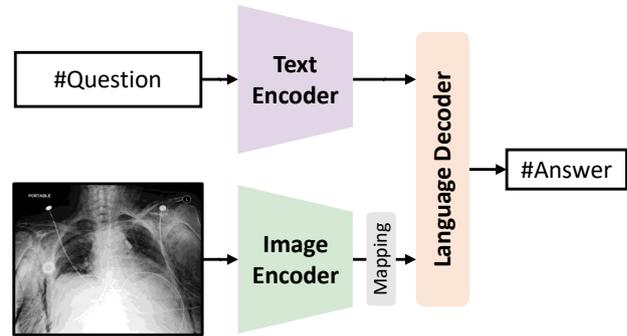


Fig. 14. Illustration of CLIP-driven methods for open-ended MedVQA.

4.3.1. Report generation

Given the time-intensive process of manually transcribing reports in clinical settings, there has been an increasing inclination toward automating the generation of medical reports (Liu et al., 2019; Yu et al., 2023). Since effective generation of medical reports needs the recognition of crucial findings, attributes, and inter-finding semantic relations, CLIP is inherently suitable for this task due to its alignment with human cognition and semantic awareness.

For example, Wang et al. (2022d) adopt CLIP’s vision encoder to extract semantic-aware image representations from chest X-ray, which then interacts with learnable concept embeddings and hence benefits the performance of report generation. Keicher et al. (2022) fully leverage the strengths of CLIP by reformulating the report generation task as a multi-label classification task, with labels indicating the presence or absence of specific findings. They compile all possible combinations of clinical findings and corresponding locations in the training set to form a prompt set. They utilize CLIP’s zero-shot capability to calculate the likelihood of each prompt appearing in the image.

4.3.2. Medical visual question answering

Medical visual question answering (MedVQA) is a task that demands an in-depth understanding of both text-based questions and visual content of medical images (Lin et al., 2023c). It has drawn attention from the community as it would lead to more efficient and accurate diagnoses and treatment decisions. Since CLIP has long been favored by its ability to align visual and text content, recent efforts have been made to apply CLIP in MedVQA.

Previous efforts have incorporated CLIP into closed-ended MedVQA tasks. These studies (Eslami et al., 2023; Liu et al., 2023f) usually only integrate CLIP’s image encoder into the original MedVQA framework, aiming to enhance image representation with semantic understanding. However, they tend to overlook the comprehensive utilization of image-text alignment. Moreover, the closed-ended MedVQA typically offers all potential answer options for each question, which essentially transforms the task into a classification problem. Consequently, the practical utility of these methods appears constrained due to these limitations.

Conversely, the open-ended MedVQA has shown promise

Table 5. Overview of representative cross-modality applications.

Method	Tasks	Organ	Modality	Pre-trained CLIP
FlexR (Keicher et al., 2022)	Report generation	Chest	X-ray	Fine-tuned CLIP (Radford et al., 2021)
MCGN (Wang et al., 2022d)	Report generation	Chest	X-ray	CLIP(Radford et al., 2021)
X-TRA (van Sonsbeek and Worrying, 2023)	Image-text Retrieval	Chest	X-ray	Fine-tuned CLIP (Radford et al., 2021), Fine-tuned PubMedCLIP (Eslami et al., 2021)
MONET (Kim et al., 2023a)	Image-text Retrieval	Skin	Dermatology	CLIP (Radford et al., 2021)
VQA-adapter (Liu et al., 2023f)	MedVQA	Multiple	Multiple	CLIP (Radford et al., 2021)
Eslami et al. (2021)	MedVQA	Multiple	Multiple	PubMedCLIP (Radford et al., 2021)
Sonsbeek et al. (van Sonsbeek et al., 2023)	MedVQA	Multiple	Multiple	CLIP (Radford et al., 2021)

due to the development of CLIP. It does not pre-define options for each question, expanding its applicability to various scenarios and necessitating a heightened capacity for image-text comprehension (Lin et al., 2023c). Hence, Zhang et al. (2023f) leveraged CLIP’s image encoder and text encoder for question and image understanding, respectively, with a subsequent language decoder for answer generation. We illustrate the CLIP-driven open-ended MedVQA in Fig. 14. To mitigate the domain gap between CLIP’s pre-training dataset and the current MedVQA dataset, a mapping layer is commonly employed. The question embedding and the transformed image embedding are concatenated and directly input into a language decoder, which may take the form of a multi-layer transformer or a language model, facilitating the generation of answers.

4.3.3. Image-text retrieval

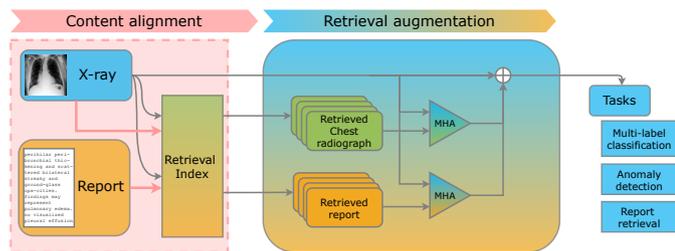


Fig. 15. Architecture overview of X-TRA (from van Sonsbeek and Worrying (2023)).

Retrieval augmentation (Komeili et al., 2022), which involves supplementing data by retrieving relevant information, allows utilization of up-to-time information from a trusted knowledge source, essentially providing a non-parametric memory expansion (Ramos et al., 2023). This approach has gained attention for its versatility, especially in the area of retrieval-augmented large language model (Zhao et al., 2023; Asai et al., 2023). However, existing retrieval methods often focus on global image features (Ionescu et al., 2023), which can lead to sub-optimal results in medical imaging. Unlike global features that may resemble across patients, subtle image details have effects on disease diagnosis and are of significance.

To address the domain shift between medical and natural images, van Sonsbeek and Worrying (2023) propose a CLIP-based multi-modal retrieval framework. This method comprises two

main parts as illustrated in Fig. 15. The first part involves fine-tuning the original CLIP model to construct the retrieval model. Given the visual similarity of medical images and the significance of small, localized markers as disease indicators, they propose a content classifier to implement supervised content-based alignment. The second part utilizes the output of the retriever in cross-modal retrieval augmentation, enhancing downstream tasks with multi-head attention (MHA). When evaluating the performance of their retrieval method in comparison to previous approaches for disease classification and report retrieval, van Sonsbeek and Worrying (2023) demonstrate substantial performance improvement, outperforming all existing retrieval methods by a significant margin. The observed performance difference underscores the potential of CLIP in constructing a robust retrieval method.

4.4. Summary

In this section, we demonstrate some representative CLIP-driven applications to show the performance improvements under CLIP assistance. While these studies focus on various tasks, they generally indicate the strength of a pre-trained CLIP model lying in its ability to **interpret and convey human knowledge**. As best illustrated in Pellegrini et al. (2023); Zhang et al. (2023d); Yang et al. (2023), where descriptive text prompts are fed to the CLIP, the experimental results showcase CLIP’s adeptness in comprehending the semantics embedded within prompts and effectively conveying semantics to other components within the framework. It implies that CLIP-driven applications can be adaptable to different groups of patients by simply modifying the specific content of the input prompt, which is beneficial for the diagnosis or prognosis of diseases having regional or age-related differences. For instance, diseases like sepsis often exhibit distinct progression patterns among different racial groups (Khoshnevisan and Chi, 2021; Tintinalli et al., 2016), while the survival rate of Community-Acquired Pneumonia correlates with the patient’s age (Stupka et al., 2009; Ravioli et al., 2022). By adjusting the content within the descriptive prompt, the develop CLIP-driven application can seamlessly transition between various groups without requiring re-training or fine-tuning.

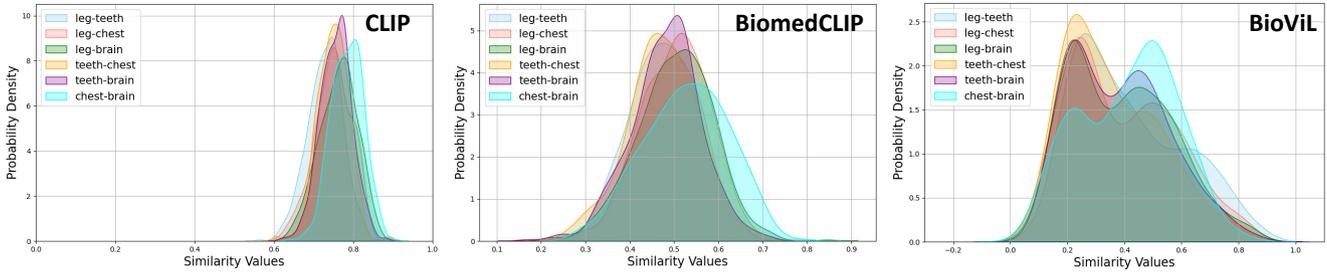


Fig. 16. Comparison between non-domain-specific and domain-specific pre-training. CLIP (OpenAI) tends to present high inter-disease similarity, which is significantly alleviated in BiomedCLIP and BioViL, revealing the irrationality of adopting CLIP (OpenAI) in medical applications.

5. Discussions and future directions

The aforementioned sections have delved into research studies that either leverage a refined CLIP pre-training paradigm or showcase CLIP-driven clinical applications within the medical imaging field. Despite significant strides, there still exist several challenges and open questions. In this section, we summarize key challenges and offer discussions on potential future directions.

Inconsistency between pre-training and application.

Some readers might notice that the two sections – refined CLIP pre-training and CLIP-driven application – are currently uncoordinated. Ideally, refined CLIP pre-training is responsible for offering the domain-specific CLIP for CLIP-driven applications. Unfortunately, the CLIP-driven applications covered in this survey still primarily rely on OpenAI’s pre-trained CLIP (trained on natural image-text datasets), accounting for a high proportion of 76.67%. This would significantly limit their performance in clinical practice. In Fig. 16, we select the top 20 to 30 most frequently occurring diseases for each organ, computing inter-organ similarity distributions of textual disease embeddings. Despite the inherent semantic differences among the selected diseases, the resulting similarity distribution reveals a challenge for CLIP in effectively discriminating them, as the distribution curves overlap significantly in the left panel of Fig. 16. Notably, this issue is markedly mitigated in BiomedCLIP, underscoring the importance of domain-specific CLIP pre-training. Simultaneously, BioViL, a model tailored for Chest X-ray analysis, demonstrates the best performance. This observation underscores the efficacy of specialized pre-trained CLIP model, emphasizing their ability to outperform generalized counterparts, especially in contexts where fine-grained discrimination among diseases is crucial. Hence, we argue that future works focusing on CLIP-driven applications should adopt a pre-trained CLIP specific to their target organ. Even for research studies focusing on context optimization (in Section 4.1.2), which aim to efficiently fine-tune a non-domain-specific CLIP to specific medical imaging scenarios, we still recommend the use of BiomedCLIP (Zhang et al., 2023c) rather than OpenAI’s general-purpose CLIP.

Incomprehensive evaluation of refined pre-training. As previously illustrated in Section 3.5, studies focusing on refined CLIP pre-training commonly assess the quality of pre-training through various evaluation tasks. These evaluation tasks include those primarily aimed at evaluating vision encoders, such

as CLS/ZSC/SEG/DET, and tasks that simultaneously assess image and text encoders, such as ITR/VQA/PG. However, the issue lies in the fact that existing studies tend to favor vision-biased evaluation tasks, somewhat overlooking the evaluation of text encoders, which is evidently demonstrated in Table 2. The essence of CLIP lies in the alignment between images and texts. Only when both the vision encoder and the text encoder demonstrate high quality, they can then effectively function as foundational components in the domain-specific CLIP-driven applications. BioViL (Boecking et al., 2022) and BioViL-T (Bannur et al., 2023) deserve recognition as they implement relatively comprehensive evaluations for their pre-trained vision and text encoder, and BioViL has been adopted in some CLIP-driven applications due to its robust performance (see Table 3). For future work, we encourage researchers to conduct more comprehensive evaluations. These evaluations could encompass their performance across tasks such as report generation (IU-Xray (Pavlopoulos et al., 2019)), phrase grounding (MS-CXR (Boecking et al., 2022)), and VQA (EHRXQA (Bae et al., 2023)).

Limited scope of refined CLIP pre-training. Presently, domain-specific CLIP models are tailored specifically for Chest X-rays within medical imaging, leaving other prevalent image types like mammography, knee MRI, and histology without adequate research. This limitation is primarily attributed to the scarcity of publicly available medical datasets. Previously, MIMIC-CXR stood as the predominant large-scale dataset for image-text alignment in medical imaging. However, with the recent release of FFA-IR (in 2021) and two additional histology datasets (in 2023), there is a pressing need for further advancements in CLIP pre-training that prioritize these two domains rather than solely focusing on chest X-rays. These two domains also have their specific challenges, which make them different from Chest X-ray. The FFA-IR dataset is featured by multi-view diagnosis. A fundus fluorescein angiography (FFA) examination may include tens or even more images to comprehensively assess the status of the eye’s vascular system, which is much larger than that of Chest X-ray (only 1 or 2 views). At the same time, histology images are characterized by giga-pixel resolution and are usually processed at the patch level, which encourages the investigation of patch-level alignment and slide-level alignment. We expect that future works could develop more sophisticated CLIP-style pre-training methods to address these issues on domains beyond Chest X-ray.

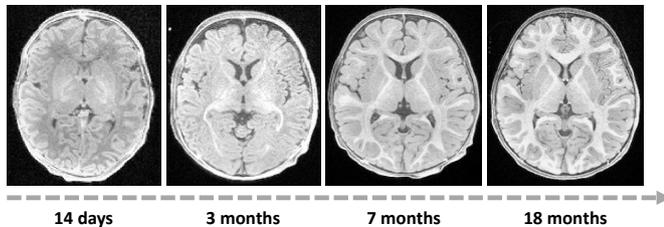


Fig. 17. Illustration of changes in both brain morphology and intensity contrast throughout infancy.

Exploring the potential of metadata. The potential of metadata has been largely underexplored. This type of data typically includes a range of patient attributes, many of which may exhibit a strong correlation with visual morphology. For example, brain development is dynamic along with age (Stiles and Jernigan, 2010; ?; Li et al., 2019), especially during infancy. Fig. 17 illustrates the varied morphology and tissue contrast observed throughout infancy, highlighting the potential importance of age information in brain-related tasks. Thus, integrating the metadata into the prompt may enhance the performance of deep learning models for brain development study. Unlike previous methods that encoded metadata directly using a multi-layer perceptron (Cetin et al., 2023; Zhao et al., 2021), CLIP can offer a more semantically rich approach to text embeddings due to large-scale pre-training. This suggests a promising avenue for future research and exploration in the field.

Incorporation of high-order correlations. Existing CLIP-style pre-training methods in the medical imaging domain still predominantly adhere to orthogonal alignment between images and texts, lacking explicit consideration for inter-sample correlation. This conventional practice involves orthogonal alignment of each image with its corresponding ground-truth report. As elucidated in Section 3.3, this approach may result in performance degradation due to substantial semantic overlap among medical samples. Although attempts have been made to mitigate this issue through inter-report semantic similarity, their success has primarily relied on handcrafted rules and low-order inter-report correlations. Consequently, the integration of high-order correlations emerges as a promising solution.

The effectiveness of high-order correlations has been well-established in tasks involving multiple information sources or those requiring interpretations of complex relationships, including brain network analysis (Ohiorhenuan et al., 2010; Chen et al., 2016; Zhang et al., 2017; Owen et al., 2021; Liu et al., 2023j), multi-label classification (Zhang et al., 2014; Nazmi et al., 2020; Si et al., 2023), and multi-view clustering (Li et al., 2022d). Likewise, medical image-text pre-training involves two kinds of information (i.e., image and text), and their semantic correlations need to be further explored. Hence, we expect that future studies will devote increased attentions to comprehending the intricate semantic correlations between medical image-text samples, addressing the challenge of orthogonal image-text alignment via the methodology of high-order correlation.

Beyond image-text alignment. The philosophy of CLIP revolves around achieving alignment between different modalities, specifically images and text. Alignment, in this context,

refers to the model’s ability to understand and establish meaningful connections between visual and textual content. By comprehending the intrinsic connections between visual and textual information, CLIP can perform exceptionally well in various cross-modal applications, reflecting a broader trend. Extending the alignment philosophy of CLIP to other multimodal medical imaging can be a promising direction. Medical imaging often involves various modalities like X-rays, MRI, and CT scans, each providing unique insights into different aspects of same patient’s condition. Analogous to CLIP’s methodology, aligning these diverse imaging modalities within a unified embedding space could potentially revolutionize medical data analysis, presenting a progressive direction for medical research and diagnostics. This kind of technique could also be used for aligning same-modalify images from different subjects as widely investigated by various image registration techniques before (Jia et al., 2012; Fan et al., 2018).

6. Conclusion

In conclusion, we have presented the first comprehensive review of the CLIP in medical imaging. Starting by introducing the foundational concepts that underpin CLIP’s success, we then delve into an extensive literature review from two aspects: refined CLIP pre-training methods and diverse CLIP-driven applications. For refined CLIP pre-training methods, our survey offers a structured taxonomy based on the unique challenges that CLIP pre-training owns in the medical imaging domain, aiming to chart a clear pathway for researchers to advance this field progressively. In exploring diverse CLIP-driven applications, we compare CLIP-related approaches against those solely vision-driven methods, emphasizing the added value that pre-trained CLIP models could bring. Notably, through thoughtful design, they could serve as valuable supplementary supervision signals, significantly enhancing the performance across various tasks. Beyond simply reviewing existing studies in these two sections, we also discuss common issues, laying the groundwork for future directions. By illuminating the potential and challenges of employing CLIP in medical imaging, we aim to push the field forward, encouraging innovation and paving the way for human-aligned medical AI.

References

- Adhikari, R., Dhakal, M., Thapaliya, S., Poudel, K., Bhandari, P., Khanal, B., 2023. Synthetic boost: Leveraging synthetic data for enhanced vision-language segmentation in echocardiography, in: International Workshop on Advances in Simplifying Medical Ultrasound, Springer. pp. 89–99.
- Ahn, J., Kwak, S., 2018. Learning pixel-level semantic affinity with image-level supervision for weakly supervised semantic segmentation, in: Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 4981–4990.
- Alsentzer, E., Murphy, J., Boag, W., Weng, W.H., Jindi, D., Naumann, T., McDermott, M., 2019. Publicly available clinical, in: Proceedings of the 2nd Clinical Natural Language Processing Workshop, Association for Computational Linguistics.
- Anand, D., Singhal, V., Shanbhag, D.D., KS, S., Patil, U., Bhushan, C., Manickam, K., Gui, D., Mullick, R., Gopal, A., et al., 2023. One-shot localization and segmentation of medical images with foundation models. arXiv preprint arXiv:2310.18642 .

- Armato III, S.G., McLennan, G., Bidaut, L., McNitt-Gray, M.F., Meyer, C.R., Reeves, A.P., Zhao, B., Aberle, D.R., Henschke, C.I., Hoffman, E.A., et al., 2011. The lung image database consortium (lidc) and image database resource initiative (idri): a completed reference database of lung nodules on ct scans. *Medical physics* 38, 915–931.
- Asai, A., Min, S., Zhong, Z., Chen, D., 2023. Retrieval-based language models and applications, in: *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 6: Tutorial Abstracts)*, pp. 41–46.
- Austin, J., Romney, B., Goldsmith, L., 1992. Missed bronchogenic carcinoma: radiographic findings in 27 patients with a potentially resectable lesion evident in retrospect. *Radiology* 182, 115–122.
- Azad, B., Azad, R., Eskandari, S., Bozorgpour, A., Kazerouni, A., Rekik, I., Merhof, D., 2023. Foundational models in medical imaging: A comprehensive survey and future vision. *arXiv preprint arXiv:2310.18689*.
- Azizi, S., Mustafa, B., Ryan, F., Beaver, Z., Freyberg, J., Deaton, J., Loh, A., Karthikesalingam, A., Kornblith, S., Chen, T., et al., 2021. Big self-supervised models advance medical image classification. *arXiv preprint arXiv:2101.05224*.
- Bae, S., Kyung, D., Ryu, J., Cho, E., Lee, G., Kweon, S., Oh, J., Ji, L., Chang, E.I.C., Kim, T., Choi, E., 2023. EHRXQA: A multi-modal question answering dataset for electronic health records with chest x-ray images, in: *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*. URL: <https://openreview.net/forum?id=Pk2x7FPuZ4>.
- Baliah, S., Maani, F.A., Sanjeev, S., Khan, M.H., 2023. Exploring the transfer learning capabilities of clip in domain generalization for diabetic retinopathy, in: *International Workshop on Machine Learning in Medical Imaging*, Springer. pp. 444–453.
- Bangalath, H., Maaz, M., Khattak, M.U., Khan, S.H., Shahbaz Khan, F., 2022. Bridging the gap between object and image-level representations for open-vocabulary detection. *Advances in Neural Information Processing Systems* 35, 33781–33794.
- Bannur, S., Hyland, S., Liu, Q., Perez-Garcia, F., Ilse, M., Castro, D.C., Boecking, B., Sharma, H., Bouzid, K., Thieme, A., et al., 2023. Learning to exploit temporal structure for biomedical vision-language processing, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 15016–15027.
- Battleday, R.M., Peterson, J.C., Griffiths, T.L., 2020. Capturing human categorization of natural images by combining deep networks and cognitive models. *Nature communications* 11, 5418.
- Baumgartner, M., Jäger, P.F., Isensee, F., Maier-Hein, K.H., 2021. nndetection: a self-configuring method for medical object detection, in: *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part V 24*, Springer. pp. 530–539.
- Bearman, A., Russakovsky, O., Ferrari, V., Fei-Fei, L., 2016. What’s the point: Semantic segmentation with point supervision, in: *European conference on computer vision*, Springer. pp. 549–565.
- Beltagy, I., Lo, K., Cohan, A., 2019. Scibert: A pretrained language model for scientific text, in: *EMNLP, Association for Computational Linguistics*. URL: <https://www.aclweb.org/anthology/D19-1371>.
- Bilic, P., Christ, P., Li, H.B., Vorontsov, E., Ben-Cohen, A., Kaissis, G., Szeleskin, A., Jacobs, C., Mamani, G.E.H., Chartrand, G., et al., 2023. The liver tumor segmentation benchmark (lits). *Medical Image Analysis* 84, 102680.
- Blumer, A., Ehrenfeucht, A., Haussler, D., Warmuth, M.K., 1987. Occam’s razor. *Information processing letters* 24, 377–380.
- Bodenreider, O., 2004. The unified medical language system (umls): integrating biomedical terminology. *Nucleic acids research* 32, D267–D270.
- Boecking, B., Usuyama, N., Bannur, S., Castro, D.C., Schwaighofer, A., Hyland, S., Wetscherek, M., Naumann, T., Nori, A., Alvarez-Valle, J., et al., 2022. Making the most of text semantics to improve biomedical vision-language processing, in: *European conference on computer vision*, Springer. pp. 1–21.
- Bordes, A., Usunier, N., Garcia-Duran, A., Weston, J., Yakhnenko, O., 2013. Translating embeddings for modeling multi-relational data. *Advances in neural information processing systems* 26.
- Bouget, D., Allan, M., Stoyanov, D., Jannin, P., 2017. Vision-based and markerless surgical tool detection and tracking: a review of the literature. *Medical image analysis* 35, 633–654.
- Bustos, A., Pertusa, A., Salinas, J.M., De La Iglesia-Vaya, M., 2020. Padchest: A large chest x-ray image dataset with multi-label annotated reports. *Medical image analysis* 66, 101797.
- Byra, M., Rachmadi, M.F., Skibbe, H., 2023. Few-shot medical image classification with simple shape and texture text descriptors using vision-language models. *arXiv preprint arXiv:2308.04005*.
- Cao, Q., Xu, Z., Chen, Y., Ma, C., Yang, X., 2023. Domain-controlled prompt learning. *arXiv preprint arXiv:2310.07730*.
- Caron, M., Touvron, H., Misra, I., Jégou, H., Mairal, J., Bojanowski, P., Joulin, A., 2021. Emerging properties in self-supervised vision transformers, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 9650–9660.
- Cetin, I., Stephens, M., Camara, O., Ballester, M.A.G., 2023. Attri-vae: Attribute-based interpretable representations of medical images with variational autoencoders. *Computerized Medical Imaging and Graphics* 104, 102158.
- Chaitanya, K., Erdil, E., Karani, N., Konukoglu, E., 2020. Contrastive learning of global and local features for medical image segmentation with limited annotations. *arXiv preprint arXiv:2006.10511*.
- Chambon, P., Bluethgen, C., Delbrouck, J.B., Van der Sluijs, R., Polacin, M., Chaves, J.M.Z., Abraham, T.M., Purohit, S., Langlotz, C.P., Chaudhari, A., 2022. Roentgen: vision-language foundation model for chest x-ray generation. *arXiv preprint arXiv:2211.12737*.
- Chen, S., Ma, K., Zheng, Y., 2019. Med3d: Transfer learning for 3d medical image analysis. *arXiv preprint arXiv:1904.00625*.
- Chen, T., Kornblith, S., Norouzi, M., Hinton, G., 2020a. A simple framework for contrastive learning of visual representations, in: *International conference on machine learning*, PMLR. pp. 1597–1607.
- Chen, X., Han, Y., Zhang, J., 2023a. A zero-/few-shot anomaly classification and segmentation method for cvpr 2023 vand workshop challenge tracks 1&2: 1st place on zero-shot ad and 4th place on few-shot ad. *arXiv preprint arXiv:2305.17382*.
- Chen, X., He, K., 2021. Exploring simple siamese representation learning, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 15750–15758.
- Chen, X., Zhang, H., Gao, Y., Wee, C.Y., Li, G., Shen, D., Initiative, A.D.N., 2016. High-order resting-state functional connectivity network for mci classification. *Human brain mapping* 37, 3282–3296.
- Chen, Z., Guo, Q., Yeung, L.K., Chan, D.T., Lei, Z., Liu, H., Wang, J., 2023b. Surgical video captioning with mutual-modal concept alignment, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 24–34.
- Chen, Z., Li, G., Wan, X., 2022a. Align, reason and learn: Enhancing medical vision-and-language pre-training with knowledge, in: *Proceedings of the 30th ACM International Conference on Multimedia*, pp. 5152–5161.
- Chen, Z., Song, Y., Chang, T.H., Wan, X., 2020b. Generating radiology reports via memory-driven transformer, in: *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 1439–1449.
- Chen, Z., Tian, Z., Zhu, J., Li, C., Du, S., 2022b. C-cam: Causal cam for weakly supervised semantic segmentation on medical image, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 11676–11685.
- Cheng, P., Lin, L., Lyu, J., Huang, Y., Luo, W., Tang, X., 2023. Prior: Prototype representation joint learning from medical images and reports, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 21361–21371.
- Cherti, M., Beaumont, R., Wightman, R., Wortsman, M., Ilharco, G., Gordon, C., Schuhmann, C., Schmidt, L., Jitsev, J., 2023. Reproducible scaling laws for contrastive language-image learning, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2818–2829.
- Dai, J., He, K., Sun, J., 2015. Boxesup: Exploiting bounding boxes to supervise convolutional networks for semantic segmentation, in: *Proceedings of the IEEE international conference on computer vision*, pp. 1635–1643.
- Decencière, E., Zhang, X., Cazuguel, G., Lay, B., Cochener, B., Trone, C., Gain, P., Ordonez, R., Massin, P., Erginay, A., et al., 2014. Feedback on a publicly distributed image database: the messidor database. *Image Analysis & Stereology* 33, 231–234.
- Ding, K., Zhou, M., Metaxas, D.N., Zhang, S., 2023. Pathology-and-genomics multimodal transformer for survival outcome prediction, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 622–631.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al.,

2020. An image is worth 16x16 words: Transformers for image recognition at scale. arXiv preprint arXiv:2010.11929 .
- Dubey, S.R., Singh, S.K., Singh, R.K., 2015. Local wavelet pattern: a new feature descriptor for image retrieval in medical ct databases. *IEEE Transactions on Image Processing* 24, 5892–5903.
- Emma, D., Jared, Jorge, Will, C., 2015. Diabetic retinopathy detection. URL: <https://kaggle.com/competitions/diabetic-retinopathy-detection>.
- Eslami, S., Meinel, C., De Melo, G., 2023. Pubmedclip: How much does clip benefit visual question answering in the medical domain?, in: Findings of the Association for Computational Linguistics: EACL 2023, pp. 1151–1163.
- Eslami, S., de Melo, G., Meinel, C., 2021. Does clip benefit visual question answering in the medical domain as much as it does in the general domain? arXiv preprint arXiv:2112.13906 .
- Fan, J., Cao, X., Xue, Z., Yap, P.T., Shen, D., 2018. Adversarial similarity network for evaluating image alignment in deep learning based registration, in: *Medical Image Computing and Computer Assisted Intervention–MICCAI 2018: 21st International Conference, Granada, Spain, September 16–20, 2018, Proceedings, Part I*, Springer. pp. 739–746.
- Fang, X., Yan, P., 2020. Multi-organ segmentation over partially labeled datasets with multi-scale feature abstraction. *IEEE Transactions on Medical Imaging* 39, 3619–3629.
- Fernando, T., Gammulle, H., Denman, S., Sridharan, S., Fookes, C., 2021. Deep learning for medical anomaly detection—a survey. *ACM Computing Surveys (CSUR)* 54, 1–37.
- Ganeshan, D., Duong, P.A.T., Probyn, L., Lenchik, L., McArthur, T.A., Retrouvey, M., Ghobadi, E.H., Desouches, S.L., Pastel, D., Francis, I.R., 2018. Structured reporting in radiology. *Academic radiology* 25, 66–73.
- Geirhos, R., Jacobsen, J.H., Michaelis, C., Zemel, R., Brendel, W., Bethge, M., Wichmann, F.A., 2020. Shortcut learning in deep neural networks. *Nature Machine Intelligence* 2, 665–673.
- Grill, J.B., Strub, F., Altché, F., Tallec, C., Richemond, P.H., Buchatskaya, E., Doersch, C., Pires, B.A., Guo, Z.D., Azar, M.G., et al., 2020. Bootstrap your own latent: A new approach to self-supervised learning. arXiv preprint arXiv:2006.07733 .
- Gu, J., Han, Z., Chen, S., Beirami, A., He, B., Zhang, G., Liao, R., Qin, Y., Tresp, V., Torr, P., 2023. A systematic survey of prompt engineering on vision-language foundation models. arXiv preprint arXiv:2307.12980 .
- Gu, Y., Tinn, R., Cheng, H., Lucas, M., Usuyama, N., Liu, X., Naumann, T., Gao, J., Poon, H., 2021. Domain-specific language model pretraining for biomedical natural language processing. *ACM Transactions on Computing for Healthcare (HEALTH)* 3, 1–23.
- Guo, M., Yi, H., Qin, Z., Wang, H., Men, A., Lao, Q., 2023. Multiple prompt fusion for zero-shot lesion detection using vision-language models, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 283–292.
- Han, C., Lin, J., Mai, J., Wang, Y., Zhang, Q., Zhao, B., Chen, X., Pan, X., Shi, Z., Xu, Z., et al., 2022. Multi-layer pseudo-supervision for histopathology tissue semantic segmentation using patch-level classification labels. *Medical Image Analysis* 80, 102487.
- He, K., Chen, X., Xie, S., Li, Y., Dollár, P., Girshick, R., 2021. Masked autoencoders are scalable vision learners. arXiv preprint arXiv:2111.06377 .
- He, K., Gkioxari, G., Dollár, P., Girshick, R., 2017. Mask r-cnn, in: *Proceedings of the IEEE international conference on computer vision*, pp. 2961–2969.
- He, K., Zhang, X., Ren, S., Sun, J., 2016. Deep residual learning for image recognition, in: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 770–778.
- Heller, N., Sathianathan, N., Kalapara, A., Walczak, E., Moore, K., Kaluzniak, H., Rosenberg, J., Blake, P., Rengel, Z., Oestreich, M., et al., 2019. The kits19 challenge data: 300 kidney tumor cases with clinical context, ct semantic segmentations, and surgical outcomes. arXiv preprint arXiv:1904.00445 .
- Huang, S.C., Shen, L., Lungren, M.P., Yeung, S., 2021. Gloria: A multimodal global-local representation learning framework for label-efficient medical image recognition, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 3942–3951.
- Huang, Z., Bianchi, F., Yuksekgonul, M., Montine, T.J., Zou, J., 2023a. A visual–language foundation model for pathology image analysis using medical twitter. *Nature medicine* 29, 2307–2316.
- Huang, Z., Wang, H., Deng, Z., Ye, J., Su, Y., Sun, H., He, J., Gu, Y., Gu, L., Zhang, S., Qiao, Y., 2023b. Stu-net: Scalable and transferable medical image segmentation models empowered by large-scale supervised pre-training. arXiv:2304.06716.
- Huang, Z., Zhang, X., Zhang, S., 2023c. Kiut: Knowledge-injected u-transformer for radiology report generation, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 19809–19818.
- Ickler, M.K., Baumgartner, M., Roy, S., Wald, T., Maier-Hein, K.H., 2023. Taming detection transformers for medical object detection, in: *BVM Workshop*, Springer. pp. 183–188.
- Ikezogwo, W.O., Seyfioglu, M.S., Ghezloo, F., Geva, D.S.C., Mohammed, F.S., Anand, P.K., Krishna, R., Shapiro, L., 2023. Quilt-1m: One million image-text pairs for histopathology. arXiv preprint arXiv:2306.11207 .
- Ionescu, B., Müller, H., Drăgulescu, A.M., Yim, W.W., Ben Abacha, A., Snider, N., Adams, G., Yetisgen, M., Rückert, J., Garcia Seco de Herrera, A., et al., 2023. Overview of the imageclef 2023: Multimedia retrieval in medical, social media and internet applications, in: *International Conference of the Cross-Language Evaluation Forum for European Languages*, Springer. pp. 370–396.
- Irvin, J., Rajpurkar, P., Ko, M., Yu, Y., Ciurea-Ilcus, S., Chute, C., Marklund, H., Haghgoo, B., Ball, R., Shpanskaya, K., et al., 2019. Chexpert: A large chest radiograph dataset with uncertainty labels and expert comparison, in: *Proceedings of the AAAI conference on artificial intelligence*, pp. 590–597.
- Isensee, F., Jaeger, P.F., Kohl, S.A., Petersen, J., Maier-Hein, K.H., 2021. nnu-net: a self-configuring method for deep learning-based biomedical image segmentation. *Nature methods* 18, 203–211.
- Jain, S., Agrawal, A., Saporta, A., Truong, S., Duong, D.N., Bui, T., Chambon, P., Zhang, Y., Lungren, M.P., Ng, A.Y., Langlotz, C., Rajpurkar, P., 2021. Radgraph: Extracting clinical entities and relations from radiology reports, in: *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*. URL: <https://openreview.net/forum?id=pMwtc5NKd7V>.
- Jang, J., Kyung, D., Kim, S.H., Lee, H., Bae, K., Choi, E., 2022. Significantly improving zero-shot x-ray pathology classification via fine-tuning pre-trained image-text encoders. arXiv preprint arXiv:2212.07050 .
- Jia, H., Yap, P.T., Shen, D., 2012. Iterative multi-atlas-based multi-image segmentation with tree-based registration. *NeuroImage* 59, 422–430.
- Johnson, A.E., Pollard, T.J., Berkowitz, S.J., Greenbaum, N.R., Lungren, M.P., Deng, C.Y., Mark, R.G., Horng, S., 2019. MIMIC-CXR, a de-identified publicly available database of chest radiographs with free-text reports. *Scientific data* 6, 317.
- Karargyris, A., Kashyap, S., Lourentzou, I., Wu, J.T., Sharma, A., Tong, M., Abedin, S., Beymer, D., Mukherjee, V., Krupinski, E.A., et al., 2021. Creation and validation of a chest x-ray dataset with eye-tracking and report dictation for ai development. *Scientific data* 8, 1–18.
- Karthik, Maggie, S.D., 2019. Aptos 2019 blindness detection. URL: <https://kaggle.com/competitions/aptos2019-blindness-detection>.
- Kather, J.N., Weis, C.A., Bianconi, F., Melchers, S.M., Schad, L.R., Gaiser, T., Marx, A., Zöllner, F.G., 2016. Multi-class texture analysis in colorectal cancer histology. *Scientific reports* 6, 27988.
- Keicher, M., Zaripova, K., Czempiel, T., Mach, K., Khakzar, A., Navab, N., 2022. Flexr: Few-shot classification with language embeddings for structured reporting of chest x-rays. arXiv preprint arXiv:2203.15723 .
- Kellgren, J., Lawrence, J., 1957. Radiological assessment of osteo-arthritis. *Annals of the rheumatic diseases* 16, 494.
- Kenton, J.D.M.W.C., Toutanova, L.K., 2019. Bert: Pre-training of deep bidirectional transformers for language understanding, in: *Proceedings of NAACL-HLT*, pp. 4171–4186.
- Kermany, D.S., Goldbaum, M., Cai, W., Valentim, C.C., Liang, H., Baxter, S.L., McKeown, A., Yang, G., Wu, X., Yan, F., et al., 2018. Identifying medical diagnoses and treatable diseases by image-based deep learning. *cell* 172, 1122–1131.
- Khare, Y., Bagal, V., Mathew, M., Devi, A., Priyakumar, U.D., Jawahar, C., 2021. Mmbert: Multimodal bert pretraining for improved medical vqa, in: *2021 IEEE 18th International Symposium on Biomedical Imaging (ISBI)*, IEEE. pp. 1033–1036.
- Khattak, M.U., Rasheed, H., Maaz, M., Khan, S., Khan, F.S., 2023. Maple: Multi-modal prompt learning, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 19113–19122.
- Khoreva, A., Benenson, R., Hosang, J., Hein, M., Schiele, B., 2017. Simple does it: Weakly supervised instance and semantic segmentation, in: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 876–885.

- Khoshnevisan, F., Chi, M., 2021. Unifying domain adaptation and domain generalization for robust prediction across minority racial groups, in: Machine Learning and Knowledge Discovery in Databases. Research Track: European Conference, ECML PKDD 2021, Bilbao, Spain, September 13–17, 2021, Proceedings, Part I 21, Springer. pp. 521–537.
- Kim, C., Gadgil, S.U., DeGrave, A.J., Cai, Z.R., Daneshjou, R., Lee, S.I., 2023a. Fostering transparent medical image ai via an image-text foundation model grounded in medical literature. medRxiv .
- Kim, I., Kim, J., Choi, J., Kim, H.J., 2023b. Concept bottleneck with visual concept filtering for explainable medical image classification. arXiv preprint arXiv:2308.11920 .
- Kolesnikov, A., Lampert, C.H., 2016. Seed, expand and constrain: Three principles for weakly-supervised image segmentation, in: Computer Vision–ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14, Springer. pp. 695–711.
- Komeili, M., Shuster, K., Weston, J., 2022. Internet-augmented dialogue generation, in: Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pp. 8460–8478.
- Kumar, B., Palepu, A., Tuwani, R., Beam, A., 2022. Towards reliable zero shot classification in self-supervised models with conformal prediction. arXiv preprint arXiv:2210.15805 .
- Lauritsen, S.M., Kristensen, M., Olsen, M.V., Larsen, M.S., Lauritsen, K.M., Jørgensen, M.J., Lange, J., Thiesson, B., 2020. Explainable artificial intelligence model to predict acute critical illness from electronic health records. Nature communications 11, 3852.
- Lee, J., Yoon, W., Kim, S., Kim, D., Kim, S., So, C.H., Kang, J., 2020. Biobert: a pre-trained biomedical language representation model for biomedical text mining. Bioinformatics 36, 1234–1240.
- Lee, S., Lee, M., Lee, J., Shim, H., 2021. Railroad is not a train: Saliency as pseudo-pixel supervision for weakly supervised semantic segmentation, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp. 5495–5505.
- Lei, H., Huang, H., Yang, B., Cui, G., Wang, R., Wu, D., Li, Y., 2023a. Tcsa: A text-guided cross-view medical semantic alignment framework for adaptive multi-view visual representation learning, in: International Symposium on Bioinformatics Research and Applications, Springer. pp. 136–149.
- Lei, J., Dai, L., Jiang, H., Wu, C., Zhang, X., Zhang, Y., Yao, J., Xie, W., Zhang, Y., Li, Y., et al., 2023b. Unibrain: Universal brain mri diagnosis with hierarchical knowledge-enhanced pre-training. arXiv preprint arXiv:2309.06828 .
- Lei, Y., Li, Z., Shen, Y., Zhang, J., Shan, H., 2023c. Clip-lung: Textual knowledge-guided lung nodule malignancy prediction, in: Medical Image Computing and Computer Assisted Intervention – MICCAI 2023, Springer Nature Switzerland, Cham. pp. 403–412.
- Lessmann, N., Van Ginneken, B., De Jong, P.A., Išgum, I., 2019. Iterative fully convolutional neural networks for automatic vertebra segmentation and identification. Medical image analysis 53, 142–155.
- Li, B., Weinberger, K.Q., Belongie, S., Koltun, V., Ranftl, R., 2022a. Language-driven semantic segmentation, in: International Conference on Learning Representations. URL: <https://openreview.net/forum?id=RriDjddCLN>.
- Li, G., Wang, L., Yap, P.T., Wang, F., Wu, Z., Meng, Y., Dong, P., Kim, J., Shi, F., Reikik, I., et al., 2019. Computational neuroanatomy of baby brains: A review. NeuroImage 185, 906–925.
- Li, L.H., Zhang, P., Zhang, H., Yang, J., Li, C., Zhong, Y., Wang, L., Yuan, L., Zhang, L., Hwang, J.N., et al., 2022b. Grounded language-image pre-training, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 10965–10975.
- Li, M., Cai, W., Liu, R., Weng, Y., Zhao, X., Wang, C., Chen, X., Liu, Z., Pan, C., Li, M., et al., 2021. Ffa-ir: Towards an explainable and reliable medical report generation benchmark, in: Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2).
- Li, X., Shen, L., Xie, X., Huang, S., Xie, Z., Hong, X., Yu, J., 2020. Multi-resolution convolutional networks for chest x-ray radiograph based lung nodule detection. Artificial intelligence in medicine 103, 101744.
- Li, Y., Jia, S., Song, G., Wang, P., Jia, F., 2023. Sda-clip: surgical visual domain adaptation using video and text labels. Quantitative Imaging in Medicine and Surgery 13, 6989.
- Li, Y., Yu, Y., Zou, Y., Xiang, T., Li, X., 2022c. Online easy example mining for weakly-supervised gland segmentation from histology images, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer. pp. 578–587.
- Li, Z., Tang, C., Zheng, X., Liu, X., Zhang, W., Zhu, E., 2022d. High-order correlation preserved incomplete multi-view subspace clustering. IEEE Transactions on Image Processing 31, 2067–2080.
- Liao, R., Moyer, D., Cha, M., Quigley, K., Berkowitz, S., Hornig, S., Golland, P., Wells, W.M., 2021. Multimodal representation learning via maximization of local mutual information, in: Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part II 24, Springer. pp. 273–283.
- Lieberman, L., Menell, J.H., 2002. Breast imaging reporting and data system (bi-rads). Radiologic Clinics 40, 409–430.
- Lin, B., Chen, Z., Li, M., Lin, H., Xu, H., Zhu, Y., Liu, J., Cai, W., Yang, L., Zhao, S., et al., 2023a. Towards medical artificial general intelligence via knowledge-enhanced multimodal pretraining. arXiv preprint arXiv:2304.14204 .
- Lin, D., Dai, J., Jia, J., He, K., Sun, J., 2016. Scribblesup: Scribble-supervised convolutional networks for semantic segmentation, in: Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 3159–3167.
- Lin, J., Gong, S., 2023. Gridclip: One-stage object detection by grid-level clip representation learning. arXiv preprint arXiv:2303.09252 .
- Lin, W., Zhao, Z., Zhang, X., Wu, C., Zhang, Y., Wang, Y., Xie, W., 2023b. Pmc-clip: Contrastive language-image pre-training using biomedical documents. arXiv preprint arXiv:2303.07240 .
- Lin, Z., Zhang, D., Tao, Q., Shi, D., Haffari, G., Wu, Q., He, M., Ge, Z., 2023c. Medical visual question answering: A survey. Artificial Intelligence in Medicine , 102611.
- Liu, B., Lu, D., Wei, D., Wu, X., Wang, Y., Zhang, Y., Zheng, Y., 2023a. Improving medical vision-language contrastive pretraining with semantics-aware triage. IEEE Transactions on Medical Imaging .
- Liu, C., Cheng, S., Chen, C., Qiao, M., Zhang, W., Shah, A., Bai, W., Arcucci, R., 2023b. M-flag: Medical vision-language pre-training with frozen language models and latent space geometry optimization, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer. pp. 637–647.
- Liu, C., Cheng, S., Shi, M., Shah, A., Bai, W., Arcucci, R., 2023c. Imitate: Clinical prior guided hierarchical vision-language pre-training. arXiv preprint arXiv:2310.07355 .
- Liu, C., Shah, A., Bai, W., Arcucci, R., 2023d. Utilizing synthetic data for medical vision-language pre-training: Bypassing the need for real images. arXiv preprint arXiv:2310.07027 .
- Liu, C., Wan, Z., Cheng, S., Zhang, M., Arcucci, R., 2023e. Etp: Learning transferable ecg representations via ecg-text pre-training. arXiv preprint arXiv:2309.07145 .
- Liu, F., Liu, C., Zhao, L., Zhang, X., Wu, X., Xu, X., Liu, Y., Ma, C., Wei, S., He, Z., et al., 2018. An open access database for evaluating the algorithms of electrocardiogram rhythm and morphology abnormality detection. Journal of Medical Imaging and Health Informatics 8, 1368–1373.
- Liu, G., Hsu, T.M.H., McDermott, M., Boag, W., Weng, W.H., Szolovits, P., Ghassemi, M., 2019. Clinically accurate chest x-ray report generation, in: Machine Learning for Healthcare Conference, PMLR. pp. 249–269.
- Liu, J., Hu, T., Zhang, Y., Feng, Y., Hao, J., Lv, J., Liu, Z., 2023f. Parameter-efficient transfer learning for medical visual question answering. IEEE Transactions on Emerging Topics in Computational Intelligence .
- Liu, J., Hu, T., Zhang, Y., Gai, X., Feng, Y., Liu, Z., 2023g. A chatgpt aided explainable framework for zero-shot medical image diagnosis. arXiv preprint arXiv:2307.01981 .
- Liu, J., Wang, Z., Ye, Q., Chong, D., Zhou, P., Hua, Y., 2023h. Qilin-med-vl: Towards chinese large vision-language model for general healthcare. arXiv preprint arXiv:2310.17956 .
- Liu, J., Zhang, Y., Chen, J.N., Xiao, J., Lu, Y., A Landman, B., Yuan, Y., Yuille, A., Tang, Y., Zhou, Z., 2023i. Clip-driven universal model for organ segmentation and tumor detection, in: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 21152–21164.
- Liu, P., Wang, X., Fan, M., Pan, H., Yin, M., Zhu, X., Du, D., Zhao, X., Xiao, L., Ding, L., et al., 2022a. Learning incrementally to segment multiple organs in a ct image, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer. pp. 714–724.
- Liu, Q., Dou, Q., Yu, L., Heng, P.A., 2020. Ms-net: multi-site network for improving prostate segmentation with heterogeneous mri data. IEEE transactions on medical imaging 39, 2713–2724.
- Liu, Y., Liu, M., Zhang, Y., Shen, D., 2023j. Learning hierarchical-order func-

- tional connectivity networks for mild cognitive impairment diagnosis, in: 2023 IEEE 20th International Symposium on Biomedical Imaging (ISBI), IEEE, pp. 1–5.
- Liu, Z., Lin, Y., Cao, Y., Hu, H., Wei, Y., Zhang, Z., Lin, S., Guo, B., 2021. Swin transformer: Hierarchical vision transformer using shifted windows, in: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 10012–10022.
- Liu, Z., Mao, H., Wu, C.Y., Feichtenhofer, C., Darrell, T., Xie, S., 2022b. A convnet for the 2020s, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp. 11976–11986.
- Lo, S.C., Lou, S.L., Lin, J.S., Freedman, M.T., Chien, M.V., Mun, S.K., 1995. Artificial convolution neural network techniques and applications for lung nodule detection. *IEEE transactions on medical imaging* 14, 711–718.
- López-Linares, K., Aranjuelo, N., Kabongo, L., Maclair, G., Lete, N., Ceresa, M., García-Familiar, A., Macía, I., Ballester, M.A.G., 2018. Fully automatic detection and segmentation of abdominal aortic thrombus in post-operative cta images using deep convolutional neural networks. *Medical image analysis* 46, 202–214.
- Lüddecke, T., Ecker, A., 2022. Image segmentation using text and image prompts, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 7086–7096.
- Luo, H., Bao, J., Wu, Y., He, X., Li, T., 2023. Segclip: Patch aggregation with learnable centers for open-vocabulary semantic segmentation, in: International Conference on Machine Learning, PMLR, pp. 23033–23044.
- Luo, L., Chen, H., Xiao, Y., Zhou, Y., Wang, X., Vardhanabuthi, V., Wu, M., Han, C., Liu, Z., Fang, X.H.B., et al., 2022. Rethinking annotation granularity for overcoming shortcuts in deep learning-based radiograph diagnosis: A multicenter study. *Radiology: Artificial Intelligence* 4, e210299.
- Luo, M., Cohen, A.M., Addepalli, S., Smalheiser, N.R., 2020. Identifying main finding sentences in clinical case reports. *Database* 2020, baaa041.
- Lv, J., Hu, Y., Fu, Q., Hu, Y., Lv, L., Yang, G., Li, J., Zhao, Y., 2023. Local feature matters: Cascade multi-scale mlp for edge segmentation of medical images. *IEEE Transactions on NanoBioscience*.
- Lyu, F., Yang, B., Ma, A.J., Yuen, P.C., 2021. A segmentation-assisted model for universal lesion detection with partial labels, in: Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part V 24, Springer, pp. 117–127.
- Madhawa, K., 2021. Medclip: Fine-tuning a clip model on the roco medical dataset. URL: <https://github.com/Kaushalya/medclip>.
- Mehta, S., Mercan, E., Bartlett, J., Weaver, D., Elmore, J.G., Shapiro, L., 2018. Y-net: joint segmentation and classification for diagnosis of breast biopsy images, in: Medical Image Computing and Computer Assisted Intervention–MICCAI 2018: 21st International Conference, Granada, Spain, September 16–20, 2018, Proceedings, Part II 11, Springer, pp. 893–901.
- Mishra, A., Mittal, R., Jestin, C., Tingos, K., Rajpurkar, P., 2023. Improving zero-shot detection of low prevalence chest pathologies using domain pre-trained language models. *arXiv preprint arXiv:2306.08000*.
- Miura, Y., Zhang, Y., Tsai, E., Langlotz, C., Jurafsky, D., 2021. Improving factual completeness and consistency of image-to-text radiology report generation, in: Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pp. 5288–5304.
- Moon, J.H., Lee, H., Shin, W., Kim, Y.H., Choi, E., 2022. Multi-modal understanding and generation for medical images and text via vision-language pre-training. *IEEE Journal of Biomedical and Health Informatics* 26, 6070–6080.
- Morid, M.A., Fiszman, M., Raja, K., Jonnalagadda, S.R., Del Fiol, G., 2016. Classification of clinically useful sentences in clinical evidence resources. *Journal of biomedical informatics* 60, 14–22.
- Müller, P., Kaissis, G., Rueckert, D., 2022a. The role of local alignment and uniformity in image-text contrastive learning on medical images. *arXiv preprint arXiv:2211.07254*.
- Müller, P., Kaissis, G., Zou, C., Rueckert, D., 2022b. Joint learning of localized representations from medical images and reports, in: European Conference on Computer Vision, Springer, pp. 685–701.
- Müller, P., Kaissis, G., Zou, C., Rueckert, D., 2022c. Radiological reports improve pre-training for localized imaging tasks on chest x-rays, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer, pp. 647–657.
- Müller, P., Meissen, F., Brandt, J., Kaissis, G., Rueckert, D., 2023. Anatomy-driven pathology detection on chest x-rays, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer, pp. 57–66.
- Nazmi, S., Yan, X., Homaifar, A., Doucette, E., 2020. Evolving multi-label classification rules by exploiting high-order label correlations. *Neurocomputing* 417, 176–186.
- Neumann, M., King, D., Beltagy, I., Ammar, W., 2019. ScispaCy: fast and robust models for biomedical natural language processing. *arXiv preprint arXiv:1902.07669*.
- Nguyen, H.Q., Lam, K., Le, L.T., Pham, H.H., Tran, D.Q., Nguyen, D.B., Le, D.D., Pham, C.M., Tong, H.T., Dinh, D.H., et al., 2022. Vindr-cxr: An open dataset of chest x-rays with radiologist’s annotations. *Scientific Data* 9, 429.
- Nickparvar, M., 2021. Brain tumor mri dataset. URL: <https://www.kaggle.com/dsv/2645886>, doi:10.34740/KAGGLE/DSV/2645886.
- Ohiorhenuan, I.E., Mechler, F., Purpura, K.P., Schmid, A.M., Hu, Q., Victor, J.D., 2010. Sparse coding and high-order correlations in fine-scale cortical networks. *Nature* 466, 617–621.
- O’Neil, A.Q., Kascenas, A., Henry, J., Wyeth, D., Shepherd, M., Beveridge, E., Clunie, L., Sansom, C., Seduikyte, M., Muir, E., Poole, I., 2018. Attaining human-level performance with atlas location autocontext for anatomical landmark detection in 3d ct data, in: Proceedings of the European conference on computer vision (ECCV) Workshops, pp. 0–0.
- Ouyang, X., Karanam, S., Wu, Z., Chen, T., Huo, J., Zhou, X.S., Wang, Q., Cheng, J.Z., 2020. Learning hierarchical attention for weakly-supervised chest x-ray abnormality localization and diagnosis. *IEEE transactions on medical imaging*.
- Owen, L.L., Chang, T.H., Manning, J.R., 2021. High-level cognition during story listening is reflected in high-order dynamic correlations in neural activity patterns. *Nature Communications* 12, 5728.
- Ozdemir, F., Fuernstahl, P., Goksel, O., 2018. Learn the new, keep the old: Extending pretrained models with new anatomy and images, in: Medical Image Computing and Computer Assisted Intervention–MICCAI 2018: 21st International Conference, Granada, Spain, September 16–20, 2018, Proceedings, Part IV 11, Springer, pp. 361–369.
- Ozdemir, F., Goksel, O., 2019. Extending pretrained segmentation networks with additional anatomical structures. *International journal of computer assisted radiology and surgery* 14, 1187–1195.
- Palepu, A., Beam, A., 2023. Tier: Text-image entropy regularization for medical clip-style models. *Proceedings of Machine Learning Research LEAVE UNSSET* 1, 21.
- Pan, Y., Cai, T., Mehta, M., Gernand, A.D., Goldstein, J.A., Mithal, L., Mwinyelle, D., Gallagher, K., Wang, J.Z., 2023. Enhancing automatic placenta analysis through distributional feature recombination in vision-language contrastive learning, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer, pp. 116–126.
- Pan, Y., Gernand, A.D., Goldstein, J.A., Mithal, L., Mwinyelle, D., Wang, J.Z., 2022. Vision-language contrastive learning approach to robust automatic placenta analysis using photographic images, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer, pp. 707–716.
- Pavlopoulos, J., Kougia, V., Androutsopoulos, I., 2019. A survey on biomedical image captioning, in: Proceedings of the second workshop on shortcomings in vision and language, pp. 26–36.
- Payer, C., Stern, D., Bischof, H., Urschler, M., 2020. Coarse to fine vertebrae localization and segmentation with spatialconfiguration-net and u-net., in: VISGRAPP (5: VISAPP), pp. 124–133.
- Pelka, O., Koitka, S., Rückert, J., Nensa, F., Friedrich, C.M., 2018. Radiology objects in context (roco): a multimodal image dataset, in: Intravascular Imaging and Computer Assisted Stenting and Large-Scale Annotation of Biomedical Data and Expert Label Synthesis: 7th Joint International Workshop, CVII-STENT 2018 and Third International Workshop, LABELS 2018, Held in Conjunction with MICCAI 2018, Granada, Spain, September 16, 2018, Proceedings 3, Springer, pp. 180–189.
- Pellegrini, C., Keicher, M., Özsoy, E., Jiraskova, P., Braren, R., Navab, N., 2023. Xplainer: From x-ray observations to explainable zero-shot diagnosis. *arXiv preprint arXiv:2303.13391*.
- Peng, Y., Wang, X., Lu, L., Bagheri, M., Summers, R., Lu, Z., 2018. Negbio: a high-performance tool for negation and uncertainty detection in radiology reports. *AMIA Summits on Translational Science Proceedings* 2018, 188.
- Peters, B., Kriegeskorte, N., 2021. Capturing the objects of vision with neural networks. *Nature human behaviour* 5, 1127–1144.
- Peterson, J.C., Battleday, R.M., Griffiths, T.L., Russakovsky, O., 2019. Human uncertainty makes classification more robust, in: Proceedings of the

- IEEE/CVF International Conference on Computer Vision, pp. 9617–9626.
- Pham, T.T., Brecheisen, J., Nguyen, A., Nguyen, H., Le, N., 2023. Decoding radiologists intense focus for accurate cxr diagnoses: A controllable and interpretable ai system. arXiv preprint arXiv:2309.13550 .
- Poudel, K., Dhakal, M., Bhandari, P., Adhikari, R., Thapaliya, S., Khanal, B., 2023. Exploring transfer learning in medical image segmentation using vision-language models. arXiv preprint arXiv:2308.07706 .
- Qu, C., Zhang, T., Qiao, H., Liu, J., Tang, Y., Yuille, A., Zhou, Z., 2023. Abdomenatlas-8k: Annotating 8,000 ct volumes for multi-organ segmentation in three weeks, in: Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track.
- Radford, A., Kim, J.W., Hallacy, C., Ramesh, A., Goh, G., Agarwal, S., Sastry, G., Askell, A., Mishkin, P., Clark, J., et al., 2021. Learning transferable visual models from natural language supervision, in: International Conference on Machine Learning, PMLR. pp. 8748–8763.
- Rahimi, S., Oktay, O., Alvarez-Valle, J., Bharadwaj, S., 2021. Addressing the exorbitant cost of labeling medical images with active learning, in: International Conference on Machine Learning in Medical Imaging and Analysis, p. 1.
- Ramesh, A., Dhariwal, P., Nichol, A., Chu, C., Chen, M., 2022. Hierarchical text-conditional image generation with clip latents. arXiv preprint arXiv:2204.06125 1, 3.
- Ramos, R., Martins, B., Elliott, D., Kementchedjheva, Y., 2023. Smallcap: lightweight image captioning prompted with retrieval augmentation, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 2840–2849.
- Rao, Y., Zhao, W., Chen, G., Tang, Y., Zhu, Z., Huang, G., Zhou, J., Lu, J., 2022. Denseclip: Language-guided dense prediction with context-aware prompting, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 18082–18091.
- Ravioli, S., Germann, C., Gygli, R., Exadaktylos, A.K., Lindner, G., 2022. Age-and sex-related differences in community-acquired pneumonia at presentation to the emergency department: a retrospective cohort study. European journal of emergency medicine 29, 366–372.
- Ribli, D., Horváth, A., Unger, Z., Pollner, P., Csabai, I., 2018. Detecting and classifying lesions in mammograms with deep learning. Scientific reports 8, 4165.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., Ommer, B., 2022. High-resolution image synthesis with latent diffusion models, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp. 10684–10695.
- Ronneberger, O., Fischer, P., Brox, T., 2015. U-net: Convolutional networks for biomedical image segmentation, in: International Conference on Medical image computing and computer-assisted intervention, Springer. pp. 234–241.
- Samei, E., Flynn, M.J., Peterson, E., Eyler, W.R., 2003. Subtle lung nodules: influence of local anatomic variations on detection. Radiology 228, 76–84.
- Schuhmann, C., Beaumont, R., Vencu, R., Gordon, C., Wightman, R., Cherti, M., Coombes, T., Katta, A., Mullis, C., Wortsman, M., et al., 2022. Laion-5b: An open large-scale dataset for training next generation image-text models. Advances in Neural Information Processing Systems 35, 25278–25294.
- Seibold, C., Reiß, S., Sarfraz, M.S., Stiefelhagen, R., Kleesiek, J., 2022. Breaking with fixed set pathology recognition through report-guided contrastive training, in: International Conference on Medical Image Computing and Computer-Assisted Intervention, Springer. pp. 690–700.
- Shi, G., Xiao, L., Chen, Y., Zhou, S.K., 2021. Marginal loss and exclusion loss for partially supervised multi-organ segmentation. Medical Image Analysis 70, 101979.
- Shrestha, P., Amgain, S., Khanal, B., Linte, C.A., Bhattarai, B., 2023. Medical vision language pretraining: A survey. arXiv preprint arXiv:2312.06224 .
- Si, C., Jia, Y., Wang, R., Zhang, M.L., Feng, Y., Chongxiao, Q., 2023. Multi-label classification with high-rank and high-order label correlations. IEEE Transactions on Knowledge and Data Engineering .
- Simpson, A.L., Antonelli, M., Bakas, S., Bilello, M., Farahani, K., Van Ginneken, B., Kopp-Schneider, A., Landman, B.A., Litjens, G., Menze, B., et al., 2019. A large annotated medical image dataset for the development and evaluation of segmentation algorithms. arXiv preprint arXiv:1902.09063 .
- van Sonsbeek, T., Derakhshani, M.M., Najdenkoska, I., Snoek, C.G., Worring, M., 2023. Open-ended medical visual question answering through prefix tuning of language models. arXiv preprint arXiv:2303.05977 .
- van Sonsbeek, T., Worring, M., 2023. X-tra: Improving chest x-ray tasks with cross-modal retrieval augmentation, in: International Conference on Information Processing in Medical Imaging, Springer. pp. 471–482.
- Stiles, J., Jernigan, T.L., 2010. The basics of brain development. Neuropsychology review 20, 327–348.
- Stupka, J.E., Mortensen, E.M., Anzueto, A., Restrepo, M.I., 2009. Community-acquired pneumonia in elderly patients. Aging health 5, 763–774.
- Subramanian, S., Wang, L.L., Mehta, S., Bogin, B., van Zuylen, M., Parasa, S., Singh, S., Gardner, M., Hajishirzi, H., 2020. Medcat: A dataset of medical images, captions, and textual references. arXiv preprint arXiv:2010.06000 .
- Sun, Q., Fang, Y., Wu, L., Wang, X., Cao, Y., 2023. Eva-clip: Improved training techniques for clip at scale. arXiv preprint arXiv:2303.15389 .
- Sun, X., Hu, P., Saenko, K., 2022. Dualcoop: Fast adaptation to multi-label recognition with limited annotations. Advances in Neural Information Processing Systems 35, 30569–30582.
- Tanida, T., Müller, P., Kaissis, G., Rueckert, D., 2023. Interactive and explainable region-guided radiology report generation, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 7433–7442.
- Tarvainen, A., Valpola, H., 2017. Mean teachers are better role models: Weight-averaged consistency targets improve semi-supervised deep learning results. Advances in neural information processing systems 30.
- Tian, Z., Shen, C., Chen, H., 2020. Conditional convolutions for instance segmentation, in: Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part I 16, Springer. pp. 282–298.
- Tintinalli, J.E., Stapczynski, J.S., Ma, O., Yealy, D., Meckler, G., Cline, D., 2016. Tintinalli's Emergency Medicine: A Comprehensive Study Guide, 8e. McGraw Hill Education.
- Tiu, E., Taluis, E., Patel, P., Langlotz, C.P., Ng, A.Y., Rajpurkar, P., 2022. Expert-level detection of pathologies from unannotated chest x-ray images via self-supervised learning. Nature Biomedical Engineering 6, 1399–1406.
- Tjoa, E., Guan, C., 2020. A survey on explainable artificial intelligence (xai): Toward medical xai. IEEE transactions on neural networks and learning systems 32, 4793–4813.
- Touvron, H., Martin, L., Stone, K., Albert, P., Almahairi, A., Babaei, Y., Bashlykov, N., Batra, S., Bhargava, P., Bhosale, S., et al., 2023. Llama 2: Open foundation and fine-tuned chat models. arXiv preprint arXiv:2307.09288 .
- Tschanzl, P., Rosendahl, C., Kittler, H., 2018. The ham10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. Scientific data 5, 1–9.
- Tschuchnig, M.E., Gadermayr, M., 2022. Anomaly detection in medical imaging—a mini review, in: Data Science—Analytics and Applications: Proceedings of the 43rd International Data Science Conference—iDSC2021, Springer. pp. 33–38.
- Tsuneki, M., Kanavati, F., 2022. Inference of captions from histopathological patches, in: International Conference on Medical Imaging with Deep Learning, PMLR. pp. 1235–1250.
- Veličković, P., Cucurull, G., Casanova, A., Romero, A., Liò, P., Bengio, Y., 2018. Graph attention networks, in: International Conference on Learning Representations.
- Vernaza, P., Chandraker, M., 2017. Learning random-walk label propagation for weakly-supervised semantic segmentation, in: Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 7158–7166.
- Vinker, Y., Pajouheshgar, E., Bo, J.Y., Bachmann, R.C., Bermano, A.H., Cohen-Or, D., Zamir, A., Shamir, A., 2022. Clipasso: Semantically-aware object sketching. ACM Transactions on Graphics (TOG) 41, 1–11.
- Wagner, P., Strodthoff, N., Boussejot, R.D., Kreiseler, D., Lunze, F.I., Samek, W., Schaeffter, T., 2020. Ptb-xl, a large publicly available electrocardiography dataset. Scientific data 7, 154.
- Wallis, A., McCoubrie, P., 2011. The radiology report—are we getting the message across? Clinical radiology 66, 1015–1022.
- Wan, Z., Liu, C., Zhang, M., Fu, J., Wang, B., Cheng, S., Ma, L., Quilodrán-Casas, C., Arucci, R., 2023. Med-unic: Unifying cross-lingual medical vision-language pre-training by diminishing bias, in: Thirty-seventh Conference on Neural Information Processing Systems. URL: <https://openreview.net/forum?id=4vpsQdRB1K>.
- Wang, D., Zhang, Y., Zhang, K., Wang, L., 2020. Focalmix: Semi-supervised learning for 3d medical image detection, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 3951–3960.
- Wang, F., Zhou, Y., Wang, S., Vardhanabhuti, V., Yu, L., 2022a. Multi-granularity cross-modal alignment for generalized medical visual representation learning. Advances in Neural Information Processing Systems 35,

- 33536–33549.
- Wang, S., Ouyang, X., Liu, T., Wang, Q., Shen, D., 2022b. Follow my eye: Using gaze to supervise computer-aided diagnosis. *IEEE Transactions on Medical Imaging* .
- Wang, X., Peng, Y., Lu, L., Lu, Z., Bagheri, M., Summers, R.M., 2017. Chestx-ray8: Hospital-scale chest x-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases, in: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2097–2106.
- Wang, X., Wei, J., Schuurmans, D., Le, Q.V., Chi, E.H., Narang, S., Chowdhery, A., Zhou, D., 2023a. Self-consistency improves chain of thought reasoning in language models, in: *The Eleventh International Conference on Learning Representations*. URL: <https://openreview.net/forum?id=1PL1NIMMrw>.
- Wang, X., Xu, Z., Tam, L., Yang, D., Xu, D., 2021a. Self-supervised image-text pre-training with mixed data in chest x-rays. *arXiv preprint arXiv:2103.16022* .
- Wang, X., Zhang, R., Shen, C., Kong, T., Li, L., 2021b. Dense contrastive learning for self-supervised visual pre-training, in: *Proc. IEEE Conf. Computer Vision and Pattern Recognition (CVPR)*.
- Wang, Y., 2023. Unified medical image-text-label contrastive learning with continuous prompt. *arXiv preprint arXiv:2307.05920* .
- Wang, Z., Liang, J., He, R., Xu, N., Wang, Z., Tan, T., 2023b. Improving zero-shot generalization for clip with synthesized prompts, in: *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 3032–3042.
- Wang, Z., Liu, C., Zhang, S., Dou, Q., 2023c. Foundation model for endoscopy video analysis via large-scale self-supervised pre-train, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer.
- Wang, Z., Lu, Y., Li, Q., Tao, X., Guo, Y., Gong, M., Liu, T., 2022c. Cris: Clip-driven referring image segmentation, in: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 11686–11695.
- Wang, Z., Tang, M., Wang, L., Li, X., Zhou, L., 2022d. A medical semantic-assisted transformer for radiographic report generation, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 655–664.
- Wang, Z., Wu, Z., Agarwal, D., Sun, J., 2022e. Medclip: Contrastive learning from unpaired medical images and text. *arXiv preprint arXiv:2210.10163* .
- Wei, J., Wang, X., Schuurmans, D., Bosma, M., Xia, F., Chi, E., Le, Q.V., Zhou, D., et al., 2022. Chain-of-thought prompting elicits reasoning in large language models. *Advances in Neural Information Processing Systems* 35, 24824–24837.
- Wittmann, B., Navarro, F., Shit, S., Menze, B., 2022. Focused decoding enables 3d anatomical detection by transformers. *arXiv preprint arXiv:2207.10774* .
- Wu, C., Zhang, X., Zhang, Y., Wang, Y., Xie, W., 2023a. Medklip: Medical knowledge enhanced language-image pre-training. *medRxiv* , 2023–01.
- Wu, H., Zhang, J., Fang, Y., Liu, Z., Wang, N., Cui, Z., Shen, D., 2023b. Multi-view vertebra localization and identification from ct images, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 136–145.
- Wu, Y., Zhou, Y., Saiyin, J., Wei, B., Lai, M., Shou, J., Fan, Y., Xu, Y., 2023c. Zero-shot nuclei detection via visual-language pre-trained models, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 693–703.
- Xian, Y., Akata, Z., Sharma, G., Nguyen, Q., Hein, M., Schiele, B., 2016. Latent embeddings for zero-shot classification, in: *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 69–77.
- Xie, X., Niu, J., Liu, X., Chen, Z., Tang, S., Yu, S., 2021. A survey on incorporating domain knowledge into deep learning for medical image analysis. *Medical Image Analysis* 69, 101985. doi:<https://doi.org/10.1016/j.media.2021.101985>.
- Xie, Y., Gu, L., Harada, T., Zhang, J., Xia, Y., Wu, Q., 2023. Medim: Boost medical image representation via radiology report-guided masking, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 13–23.
- Xiong, H., Wang, S., Zhu, Y., Zhao, Z., Liu, Y., Wang, Q., Shen, D., 2023. Doctorglm: Fine-tuning your chinese doctor is not a herculean task. *arXiv preprint arXiv:2304.01097* .
- Yan, A., Wang, Y., Zhong, Y., He, Z., Karypis, P., Wang, Z., Dong, C., Gentili, A., Hsu, C.N., Shang, J., et al., 2023. Robust and interpretable medical image classifiers via concept bottleneck models. *arXiv preprint arXiv:2310.03182* .
- Yan, K., Cai, J., Zheng, Y., Harrison, A.P., Jin, D., Tang, Y., Tang, Y., Huang, L., Xiao, J., Lu, L., 2020. Learning from multiple datasets with heterogeneous and partial labels for universal lesion detection in ct. *IEEE Transactions on Medical Imaging* 40, 2759–2770.
- Yang, X., Xie, J., Li, X., Li, X., Li, X., Shen, L., Deng, Y., 2023. Tceip: Text condition embedded regression network for dental implant position prediction. *arXiv preprint arXiv:2306.14406* .
- Yang, X., Ye, M., You, Q., Ma, F., 2021. Writing by memorizing: Hierarchical retrieval-based medical report generation, in: *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 5000–5009.
- Yap, M.H., Pons, G., Marti, J., Ganau, S., Sentsis, M., Zwiggelaar, R., Davison, A.K., Marti, R., 2017. Automated breast ultrasound lesions detection using convolutional neural networks. *IEEE journal of biomedical and health informatics* 22, 1218–1226.
- You, K., Gu, J., Ham, J., Park, B., Kim, J., Hong, E.K., Baek, W., Roh, B., 2023. Cxr-clip: Toward large scale chest x-ray language-image pre-training, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 101–111.
- Yu, F., Endo, M., Krishnan, R., Pan, I., Tsai, A., Reis, E.P., Fonseca, E.K.U.N., Lee, H.M.H., Abad, Z.S.H., Ng, A.Y., et al., 2023. Evaluating progress in automatic chest x-ray radiology report generation. *Patterns* 4.
- Yu, Y., Zhan, F., Wu, R., Zhang, J., Lu, S., Cui, M., Xie, X., Hua, X.S., Miao, C., 2022. Towards counterfactual image manipulation via clip, in: *Proceedings of the 30th ACM International Conference on Multimedia*, pp. 3637–3645.
- Yüksel, A.E., Gültekin, S., Simsar, E., Özdemir, Ş.D., Gündoğar, M., Tokgöz, S.B., Hamamcı, İ.E., 2021. Dental enumeration and multiple treatment detection on panoramic x-rays using deep learning. *Scientific reports* 11, 12342.
- Zbontar, J., Jing, L., Misra, I., LeCun, Y., Deny, S., 2021. Barlow twins: Self-supervised learning via redundancy reduction, in: *International Conference on Machine Learning*.
- Zhai, X., Kolesnikov, A., Houlsby, N., Beyer, L., 2022. Scaling vision transformers, in: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12104–12113.
- Zhang, B., Wang, Y., Chen, F., 2014. Multilabel image classification via high-order label correlation driven active learning. *IEEE Transactions on Image Processing* 23, 1430–1441.
- Zhang, H., Chen, J., Jiang, F., Yu, F., Chen, Z., Li, J., Chen, G., Wu, X., Zhang, Z., Xiao, Q., et al., 2023a. Huatuogpt, towards taming language model to be a doctor. *arXiv preprint arXiv:2305.15075* .
- Zhang, J., Xie, Y., Xia, Y., Shen, C., 2021. Dodnet: Learning to segment multi-organ and tumors from multiple partially labeled datasets, in: *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 1195–1204.
- Zhang, K., Yang, Y., Yu, J., Jiang, H., Fan, J., Huang, Q., Han, W., 2023b. Multi-task paired masking with alignment modeling for medical vision-language pre-training. *IEEE Transactions on Multimedia* .
- Zhang, S., Metaxas, D., 2023. On the challenges and perspectives of foundation models for medical image analysis. *arXiv preprint arXiv:2306.05705* .
- Zhang, S., Xu, Y., Usuyama, N., Bagga, J., Tinn, R., Preston, S., Rao, R., Wei, M., Valluri, N., Wong, C., et al., 2023c. Large-scale domain-specific pretraining for biomedical vision-language processing. *arXiv preprint arXiv:2303.00915* .
- Zhang, S., Zhang, J., Xia, Y., 2022a. Transws: Transformer-based weakly supervised histology image segmentation, in: *International Workshop on Machine Learning in Medical Imaging*, Springer. pp. 367–376.
- Zhang, S., Zhang, J., Xie, Y., Xia, Y., 2023d. Tpro: Text-prompting-based weakly supervised histopathology tissue segmentation, in: *International Conference on Medical Image Computing and Computer-Assisted Intervention*, Springer. pp. 109–118.
- Zhang, X., Wu, C., Zhang, Y., Xie, W., Wang, Y., 2023e. Knowledge-enhanced visual-language pre-training on chest radiology images. *Nature Communications* 14, 4542.
- Zhang, X., Wu, C., Zhao, Z., Lin, W., Zhang, Y., Wang, Y., Xie, W., 2023f. Pmc-vqa: Visual instruction tuning for medical visual question answering. *arXiv preprint arXiv:2305.10415* .
- Zhang, Y., Gao, J., Zhou, M., Wang, X., Qiao, Y., Zhang, S., Wang, D., 2023g. Text-guided foundation model adaptation for pathological image classification, in: *International Conference on Medical Image Computing*

- and Computer-Assisted Intervention, Springer. pp. 272–282.
- Zhang, Y., Jiang, H., Miura, Y., Manning, C.D., Langlotz, C.P., 2022b. Contrastive learning of medical visual representations from paired images and text, in: Machine Learning for Healthcare Conference, PMLR. pp. 2–25.
- Zhang, Y., Li, X., Chen, H., Yuille, A.L., Liu, Y., Zhou, Z., 2023h. Continual learning for abdominal multi-organ and tumor segmentation, in: International conference on medical image computing and computer-assisted intervention, Springer. pp. 35–45.
- Zhang, Y., Wang, X., Xu, Z., Yu, Q., Yuille, A., Xu, D., 2020. When radiology report generation meets knowledge graph, in: Proceedings of the AAAI Conference on Artificial Intelligence, pp. 12910–12917.
- Zhang, Y., Zhang, H., Chen, X., Lee, S.W., Shen, D., 2017. Hybrid high-order functional connectivity networks using resting-state functional mri for mild cognitive impairment diagnosis. *Scientific reports* 7, 6530.
- Zhang, Z., Wang, J., Ye, J., Wu, F., 2022c. Rethinking graph convolutional networks in knowledge graph completion, in: Proceedings of the ACM Web Conference 2022, pp. 798–807.
- Zhao, G., Feng, Q., Chen, C., Zhou, Z., Yu, Y., 2021. Diagnose like a radiologist: Hybrid neuro-probabilistic reasoning for attribute-based medical image diagnosis. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 44, 7400–7416.
- Zhao, Z., Wang, S., Gu, J., Zhu, Y., Mei, L., Zhuang, Z., Cui, Z., Wang, Q., Shen, D., 2023. Chatcad+: Towards a universal and reliable interactive cad using llms. arXiv preprint arXiv:2305.15964 .
- Zheng, F., Cao, J., Yu, W., Chen, Z., Xiao, N., Lu, Y., . Exploring low-resource medical image classification with weakly supervised prompt learning. Available at SSRN 4578827 .
- Zhou, B., Khosla, A., Lapedriza, A., Oliva, A., Torralba, A., 2016. Learning deep features for discriminative localization, in: Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 2921–2929.
- Zhou, F., Chen, H., 2023. Cross-modal translation and alignment for survival analysis, in: Proceedings of the IEEE/CVF International Conference on Computer Vision, pp. 21485–21494.
- Zhou, H.Y., Chen, X., Zhang, Y., Luo, R., Wang, L., Yu, Y., 2022a. Generalized radiograph representation learning via cross-supervision between images and free-text radiology reports. *Nature Machine Intelligence* 4, 32–40.
- Zhou, H.Y., Lian, C., Wang, L., Yu, Y., 2022b. Advancing radiograph representation learning with masked record modeling, in: The Eleventh International Conference on Learning Representations.
- Zhou, K., Yang, J., Loy, C.C., Liu, Z., 2022c. Conditional prompt learning for vision-language models, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 16816–16825.
- Zhou, K., Yang, J., Loy, C.C., Liu, Z., 2022d. Learning to prompt for vision-language models. *International Journal of Computer Vision* 130, 2337–2348.
- Zhou, M., Zhou, L., Wang, S., Cheng, Y., Li, L., Yu, Z., Liu, J., 2021. Uc2: Universal cross-lingual cross-modal vision-and-language pre-training, in: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pp. 4155–4165.
- Zhou, Q., Pang, G., Tian, Y., He, S., Chen, J., 2023. Anomalyclip: Object-agnostic prompt learning for zero-shot anomaly detection. arXiv preprint arXiv:2310.18961 .
- Zhou, Y., He, X., Huang, L., Liu, L., Zhu, F., Cui, S., Shao, L., 2019. Collaborative learning of semi-supervised segmentation and classification for medical images, in: Proceedings of the IEEE/CVF conference on computer vision and pattern recognition, pp. 2079–2088.
- Zhu, W., Hessel, J., Awadalla, A., Gadre, S.Y., Dodge, J., Fang, A., Yu, Y., Schmidt, L., Wang, W.Y., Choi, Y., 2023. Multimodal c4: An open, billion-scale corpus of images interleaved with text. arXiv preprint arXiv:2304.06939 .
- Zuo, S., Xiao, Y., Chang, X., Wang, X., 2022. Vision transformers for dense prediction: A survey. *Knowledge-Based Systems* 253, 109552.