

CLIP in Medical Imaging: A Comprehensive Survey

Zihao Zhao¹ * Yuxiao Liu^{1,4} * Han Wu¹ * Yonghao Li¹
Sheng Wang^{1,2,3} Lin Teng¹ Disheng Liu¹ Xiang Li¹
Zhiming Cui¹ Qian Wang¹ Dinggang Shen^{1,3,5} †

¹ShanghaiTech University ²Shanghai Jiao Tong University

³Shanghai United Imaging Intelligence Co., Ltd. ⁴Lingang Laboratory

⁵Shanghai Clinical Research and Trial Center

Abstract

Contrastive Language-Image Pre-training (CLIP), a straightforward yet effective pre-training paradigm, successfully introduces semantic-rich text supervision to vision models and has demonstrated promising results in various tasks due to its generalizability and interpretability. It has recently gained increasing interest in the medical imaging domain, either as a powerful pre-training paradigm for medical vision language alignment or a pre-trained key component for various clinical tasks. With the aim of facilitating a deeper understanding of this promising direction, this survey offers an in-depth exploration of the CLIP paradigm within the domain of medical imaging, regarding both refined CLIP pre-training and CLIP-driven applications. Our survey (1) starts with a brief introduction to the fundamentals of CLIP methodology. (2) Then, we investigate the adaptation of CLIP pre-training in the medical domain, focusing on how to optimize CLIP given characteristics of medical images and reports. (3) Furthermore, we explore the practical utilization of CLIP pre-trained models in various tasks, including classification, dense prediction, and cross-modal tasks. (4) Finally, we discuss existing limitations of CLIP in the context of medical imaging and propose forward-looking directions to address the demands of medical imaging domain. We expect that this comprehensive survey will provide researchers in the field of medical image analysis with a holistic understanding of the CLIP paradigm and its potential implications. The project page is available at [Github](#), which will be regularly updated.

1. Introduction

Despite the substantial progress in vision intelligence over the last decade [35, 46, 103, 104, 152], vision-only

models were often trained on pre-defined annotation categories, which would significantly limit the scope of encoded knowledge. Although some self-supervised methods [71, 178, 187] have been proposed to eliminate such limitations, they were still scoped to visual features appearing in the training set. In contrast, the form of text supervision is naturally rich in semantics, and the corresponding language models, especially today's large language models [156, 179, 190], typically contain a huge amount of knowledge. Hence, it is intuitive to introduce text supervision in vision tasks. Although some early studies [27, 39, 41, 59, 78] have investigated proper ways to introduce text supervision, most of them either focused on specific tasks (e.g., classification, visual question answering) or had limited performance. Drew inspiration from contrastive pre-training [21, 23, 25, 42], Radford et al. [136] proposed Contrastive Language Image Pre-training (CLIP), a simple pre-training paradigm leveraging knowledge-rich text supervision through image-text alignment. While most contrastive pre-training methods generally only focused on vision information and optimized the distance between different views of the same image, CLIP considered text information as a linguistic view of the image and pulled image and text representations closer in the latent space. In this manner, image-text information was well aligned within CLIP's vision encoder and text encoder, enhancing both multimodal and unimodal visual tasks. As a result, CLIP has learned extensive knowledge from text supervision and proven useful in a wide variety of downstream areas, including image generation [137, 142, 162, 185], segmentation [79, 106, 139], detection [9, 87], and classification [169, 211, 212].

Recently, CLIP has also gained increasing attention in the field of medical imaging due to its ability to encode extensive knowledge in vision models. The interpretation of medical imaging typically demands specialized clinical knowledge, which is not an easily achievable goal for vision-only models. Previous studies attempted to address

*These authors contributed equally to this paper.

†Corresponding author

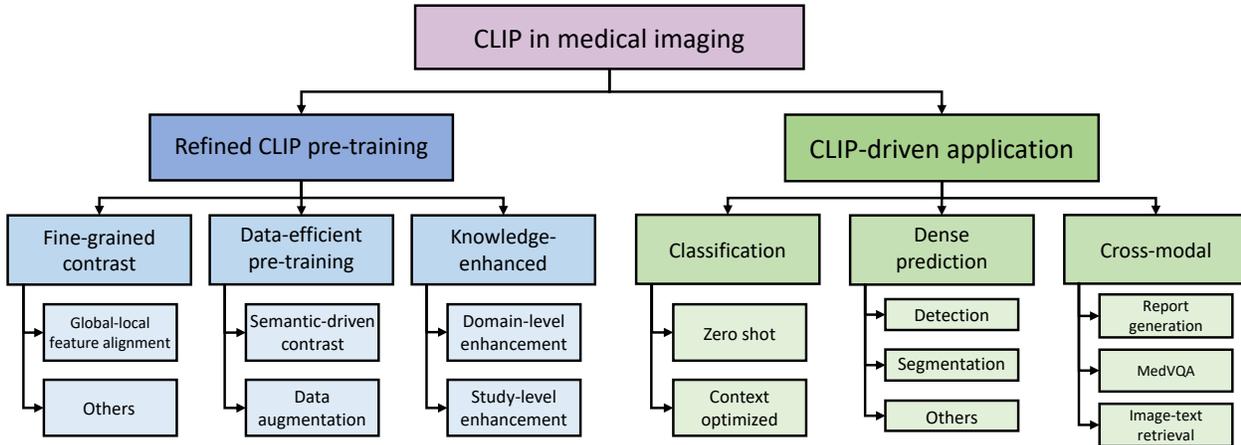


Figure 1. Taxonomy of studies focusing on CLIP in medical imaging domain.

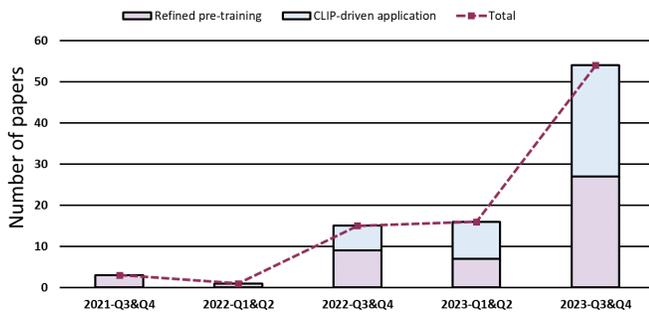


Figure 2. The number of medical imaging papers focusing on CLIP in recent years. We categorized these papers chronologically (Q indicates quarters), revealing an exponential growing trend .

the issue via fine-grained annotations such as bounding boxes [107, 114, 121, 151] and segmentation masks [109, 214]. However, collecting fine-grained annotations is time-consuming and thus hard to scale. On the contrary, encoding clinical knowledge into deep learning models via CLIP seems to be a viable solution. In the medical domain, existing studies on CLIP can be categorized into two lines, (1) refined CLIP pre-training and (2) CLIP-driven application. Studies focusing on pre-training seek to adapt the pre-training paradigm of CLIP from web-crawled image-caption pairs to medical images and corresponding clinical reports, satisfying specific requirements of the medical imaging domain, while the other line of research directly adopts a pre-trained CLIP model as a key component of the proposed method to implement various clinical tasks (e.g., thoracic disease diagnosis, multi-organ segmentation).

Motivation and contribution. Since the medical imaging community has witnessed an exponential growth of CLIP-centered studies (See Figure 2), the literature is experiencing a large influx of contributions. Thus, a survey of the existing literature is beneficial for the community. The

major features of this survey include

- To the best of our knowledge, this paper is the first comprehensive review of the state of CLIP in medical imaging, aiming to provide timely insights for potential studies in this rapidly evolving area.
- We provide thorough coverage of existing studies and a multi-level taxonomy to serve different needs of potential research, as depicted in Figure 1. For refined pre-training, we highlight key challenges most existing studies tackle, while the CLIP-driven application is further taxonomized given the nature of their involved tasks.
- Furthermore, we discuss the issues and unresolved aspects linked to existing studies. We pinpoint new trends, raise important questions, and propose future directions for further exploration

Paper organization. The rest of the paper is organized as follows. Section 2 provides preliminary knowledge of CLIP and some of its variants. In section 3, we present a systematic analysis of how to adapt CLIP pre-training to the medical imaging domain, from the perspective of key challenges and corresponding solutions. Section 4 covers various applications of pre-trained CLIP in several clinical-related tasks and provides a comparison between CLIP-driven methods and previous prior knowledge-driven or pure data-driven methods. Section 5 discusses existing problems and potential research directions to provide insights for interested researchers. We finally conclude the paper in section 6.

2. Background

CLIP-related research has advanced rapidly in recent years, both in vision and medical imaging communities.

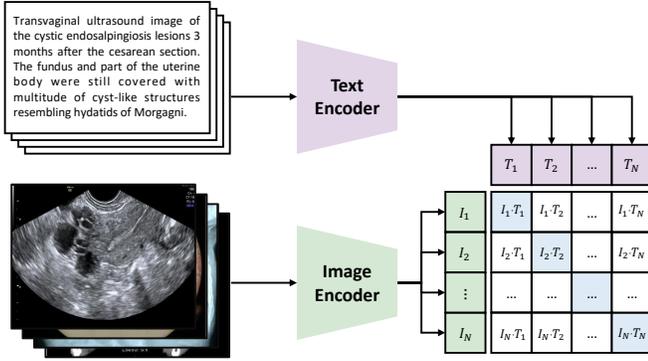


Figure 3. Illustration of Contrastive Language-Image Pre-training on the PMC-OA dataset.

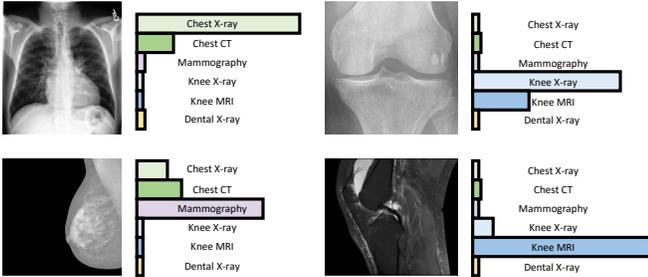


Figure 4. Illustration of CLIP's generalizability via domain identification.

In this section, we provide a brief overview of CLIP and its variants. Additionally, we summarize publicly available datasets with medical image-text pairs, catering to people in need.

2.1. Contrastive Language-Image Pre-training

CLIP (Contrastive Language-Image Pre-training) is a pre-training method developed by OpenAI [136]. Built upon the methodology of contrastive pre-training [101], it jointly optimizes a vision encoder and a text encoder, forcing the paired image-text information to be as close as possible in the encoded joint image-text latent space. Trained on a vast collection of image-text pairs, CLIP learned visual representation through natural language supervision. Since CLIP did not explicitly introduce handcrafted supervision or abundant prior design, it has achieved impressive generalization performance on natural images, which is in line with the principle of Occam's razor [14].

Architecture. In terms of its architecture, CLIP seamlessly integrates a vision model with a language model. The visual component can be based on either the ResNet [46] or the Vision Transformer [35] (ViT), while the language encoder is rooted in a transformer-based model like BERT [64]. As illustrated in Figure 3, it receives a batch of images and their corresponding text descriptions as input in each iteration. Following the encoding process, the em-

beddings are normalized and mapped to a joint image-text embedding space. That is to say, the input images and texts are encoded into $I \in \mathbb{R}^{N \times D}$ and $T \in \mathbb{R}^{N \times D}$, where N denotes batch size and D represents embedding dimension.

Contrastive pre-training. Diverging from conventional models that are sculpted for a singular, pre-defined task, CLIP's learning trajectory revolves around contrastive pre-training between paired image-text information. In specific, N^2 image-text pairs can be constructed given a batch size of N , among which there are N matched image-text pairs (positive pairs) highlighted in blue and $N^2 - N$ unmatched image-text pairs (negative pairs). The pre-training objective for the image encoder is hence denoted as

$$\mathcal{L}_{\text{img}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\Phi(I_i, T_i)/\tau)}{\sum_{j=1}^N \exp(\Phi(I_i, T_j)/\tau)}, \quad (1)$$

where $\Phi(\cdot, \cdot)$ indicates cosine similarity, τ is a learnable temperature parameter, I_i and T_i represents the i th image embedding and text embedding, respectively. The objective for the text encoder is defined symmetrically:

$$\mathcal{L}_{\text{txt}} = -\frac{1}{N} \sum_{i=1}^N \log \frac{\exp(\Phi(T_i, I_i)/\tau)}{\sum_{j=1}^N \exp(\Phi(T_i, I_j)/\tau)}. \quad (2)$$

The total optimization objective of CLIP is hence calculated via the average of equation 1 and equation 2:

$$\mathcal{L}_{\text{total}} = \frac{\mathcal{L}_{\text{img}} + \mathcal{L}_{\text{txt}}}{2}. \quad (3)$$

Zero-shot capability. Since CLIP is pre-trained to predict whether an image matches a textual description, it naturally lends itself to zero-shot recognition although not initially intended for it. This process is accomplished by comparing image embeddings with class embeddings encoded by the text encoder, which receives textual descriptions specifying classes of interest. Let I_1 represent the image features extracted by the image encoder for a given image x , and let $\{W_i\}_{i=1}^K$ be the set of class embeddings generated by the text encoder. Here, K denotes the number of classes, and each W_i is derived from a prompt resembling "a photo of a [CLASS]", where the class token is substituted with the specific class name. The probability of prediction is then calculated as follows:

$$p(y = i | I_1) = \frac{\exp(\Phi(W_i, I_1)/\tau)}{\sum_{j=1}^K \exp(\Phi(W_j, I_1)/\tau)}, \quad (4)$$

where τ is a temperature parameter learned during pre-training, and $\Phi(\cdot, \cdot)$ represents the cosine similarity. In contrast with traditional classifier learning methods where closed-set visual concepts are learned from random vectors, CLIP pre-training allows for the exploration of open-set visual concepts through a high-capacity text encoder. This

Table 1. Summary of publicly available medical image-text datasets.

Dataset	Domain	Image	Text	Source	Language	Pre-trained CLIP
ROCO [130]	Multiple	87K	87K	Research papers	English	PubMedCLIP
MedICaT [148]	Multiple	217K	217K	Research papers	English	/
PMC-OA [88]	Multiple	1.6M	1.6M	Research papers	English	PMC-CLIP
ChiMed-VL [97]	Multiple	580K	580K	Research papers	English & Chinese	/
FFA-IR [81]	Fundus	1M	10K	Medical reports	English & Chinese	/
PadChest [18]	Chest X-ray	160K	109K	Medical reports	Spanish	/
MIMIC-CXR [58]	Chest X-ray	377K	227K	Medical reports	English	BioViL & BioViL-T
OpenPath [49]	Histology	208K	208K	Social media	English	PLIP
Quilt-1M [52]	Histology	1M	1M	Research papers & Social media	English	QuiltNet

leads to a broader semantic space and, consequently, makes the learned representations more transferable to downstream tasks.

Generalizability of CLIP. The generalizability of the CLIP pre-trained model becomes evident when applied to specialized areas such as medical imaging. Though originally trained on a wide array of internet images and their textual descriptions, CLIP has demonstrated the capability to recognize and categorize medical images. Figure 4 illustrates the generalizability of CLIP via domain identification, where the class token in the text prompt is substituted with the specific class name, such as "Chest X-ray", "Mammography", "Knee X-ray", or "Dental X-ray". Its zero-shot inference capability allows it to identify the domain of a given medical image without explicit prior training on such datasets. While further studies and validations are necessary, the preliminary findings suggest that the zero-shot capability of CLIP could reduce the dependency on extensive labeled medical datasets and pave the way for more efficient AI-driven diagnostic tools in the future.

2.2. Variants of CLIP

After providing a concise overview of CLIP, we here introduce several variants of CLIP with practical applications in the area of medical imaging, which takes a step further by not only recognizing items in images but also understanding their specific details and descriptions. Following the philosophy of CLIP, GLIP [80] reformulated detection as a grounding task via aligning each region or bounding box with corresponding text phrases. It simultaneously trained both an image encoder and a language encoder to accurately predict the associations between regions and words. A fusion module was further proposed to enhance the alignment between image and text information, improving the model's ability to learn a language-aware visual representation. Pre-trained specifically at the object level, GLIP has demonstrated remarkable performance, even comparable to fully supervised methods in zero-shot object detection and phrase grounding tasks. Meanwhile, CLIPSeg [105] and CRIS [171] extended CLIP to the area of segmentation. CLIPSeg fixed the pre-trained CLIP image encoder and text encoder while introducing a trainable decoder for the seg-

mentation task. The encoded text prompt and image were fused and then input into the trainable decoder, generating the predicted segmentation mask. Conceptually aligned, a similar paradigm was proposed in CRIS. These representative variants have been favored by generalizability, further showcasing the adaptability of CLIP.


The potential of these variants lies in their attention to detail. They could combine visual and textual information to provide a more nuanced understanding of medical images. For medical imaging, where accurate identification of features such as tumors or bone fractures is crucial, they could offer significant benefits, potentially be able to locate clinical findings given the provided prompt, like "malignant mass" or "calcification."

2.3. Medical image-text dataset

The achievement of image-text alignment relies on large-scale datasets. Therefore, we summarize publicly available medical datasets here, each of which has a relatively large scale in the medical imaging domain.

As shown in Table 1, current medical image-text datasets tend to focus on different image domains and originate from various data sources. ROCO [130], MedICaT [148], PMC-OA [88], and ChiMed-VL [97] are four large-scale datasets sourced from research papers. They collected and filtered biomedical figure-caption pairs from open-access research papers via PubMed Central¹. Since research papers could cover a wide range of topics, the resulting datasets are composed of multiple kinds of medical images. Although focusing on different organs, FFA-IR [81], PadChest [18], and MIMIC-CXR [58] were collected from daily medical reports. In clinical practice, a diagnostic report is often derived from multiple images. Therefore, there exists a discrepancy in the quantities of images and text for these three datasets. OpenPath [49] crawled histopathology images and paired captions from Twitter. The proposed foundation model PLIP, which was pre-trained on OpenPath, has shown impressive performance, illuminating the significance of social media-derived data. Following OpenPath, Quilt-1M [52] extracted image-text pairs from both re-

¹<https://www.ncbi.nlm.nih.gov/pmc/tools/ftp/>

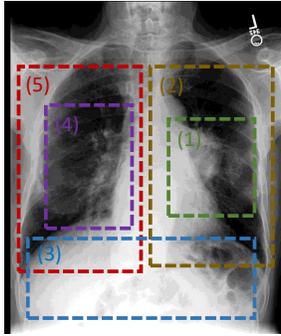

[From MIMIC-CXR]

(1) A mass is present in the superior segment of the left lower lobe and therefore malignancy must be considered. (2) Elsewhere, the left lung appears clear. (3) There is no effusion. (4) Calcified pleural plaque is present in the right mid zone. (5) The right lung appears clear.

Figure 5. Demonstration of fine-grained features of medical image-text pairs. The medical report is composed of several sentences, with each sentence focusing on region-level features instead of global-level features. Sentences are generally independent of each other, and they generally hold different levels of significance.

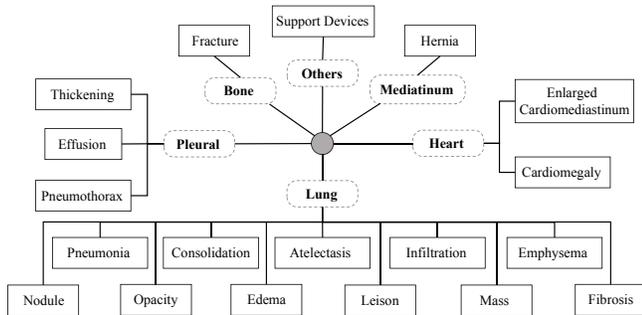


Figure 6. An illustration of hierarchical dependencies among clinical findings in chest X-rays (sourced from [50]). Solid boxes indicate clinical findings while dotted boxes represent organs or tissues.

search papers and social media platforms like YouTube. As of December 2023, Quilt-1M stands as the largest image-text dataset for Histology images. Note that not all of these datasets are in English, PadChest is provided in Spanish, while FFA-IR and ChiMed-VL have a Chinese version. For each of these open-source datasets, we also signify whether there is a publicly available pre-trained CLIP based on it. We sincerely hope that our efforts could spare those new to this field from unnecessary hassles.

3. CLIP in medical image-text pre-training

Existing CLIP pre-trained models were typically trained on general knowledge [31, 136, 149], without specificity on medical imaging knowledge. Hence, several efforts have been made to overcome the challenges posed by the medical imaging domain and adapt the paradigm of CLIP to a specific domain (e.g. Chest X-ray, Brain MRI, etc.), expecting an expert foundation model [193] with robust expertise in its area. Note that studies like BiomedCLIP [194] and PMC-CLIP [88] are not covered in this section, as they were

pre-trained on datasets containing many different types of images (see Table 1) and did not make a contribution to improve the framework of CLIP pre-training. In this section, we talk about specific challenges of medical image-text pre-training, and provide a taxonomy of existing studies given their solutions.

3.1. Challenges of CLIP pre-training

CLIP was initially proposed on natural image datasets, which may lead to suboptimal performance on medical imaging due to three key challenges.

- Fine-grained features.** One main difference between the natural image domain and the medical imaging domain is that details are of significance for the diagnosis of potential disease. For medical imaging like chest X-ray, lesion regions usually occupy only small proportions, making it difficult to effectively represent these subtle yet crucial visual cues using global representations alone. Furthermore, medical reports tend to be more complex than captions for natural images. Natural image captions are typically concise and provide an overview of the global features of the image. In contrast, as depicted in Figure 5, medical reports consist of multiple sentences, with each sentence describing the image findings in a specific region. For instance, the first sentence (highlighted in green) in Figure 5 describes the presence of a mass, which is essential for accurate diagnosis. Overall, both local image features (region-level or pixel-level) and local text features (sentence-level or word-level) should be taken into consideration during pre-training, posing challenges to the baseline CLIP pre-training, where image and text information are aligned solely at the global level.
- Data scarcity.** Unlike natural image-text datasets, which can easily reach billion-scale [143, 188, 215], medical datasets with paired images and reports [52, 58] hold a relatively limited scale. As the scale of datasets can have a significant impact on CLIP-style pre-training according to scaling laws [31], limited medical data can hinder its performance in medical imaging domain.
- High demands for specialized knowledge.** The hierarchical dependencies among various clinical concepts can be intricate and highly specialized. As depicted in Figure 6, the graph is constructed based on the expert viewpoint of chest X-rays, considering correlations, characteristics, and occurrence locations of clinical findings [50]. Lack of in-depth understanding of medical concepts may lead to degraded performance when facing data from shifted distributions, or

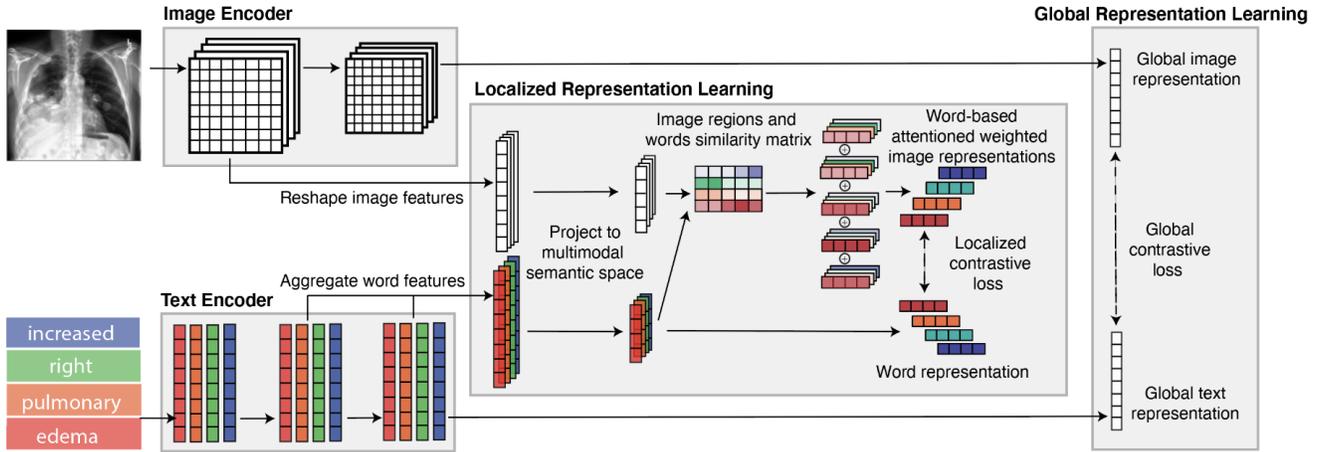


Figure 7. Overview of GLoRIA [48], which proposed to perform image-text feature alignment in a global-local manner rather than global-level alignment alone. The global alignment generally follows the CLIP paradigm, while the local contrastive objective is optimized between the attention-weighted image representations and corresponding word representations.

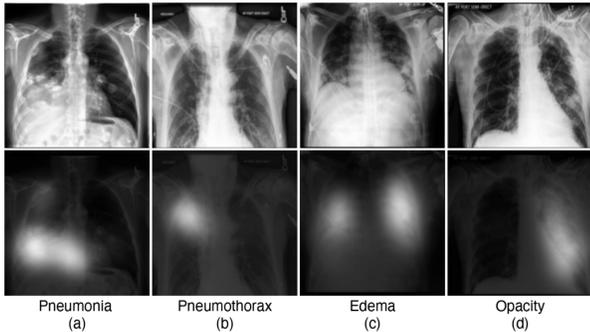


Figure 8. Visualization of local text-to-image alignment in GLoRIA [48].

even shortcut solutions [40]. Hence, in order to improve the reliability and robustness, explicitly incorporate knowledge during the process of pre-training may provide a viable solution.

These challenges highlight the impracticality of directly applying CLIP pre-training on medical image-text datasets, motivating related work to improve CLIP-style pre-training in the medical imaging domain.

3.2. Fine-grained image-text contrast

Although some early-stage studies [200, 209] attempted to extend CLIP pre-training to the medical imaging domain, they still follow the global-level contrast proposed in [136] and hence shown sub-optimal performance on downstream tasks involving dense prediction such as semantic segmentation and object detection. To address the issue, several studies have tried to perform global-local image-text alignment.

Huang et al. [48] made a pioneering contribution in this domain by introducing the concept of global-local con-

trast, as illustrated in Figure 7. In the context of global image-text alignment, their approach, named GLoRIA, followed a similar paradigm to CLIP. However, it distinguished itself by introducing local image-text alignment through the contrast between attention-weighted image sub-regions and word representations. In detail, GLoRIA initiates the process by calculating the similarity matrix between word-wise text features and sub-region-wise image features. Subsequently, it leverages the similarity matrix to derive attention-weighted local image representations for each word representation, facilitating a fine-grained local image-text alignment. Figure 8 demonstrates that the local text-to-image alignment is able to correctly identify significant image sub-regions for a given word. For instance, the attention based on the word "Pneumonia" correctly localizes regions of the right lower lobe containing heterogenous consolidative opacities indicative of pneumonia. Additionally, attention weights associated with "Pneumothorax" accurately emphasize lucency in the right lung apex, indicative of pneumothorax. Analogous results can be observed for "Edema" and "Opacity," highlighting the efficiency of local-level alignment.

The global-local alignment proposed by [48] is intuitive, but it still has some apparent weaknesses. (1) Each local text representation is treated equally, while different sentences within medical reports hold varying levels of importance for diagnosis as illustrated in Figure 5. (2) The local alignment is designed asymmetrically. The alignment from text to image is obtained via attention-weighted sub-region features, namely text-to-image local features, while the alignment from image to text is dismissed. (3) While computing text-to-image local features through weighted summation of local image features is intuitive, it may struggle to capture implicit semantic correlations between image features and

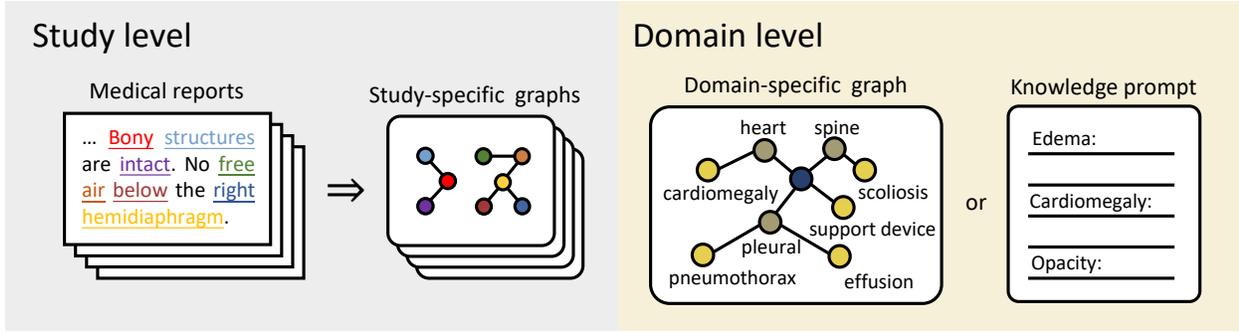


Figure 9. Illustration of external knowledge incorporation (task chest X-ray as an example). At the study level, a knowledge graph is extracted and constructed from each medical report, providing structured knowledge for entities encompassed in the report. Meanwhile, domain-specific knowledge is often presented through a specialized graph or descriptive knowledge prompt, encompassing information about related organs, tissues, or clinical findings.

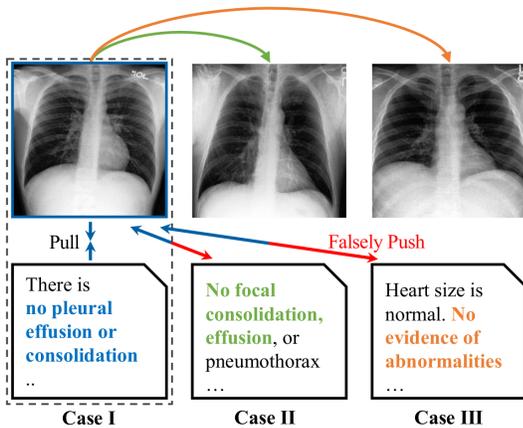


Figure 10. Illustration of false-negative pairs [89]. In CLIP pre-training, only the image and its corresponding report are regarded as a positive pair, with all other reports from distinct studies considered as negatives. This practice can lead to false-negative pairs (i.e., semantically similar reports from different studies).

text features.

Motivated by the above-mentioned limitations, Müller et al. [112] proposed a symmetric global-local alignment framework LoVT, covering both text-to-image local alignment and image-to-text local alignment. In LoVT, local text features and local image features are weighted adaptively via transformer’s attention map [35] instead of numerical similarity. Also, to better capture the implicit semantic features, both text-to-image local features and image-to-text local features are learned by transformer layers instead of weighed summation. On the basis of LoVT, Cheng et al. [30] extended the approach by incorporating a conditional reconstruction task for image and text representations. This extension facilitates cross-modality feature interaction and learns more fine-grained features. Additionally, they proposed a prototype memory bank for sentence-level embeddings, expecting to learn high-level text features

in the joint image-text space. In a parallel study [192], a similar methodology was employed. However, it focused on reconstructing raw text reports instead of using a prototype memory bank.

Besides this line of research, there are many other studies focusing on fine-grained global-local contrast. Liao et al. [85] optimized the estimated mutual information between local image features and sentence-level text representations to implement local feature alignment. Seibold et al. [144] assumed that each sentence could convey distinct information for diagnosis and proposed to perform image-sentence alignment. Further, Palepu et al. [125] sought to penalize the entropy of the text-token to image-patch similarity scores.

3.3. Data efficient pre-training

Large-scale medical imaging datasets with paired reports are hard to obtain due to ethical concerns, which adversely influences the effectiveness of CLIP pre-training due to its data-thirsty nature. To tackle this challenge, various studies have endeavored to implement contrastive image-text pre-training in a more efficient manner, broadly falling into two categories.

Semantic-driven contrast. Several studies managed to boost the efficiency of contrastive pre-training based on inter-report semantic similarity. One notable distinction between medical reports and image captions lies in the fact that medical reports were written with a clear diagnostic purpose. Since a small proportion of diseases/findings typically cover most cases [18], the semantic overlap between medical reports can be significant, especially for normal cases as shown in Figure 10. As a result, simply treating unpaired images and reports as negative pairs can lead to issues of false-negative and degrade the efficiency of pre-training. Motivated by this observation, Wang et al. [173] measured inter-report similarity following the practice of NegBio [132] and constructed a semantic similarity ma-

trix. This matrix, derived from the medical reports, was then employed as a soft optimization target for aligning images and text, enabling the effective utilization of unpaired false-negative reports. Similarly, Wang et al. [168] directly adopted the multi-hot label of each sample to construct the similarity matrix. SDA-CLIP [82] extended this methodology to surgical video data. It followed the supervised contrastive learning [67] and calculated the Kullback-Leibler (KL) divergence between the predicted frame-text similarity distribution and the ground truth annotation distribution. Further, [89] categorized all image-text pairs into positive, negative, and neutral pairs based on inter-report similarity. This improved categorization of sample pairs allowed for a more precise mining of false-negative pairs. MGCA [165] focused on semantic information at the disease level, a level of abstraction higher than that of image-level semantics, and designed a novel cross-modal disease-level alignment framework. For multimodality brain MRI and corresponding modality-wise reports, UniBrain [76] first aligned modality-wise image-text features and then concat these features together to realize subject-wise image-text alignment.

Data augmentation. Simultaneously, many other studies tried to boost training efficiency by data augmentation or mining supplementary information. Within a diagnostic report, the *Findings* section provides a detailed description of clinical observations, while the *Impression* typically encapsulates these findings and offers an overall assessment [164]. While previous studies primarily focused on extracting the *Findings* section from raw diagnostic reports, often overlooking the *Impression*, Boecking et al. [16] incorporated the latter section to enrich the information available for image-text alignment. Since the dependency between sentences is weak (see Figure 5), they also proposed a data augmentation technique that involves randomly shuffling sentences within each section. CXR-CLIP [183] explored and utilized uncertainty annotations [54]. It generated prompts based on uncertainty annotations to provide supplementary information for image-text alignment.

3.4. Explicit knowledge enhancement

While studies in section 3.2 and section 3.3 in nature still focus on **internal** information of the dataset, some research has investigated the integration of **external** medical knowledge to enhance the pre-training process.

Employing the unified medical language system (UMLS) as the external knowledge base [15] for medical concepts, existing studies typically incorporate knowledge enhancement at the **study level** and **domain level**. At the study level, ScispaCy [116], a named entity recognition tool, is adopted to extract medical entities from each report and link them to corresponding medical concepts in the UMLS for entity disambiguation. Then, a study-specific

knowledge graph is built based on relations defined in UMLS or RadGraph [56], where the former establishes relations among general medical concepts and the latter is specialized for the interpretation of chest X-ray. These study-specific graphs are able to provide structured knowledge to guide the alignment within each image-text pair. For domain-level enhancement, knowledge is typically represented as a domain-specific knowledge graph (e.g., chest X-ray, brain MRI) or a descriptive knowledge prompt, covering related organs, tissues, or clinical findings. The domain-specific graph can either be defined as a trainable symbolic graph [86], or a set of top- K most commonly appearing entity triplets in all pre-training corpus [175]. The descriptive knowledge prompt usually provides detailed observations or explanations for encompassed entities.

Incorporating external knowledge into the pre-training phase typically involves the introduction of an auxiliary knowledge encoder. This encoder serves to transform the external knowledge into knowledge embeddings, facilitating seamless interaction, fusion, and alignment with both image and text embeddings. The selection of a knowledge encoder may entail opting for a graph neural network or leveraging a BERT model pre-trained on specialized corpus. Specifically, Chen et al. [29] pre-processed all medical reports in the training set and constructed study-specific knowledge graphs for each, utilizing relations defined in the UMLS [15]. It further adopted TransE [17] algorithm to train a graph attention network [161] as the knowledge encoder, which can integrate knowledge information with image and text embeddings during pre-training. In contrast, KoBo [197] and FLAIR [170] prioritize domain-level enhancement. KoBo, for instance, extracted a sub-graph from UMLS containing clinical pathology concepts specific to the radiology domain. It proposed a knowledge semantic enhancement module and a knowledge semantic guidance module to mitigate negative sample noise and adjust semantic shifting, respectively, through knowledge guidance. Similarly, FLAIR leveraged established domain expert knowledge descriptions for fundus imaging, associating each category with detailed textual descriptions containing pertinent findings and inter-category relationships. Besides, there are also studies adopting both study-level and domain-level knowledge enhancement. MedKLIP [175] pre-processed and extracted entity triplets from each raw text report, constituting the study-level knowledge. Then, the top- K most frequently occurring entities, $K=75$ in practical implementation, were identified to form an entity query set, functioning as domain-level knowledge. Here, study-level knowledge was considered as the contrastive optimization target for the corresponding image, while the domain-level knowledge was utilized to condition visual embeddings through its proposed knowledge fusion module. This paradigm was also adopted in KAD [197]. MO-

Table 2. Overview of representative studies focusing on improving CLIP pre-training framework. CLS: classification, SEG: segmentation, DET: detection, ZSC: zero-shot classification, ITR: image-text retrieval, VQA: visual question answering, PG: phrase grounding, RG: report generation, ITC: image-text classification.

Methods	Domain	Taxonomy	Evaluation tasks	Highlights
GLoRIA [48]	Chest X-ray	Fine-grained	CLS, SEG, ZSC, ITR	Jointly learn global and local image-text representations by contrasting attention-weighted image regions with words in the paired reports.
LocalMI [85]	Chest X-ray	Fine-grained	CLS	Estimate and optimize the mutual information between local image representation and sentence-level text representation.
LoVT [112]	Chest X-ray	Fine-grained	DET, SEG	<ul style="list-style-type: none"> Align sentence-level text representation and patch-level image representation using self-attention. Adaptively weigh local representations via transformer’s attention map.
Seibold et al. [144]	Chest X-ray	Fine-grained	CLS	Align each image representation with text representation in a sentence-wise manner.
LRCLR [141]	Chest X-ray	Fine-grained	CLS, ZSC	Propose a region selection module for image representations.
PRIOR [30]	Chest X-ray	Fine-grained	CLS, SEG, DET, ZSC, ITR	To realize more fine-grained alignment, a cross-modality conditional reconstruction module is proposed for masked image modeling and sentence prototype generation.
TIER [125]	Chest X-ray	Fine-grained	CLS	A regularization strategy focusing on local image-text similarity is proposed to improve localization performance.
Müller et al. [111]	Chest X-ray	Fine-grained	DET, SEG	It analyzed from the view of distribution prior and argued that global-level and local-level alignment act complementarily. A local uniformity loss is hence proposed to replace local alignment.
LIMITR [32]	Chest X-ray	Fine-grained	PG, ITR,	Learning to weigh information from both anterior-posterior and lateral view
MRM [210]	Chest X-ray	Fine-grained	CLS, SEG	Masked image reconstruction and report completion acted as two complementary objectives during pre-training.
Pan et al. [127]	Placenta	Fine-grained	CLS	To address the issue of feature suppression during contrastive alignment, this study proposed a NegLogCosh similarity to replace cosine similarity.
Pan et al. [126]	Placenta	Fine-grained	CLS	A Distributional Feature Recomposition module was proposed to estimate the significance of each local text feature in a distribution-aware manner.
TCSA [75]	Chest X-ray	Fine-grained Data-efficient	CLS, ZSC, ITR	Besides global-local image-text contrast, TCSA learns view-specific latent space for multi-view samples and then projects them to a common latent space, which enables the effective utilization of multi-view information.
MedCLIP [173]	Chest X-ray	Data-efficient	CLS, ZSC, ITR	Employ inter-report similarity matrix as the soft optimization target for the alignment between image and text, which, to some extent, addresses the issue of false negative pairs.
SAT [89]	Chest X-ray	Fine-grained Data-efficient	CLS, SEG, ZSC, ITR	SAT categorized image-text pairs into positive/neutral/negative pairs given inter-report similarity and expected to more precisely alleviate false-negative problems. This technique can serve as a plug-and-play module for fine-grained contrast methods.
UMCL [168]	Chest X-ray	Data-efficient	CLS, ZSC, ITR	Construct positive/negative pairs through the multi-hot annotation to eliminate false negative pairs.
CXR-CLIP [183]	Chest X-ray	Data-efficient	CLS, ZSC, ITR	CXR-CLIP generates prompts based on ground-truth labels to provide supplementary information for alignment.
Jang et al. [57]	Chest X-ray	Data-efficient	ZSC	This study introduces a sentence-level text augmentation technique and suggests a novel similarity function designed to compel the model to concentrate on perfectly negative pairs, images or reports from different subjects with different semantics, instead of false-negative pairs.
casCLIP [4]	Chest X-ray	Data-efficient	CLS, ZSC	It generates additional prompts containing high-level information from raw text reports, expecting the image encoder to capture high-level semantic correspondences via alignment.
IMITATE [91]	Chest X-ray	Data-efficient	CLS, SEG, DET, ZSC	Multi-scale feature maps are aligned with both <i>Findings</i> and <i>Impression</i> sections of medical reports.

TOR [86] adopted a symbolic graph regarding key clinical findings as the domain-level knowledge and also extracted report-wise knowledge graph for study-level enhancement. Improved result indicates the rationality of explicit knowledge enhancement in CLIP-style pre-training.

3.5. Summary

We show representative methods included in this section in Table 2. Their pre-trained imaging domain, specific taxonomy, evaluation tasks, and noteworthy points are

Table 2. (continued)

Methods	Domain	Taxonomy	Evaluation tasks	Highlights
MGCA [165]	Chest X-ray	Data-efficient	CLS, DET, SEG	On the contrary to fine-grained alignment, MGCA seeks to leverage disease-level semantic correspondence, which is a kind of higher-level information compared to that at the image level.
BioViL [16]	Chest X-ray	Data-efficient	CLS, SEG, ZSC, PG	<ul style="list-style-type: none"> Text augmentation and modeling were improved to boost training efficiency Optimized using global alignment alone, BioViL still shows impressive phrase grounding performance compared with methods adopting global-local contrast
BioViL-T [10]	Chest X-ray	Data-efficient	CLS, PG, RG	It leverages the temporal connectivity commonly present in diagnostic reports, which were usually discarded in previous studies.
SDA-CLIP [82]	Surgical video	Data-efficient	CLS	Following the paradigm of supervised contrastive learning, it optimizes the Kullback-Leibler divergence between the predicted frame-text similarity distribution and the ground truth label distribution.
UniBrain [76]	Brain MRI	Knowledge Data-efficient	CLS, ZSC	<ul style="list-style-type: none"> Pre-defined knowledge prompts serve as the knowledge query for the final diagnosis of brain disease in UniBrain Since multimodality MRI is available, UniBrain initially aligns the modality-wise image-text features and then concatenates them together for subject-wise image-text alignment.
FLAIR [170]	Retina	Knowledge	CLS, ZSC	<ul style="list-style-type: none"> Knowledge encoder: ClinicalBERT [2] Incorporate domain knowledge explicitly through descriptive textual prompts during both pre-training and zero-shot inference to enhance the otherwise less-informative categorical supervision.
ARL [29]	Chest X-ray	Knowledge	VQA, ITR, ITC	<ul style="list-style-type: none"> Knowledge encoder: Graph Attention Network [161]. Extract the knowledge graph of each medical report and convert it into knowledge embeddings. In its alignment module, both image embeddings and text embeddings are aligned with their corresponding knowledge embedding, together with a cross-modality conditioned reconstruction proxy task.
MedKLIP [175]	Chest X-ray	Knowledge	CLS, SEG, ZSC, RG	<ul style="list-style-type: none"> Knowledge encoder: ClinicalBERT [2]. MedKLIP pre-processes raw reports and extracts medical-related triplets as the study-level alignment targets. Top-K most commonly appearing triplets act as general-knowledge-level alignment targets.
KAD [197]	Chest X-ray	Knowledge	ZSC	<ul style="list-style-type: none"> Knowledge encoder: PubMedBERT [43]. Image embeddings are directly aligned with study-wise knowledge embeddings. The alignment is further refined via a proxy task of disease classification. a set of disease descriptions is pre-defined as knowledge queries, allowing for the diagnosis of unseen diseases.
KoBo [197]	Chest X-ray	Knowledge Data-efficient	CLS, ZSC, SEG	<ul style="list-style-type: none"> Knowledge encoder: CompGCN with LTE [203] Medical knowledge is incorporated to distinguish noisy negative samples and alleviate their adverse impact on contrastive pre-training.
MOTOR [86]	Chest X-ray	Knowledge	CLS, RG, ITR, VQA	<ul style="list-style-type: none"> Knowledge encoder: SciBERT [12] Image embedding interacts with both general knowledge and specific knowledge. The knowledge-conditioned image embedding and raw text embedding is aligned in the alignment module.
PathOmics [34]	Pathology image	Others	SP	<ul style="list-style-type: none"> PathOmics explores intrinsic genotype-phenotype interactions in complex cancer data across modalities. Specifically, omics tabular data and image patches are aligned in a joint latent space via mean squared error instead of commonly adopted cosine similarity.
CMTA [208]	Pathology image	Others	SP	CMTA focuses on the intrinsic cross-modal correlations between genomic profile and pathology image. Cross-modal representations and intra-modal representations are aligned using L_1 norm.
SCA-Net [28]	Surgical video	Others	RG	SCA-Net mutually aligns image and text representations with prototype representations of the other modality.
M-FLAG [90]	Chest X-ray	Others	CLS, DET, SEG	<ul style="list-style-type: none"> M-FLAG keeps the pre-trained text encoder fixed during pre-training to alleviate the collapsed solution problem. It explicitly optimizes the latent geometry towards orthogonal using the proposed optimization objective.

demonstrated, aiming to offer valuable insights to the research community. Evaluation tasks mean that the quality of pre-trained vision encoder and text encoder are evalu-

ated by directly observing their performance on some specialized tasks without much modification, which is different from the application task mentioned in section 4 as CLIP is

Table 3. Overview of representative classification applications.

Methods	Organ	Imaging modality	Test dataset	Pre-trained CLIP
CheXzero [155]	Chest	X-ray	CheXpert [54] PadChest [18]	Fine-tuned CLIP [136]
Seibold et al [144]	Chest	X-ray	CheXpert [54] PadChest [18] ChestX-ray14 [166]	Fine-tuned CLIP [136]
Xplainer [131]	Chest	X-ray	CheXpert [54] ChestX-ray14 [166]	BioViL [16]
Kumar et al. [72]	Chest	X-ray	MIMIC-CXR [58]	Fine-tuned BioViL [16]
Pham et al. [133]	Chest	X-ray	EGD-CXR [60]	BiomedCLIP [194]
Mishra et al. [110]	Chest	X-ray	VinDr-CXR [117]	Fine-tuned CLIP [136]
ETP [92]	Heart	ECG	PTB-XL [163] CPSC2018 [93]	An ECG CLIP trained from scratch
CITE [199]	Stomach	Histology	PatchGastric [158]	CLIP [136]
CLIP-Lung [77]	Lung	CT	LIDC-IDRI [5]	CLIP [136]
Kim et al. [69]	Skin	Dermatology	HAM10000 [157]	CLIP [136]
DCPL [20]	Brain, Colorectal	MRI, Histology	BTMRI [118] CHMNIST [62]	CLIP [136]
CoOPLVT [8]	Eye	Fundus	EyePACS [36] APTOS [61] Messidor [33]	CLIP [136]
Byra et al. [19]	Chest, Breast	X-ray, Ultrasound	Pneumonia [65] UDIAT [182]	CLIP [136]
Liu et al. [96]	Multiple	Multiple	Pneumonia [65] Shenzhen dataset [55] Montgomery [55] IDRID [134]	CLIP [136]

only considered as a part of the entire method framework there.

While existing methods can typically be categorized according to the taxonomy we previously outlined, exceptions exist, and certain deviations can serve as motivational factors. Illustrated in Table 2, SAT [89] and TCSA [75] employ fine-grained alignment and data-efficient pre-training, whereas UniBrain [76] and KoBo [197] integrate data-efficient pre-training with explicit knowledge enhancement. Such studies encourage the community to explore the proper combination of these three solutions in future work. Moreover, there are also multiple interesting studies that may provide insight for potential research. M-FLAG [90] focused on the issue of collapse solution, namely image and text features are encoded into the same constant feature embedding to minimize their distance in the latent space. It kept the pre-trained text encoder frozen during pre-training, and adopted an orthogonality loss to encourage the orthogonality of visual representations. CMTA [208] and Path-Omics [34] investigate the alignment between omics tabular data and pathology images, which could potentially inspire

the exploration of aligning other forms of data with images beyond diagnostic reports.

4. CLIP-driven application

Benefiting from large-scale text supervision, the pre-trained CLIP model is able to align the input visual features with human language/knowledge, even on medical images (see in Figure 4), indicating its potential in clinical scenarios, where interpretability and human alignment is significant. Moreover, the human-level knowledge and visual-linguistic semantic correspondence encoded within CLIP can serve as external supervision signals for some annotation-demanding tasks (e.g., tumor segmentation) and therefore boost the performance of the vision model. These strengths have made CLIP be applied in various clinical-related tasks.

4.1. Classification

Since CLIP was pre-trained through global-level image-text alignment, it is intuitive to apply it to medical image

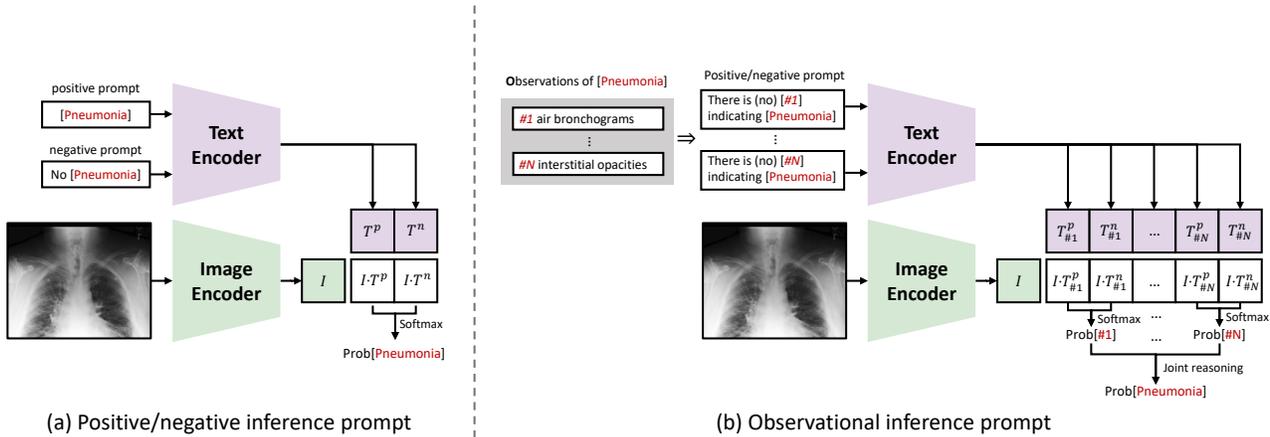


Figure 11. Illustration of the prompt engineering for zero-shot disease diagnosis. The diagnosis of Pneumonia is demonstrated here, while any potential disease can be diagnosed in this way

classification, where the model is usually asked to provide a global assessment of the image, determining aspects like its benign or malignant nature or the presence of specific diseases. Existing CLIP-driven classification studies are presented in Table 3, and they can be generally categorized into two lines, zero-shot classification and context optimization. **The former** investigates how to properly and effectively mine the diagnostic capability of the pre-trained **domain-specific** CLIP via prompt engineering, while **the latter** expects to adapt the **non-domain-specific** CLIP to the medical domain in a parameter-efficient and data-efficient way.

4.1.1 Zero-shot classification

The performance of zero-shot classification largely depends on the pre-embedded knowledge, which influences the choice of pre-trained CLIP in existing studies. As shown illustrated in Table 3, this line of research typically acquires a domain-specific CLIP by either fine-tuning the original CLIP on the medical image-text dataset [58] independently [72, 110, 144, 155] or by adopting an open-source specialized CLIP model [16, 133]. In the case of electrocardiogram (ECG) [92], where the data exists in the form of one-dimensional multi-channel signals, researchers decided to train an ECG-specific CLIP model from scratch.

Besides the choice of pre-trained CLIP, the other key point of zero-shot classification lies in prompt engineering. The original CLIP zero-shot prompt described in section 2.1, indeed, does not work well on disease diagnosis. The probability calculation in equation 4 involves softmax operations, indicating that in the computation, each class is mutually exclusive from the others. However, this does not align with the practical scenario of disease diagnosis, as patients may simultaneously suffer from multiple diseases. To address this issue, CheXzero [155] defined the

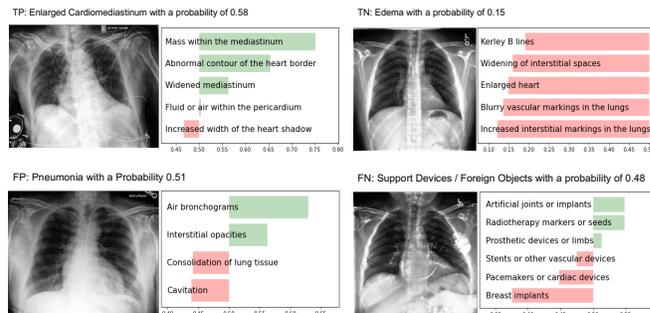


Figure 12. Qualitative results of Xplainer of giving explainable classification.

positive and negative prompts (such as ‘Pneumonia’ versus ‘no Pneumonia’) for each pathology to implement zero-shot disease diagnosis independently (see in Figure 11(a)). However, CheXzero fails to give explainable zero-shot diagnosis. To alleviate this issue, many methods tried to align image with texture, shape and other fine-grained information [19, 69, 96, 131, 180]. Among them, Pellegrini et al. [131] introduced Xplainer, a novel framework for explainable zero-shot diagnosis in the clinical setting. Specifically, instead of directly predicting a diagnosis, they prompted the model to classify the existence of descriptive observations, which a radiologist would look for on an X-ray scan, and use the descriptor probabilities to estimate the likelihood of a diagnosis. They first query the ChatGPT to describe observations in X-ray images that would occur in a radiology report indicating specific pathology and further refine those generated observations with the help of radiologists to make them more credible. Then they give both positive and negative prompts of those observations as shown in Figure 11 (b). Given these observation probabilities (from Prob[#1] to Prob[#N]), a joint probability is estimated as the final

results of the pathology in concern. Figure 12 gives qualitative examples of Xplainer’s explainable diagnosis on giving true positive (TP), true negative (TN), false positive (FP), and false negative (FN) cases. It can be observed that most of the descriptors are detected for the true positive case, and the model, correctly, detected the non-existence of all descriptors to the pathology for true positive and negative cases. Although the model fails to always make correct decisions in false positive and negative cases, these two false classification results are easily changed by the radiologist. This is because there exist contradictory findings (e.g., bronchogram tends to co-occur with consolidation) in false cases. Thus, knowing which combination of observations leads to such a decision improves explainability.

4.1.2 Context optimization

While the concept of zero-shot disease diagnosis appears impressive and promising, its broader application in the medical imaging community is constrained by the limited availability of domain-specific CLIP models as most open-source biomedical CLIP models are predominantly focused on Chest X-rays. Consequently, certain studies have turned to non-domain-specific pre-trained CLIP models, aiming to efficiently adapt these models to the context of medical imaging domains with optimal use of trainable parameters.

Although some parameter-efficient tuning studies such as CoOp [212] and CoCoOp [211] have been proposed to adapt CLIP to out-of-distribution natural image datasets, none of them considered the medical imaging domain. The lack of domain awareness also may lead to an inadequate perception of medical images and results in suboptimal performance.

To tackle this issue, several studies [8, 20, 206] proposed context optimization methods for specialized medical domain images by providing medical domain-adaptive prompts. Moreover, to generate more specific optimizable prompts, Lei et al. [77] proposed the channel-wise conditional prompt (CCP) for lung nodule malignancy prediction as Figure 13 shows. Different from CoCoOp [211], which only constructs global and instance level prompts and provides the common condition for all the prompt tokens, CCP additionally constructed specific learnable prompts conditioned on feature maps in different channels individually and triggers more explainable attention maps. Moreover, they simultaneously aligned image features with class and attribute features through contrastive learning while generating more explainable attention maps and thus provide more diagnosis-related prompts.

4.2. Dense prediction

Unlike disease diagnosis, dense prediction focuses on more granular tasks such as localization, segmentation, and

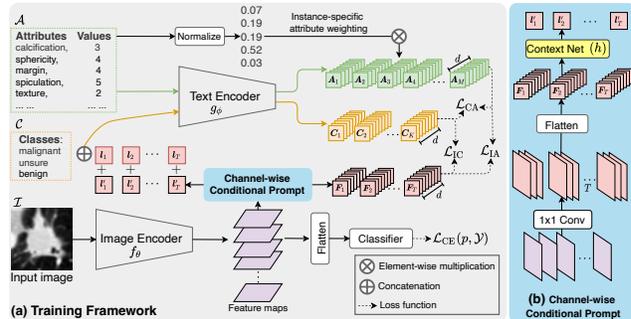


Figure 13. Context optimization for lung nodule classification (from [77]).

others [139, 167, 216]. Methods proposed by this line of study typically function as an auxiliary tool, providing clinicians with valuable information (e.g. potential lesion region) to support their decision-making. Owing to the robust feature extraction and image-text/label alignment capability, CLIP, together with its variants, has been applied to a wide variety of dense prediction tasks.

4.2.1 Detection

Detection is an essential task for clinical practice such as surgical planning, pathological diagnosis, and post-operative assessment. Previous approaches [11, 51, 174, 186] in medical image detection typically focused on leveraging image-based features extracted through various convolutional neural networks or with transformer-based architectures. These methods, while effective to a certain extent, often struggle with the nuanced and complex nature of medical images, especially in cases where visual cues are subtle or ambiguous. The pipeline for detection tasks in medical imaging has been significantly influenced by the advancements and integration of visual-language models, such as directly using CLIP [113] or its extension GLIP [80]. [44] proposed a multiple-prompt, ensemble-guided fusion technique for lesion detection, utilizing GLIP’s proficiency in interpreting complex medical scenarios through the amalgamation of diverse textual descriptions. Moreover, VLPM-NuD [177] introduced GLIP for zero-shot nuclei detection in H&E stained images in a training-free manner. It proposed an innovative automated prompt design and adopted a self-training framework to refine the predicted boxes iteratively during post-processing.

While object detection focuses on identifying and localizing specific and pre-defined items, such as tumors or fractures, another crucial aspect in medical imaging is anomaly detection, especially zero-shot anomaly detection (ZSAD), which aims to identify deviations from the norm without any training samples from the target dataset. AnomalyCLIP [213] showcased CLIP’s enhanced capabilities in Zero-Shot anomaly detection across medi-

Table 4. Overview of representative dense prediction applications.

Methods	Task	Organ	Imaging modality	Pre-trained CLIP
Guo et al. [44]	Detection	Skin lesion, Polyp, Cell	Endoscopy, Cytology	GLIP [80]
VLPMMuD [177]	Detection	Nuclei	Cytology images	GLIP [80]
AnomalyCLIP [213]	Anomaly Detection	Skin, Colon, Thyroid, Chest, etc.	CT, MRI, Ultrasound, X-ray, Colonoscopy	CLIP [136]
Anand et al. [3]	Segmentation	Spleen, Liver, Kidney, Shoulder, etc.	CT, MRI, Ultrasound	Fine-tuned CLIP [136]
MedVLSM [135]	Segmentation	Colon, Skin, Chest, etc.	X-ray, Ultrasound, Endoscopy,	Fine-tuned CLIPSeg [105] Fine-tuned CRIS [171]
SyntheticBoost [1]	Segmentation	Heart	Ultrasound	Fine-tuned CLIPSeg [105] Fine-tuned CRIS [171]
Liu et al. [98]	Segmentation	Multi-organ	CT, MRI	CLIP [136]
Zhang et al. [201]	Segmentation	Multi-organ	CT	CLIP [136]
TPRO [196]	Segmentation	Breast, Lung	Histology	MedCLIP [108]
TCEIP [181]	Keypoints Localization	Tooth	Tooth crown images	CLIP [136]

cal domains. AnomalyCLIP employed object-agnostic text prompts, which captured the essence of normality and abnormality across various images, irrespective of their specific foreground objects. This forced CLIP to focus more on abnormal regions within an image rather than on the semantics of the objects, thereby facilitating a more generalized recognition of anomalies compared with previous ZSAD methods [24, 150, 211].

4.2.2 2D medical image segmentation

CLIP was pre-trained on the 2D image domain via text supervision. Therefore, it can be seamlessly integrated into 2D medical image segmentation for fine-tuning. Following this idea, Müller et al. [113] and Anand et al. [3] applied the CLIP pre-trained image encoder across various medical imaging modalities, including X-rays, Ultrasound, and CT/MR(3D data was treated in 2D slice way). Their work demonstrated that CLIP’s image encoder, originally trained on natural images, can also deliver impressive performance in medical image segmentation tasks. Further, more studies [1, 135] employed both pre-trained CLIP image and text encoders to construct a vision-language segmentation model, and finetuned it to serve 2D medical image segmentation tasks.

4.2.3 3D medical image segmentation

A growing number of publicly available annotated datasets [13, 47, 100, 146] have allowed researchers to train increasingly sophisticated models to segment anatomical structures and lesions from medical scans. However, most of them only have a small number of samples. They typically only focus on certain organs or anatomical structures

while all task-irrelevant organs and tumors are annotated as the background. Consequently, it remains a constraint on how to break the barrier of individual datasets and fully leverage existing data sources to expand the capabilities of segmentation models. Previously, DoDNet [191] was the first universal segmentation model to address this issue by introducing a dynamic segmentation head [153] tailored to specific tasks, with the task represented as a one-hot embedding. However, such label orthogonality encoding ignores the natural semantic relationship between organs. This limitation is exacerbated as the number of distinct segmentation tasks increases. Struggle to leverage the inherent correlations between related anatomical structures and pathologies, label orthogonality encoding fails to generalize effectively when the diversity of tasks grows more complex. To tackle the aforementioned challenges and limitations, Liu et al. [98] proposed a CLIP-Driven Universal Model for medical image segmentation by introducing the text embedding learned from CLIP to replace the one-hot encoding used in DoDNet [191]. Specifically, they utilized the trained CLIP text encoder to encode several task prompts like ‘liver’, ‘liver tumor’, ‘left kidney’, ‘right kidney’, ‘hepatic vessel’, ‘kidney tumor’ etc as shown in Figure 14. Such embeddings were then concatenated with the pooled image features generated by the vision encoder, to generate the dynamic segmentation head, which is used after the decoder. As shown in Figure 16, the correlations between organs and tumors are better established with the fixed-length CLIP label embedding, i.e. the relationship between liver and liver tumor, liver tumor, and kidney tumor. This method not only provided superior performance in organ segmentation but also in more challenging tumor segmentation tasks, surpassing other image-only SOTA segmentation models as shown

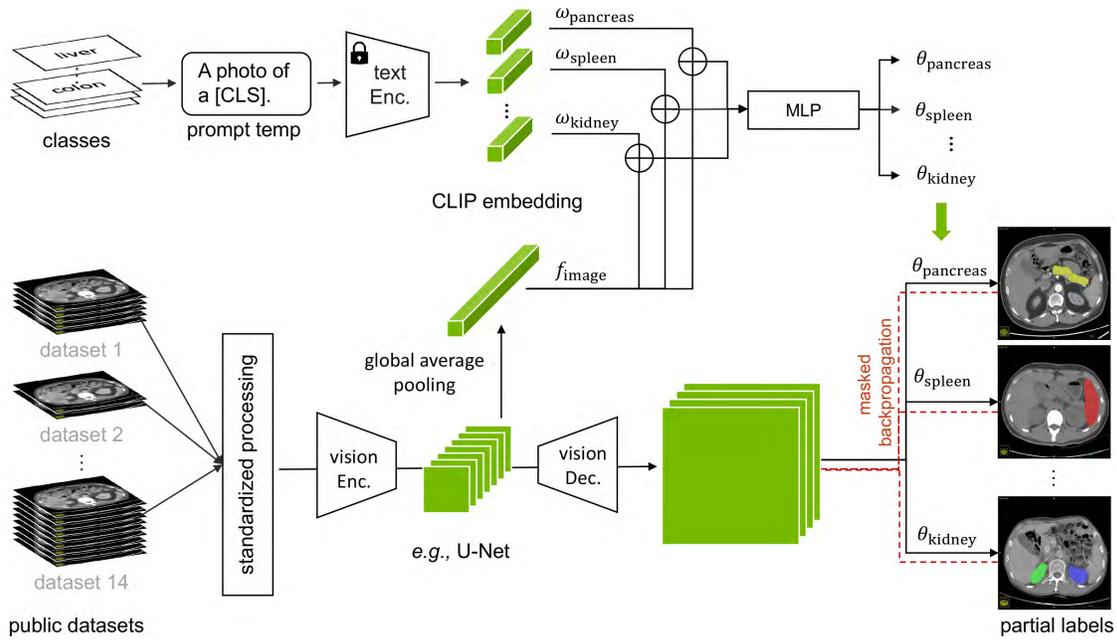


Figure 14. CLIP-driven segmentation model for universal segmentation [98].

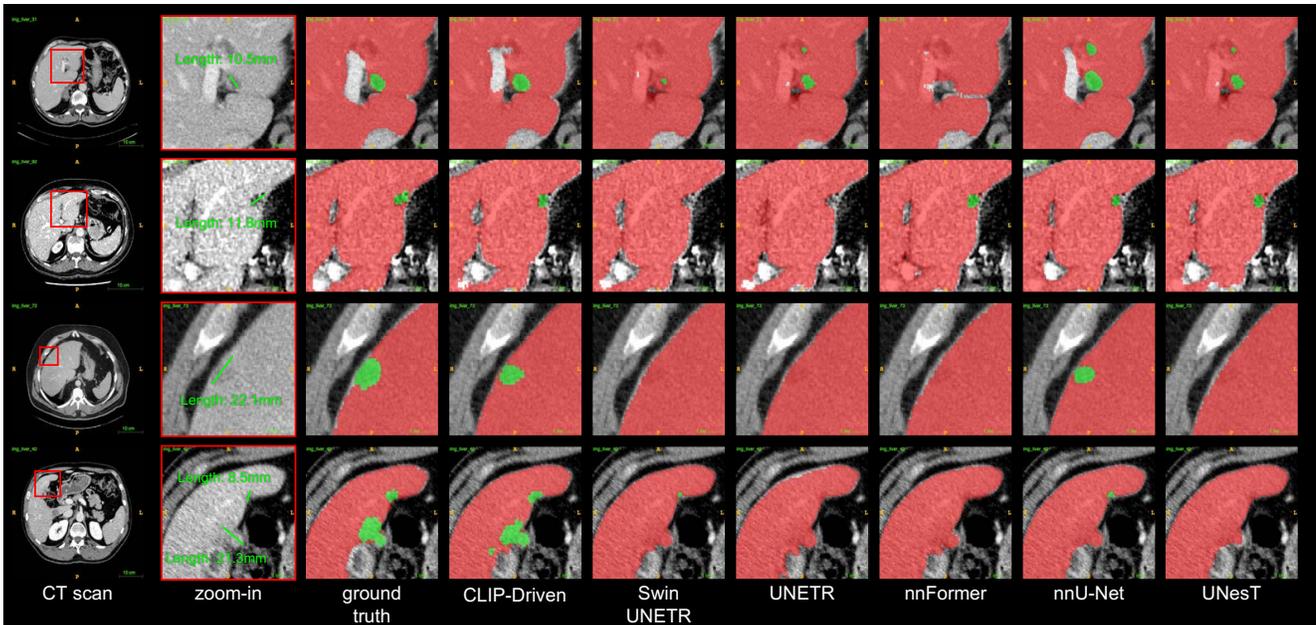


Figure 15. Liver tumor segmentation results. Qualitative visualizations of CLIP-Driven Uniserval Model [98] and five vision-only SOTA segmentation methods (green for tumor and red for organ). By reviewing the segmentation of tumors (Row 1-4), the CLIP-Driven segmentation model succeeds in detecting small tumors, even with multiple tiny tumors as shown in Row 4, which are ignored by most image-only methods. Moreover, the CLIP-Driven Universal Model provides much fewer false positive predictions, which is of great value in clinical tumor segmentation tasks.

in Figure 15.

Following the idea proposed in [98], Zhang et al. [201] extend this framework into continual learning by leveraging additional MLPs to tackle new tasks. As previous studies [99, 123, 124] have focused on developing novel loss

functions as additional constraints to maintain performance on learned classes, or memory modules to preserve patterns from the original data, Zhang et al. [201] used the paired MLP and the text embedding generated from CLIP leverage linguistic assistance for task isolation, enabling the dy-

namic segmentation head to filter and retain task-specific information with superior performance.

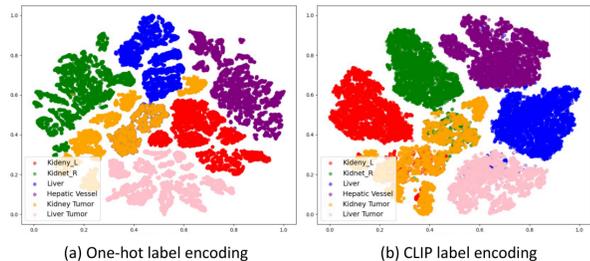


Figure 16. t-SNE visualization of the decoder embedding space between (a) one-shot task encoding and (b) CLIP label encoding.

4.2.4 Others

In weakly-supervised segmentation, class activation maps (CAM) [207] are commonly used for attention localization and pseudo-label generation, but they only focus on the most distinctive object parts often leads to low-quality labels due to boundary neglect. Despite recent attempts [45, 74, 83, 195] to broaden CAM’s coverage, this fundamental problem persists. Notably, Zhang et al. [196] proposed to integrate language prior knowledge into weakly supervised learning to provide reliable assistance in finding target structures. Specifically, they introduced a text-prompting-based weakly supervised segmentation method (TPRO) by employing a pre-trained MedCLIP [108] text encoder to analyze semantic labels and extract text features as class-level embedding. An additional BioBERT [73] was also adopted to extract detailed information about the label’s corresponding text descriptions. These two additional text supervisions are then fused with the image features, effectively improving the quality of pseudo labels and thus providing solid superior performance compared to other CAM-based methods.

Considering keypoints localization, various methods [120, 129, 176] have been developed for challenges in the medical imaging domain, such as blurred vision and indistinct organ morphology. While these methods have demonstrated solid performance in common cases, they still struggle to handle cases with complex localization environments. TCEIP [181] addressed this limitation by integrating the instructional text embedding of the target region into a regression network to guide the prediction of implant position. By leveraging CLIP, TCEIP was able to interpret and process instructions such as ‘left’, ‘middle’, and ‘right’ alongside visual data, ensuring a more precise and context-aware keypoints detection. Its performance surpassed the capabilities of previous image-only detection methods, especially in challenging cases with multiple missing teeth or sparse teeth.

4.3. Cross-modal

In addition to the previously mentioned pure vision tasks, CLIP has also propelled the development of cross-modal tasks, where cross-modal refers to the interaction between image and text modalities. Representative studies are shown in Table 5.

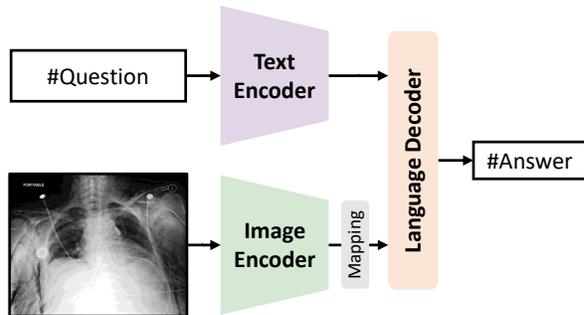


Figure 17. Illustration of CLIP-driven methods for open-ended MedVQA [198].

4.3.1 Report generation

Given the time-intensive process of manually transcribing reports in clinical settings, there has been an increasing inclination toward automating the generation of medical reports [94, 184]. Since the effective generation of medical reports necessitates the recognition of crucial findings, attributes, and inter-finding semantic relations, CLIP is inherently suitable for this task due to its inherent semantic awareness.

Wang et al. [172] adopted CLIP’s vision encoder to extract semantic-aware image representations from the Chest X-ray, so that the proposed Medical Concepts Generation Network could introduce rich semantic concepts and encode them as semantic information to benefit the performance of report generation. Keicher et al. [63] fully leveraged the strengths of CLIP by reformulating the report generation task as a multi-label classification task, with labels indicating the presence or absence of specific findings. They compiled all possible combinations of *Findings* and *Locations* in the training set to form a prompt set, and utilized CLIP’s zero-shot capability to calculate the likelihood of each prompt appearing in the image.

4.3.2 Medical Visual Question Answering

Medical Visual Question Answering (MedVQA) is a task that demands an in-depth understanding of both text-based questions and associated medical visual content. It has drawn attention from the community as it would lead to more efficient and accurate diagnoses and treatment decisions. Since CLIP has long been favored by its ability to

Table 5. Overview of representative cross-modality applications.

Methods	Tasks	Organ	Imaging modality	Pre-trained CLIP
FlexR [63]	Report generation	Chest	X-ray	Fine-tuned CLIP [136]
MCGN [172]	Report generation	Chest	X-ray	CLIP [136]
X-TRA [160]	Image-text Retrieval	Chest	X-ray	Fine-tuned CLIP [136] Fine-tuned PubMedCLIP [37]
MONET [68]	Image-text Retrieval	Skin	Dermatology	CLIP [136]
VQA-adapter [95]	MedVQA	Multiple	Multiple	CLIP [136]
Eslami et al. [37]	MedVQA	Multiple	Multiple	PubMedCLIP [136]
Sonsbeek et al. [159]	MedVQA	Multiple	Multiple	CLIP [136]

align visual and text content, recent efforts have been made to apply CLIP in MedVQA.

Preliminary efforts have incorporated CLIP into closed-ended MedVQA tasks. These studies [38, 95] usually integrated CLIP’s image encoder into the original MedVQA framework, aiming to enhance image representation with semantic understanding. However, they tended to overlook the comprehensive utilization of image-text alignment. Moreover, closed-ended MedVQA typically offers all potential answer options for each question, which essentially transforms the task into a classification problem. Consequently, the practical utility of these methods appears constrained due to these limitations.

Conversely, open-ended MedVQA does not pre-define options for each question, expanding its applicability to various scenarios and necessitating a heightened capacity for image-text comprehension. Hence, Zhang et al. [198] fully leveraged CLIP’s image encoder and text encoder for question and image understanding, with a following language decoder for answer generation. We illustrate the CLIP-driven open-ended MedVQA in Figure 17. To align the raw image embedding with the current MedVQA dataset and mitigate domain shift from CLIP’s pre-training dataset, a mapping layer is commonly employed. The question embedding and the transformed image embedding are then concatenated and directly input into a language decoder, which may take the form of a multi-layer transformer or a language model, facilitating the generation of answers.

4.3.3 Image-text retrieval

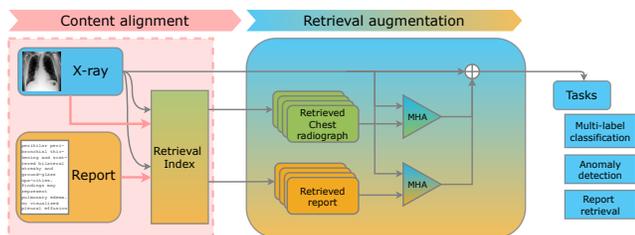


Figure 18. Architecture overview of X-TRA (from [160]).

Retrieval augmentation [70], which involves supplementing data by retrieving relevant information, allows utilization of up-to-time information from a trusted knowledge source, essentially providing a non-parametric memory expansion [138]. This approach has gained attention for its versatility, especially in the area of retrieval-augmented large language model [6, 205]. However, existing retrieval methods often focus on global image features [53], which can lead to sub-optimal results in medical imaging. Unlike global features that may resemble across patients, subtle image details have effects on disease diagnosis and are of significance.

To address the domain shift between medical and natural images, Van et al. [160] proposed a CLIP-based multi-modal retrieval framework. This method comprises two main parts, illustrated in Figure 18. The first part involves fine-tuning the original CLIP model to construct the retrieval model. Given the visual similarity of medical images and the significance of small, localized markers as disease indicators, they proposed a content classifier to implement supervised content-based alignment. The second part utilizes the output of the retriever in cross-modal retrieval augmentation, enhancing downstream tasks with multi-head attention (MHA). When evaluating the performance of their retrieval method in comparison to previous approaches for disease classification and report retrieval, it demonstrated a substantial performance improvement, outperforming all existing retrieval methods by a significant margin. The observed performance difference underscores the potential of CLIP in constructing a robust retrieval method.

4.4. Summary

In this section, we demonstrate some representative CLIP-driven applications to show the performance improvements under CLIP assistance. While these studies focus on various tasks, they generally indicate that the strength of a pre-trained CLIP lies in its ability to **interpret and convey human knowledge**. As best illustrated in [131, 181, 196], they fed descriptive text prompts to the CLIP, and the experimental results showcase CLIP’s adept-

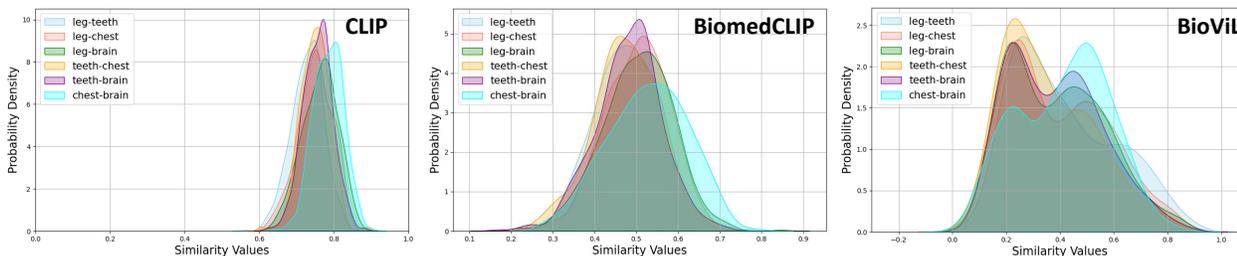


Figure 19. Comparison between non-domain-specific and domain-specific pre-training. CLIP (OpenAI) tends to present high inter-disease similarity, which is significantly alleviated in BiomedCLIP and BioViL, revealing the irrationality of adopting CLIP (OpenAI) in medical applications.

ness in comprehending the semantics embedded within prompts and effectively conveying semantics to other components within the framework. This implies that CLIP-driven applications can be adaptable to different groups of patients by simply modifying the specific content of the input prompt, which is beneficial for the diagnosis or prognosis of diseases having regional or age-related differences. For instance, diseases like sepsis often exhibit distinct progression patterns among different racial groups [66, 154], while the survival rate of Community-Acquired Pneumonia correlates with the patient’s age [140, 147]. By adjusting the content within the descriptive prompt, the developed CLIP-driven application can seamlessly transition between various groups without necessitating re-training or fine-tuning.

5. Discussions and future directions

The aforementioned sections have delved into research studies that either leverage a refined CLIP pre-training paradigm or showcase CLIP-driven clinical applications within the medical imaging community. Despite significant strides, there still exist several challenges and open issues. In this section, we summarize key challenges and offer discussions on potential future directions.

Inconsistency between pre-training and application.

Some readers might notice that the two sections, refined CLIP pre-training and CLIP-driven application, are currently uncoordinated. Ideally, refined CLIP pre-training is responsible for offering a more specialized domain-specific CLIP, which, in turn, ought to be utilized in CLIP-driven Applications for their increased expertise. Unfortunately, the CLIP-driven applications covered in this survey still primarily rely on OpenAI’s pre-trained CLIP (trained on natural image-text datasets). This would significantly limit the performance of CLIP-driven applications in clinical practice. In Fig. 19, we select the top 20 to 30 most frequently occurring diseases for each organ, computing inter-organ similarity distributions of disease text embeddings. Despite the inherent semantic differences among the selected diseases, the resulting similarity distribution reveals a challenge for CLIP in effectively discriminating them. Notably,

this predicament is markedly mitigated in BiomedCLIP, underscoring the importance of domain-specific CLIP pre-training. Simultaneously, BioViL, a model tailored for Chest X-ray analysis, demonstrates the best performance. This observation underscores the efficacy of specialized pre-trained CLIP model, emphasizing their ability to outperform generalized counterparts, especially in contexts where fine-grained discrimination among diseases is crucial. Hence, we argue that future work focusing on CLIP-driven applications should adopt a pre-trained CLIP specific to their target organ. Even for research studies focusing on context optimization (see in section 4.1.2), which aim to efficiently fine-tune a non-domain-specific CLIP to specific medical imaging scenarios, we still recommend the use of BiomedCLIP [194] rather than OpenAI’s CLIP.

Incomprehensive evaluation of refined pre-training.

As previously illustrated in section 3.5, studies centered on refined CLIP pre-training commonly assess pre-training quality through various evaluation tasks. These evaluation tasks include those primarily aimed at evaluating vision encoders, such as CLS/ZSC/SEG/DET, and tasks that simultaneously assess image and text encoders, such as ITR/VQA/PG. However, the issue lies in the fact that existing studies tend to favor vision-biased evaluation tasks, somewhat overlooking the evaluation of text encoders, which is evidently demonstrated in Table 2. While a high-quality pre-trained vision model can be more readily applied to domain-specific tasks (e.g., thoracic disease diagnosis), it should not serve as a reason to overlook the text encoder. The essence of CLIP lies in the alignment between images and text. It is only when both the vision encoder and the text encoder demonstrate high quality that can they effectively function as foundational components in domain-specific CLIP-driven applications. BioViL [16] and BioViL-T [10] deserve recognition as they implemented relatively comprehensive evaluations for their pre-trained vision and text encoder, and BioViL has been adopted in some CLIP-driven applications (see Table 3). For future work, we encourage researchers to conduct more comprehensive evaluations. These evaluations could encompass

their performance across tasks such as report generation (IU-Xray [128]), phrase grounding (MS-CXR [16]), and VQA (EHRXQA [7]).

Limited scope of refined CLIP pre-training. Presently, domain-specific CLIP models are tailored specifically for Chest X-rays within medical imaging, leaving other prevalent image types like Mammography, Knee MRI, and Histology without adequate research. This limitation is primarily attributed to the scarcity of publicly available datasets. Previously, MIMIC-CXR stood as the predominant large-scale dataset for image-text alignment in medical imaging. However, with the recent release of FFA-IR (in 2021) and two additional Histology datasets (in 2023), there is a pressing need for further advancements in CLIP pre-training that prioritize these two domains rather than solely focusing on chest X-rays. These two domains also have their specific challenges, which make them different from Chest X-ray. The FFA-IR dataset is featured by multi-view diagnosis. A fundus fluorescein angiography (FFA) examination may include several tens or even more images to comprehensively observe and assess the status and activity of the eye’s vascular system, which is much larger than the situation of Chest X-ray (only 1 or 2 views). At the same time, Histology images are characterized by giga-pixel resolution and are usually processed at the patch level, which encourages the investigation of patch-level alignment and slide-level alignment. We expect that future work could develop more sophisticated CLIP-style pre-training methods to address these issues on domains beyond Chest X-ray.

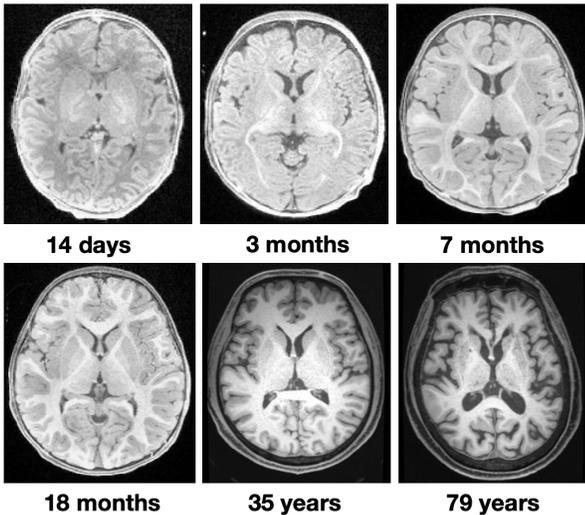


Figure 20. Brain morphology and intensity contrast vary as a function of age. Each figure represents T1-weighted MR image with one-time point.

Exploring the potential of metadata. While metadata has the potential to offer valuable information, it has largely remained unexplored. This data typically encompasses var-

ious patient attributes, some of which may exhibit a strong correlation with visual morphology. For instance, a commonly present attribute like the patient’s age can offer insights into brain tissue segmentation. In Fig. 20, the diverse morphology and tissue contrast across the human lifespan underscore the potential significance of age information in tasks related to the brain. Therefore, integrating metadata as part of prompts can enhance the comprehension and interpretation of data for deep learning-based models. In comparison to previous methods that directly encode metadata through multi-layer perceptron [22, 204], CLIP stands out by providing more semantically rich text embeddings, indicating a promising avenue for future exploration.

Incorporation of high-order correlation. Existing CLIP-style pre-training methods in the medical imaging domain still predominantly adhere to orthogonal alignment between images and texts, lacking explicit consideration for inter-sample correlation. This conventional practice involves orthogonal alignment of each image with its corresponding ground-truth report. As elucidated in section 3.3, this approach may result in performance degradation due to substantial semantic overlap among medical samples. While attempts have been made to mitigate this issue through inter-report semantic similarity in some studies introduced before, their success has primarily hinged on handcrafted rules or the utilization of a pre-trained text encoder. Additionally, they have overlooked the inter-image semantic similarity. Consequently, the integration of high-order correlation emerges as a promising solution. To elaborate, the first-order correlation between image and text samples, representing the image-text similarity optimized during CLIP pre-training, is denoted as $C \in \mathbb{R}^{N \times N}$, where N signifies the number of samples. The second-order correlation, denoting the correlation between correlations, is computed as $C \cdot C^T$. Extending this logic, higher-order correlation can be similarly computed. The effectiveness of high-order correlation has been well-established in tasks involving multiple information sources or those requiring interpretations of complex relationships, including brain network analysis [26, 102, 119, 122, 202], multi-label classification [115, 145, 189], and multi-view clustering [84]. Likewise, medical image-text pre-training involves two kinds of information (i.e., image and text), and their semantic correlations need to be further explored. Hence, we expect that future studies will devote increased attention to comprehending the intricate semantic correlations between medical image-text samples, addressing the challenge of orthogonal image-text alignment via the methodology of high-order correlation.

Although some studies have attempted to address the issue via inter-report semantic similarity, their success largely relied on handcrafted rules or a pre-trained text encoder. Meanwhile, they also neglect inter-image semantic simi-

larity. As a result, the incorporation of high-order correlation seems to be a viable solution. Indicate the first-order correlation between image and text samples, namely the image-text similarity optimized during CLIP pre-training, as $C \in \mathbb{R}^{N \times N}$, where N denotes the number of samples, the second-order correlation, namely correlation between correlation, is computed as $C \cdot C^T$. Higher-order correlation can also be computed in this way. High-order correlation has been widely adopted in tasks involving multiple information sources or need to clarify complex correlations, such as brain network analysis [26, 102, 119, 122, 202], multi-label classification [115, 145, 189], and multi-view clustering [84]. We expect future studies to pay more attention to the complex semantic similarity in the medical imaging domain and address the issue of orthogonal image-text alignment appropriately.

Beyond image-text alignment. The philosophy of CLIP revolves around achieving alignment between different modalities, specifically images and text. Alignment, in this context, refers to the model’s ability to understand and establish meaningful connections between visual and textual content. By comprehending the intrinsic connections between visual and textual information, CLIP can perform exceptionally well in various cross-modal applications, reflecting a broader trend. Extending the alignment philosophy of CLIP to other multimodal medical imaging analysis can be a promising direction. Medical imaging often involves various modalities like X-rays, MRIs, CT scans, each providing unique insights into different aspects of a patient’s condition. Analogous to CLIP’s methodology, aligning these diverse imaging modalities within a unified embedding space could potentially revolutionize medical data analysis. This alignment approach holds the potential to enhance the holistic comprehension and comprehensive evaluation of complex medical information, presenting a progressive direction for medical research and diagnostics.

6. conclusion

In conclusion, we present the first comprehensive review of the CLIP in medical imaging. Starting by introducing the foundational concepts that underpin CLIP’s success, we then delve into an extensive literature review from two angles: refined CLIP pre-training methods and diverse CLIP-driven applications. Within the realm of refined CLIP pre-training, our survey offers a structured taxonomy based on the unique challenges that CLIP pre-training encountered in the medical imaging domain, aiming to chart a clear pathway for researchers to advance this field progressively. In exploring CLIP-driven applications, we compare these approaches against solely vision-driven methods, emphasizing the added value that pre-trained CLIP models bring to the table. Notably, through thoughtful design, they could serve as valuable supplementary supervision signals, sig-

nificantly enhancing the performance across various tasks. Beyond simply reviewing existing studies in these two sections, we also discuss common issues, laying the groundwork for future directions. By illuminating the potential and challenges of employing CLIP in medical imaging, we aim to propel the field forward, encouraging innovation and paving the way for human-aligned medical AI.

References

- [1] Rabin Adhikari, Manish Dhakal, Safal Thapaliya, Kanchan Poudel, Prasiddha Bhandari, and Bishesh Khanal. Synthetic boost: Leveraging synthetic data for enhanced vision-language segmentation in echocardiography. In *International Workshop on Advances in Simplifying Medical Ultrasound*, pages 89–99. Springer, 2023. 14
- [2] Emily Alsentzer, John Murphy, William Boag, Wei-Hung Weng, Di Jindi, Tristan Naumann, and Matthew McDermott. Publicly available clinical. In *Proceedings of the 2nd Clinical Natural Language Processing Workshop*. Association for Computational Linguistics, 2019. 10
- [3] Deepa Anand, Vanika Singhal, Dattesh D Shanbhag, Shriram KS, Uday Patil, Chitresh Bhushan, Kavitha Manickam, Dawei Gui, Rakesh Mullick, Avinash Gopal, et al. One-shot localization and segmentation of medical images with foundation models. *arXiv preprint arXiv:2310.18642*, 2023. 14
- [4] Anonymous. Cascaded contrastive medical language-image pretraining on radiology images. In *Submitted to The Twelfth International Conference on Learning Representations*, 2023. under review. 9
- [5] Samuel G Armato III, Geoffrey McLennan, Luc Bidaut, Michael F McNitt-Gray, Charles R Meyer, Anthony P Reeves, Binsheng Zhao, Denise R Aberle, Claudia I Henschke, Eric A Hoffman, et al. The lung image database consortium (lidc) and image database resource initiative (idri): a completed reference database of lung nodules on ct scans. *Medical physics*, 38(2):915–931, 2011. 11
- [6] Akari Asai, Sewon Min, Zexuan Zhong, and Danqi Chen. Retrieval-based language models and applications. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 6: Tutorial Abstracts)*, pages 41–46, 2023. 17
- [7] Seongsu Bae, Daeun Kyung, Jaehee Ryu, Eunbyeol Cho, Gyubok Lee, Sunjun Kweon, Jungwoo Oh, Lei Ji, Eric I-Chao Chang, Tackeun Kim, and Edward Choi. EHRXQA: A multi-modal question answering dataset for electronic health records with chest x-ray images. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2023. 19
- [8] Sanoojan Baliyah, Fadillah A Maani, Santosh Sanjeev, and Muhammad Haris Khan. Exploring the transfer learning capabilities of clip in domain generalization for diabetic retinopathy. In *International Workshop on Machine Learning in Medical Imaging*, pages 444–453. Springer, 2023. 11, 13
- [9] Hanoona Bangalath, Muhammad Maaz, Muhammad Uzair Khattak, Salman H Khan, and Fahad Shahbaz Khan. Bridging the gap between object and image-level representations

- for open-vocabulary detection. *Advances in Neural Information Processing Systems*, 35:33781–33794, 2022. [1](#)
- [10] Shruthi Bannur, Stephanie Hyland, Qianchu Liu, Fernando Perez-Garcia, Maximilian Ilse, Daniel C Castro, Benedikt Boecking, Harshita Sharma, Kenza Bouzid, Anja Thieme, et al. Learning to exploit temporal structure for biomedical vision-language processing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15016–15027, 2023. [10](#), [18](#)
- [11] Michael Baumgartner, Paul F Jäger, Fabian Isensee, and Klaus H Maier-Hein. nndetection: a self-configuring method for medical object detection. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part V 24*, pages 530–539. Springer, 2021. [13](#)
- [12] Iz Beltagy, Kyle Lo, and Arman Cohan. Scibert: A pre-trained language model for scientific text. In *EMNLP. Association for Computational Linguistics*, 2019. [10](#)
- [13] Patrick Bilic, Patrick Christ, Hongwei Bran Li, Eugene Vorontsov, Avi Ben-Cohen, Georgios Kaissis, Adi Szeskin, Colin Jacobs, Gabriel Efrain Humpire Mamani, Gabriel Chartrand, et al. The liver tumor segmentation benchmark (lits). *Medical Image Analysis*, 84:102680, 2023. [14](#)
- [14] Anselm Blumer, Andrzej Ehrenfeucht, David Haussler, and Manfred K Warmuth. Occam’s razor. *Information processing letters*, 24(6):377–380, 1987. [3](#)
- [15] Olivier Bodenreider. The unified medical language system (umls): integrating biomedical terminology. *Nucleic acids research*, 32(suppl.1):D267–D270, 2004. [8](#)
- [16] Benedikt Boecking, Naoto Usuyama, Shruthi Bannur, Daniel C Castro, Anton Schwaighofer, Stephanie Hyland, Maria Wetscherek, Tristan Naumann, Aditya Nori, Javier Alvarez-Valle, et al. Making the most of text semantics to improve biomedical vision–language processing. In *European conference on computer vision*, pages 1–21. Springer, 2022. [8](#), [10](#), [11](#), [12](#), [18](#), [19](#)
- [17] Antoine Bordes, Nicolas Usunier, Alberto Garcia-Duran, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. *Advances in neural information processing systems*, 26, 2013. [8](#)
- [18] Aurelia Bustos, Antonio Pertusa, Jose-Maria Salinas, and Maria De La Iglesia-Vaya. Padchest: A large chest x-ray image dataset with multi-label annotated reports. *Medical image analysis*, 66:101797, 2020. [4](#), [7](#), [11](#)
- [19] Michal Byra, Muhammad Febrian Rachmadi, and Henrik Skibbe. Few-shot medical image classification with simple shape and texture text descriptors using vision-language models. *arXiv preprint arXiv:2308.04005*, 2023. [11](#), [12](#)
- [20] Qinglong Cao, Zhengqin Xu, Yuantian Chen, Chao Ma, and Xiaokang Yang. Domain-controlled prompt learning. *arXiv preprint arXiv:2310.07730*, 2023. [11](#), [13](#)
- [21] Mathilde Caron, Hugo Touvron, Ishan Misra, Hervé Jégou, Julien Mairal, Piotr Bojanowski, and Armand Joulin. Emerging properties in self-supervised vision transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9650–9660, 2021. [1](#)
- [22] Irem Cetin, Maialen Stephens, Oscar Camara, and Miguel A González Ballester. Attri-vae: Attribute-based interpretable representations of medical images with variational autoencoders. *Computerized Medical Imaging and Graphics*, 104:102158, 2023. [19](#)
- [23] Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pages 1597–1607. PMLR, 2020. [1](#)
- [24] Xuhai Chen, Yue Han, and Jiangning Zhang. A zero-/few-shot anomaly classification and segmentation method for cvpr 2023 vand workshop challenge tracks 1&2: 1st place on zero-shot ad and 4th place on few-shot ad. *arXiv preprint arXiv:2305.17382*, 2023. [14](#)
- [25] Xinlei Chen and Kaiming He. Exploring simple siamese representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15750–15758, 2021. [1](#)
- [26] Xiaobo Chen, Han Zhang, Yue Gao, Chong-Yaw Wee, Gang Li, Dinggang Shen, and Alzheimer’s Disease Neuroimaging Initiative. High-order resting-state functional connectivity network for mci classification. *Human brain mapping*, 37(9):3282–3296, 2016. [19](#), [20](#)
- [27] Yen-Chun Chen, Linjie Li, Licheng Yu, Ahmed El Kholy, Faisal Ahmed, Zhe Gan, Yu Cheng, and Jingjing Liu. Uniter: Universal image-text representation learning. In *European conference on computer vision*, pages 104–120. Springer, 2020. [1](#)
- [28] Zhen Chen, Qingyu Guo, Leo KT Yeung, Danny TM Chan, Zhen Lei, Hongbin Liu, and Jinqiao Wang. Surgical video captioning with mutual-modal concept alignment. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 24–34. Springer, 2023. [10](#)
- [29] Zhihong Chen, Guanbin Li, and Xiang Wan. Align, reason and learn: Enhancing medical vision-and-language pre-training with knowledge. In *Proceedings of the 30th ACM International Conference on Multimedia*, pages 5152–5161, 2022. [8](#), [10](#)
- [30] Pujin Cheng, Li Lin, Junyan Lyu, Yijin Huang, Wenhan Luo, and Xiaoying Tang. Prior: Prototype representation joint learning from medical images and reports. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21361–21371, 2023. [7](#), [9](#)
- [31] Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible scaling laws for contrastive language-image learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2818–2829, 2023. [5](#)
- [32] Gefen Dawidowicz, Elad Hirsch, and Ayellet Tal. Limitr: Leveraging local information for medical image-text representation. *arXiv preprint arXiv:2303.11755*, 2023. [9](#)
- [33] Etienne Decencière, Xiwei Zhang, Guy Cazuguel, Bruno Lay, Béatrice Cochener, Caroline Trone, Philippe Gain, Richard Ordonez, Pascale Massin, Ali Erginay, et al. Feed-

- back on a publicly distributed image database: the messidor database. *Image Analysis & Stereology*, 33(3):231–234, 2014. 11
- [34] Kexin Ding, Mu Zhou, Dimitris N Metaxas, and Shaoting Zhang. Pathology-and-genomics multimodal transformer for survival outcome prediction. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 622–631. Springer, 2023. 10, 11
- [35] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020. 1, 3, 7
- [36] Dugas Emma, Jared, Jorge, and Cukierski Will. Diabetic retinopathy detection, 2015. 11
- [37] Sedigheh Eslami, Gerard de Melo, and Christoph Meinel. Does clip benefit visual question answering in the medical domain as much as it does in the general domain? *arXiv preprint arXiv:2112.13906*, 2021. 17
- [38] Sedigheh Eslami, Christoph Meinel, and Gerard De Melo. Pubmedclip: How much does clip benefit visual question answering in the medical domain? In *Findings of the Association for Computational Linguistics: EACL 2023*, pages 1151–1163, 2023. 17
- [39] Andrea Frome, Greg S Corrado, Jon Shlens, Samy Bengio, Jeff Dean, Marc’Aurelio Ranzato, and Tomas Mikolov. Devise: A deep visual-semantic embedding model. *Advances in neural information processing systems*, 26, 2013. 1
- [40] Robert Geirhos, Jörn-Henrik Jacobsen, Claudio Michaelis, Richard Zemel, Wieland Brendel, Matthias Bethge, and Felix A Wichmann. Shortcut learning in deep neural networks. *Nature Machine Intelligence*, 2(11):665–673, 2020. 6
- [41] Lluís Gomez, Yash Patel, Marçal Rusinol, Dimosthenis Karatzas, and CV Jawahar. Self-supervised learning of visual features through embedding images into text topic spaces. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4230–4239, 2017. 1
- [42] Jean-Bastien Grill, Florian Strub, Florent Altché, Corentin Tallec, Pierre H Richemond, Elena Buchatskaya, Carl Doersch, Bernardo Avila Pires, Zhaohan Daniel Guo, Mohammad Gheshlaghi Azar, et al. Bootstrap your own latent: A new approach to self-supervised learning. *arXiv preprint arXiv:2006.07733*, 2020. 1
- [43] Yu Gu, Robert Tinn, Hao Cheng, Michael Lucas, Naoto Usuyama, Xiaodong Liu, Tristan Naumann, Jianfeng Gao, and Hoifung Poon. Domain-specific language model pre-training for biomedical natural language processing. *ACM Transactions on Computing for Healthcare (HEALTH)*, 3(1):1–23, 2021. 10
- [44] Miaotian Guo, Huahui Yi, Ziyuan Qin, Haiying Wang, Aidong Men, and Qicheng Lao. Multiple prompt fusion for zero-shot lesion detection using vision-language models. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 283–292. Springer, 2023. 13, 14
- [45] Chu Han, Jiatai Lin, Jinhai Mai, Yi Wang, Qingling Zhang, Bingchao Zhao, Xin Chen, Xipeng Pan, Zhenwei Shi, Zeyan Xu, et al. Multi-layer pseudo-supervision for histopathology tissue semantic segmentation using patch-level classification labels. *Medical Image Analysis*, 80:102487, 2022. 16
- [46] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016. 1, 3
- [47] Nicholas Heller, Niranjana Sathianathan, Arveen Kalapara, Edward Walczak, Keenan Moore, Heather Kaluzniak, Joel Rosenberg, Paul Blake, Zachary Rengel, Makinna Oestreich, et al. The kits19 challenge data: 300 kidney tumor cases with clinical context, ct semantic segmentations, and surgical outcomes. *arXiv preprint arXiv:1904.00445*, 2019. 14
- [48] Shih-Cheng Huang, Liyue Shen, Matthew P Lungren, and Serena Yeung. Gloria: A multimodal global-local representation learning framework for label-efficient medical image recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3942–3951, 2021. 6, 9
- [49] Zhi Huang, Federico Bianchi, Mert Yuksekogun, Thomas J Montine, and James Zou. A visual–language foundation model for pathology image analysis using medical twitter. *Nature medicine*, 29(9):2307–2316, 2023. 4
- [50] Zhongzhen Huang, Xiaofan Zhang, and Shaoting Zhang. Kiut: Knowledge-injected u-transformer for radiology report generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 19809–19818, 2023. 5
- [51] Marc K Ickler, Michael Baumgartner, Saikat Roy, Tassilo Wald, and Klaus H Maier-Hein. Taming detection transformers for medical object detection. In *BVM Workshop*, pages 183–188. Springer, 2023. 13
- [52] Wisdom Oluchi Ikezogwo, Mehmet Saygin Seyfioglu, Fatemeh Ghezloo, Dylan Stefan Chan Geva, Fatwir Sheikh Mohammed, Pavan Kumar Anand, Ranjay Krishna, and Linda Shapiro. Quilt-1m: One million image-text pairs for histopathology. *arXiv preprint arXiv:2306.11207*, 2023. 4, 5
- [53] Bogdan Ionescu, Henning Müller, Ana-Maria Drăgulinescu, Wen-Wai Yim, Asma Ben Abacha, Neal Snider, Griffin Adams, Meliha Yetisgen, Johannes Rückert, Alba García Seco de Herrera, et al. Overview of the imageclef 2023: Multimedia retrieval in medical, social media and internet applications. In *International Conference of the Cross-Language Evaluation Forum for European Languages*, pages 370–396. Springer, 2023. 17
- [54] Jeremy Irvin, Pranav Rajpurkar, Michael Ko, Yifan Yu, Silvana Ciurea-Illcus, Chris Chute, Henrik Marklund, Behzad Haghgoo, Robyn Ball, Katie Shpanskaya, et al. Chexpert: A large chest radiograph dataset with uncertainty labels and expert comparison. In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pages 590–597, 2019. 8, 11

- [55] Stefan Jaeger, Sema Candemir, Sameer Antani, Yi-Xiang J Wang, Pu-Xuan Lu, and George Thoma. Two public chest x-ray datasets for computer-aided screening of pulmonary diseases. *Quantitative imaging in medicine and surgery*, 4(6):475, 2014. [11](#)
- [56] Saahil Jain, Ashwin Agrawal, Adriel Saporta, Steven Truong, Du Nguyen Duong, Tan Bui, Pierre Chambon, Yuhao Zhang, Matthew P. Lungren, Andrew Y. Ng, Curtis Langlotz, and Pranav Rajpurkar. Radgraph: Extracting clinical entities and relations from radiology reports. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 1)*, 2021. [8](#)
- [57] Jongseong Jang, Daeun Kyung, Seung Hwan Kim, Honglak Lee, Kyunghoon Bae, and Edward Choi. Significantly improving zero-shot x-ray pathology classification via fine-tuning pre-trained image-text encoders. *arXiv preprint arXiv:2212.07050*, 2022. [9](#)
- [58] Alistair EW Johnson, Tom J Pollard, Seth J Berkowitz, Nathaniel R Greenbaum, Matthew P Lungren, Chih-ying Deng, Roger G Mark, and Steven Horng. Mimic-cxr, a de-identified publicly available database of chest radiographs with free-text reports. *Scientific data*, 6(1):317, 2019. [4](#), [5](#), [11](#), [12](#)
- [59] Armand Joulin, Laurens Van Der Maaten, Allan Jabri, and Nicolas Vasilache. Learning visual features from large weakly supervised data. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part VII 14*, pages 67–84. Springer, 2016. [1](#)
- [60] Alexandros Karargyris, Satyananda Kashyap, Ismini Lourentzou, Joy T Wu, Arjun Sharma, Matthew Tong, Shafiq Abedin, David Beymer, Vandana Mukherjee, Elizabeth A Krupinski, et al. Creation and validation of a chest x-ray dataset with eye-tracking and report dictation for ai development. *Scientific data*, 8(1):1–18, 2021. [11](#)
- [61] Sohier Dane Karthik, Maggie. Aptos 2019 blindness detection, 2019. [11](#)
- [62] Jakob Nikolas Kather, Cleo-Aron Weis, Francesco Bianconi, Susanne M Melchers, Lothar R Schad, Timo Gaiser, Alexander Marx, and Frank Gerrit Zöllner. Multi-class texture analysis in colorectal cancer histology. *Scientific reports*, 6(1):27988, 2016. [11](#)
- [63] Matthias Keicher, Kamilia Zaripova, Tobias Czempiel, Kristina Mach, Ashkan Khakzar, and Nassir Navab. Flexr: Few-shot classification with language embeddings for structured reporting of chest x-rays. *arXiv preprint arXiv:2203.15723*, 2022. [16](#), [17](#)
- [64] Jacob Devlin Ming-Wei Chang Kenton and Lee Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of NAACL-HLT*, pages 4171–4186, 2019. [3](#)
- [65] Daniel S Kermay, Michael Goldbaum, Wenjia Cai, Carolina CS Valentim, Huiying Liang, Sally L Baxter, Alex McKeown, Ge Yang, Xiaokang Wu, Fangbing Yan, et al. Identifying medical diagnoses and treatable diseases by image-based deep learning. *cell*, 172(5):1122–1131, 2018. [11](#)
- [66] Farzaneh Khoshnevisan and Min Chi. Unifying domain adaptation and domain generalization for robust prediction across minority racial groups. In *Machine Learning and Knowledge Discovery in Databases. Research Track: European Conference, ECML PKDD 2021, Bilbao, Spain, September 13–17, 2021, Proceedings, Part I 21*, pages 521–537. Springer, 2021. [18](#)
- [67] Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschiot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. *Advances in neural information processing systems*, 33:18661–18673, 2020. [8](#)
- [68] Chanwoo Kim, Soham U Gadgil, Alex J DeGrave, Zhuo Ran Cai, Roxana Daneshjou, and Su-In Lee. Fostering transparent medical image ai via an image-text foundation model grounded in medical literature. *medRxiv*, 2023. [17](#)
- [69] Injae Kim, Jongha Kim, Joonmyung Choi, and Hyunwoo J Kim. Concept bottleneck with visual concept filtering for explainable medical image classification. *arXiv preprint arXiv:2308.11920*, 2023. [11](#), [12](#)
- [70] Mojtaba Komeili, Kurt Shuster, and Jason Weston. Internet-augmented dialogue generation. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 8460–8478, 2022. [17](#)
- [71] Nikos Komodakis and Spyros Gidaris. Unsupervised representation learning by predicting image rotations. In *ICLR*, 2018. [1](#)
- [72] Bhawesh Kumar, Anil Palepu, Rudraksh Tuwani, and Andrew Beam. Towards reliable zero shot classification in self-supervised models with conformal prediction. *arXiv preprint arXiv:2210.15805*, 2022. [11](#), [12](#)
- [73] Jinhyuk Lee, Wonjin Yoon, Sungdong Kim, Donghyeon Kim, Sunkyu Kim, Chan Ho So, and Jaewoo Kang. Biobert: a pre-trained biomedical language representation model for biomedical text mining. *Bioinformatics*, 36(4):1234–1240, 2020. [16](#)
- [74] Seunggho Lee, Minhyun Lee, Jongwuk Lee, and Hyunjung Shim. Railroad is not a train: Saliency as pseudo-pixel supervision for weakly supervised semantic segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5495–5505, 2021. [16](#)
- [75] Hongyang Lei, Huazhen Huang, Bokai Yang, Guosheng Cui, Ruxin Wang, Dan Wu, and Ye Li. Tcsa: A text-guided cross-view medical semantic alignment framework for adaptive multi-view visual representation learning. In *International Symposium on Bioinformatics Research and Applications*, pages 136–149. Springer, 2023. [9](#), [11](#)
- [76] Jiayu Lei, Lisong Dai, Haoyun Jiang, Chaoyi Wu, Xiaoman Zhang, Yao Zhang, Jiangchao Yao, Weidi Xie, Yanyong Zhang, Yuehua Li, et al. Unibrain: Universal brain mri diagnosis with hierarchical knowledge-enhanced pre-training. *arXiv preprint arXiv:2309.06828*, 2023. [8](#), [10](#), [11](#)
- [77] Yiming Lei, Zilong Li, Yan Shen, Junping Zhang, and Hongming Shan. Clip-lung: Textual knowledge-guided

- lung nodule malignancy prediction. In *Medical Image Computing and Computer Assisted Intervention – MICCAI 2023*, pages 403–412, Cham, 2023. Springer Nature Switzerland. **11, 13**
- [78] Jimmy Lei Ba, Kevin Swersky, Sanja Fidler, et al. Predicting deep zero-shot convolutional neural networks using textual descriptions. In *Proceedings of the IEEE international conference on computer vision*, pages 4247–4255, 2015. **1**
- [79] Boyi Li, Kilian Q Weinberger, Serge Belongie, Vladlen Koltun, and Rene Ranftl. Language-driven semantic segmentation. In *International Conference on Learning Representations*, 2022. **1**
- [80] Liunian Harold Li, Pengchuan Zhang, Haotian Zhang, Jianwei Yang, Chunyuan Li, Yiwu Zhong, Lijuan Wang, Lu Yuan, Lei Zhang, Jenq-Neng Hwang, et al. Grounded language-image pre-training. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10965–10975, 2022. **4, 13, 14**
- [81] Mingjie Li, Wenjia Cai, Rui Liu, Yuetian Weng, Xiaoyun Zhao, Cong Wang, Xin Chen, Zhong Liu, Caineng Pan, Mengke Li, et al. Ffa-ir: Towards an explainable and reliable medical report generation benchmark. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021. **4**
- [82] Yuchong Li, Shuangfu Jia, Guangbi Song, Ping Wang, and Fucang Jia. Sda-clip: surgical visual domain adaptation using video and text labels. *Quantitative Imaging in Medicine and Surgery*, 13(10):6989, 2023. **8, 10**
- [83] Yi Li, Yiduo Yu, Yiwen Zou, Tianqi Xiang, and Xiaomeng Li. Online easy example mining for weakly-supervised gland segmentation from histology images. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 578–587. Springer, 2022. **16**
- [84] Zhenglai Li, Chang Tang, Xiao Zheng, Xinwang Liu, Wei Zhang, and En Zhu. High-order correlation preserved incomplete multi-view subspace clustering. *IEEE Transactions on Image Processing*, 31:2067–2080, 2022. **19, 20**
- [85] Ruizhi Liao, Daniel Moyer, Miriam Cha, Keegan Quigley, Seth Berkowitz, Steven Horng, Polina Golland, and William M Wells. Multimodal representation learning via maximization of local mutual information. In *Medical Image Computing and Computer Assisted Intervention–MICCAI 2021: 24th International Conference, Strasbourg, France, September 27–October 1, 2021, Proceedings, Part II 24*, pages 273–283. Springer, 2021. **7, 9**
- [86] Bingqian Lin, Zicong Chen, Mingjie Li, Haokun Lin, Hang Xu, Yi Zhu, Jianzhuang Liu, Wenjia Cai, Lei Yang, Shen Zhao, et al. Towards medical artificial general intelligence via knowledge-enhanced multimodal pretraining. *arXiv preprint arXiv:2304.14204*, 2023. **8, 9, 10**
- [87] Jiayi Lin and Shaogang Gong. Gridclip: One-stage object detection by grid-level clip representation learning. *arXiv preprint arXiv:2303.09252*, 2023. **1**
- [88] Weixiong Lin, Ziheng Zhao, Xiaoman Zhang, Chaoyi Wu, Ya Zhang, Yanfeng Wang, and Weidi Xie. Pmc-clip: Contrastive language-image pre-training using biomedical documents. *arXiv preprint arXiv:2303.07240*, 2023. **4, 5**
- [89] Bo Liu, Donghuan Lu, Dong Wei, Xian Wu, Yan Wang, Yu Zhang, and Yefeng Zheng. Improving medical vision-language contrastive pretraining with semantics-aware triage. *IEEE Transactions on Medical Imaging*, 2023. **7, 8, 9, 11**
- [90] Che Liu, Sibao Cheng, Chen Chen, Mengyun Qiao, Weitong Zhang, Anand Shah, Wenjia Bai, and Rossella Arcucci. M-flag: Medical vision-language pre-training with frozen language models and latent space geometry optimization. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 637–647. Springer, 2023. **10, 11**
- [91] Che Liu, Sibao Cheng, Miaoqing Shi, Anand Shah, Wenjia Bai, and Rossella Arcucci. Imitate: Clinical prior guided hierarchical vision-language pre-training. *arXiv preprint arXiv:2310.07355*, 2023. **9**
- [92] Che Liu, Zhongwei Wan, Sibao Cheng, Mi Zhang, and Rossella Arcucci. Etp: Learning transferable ecg representations via ecg-text pre-training. *arXiv preprint arXiv:2309.07145*, 2023. **11, 12**
- [93] Feifei Liu, Chengyu Liu, Lina Zhao, Xiangyu Zhang, Xiaoling Wu, Xiaoyan Xu, Yulin Liu, Caiyun Ma, Shoushui Wei, Zhiqiang He, et al. An open access database for evaluating the algorithms of electrocardiogram rhythm and morphology abnormality detection. *Journal of Medical Imaging and Health Informatics*, 8(7):1368–1373, 2018. **11**
- [94] Guanxiong Liu, Tzu-Ming Harry Hsu, Matthew McDermott, Willie Boag, Wei-Hung Weng, Peter Szolovits, and Marzyeh Ghassemi. Clinically accurate chest x-ray report generation. In *Machine Learning for Healthcare Conference*, pages 249–269. PMLR, 2019. **16**
- [95] Jiaxiang Liu, Tianxiang Hu, Yan Zhang, Yang Feng, Jin Hao, Junhui Lv, and Zuozhu Liu. Parameter-efficient transfer learning for medical visual question answering. *IEEE Transactions on Emerging Topics in Computational Intelligence*, 2023. **17**
- [96] Jiaxiang Liu, Tianxiang Hu, Yan Zhang, Xiaotang Gai, Yang Feng, and Zuozhu Liu. A chatgpt aided explainable framework for zero-shot medical image diagnosis. *arXiv preprint arXiv:2307.01981*, 2023. **11, 12**
- [97] Junling Liu, Ziming Wang, Qichen Ye, Dading Chong, Peilin Zhou, and Yining Hua. Qilin-med-vl: Towards chinese large vision-language model for general healthcare. *arXiv preprint arXiv:2310.17956*, 2023. **4**
- [98] Jie Liu, Yixiao Zhang, Jie-Neng Chen, Junfei Xiao, Yongyi Lu, Bennett A Landman, Yixuan Yuan, Alan Yuille, Yucheng Tang, and Zongwei Zhou. Clip-driven universal model for organ segmentation and tumor detection. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21152–21164, 2023. **14, 15**
- [99] Pengbo Liu, Xia Wang, Mengsi Fan, Hongli Pan, Minmin Yin, Xiaohong Zhu, Dandan Du, Xiaoying Zhao, Li Xiao, Lian Ding, et al. Learning incrementally to segment multiple organs in a ct image. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 714–724. Springer, 2022. **15**
- [100] Quande Liu, Qi Dou, Lequan Yu, and Pheng Ann Heng. Ms-net: multi-site network for improving prostate segmen-

- tation with heterogeneous mri data. *IEEE transactions on medical imaging*, 39(9):2713–2724, 2020. 14
- [101] Xiao Liu, Fanjin Zhang, Zhenyu Hou, Li Mian, Zhaoyu Wang, Jing Zhang, and Jie Tang. Self-supervised learning: Generative or contrastive. *IEEE transactions on knowledge and data engineering*, 35(1):857–876, 2021. 3
- [102] Yuxiao Liu, Mianxin Liu, Yuanwang Zhang, and Dinggang Shen. Learning hierarchical-order functional connectivity networks for mild cognitive impairment diagnosis. In *2023 IEEE 20th International Symposium on Biomedical Imaging (ISBI)*, pages 1–5. IEEE, 2023. 19, 20
- [103] Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 10012–10022, 2021. 1
- [104] Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A convnet for the 2020s. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11976–11986, 2022. 1
- [105] Timo Lüddecke and Alexander Ecker. Image segmentation using text and image prompts. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7086–7096, 2022. 4, 14
- [106] Huaishao Luo, Junwei Bao, Youzheng Wu, Xiaodong He, and Tianrui Li. Segclip: Patch aggregation with learnable centers for open-vocabulary semantic segmentation. In *International Conference on Machine Learning*, pages 23033–23044. PMLR, 2023. 1
- [107] Luyang Luo, Hao Chen, Yongjie Xiao, Yanning Zhou, Xi Wang, Varut Vardhanabhuti, Mingxiang Wu, Chu Han, Zaiyi Liu, Xin Hao Benjamin Fang, et al. Rethinking annotation granularity for overcoming shortcuts in deep learning-based radiograph diagnosis: A multicenter study. *Radiology: Artificial Intelligence*, 4(5):e210299, 2022. 2
- [108] Kaushalya Madhawa. Medclip: Fine-tuning a clip model on the roco medical dataset, 2021. 14, 16
- [109] Sachin Mehta, Ezgi Mercan, Jamen Bartlett, Donald Weaver, Joann G Elmore, and Linda Shapiro. Y-net: joint segmentation and classification for diagnosis of breast biopsy images. In *Medical Image Computing and Computer Assisted Intervention—MICCAI 2018: 21st International Conference, Granada, Spain, September 16-20, 2018, Proceedings, Part II 11*, pages 893–901. Springer, 2018. 2
- [110] Aakash Mishra, Rajat Mittal, Christy Jestin, Kostas Tingos, and Pranav Rajpurkar. Improving zero-shot detection of low prevalence chest pathologies using domain pre-trained language models. *arXiv preprint arXiv:2306.08000*, 2023. 11, 12
- [111] Philip Müller, Georgios Kaissis, and Daniel Rueckert. The role of local alignment and uniformity in image-text contrastive learning on medical images. *arXiv preprint arXiv:2211.07254*, 2022. 9
- [112] Philip Müller, Georgios Kaissis, Congyu Zou, and Daniel Rueckert. Joint learning of localized representations from medical images and reports. In *European Conference on Computer Vision*, pages 685–701. Springer, 2022. 7, 9
- [113] Philip Müller, Georgios Kaissis, Congyu Zou, and Daniel Rueckert. Radiological reports improve pre-training for localized imaging tasks on chest x-rays. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 647–657. Springer, 2022. 13, 14
- [114] Philip Müller, Felix Meissen, Johannes Brandt, Georgios Kaissis, and Daniel Rueckert. Anatomy-driven pathology detection on chest x-rays. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 57–66. Springer, 2023. 2
- [115] Shabnam Nazmi, Xuyang Yan, Abdollah Homaifar, and Emily Doucette. Evolving multi-label classification rules by exploiting high-order label correlations. *Neurocomputing*, 417:176–186, 2020. 19, 20
- [116] Mark Neumann, Daniel King, Iz Beltagy, and Waleed Ammar. Scispacy: fast and robust models for biomedical natural language processing. *arXiv preprint arXiv:1902.07669*, 2019. 8
- [117] Ha Q Nguyen, Khanh Lam, Linh T Le, Hieu H Pham, Dat Q Tran, Dung B Nguyen, Dung D Le, Chi M Pham, Hang TT Tong, Diep H Dinh, et al. Vindr-cxr: An open dataset of chest x-rays with radiologist’s annotations. *Scientific Data*, 9(1):429, 2022. 11
- [118] Msoud Nickparvar. Brain tumor mri dataset, 2021. 11
- [119] Ifije E Ohiorhenuan, Ferenc Mechler, Keith P Purpura, Anita M Schmid, Qin Hu, and Jonathan D Victor. Sparse coding and high-order correlations in fine-scale cortical networks. *Nature*, 466(7306):617–621, 2010. 19, 20
- [120] Alison Q O’Neil, Antanas Kascenas, Joseph Henry, Daniel Wyeth, Matthew Shepherd, Erin Beveridge, Lauren Clunie, Carrie Sansom, Evelina Seduikyte Keith Muir, and Ian Poole. Attaining human-level performance with atlas location autocontext for anatomical landmark detection in 3d ct data. In *Proceedings of the European conference on computer vision (ECCV) Workshops*, pages 0–0, 2018. 16
- [121] Xi Ouyang, Srikrishna Karanam, Ziyang Wu, Terrence Chen, Jiayu Huo, Xiang Sean Zhou, Qian Wang, and Jie-Zhi Cheng. Learning hierarchical attention for weakly-supervised chest x-ray abnormality localization and diagnosis. *IEEE transactions on medical imaging*, 2020. 2
- [122] Lucy LW Owen, Thomas H Chang, and Jeremy R Manning. High-level cognition during story listening is reflected in high-order dynamic correlations in neural activity patterns. *Nature Communications*, 12(1):5728, 2021. 19, 20
- [123] Firat Ozdemir, Philipp Fuernstahl, and Orcun Goksel. Learn the new, keep the old: Extending pretrained models with new anatomy and images. In *Medical Image Computing and Computer Assisted Intervention—MICCAI 2018: 21st International Conference, Granada, Spain, September 16-20, 2018, Proceedings, Part IV 11*, pages 361–369. Springer, 2018. 15
- [124] Firat Ozdemir and Orcun Goksel. Extending pretrained segmentation networks with additional anatomical structures. *International journal of computer assisted radiology and surgery*, 14:1187–1195, 2019. 15

- [125] Anil Palepu and Andrew Beam. Tier: Text-image entropy regularization for medical clip-style models. *Proceedings of Machine Learning Research LEAVE UNSET*, 1:21, 2023. [7](#), [9](#)
- [126] Yimu Pan, Tongan Cai, Manas Mehta, Alison D Gernand, Jeffery A Goldstein, Leena Mithal, Delia Mwinyelle, Kelly Gallagher, and James Z Wang. Enhancing automatic placenta analysis through distributional feature recomposition in vision-language contrastive learning. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 116–126. Springer, 2023. [9](#)
- [127] Yimu Pan, Alison D Gernand, Jeffery A Goldstein, Leena Mithal, Delia Mwinyelle, and James Z Wang. Vision-language contrastive learning approach to robust automatic placenta analysis using photographic images. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 707–716. Springer, 2022. [9](#)
- [128] John Pavlopoulos, Vasiliki Kougia, and Ion Androutsopoulos. A survey on biomedical image captioning. In *Proceedings of the second workshop on shortcomings in vision and language*, pages 26–36, 2019. [19](#)
- [129] Christian Payer, Darko Stern, Horst Bischof, and Martin Urschler. Coarse to fine vertebrae localization and segmentation with spatialconfiguration-net and u-net. In *VIS-GRAPP (5: VISAPP)*, pages 124–133, 2020. [16](#)
- [130] Obioma Pelka, Sven Koitka, Johannes Rückert, Felix Nensa, and Christoph M Friedrich. Radiology objects in context (roco): a multimodal image dataset. In *Intravascular Imaging and Computer Assisted Stenting and Large-Scale Annotation of Biomedical Data and Expert Label Synthesis: 7th Joint International Workshop, CVII-STENT 2018 and Third International Workshop, LABELS 2018, Held in Conjunction with MICCAI 2018, Granada, Spain, September 16, 2018, Proceedings 3*, pages 180–189. Springer, 2018. [4](#)
- [131] Chantal Pellegrini, Matthias Keicher, Ege Özsoy, Petra Jiraskova, Rickmer Braren, and Nassir Navab. Xplainer: From x-ray observations to explainable zero-shot diagnosis. *arXiv preprint arXiv:2303.13391*, 2023. [11](#), [12](#), [17](#)
- [132] Yifan Peng, Xiaosong Wang, Le Lu, Mohammadhadi Bagheri, Ronald Summers, and Zhiyong Lu. Negbio: a high-performance tool for negation and uncertainty detection in radiology reports. *AMIA Summits on Translational Science Proceedings*, 2018:188, 2018. [7](#)
- [133] Trong Thang Pham, Jacob Brecheisen, Anh Nguyen, Hien Nguyen, and Ngan Le. Decoding radiologists intense focus for accurate cxr diagnoses: A controllable and interpretable ai system. *arXiv preprint arXiv:2309.13550*, 2023. [11](#), [12](#)
- [134] Prasanna Porwal, Samiksha Pachade, Ravi Kamble, Manesh Kokare, Girish Deshmukh, Vivek Sahasrabudhe, and Fabrice Meriaudeau. Indian diabetic retinopathy image dataset (idrid): a database for diabetic retinopathy screening research. *Data*, 3(3):25, 2018. [11](#)
- [135] Kanchan Poudel, Manish Dhakal, Prasiddha Bhandari, Rabin Adhikari, Safal Thapaliya, and Bishesh Khanal. Exploring transfer learning in medical image segmentation using vision-language models. *arXiv preprint arXiv:2308.07706*, 2023. [14](#)
- [136] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021. [1](#), [3](#), [5](#), [6](#), [11](#), [14](#), [17](#)
- [137] Aditya Ramesh, Prafulla Dhariwal, Alex Nichol, Casey Chu, and Mark Chen. Hierarchical text-conditional image generation with clip latents. *arXiv preprint arXiv:2204.06125*, 1(2):3, 2022. [1](#)
- [138] Rita Ramos, Bruno Martins, Desmond Elliott, and Yova Kementchedjieva. Smallcap: lightweight image captioning prompted with retrieval augmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2840–2849, 2023. [17](#)
- [139] Yongming Rao, Wenliang Zhao, Guangyi Chen, Yansong Tang, Zheng Zhu, Guan Huang, Jie Zhou, and Jiwen Lu. Denseclip: Language-guided dense prediction with context-aware prompting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18082–18091, 2022. [1](#), [13](#)
- [140] Svenja Ravioli, Céline Germann, Rebecca Gygli, Aristomenis K Exadaktylos, and Gregor Lindner. Age-and sex-related differences in community-acquired pneumonia at presentation to the emergency department: a retrospective cohort study. *European journal of emergency medicine*, 29(5):366–372, 2022. [18](#)
- [141] SA Rizvi, R Tang, X Jiang, X Ma, and X Hu. Local contrastive learning for medical image recognition. *arXiv preprint arXiv:2303.14153*, 2023. [9](#)
- [142] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022. [1](#)
- [143] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022. [5](#)
- [144] Constantin Seibold, Simon Reiß, M Saquib Sarfraz, Rainer Stiefelhagen, and Jens Kleesiek. Breaking with fixed set pathology recognition through report-guided contrastive training. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 690–700. Springer, 2022. [7](#), [9](#), [11](#), [12](#)
- [145] Chongjie Si, Yuheng Jia, Ran Wang, Min-Ling Zhang, Yanghe Feng, and Qu Chongxiao. Multi-label classification with high-rank and high-order label correlations. *IEEE Transactions on Knowledge and Data Engineering*, 2023. [19](#), [20](#)
- [146] Amber L Simpson, Michela Antonelli, Spyridon Bakas, Michel Bilello, Keyvan Farahani, Bram Van Ginneken, Annette Kopp-Schneider, Bennett A Landman, Geert Litjens,

- Bjoern Menze, et al. A large annotated medical image dataset for the development and evaluation of segmentation algorithms. *arXiv preprint arXiv:1902.09063*, 2019. 14
- [147] John E Stupka, Eric M Mortensen, Antonio Anzueto, and Marcos I Restrepo. Community-acquired pneumonia in elderly patients. *Aging health*, 5(6):763–774, 2009. 18
- [148] Sanjay Subramanian, Lucy Lu Wang, Sachin Mehta, Ben Bogin, Madeleine van Zuylen, Sravanthi Parasa, Sameer Singh, Matt Gardner, and Hannaneh Hajishirzi. MedicaT: A dataset of medical images, captions, and textual references. *arXiv preprint arXiv:2010.06000*, 2020. 4
- [149] Quan Sun, Yuxin Fang, Ledell Wu, Xinlong Wang, and Yue Cao. Eva-clip: Improved training techniques for clip at scale. *arXiv preprint arXiv:2303.15389*, 2023. 5
- [150] Ximeng Sun, Ping Hu, and Kate Saenko. Dualcoop: Fast adaptation to multi-label recognition with limited annotations. *Advances in Neural Information Processing Systems*, 35:30569–30582, 2022. 14
- [151] Tim Tanida, Philip Müller, Georgios Kaissis, and Daniel Rueckert. Interactive and explainable region-guided radiology report generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7433–7442, 2023. 2
- [152] Antti Tarvainen and Harri Valpola. Mean teachers are better role models: Weight-averaged consistency targets improve semi-supervised deep learning results. *Advances in neural information processing systems*, 30, 2017. 1
- [153] Zhi Tian, Chunhua Shen, and Hao Chen. Conditional convolutions for instance segmentation. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part I 16*, pages 282–298. Springer, 2020. 14
- [154] Judith E Tintinalli, J Stephan Stapczynski, OJ Ma, DM Yealy, GD Meckler, and DM Cline. *Tintinalli’s Emergency Medicine: A Comprehensive Study Guide, 8e*. McGraw Hill Education, 2016. 18
- [155] Ekin Tiu, Ellie Talius, Pujan Patel, Curtis P Langlotz, Andrew Y Ng, and Pranav Rajpurkar. Expert-level detection of pathologies from unannotated chest x-ray images via self-supervised learning. *Nature Biomedical Engineering*, 6(12):1399–1406, 2022. 11, 12
- [156] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023. 1
- [157] Philipp Tschandl, Cliff Rosendahl, and Harald Kittler. The ham10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. *Scientific data*, 5(1):1–9, 2018. 11
- [158] Masayuki Tsuneki and Fahdi Kanavati. Inference of captions from histopathological patches. In *International Conference on Medical Imaging with Deep Learning*, pages 1235–1250. PMLR, 2022. 11
- [159] Tom van Sonsbeek, Mohammad Mahdi Derakhshani, Ivona Najdenkoska, Cees GM Snoek, and Marcel Worring. Open-ended medical visual question answering through prefix tuning of language models. *arXiv preprint arXiv:2303.05977*, 2023. 17
- [160] Tom van Sonsbeek and Marcel Worring. X-tra: Improving chest x-ray tasks with cross-modal retrieval augmentation. In *International Conference on Information Processing in Medical Imaging*, pages 471–482. Springer, 2023. 17
- [161] Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks. In *International Conference on Learning Representations*, 2018. 8, 10
- [162] Yael Vinker, Ehsan Pajouheshgar, Jessica Y Bo, Roman Christian Bachmann, Amit Haim Bermano, Daniel Cohen-Or, Amir Zamir, and Ariel Shamir. Clipasso: Semantically-aware object sketching. *ACM Transactions on Graphics (TOG)*, 41(4):1–11, 2022. 1
- [163] Patrick Wagner, Nils Strodthoff, Ralf-Dieter Boussejot, Dieter Kreiseler, Fatima I Lunze, Wojciech Samek, and Tobias Schaeffter. Ptb-xl, a large publicly available electrocardiography dataset. *Scientific data*, 7(1):154, 2020. 11
- [164] A Wallis and P McCoubrie. The radiology report—are we getting the message across? *Clinical radiology*, 66(11):1015–1022, 2011. 8
- [165] Fuying Wang, Yuyin Zhou, Shujun Wang, Varut Vardhanabhuti, and Lequan Yu. Multi-granularity cross-modal alignment for generalized medical visual representation learning. *Advances in Neural Information Processing Systems*, 35:33536–33549, 2022. 8, 10
- [166] Xiaosong Wang, Yifan Peng, Le Lu, Zhiyong Lu, Mohammadhadi Bagheri, and Ronald M Summers. Chestx-ray8: Hospital-scale chest x-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2097–2106, 2017. 11
- [167] Xinlong Wang, Rufeng Zhang, Chunhua Shen, Tao Kong, and Lei Li. Dense contrastive learning for self-supervised visual pre-training. In *Proc. IEEE Conf. Computer Vision and Pattern Recognition (CVPR)*, 2021. 13
- [168] Yuhao Wang. Unified medical image-text-label contrastive learning with continuous prompt. *arXiv preprint arXiv:2307.05920*, 2023. 8, 9
- [169] Zhengbo Wang, Jian Liang, Ran He, Nan Xu, Zilei Wang, and Tieniu Tan. Improving zero-shot generalization for clip with synthesized prompts. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3032–3042, 2023. 1
- [170] Zhao Wang, Chang Liu, Shaoting Zhang, and Qi Dou. Foundation model for endoscopy video analysis via large-scale self-supervised pre-train. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer, 2023. 8, 10
- [171] Zhaoqing Wang, Yu Lu, Qiang Li, Xunqiang Tao, Yandong Guo, Mingming Gong, and Tongliang Liu. Cris: Clip-driven referring image segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11686–11695, 2022. 4, 14

- [172] Zhanyu Wang, Mingkang Tang, Lei Wang, Xiu Li, and Luping Zhou. A medical semantic-assisted transformer for radiographic report generation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 655–664. Springer, 2022. 16, 17
- [173] Zifeng Wang, Zhenbang Wu, Dinesh Agarwal, and Jimeng Sun. Medclip: Contrastive learning from unpaired medical images and text. *arXiv preprint arXiv:2210.10163*, 2022. 7, 9
- [174] Bastian Wittmann, Fernando Navarro, Suprosanna Shit, and Bjoern Menze. Focused decoding enables 3d anatomical detection by transformers. *arXiv preprint arXiv:2207.10774*, 2022. 13
- [175] Chaoyi Wu, Xiaoman Zhang, Ya Zhang, Yanfeng Wang, and Weidi Xie. Medklip: Medical knowledge enhanced language-image pre-training. *medRxiv*, pages 2023–01, 2023. 8, 10
- [176] Han Wu, Jiadong Zhang, Yu Fang, Zhentao Liu, Nizhuan Wang, Zhiming Cui, and Dinggang Shen. Multi-view vertebra localization and identification from ct images. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 136–145. Springer, 2023. 16
- [177] Yongjian Wu, Yang Zhou, Jiya Saiyin, Bingzheng Wei, Maode Lai, Jianzhong Shou, Yubo Fan, and Yan Xu. Zero-shot nuclei detection via visual-language pre-trained models. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 693–703. Springer, 2023. 13, 14
- [178] Zhirong Wu, Yuanjun Xiong, Stella X Yu, and Dahua Lin. Unsupervised feature learning via non-parametric instance discrimination. In *CVPR*, 2018. 1
- [179] Honglin Xiong, Sheng Wang, Yitao Zhu, Zihao Zhao, Yuxiao Liu, Qian Wang, and Dinggang Shen. Doctorglm: Fine-tuning your chinese doctor is not a herculean task. *arXiv preprint arXiv:2304.01097*, 2023. 1
- [180] An Yan, Yu Wang, Yiwu Zhong, Zexue He, Petros Karypis, Zihan Wang, Chengyu Dong, Amilcare Gentili, Chun-Nan Hsu, Jingbo Shang, et al. Robust and interpretable medical image classifiers via concept bottleneck models. *arXiv preprint arXiv:2310.03182*, 2023. 12
- [181] Xinquan Yang, Jinheng Xie, Xuguang Li, Xuechen Li, Xin Li, Linlin Shen, and Yongqiang Deng. Tceip: Text condition embedded regression network for dental implant position prediction. *arXiv preprint arXiv:2306.14406*, 2023. 14, 16, 17
- [182] Moi Hoon Yap, Gerard Pons, Joan Marti, Sergi Ganau, Melcior Sentis, Reyer Zwiggelaar, Adrian K Davison, and Robert Marti. Automated breast ultrasound lesions detection using convolutional neural networks. *IEEE journal of biomedical and health informatics*, 22(4):1218–1226, 2017. 11
- [183] Kihyun You, Jawook Gu, Jiyeon Ham, Beomhee Park, Jiho Kim, Eun K Hong, Woonhyuk Baek, and Byungseok Roh. Cxr-clip: Toward large scale chest x-ray language-image pre-training. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 101–111. Springer, 2023. 8, 9
- [184] Feiyang Yu, Mark Endo, Rayan Krishnan, Ian Pan, Andy Tsai, Eduardo Pontes Reis, Eduardo Kaiser Ururahy Nunes Fonseca, Henrique Min Ho Lee, Zahra Shakeri Hossein Abad, Andrew Y Ng, et al. Evaluating progress in automatic chest x-ray radiology report generation. *Patterns*, 4(9), 2023. 16
- [185] Yingchen Yu, Fangneng Zhan, Rongliang Wu, Jiahui Zhang, Shijian Lu, Miaomiao Cui, Xuansong Xie, Xian-Sheng Hua, and Chunyan Miao. Towards counterfactual image manipulation via clip. In *Proceedings of the 30th ACM International Conference on Multimedia*, pages 3637–3645, 2022. 1
- [186] Atif Emre Yüksel, Sadullah Gültekin, Enis Simsar, Şerife Damla Özdemir, Mustafa Gündoğar, Salih Barkın Tokgöz, and İbrahim Ethem Hamamcı. Dental enumeration and multiple treatment detection on panoramic x-rays using deep learning. *Scientific reports*, 11(1):12342, 2021. 13
- [187] Jure Zbontar, Li Jing, Ishan Misra, Yann LeCun, and Stéphane Deny. Barlow twins: Self-supervised learning via redundancy reduction. In *International Conference on Machine Learning*, 2021. 1
- [188] Xiaohua Zhai, Alexander Kolesnikov, Neil Houlsby, and Lucas Beyer. Scaling vision transformers. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12104–12113, 2022. 5
- [189] Bang Zhang, Yang Wang, and Fang Chen. Multilabel image classification via high-order label correlation driven active learning. *IEEE Transactions on Image Processing*, 23(3):1430–1441, 2014. 19, 20
- [190] Hongbo Zhang, Junying Chen, Feng Jiang, Fei Yu, Zhihong Chen, Jianquan Li, Guiming Chen, Xiangbo Wu, Zhiyi Zhang, Qingying Xiao, et al. Huatuogpt, towards taming language model to be a doctor. *arXiv preprint arXiv:2305.15075*, 2023. 1
- [191] Jianpeng Zhang, Yutong Xie, Yong Xia, and Chunhua Shen. Dodnet: Learning to segment multi-organ and tumors from multiple partially labeled datasets. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1195–1204, 2021. 14
- [192] Ke Zhang, Yan Yang, Jun Yu, Hanliang Jiang, Jianping Fan, Qingming Huang, and Weidong Han. Multi-task paired masking with alignment modeling for medical vision-language pre-training. *IEEE Transactions on Multimedia*, 2023. 7
- [193] Shaoting Zhang and Dimitris Metaxas. On the challenges and perspectives of foundation models for medical image analysis. *arXiv preprint arXiv:2306.05705*, 2023. 5
- [194] Sheng Zhang, Yanbo Xu, Naoto Usuyama, Jaspreet Bagga, Robert Tinn, Sam Preston, Rajesh Rao, Mu Wei, Naveen Valluri, Cliff Wong, et al. Large-scale domain-specific pre-training for biomedical vision-language processing. *arXiv preprint arXiv:2303.00915*, 2023. 5, 11, 18
- [195] Shaoteng Zhang, Jianpeng Zhang, and Yong Xia. Transwts: Transformer-based weakly supervised histology image segmentation. In *International Workshop on Machine Learning in Medical Imaging*, pages 367–376. Springer, 2022. 16

- [196] Shaoteng Zhang, Jianpeng Zhang, Yutong Xie, and Yong Xia. Tpro: Text-prompting-based weakly supervised histopathology tissue segmentation. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 109–118. Springer, 2023. 14, 16, 17
- [197] Xiaoman Zhang, Chaoyi Wu, Ya Zhang, Weidi Xie, and Yanfeng Wang. Knowledge-enhanced visual-language pre-training on chest radiology images. *Nature Communications*, 14(1):4542, 2023. 8, 10, 11
- [198] Xiaoman Zhang, Chaoyi Wu, Ziheng Zhao, Weixiong Lin, Ya Zhang, Yanfeng Wang, and Weidi Xie. Pmc-vqa: Visual instruction tuning for medical visual question answering. *arXiv preprint arXiv:2305.10415*, 2023. 16, 17
- [199] Yunkun Zhang, Jin Gao, Mu Zhou, Xiaosong Wang, Yu Qiao, Shaoting Zhang, and Dequan Wang. Text-guided foundation model adaptation for pathological image classification. In *International Conference on Medical Image Computing and Computer-Assisted Intervention*, pages 272–282. Springer, 2023. 11
- [200] Yuhao Zhang, Hang Jiang, Yasuhide Miura, Christopher D Manning, and Curtis P Langlotz. Contrastive learning of medical visual representations from paired images and text. In *Machine Learning for Healthcare Conference*, pages 2–25. PMLR, 2022. 6
- [201] Yixiao Zhang, Xinyi Li, Huimiao Chen, Alan L Yuille, Yaoyao Liu, and Zongwei Zhou. Continual learning for abdominal multi-organ and tumor segmentation. In *International conference on medical image computing and computer-assisted intervention*, pages 35–45. Springer, 2023. 14, 15
- [202] Yu Zhang, Han Zhang, Xiaobo Chen, Seong-Whan Lee, and Dinggang Shen. Hybrid high-order functional connectivity networks using resting-state functional mri for mild cognitive impairment diagnosis. *Scientific reports*, 7(1):6530, 2017. 19, 20
- [203] Zhanqiu Zhang, Jie Wang, Jieping Ye, and Feng Wu. Rethinking graph convolutional networks in knowledge graph completion. In *Proceedings of the ACM Web Conference 2022*, pages 798–807, 2022. 10
- [204] Gangming Zhao, Quanlong Feng, Chaoqi Chen, Zhen Zhou, and Yizhou Yu. Diagnose like a radiologist: Hybrid neuro-probabilistic reasoning for attribute-based medical image diagnosis. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(11):7400–7416, 2021. 19
- [205] Zihao Zhao, Sheng Wang, Jinchun Gu, Yitao Zhu, Lanzhuju Mei, Zixu Zhuang, Zhiming Cui, Qian Wang, and Dinggang Shen. Chatcad+: Towards a universal and reliable interactive cad using llms. *arXiv preprint arXiv:2305.15964*, 2023. 17
- [206] Fudan Zheng, Jindong Cao, Weijiang Yu, Zhiguang Chen, Nong Xiao, and Yutong Lu. Exploring low-resource medical image classification with weakly supervised prompt learning. *Available at SSRN 4578827*. 13
- [207] Bolei Zhou, Aditya Khosla, Agata Lapedriza, Aude Oliva, and Antonio Torralba. Learning deep features for discriminative localization. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2921–2929, 2016. 16
- [208] Fengtao Zhou and Hao Chen. Cross-modal translation and alignment for survival analysis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 21485–21494, 2023. 10, 11
- [209] Hong-Yu Zhou, Xiaoyu Chen, Yinghao Zhang, Ruibang Luo, Liansheng Wang, and Yizhou Yu. Generalized radiograph representation learning via cross-supervision between images and free-text radiology reports. *Nature Machine Intelligence*, 4(1):32–40, 2022. 6
- [210] Hong-Yu Zhou, Chenyu Lian, Liansheng Wang, and Yizhou Yu. Advancing radiograph representation learning with masked record modeling. In *The Eleventh International Conference on Learning Representations*, 2022. 9
- [211] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Conditional prompt learning for vision-language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16816–16825, 2022. 1, 13, 14
- [212] Kaiyang Zhou, Jingkang Yang, Chen Change Loy, and Ziwei Liu. Learning to prompt for vision-language models. *International Journal of Computer Vision*, 130(9):2337–2348, 2022. 1, 13
- [213] Qihang Zhou, Guansong Pang, Yu Tian, Shibo He, and Jiming Chen. Anomalyclip: Object-agnostic prompt learning for zero-shot anomaly detection. *arXiv preprint arXiv:2310.18961*, 2023. 13, 14
- [214] Yi Zhou, Xiaodong He, Lei Huang, Li Liu, Fan Zhu, Shanshan Cui, and Ling Shao. Collaborative learning of semi-supervised segmentation and classification for medical images. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2079–2088, 2019. 2
- [215] Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Youngjae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal c4: An open, billion-scale corpus of images interleaved with text. *arXiv preprint arXiv:2304.06939*, 2023. 5
- [216] Shuangquan Zuo, Yun Xiao, Xiaojun Chang, and Xuanhong Wang. Vision transformers for dense prediction: A survey. *Knowledge-Based Systems*, 253:109552, 2022. 13