

Leveraging Habitat Information for Fine-grained Bird Identification

Tin Nguyen^{1*} Anh Nguyen²
Auburn University

ttn0011@auburn.edu, anh.ng8@gmail.com

Abstract

Traditional bird classifiers mostly rely on the visual characteristics of birds. Some prior works even train classifiers to be invariant to the background, completely discarding the living environment of birds. Instead, we are the first to explore integrating **habitat** information, one of the four major cues for identifying birds by ornithologists, into modern bird classifiers. We focus on two leading model types: (1) CNNs and ViTs trained on the downstream bird datasets; and (2) original, multi-modal CLIP [31]. Training CNNs and ViTs with habitat-augmented data results in an improvement of up to **+0.83** and **+0.23** points on NABirds and CUB-200, respectively. Similarly, adding habitat descriptors to the prompts for CLIP yields a substantial accuracy boost of up to **+0.99** and **+1.1** points on NABirds and CUB-200, respectively. We find consistent accuracy improvement after integrating habitat features into the image augmentation process and into the textual descriptors of vision-language CLIP classifiers. Code is available at: <https://anonymous.4open.science/r/reasoning-8B7E/>.

1. Introduction

Bird identification, despite recent progress, continues to be challenging, particularly in distinguishing between species with similar appearances, such as various sparrow species [40]. A promising feature that can address the issue is habitat, which is recognized as one of four keys to identifying birds by bird watchers and ornithologists [5, 6, 11]. This is exemplified by species like the Scott Oriole and Evening Grosbeak (Fig. 2), which are visually similar but inhabit distinct environments: The former nest and forage in deserts or cactus flats, whereas the latter breed in pine-oak, pinyon-juniper, and aspen forests [3].

Early works focus on finding the most discriminative features of birds, giving rise to part-based models [22, 45, 48]. More recent efforts have expanded to include additional information like geolocation [10, 24, 37] and textual descriptions [12, 20] to enhance identification accuracy. [43] made preliminary efforts to emphasize the significance of

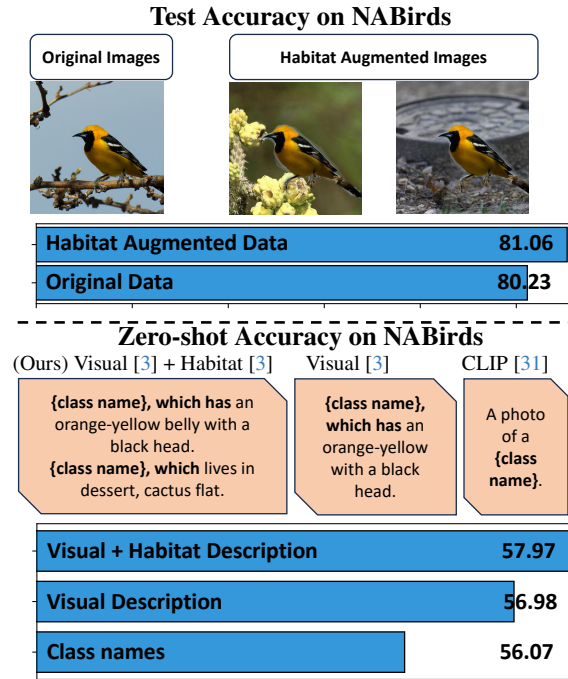


Figure 1. **Top:** CNN trained on with habitat-augmented data improves accuracy by **+0.83** pts over original data. **Bottom:** Adding habitat descriptions to CLIP boosts zero-shot accuracy, exceeding visually-based or class name-only descriptions by **+0.99** pts and **+1.90** pts, respectively (details in Tab. 1, 3, and 4). Note that, both models are tested on NABirds.

background for classification. Additionally, other researchers have approached the problem by focusing on habitat classification [16, 42].

However, to our best knowledge, no prior works explored how to leverage habitat information to improve bird identification accuracy. Our study addresses this research gap by introducing novel methodologies for integrating habitat information into both vision-only and vision-language models, broadening the scope of bird identification techniques. For vision-only models, we introduce a technique of superimposing bird images onto their relevant habitat backgrounds, creating habitat-augmented data for training purposes. In

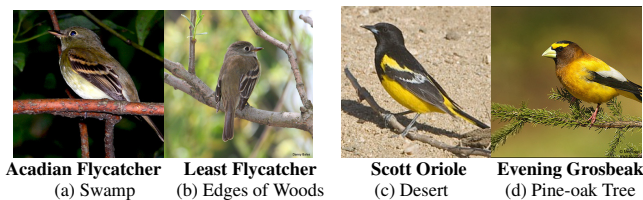


Figure 2. Visual comparison of two bird pairs with similar morphologies but different habitats: Acadian Flycatcher in swamps vs. Least Flycatcher in woodland edges; Scott Oriole in deserts vs. Evening Grosbeak in pine-oak areas. See Appendix Sec. A3.1 for details.

the vision-language model context, we specifically tailor the text input to include relevant habitat information, a targeted approach that contributes to improved accuracy in bird recognition.

In this work, we aim to assess how habitat information influences the performance of both vision-only and vision-language models in bird identification. We focus on evaluating two prominent vision-only models, ResNet-50 [19] trained by [36], and TransFG [18] with a Vision Transformer (ViT) [14] backbone, each augmented with habitat-specific data. Additionally, for a vision-language approach, we examine the CLIP model [31], adding habitat details to textual prompts. This methodology aims to highlight the potential of habitat integration in enhancing model accuracy, offering a comprehensive analysis of its impact on ornithological machine learning.

As highlighted by allaboutbirds.org, a leading resource in avian studies, critical attributes for identifying bird species include shape & size, color pattern, behavior, and **habitat**. Consistent with these attributes, our study demonstrates that the integration of habitat data consistently improves the performance of both vision-only and vision-language models in bird identification, thereby validating the significance of this approach. To the best of our knowledge, our work is the first to demonstrate the effectiveness of habitat information in bird identification. Our main findings are:

- State-of-the-art vision-only models can be improved in accuracy when training with habitat-augmented images (e.g., +0.23 pts in NABirds for ResNet-50 as shown in Tab. 1).
- The addition of habitat descriptions to the CLIP model significantly boosts its zero-shot and few-shot accuracy, with increases of up to +1.1 and +4.63 points respectively (Tabs. 3 to 5).
- State-of-the-art models struggle with images lacking habitat information, such as FlyBird images. In the NABirds dataset, Non-FlyBird images outperform FlyBird by +6.92 points in vision-only and +4.10 points in vision-language models, emphasizing the crucial role of habitat data

(Tabs. 6 and 7).

2. Related Work

Current methods in fine-grained bird classification have two main branches: vision-only models, which focus on augmenting visual information through innovative architectural designs, and vision-language models (VLMs), which integrate external textual knowledge as an additional modality. Exploring these branches in detail reveals distinct methodologies and their evolution in bird classification.

Utilizing visual features in vision-only models Early methods in fine-grained bird classification primarily explored visual features, such as zooming into particular regions [15], extracting certain visual features [22, 45, 48]. recent approaches have advanced this field by concentrating on bird-specific parts or concepts to both enhance and explain the classification process [13, 18, 27, 28, 32, 44]. These methods have intensively focused on avian characteristics, yet notably, they have not incorporated habitat information into their classification frameworks.

Adding extra information as another modality Incorporating additional data types, such as geolocation and time of observation, has proven beneficial in fine-grained bird classification. Researchers have found that geographical information, in particular, can significantly improve classification accuracy [10, 12, 24]. Recently, Visual Language Models (VLMs) like CLIP [31], FILIP [46], and CoCa [47], which combine visual and textual data, have shown promising results. These models, pretrained on large-scale datasets [33, 34], perform comparably to specialized fine-grained classifiers. [26] found that the foundation model CLIP [31] can be further amplified by adding more descriptive textual descriptions. However, these methods have yet to fully explore the use of habitat information, a key factor in bird identification [1, 2, 7, 25, 38].

Background Information Several studies have emphasized the influence of background in image classification. For instance, [43] found that changing backgrounds can significantly affect model accuracy, as models exploit background correlations. Similarly, [49] demonstrated enhanced object recognition performance by combining networks trained on both the foreground object and the background context. In a different approach, [41] developed a contrastive learning method to mitigate background bias. Building on top of these insights, our research takes a distinct path by explicitly emphasizing the recognition of habitat elements in bird identification, an aspect pivotal yet needs to be explored in the field.

Habitat Classification While [42] conducted a study on recognizing habitat elements in bird images, their approach did not directly apply this information to bird species identification. Instead, they developed a classifier for categorizing different types of habitats, such as stone, water, leafless areas, or trunks. Our approach, however, diverges significantly. We integrate habitat information into our dataset through augmentation, enriching the data associated with each bird species. This strategy allows our model to leverage habitat context, making more informed and accurate identification decisions.

3. Methods

This section presents our proposed habitat-based data augmentation for vision-only models in Sec. 3.1. Then, we propose a simple approach to include habitat into bird descriptions for the foundation model CLIP Sec. 3.2.

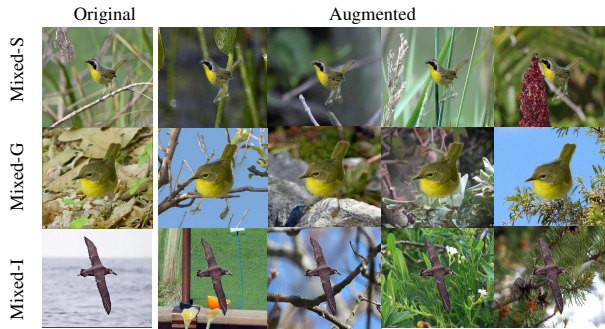


Figure 3. Three augmentation techniques (Mixed-S, Mixed-G, Mixed-I) are illustrated: Original bird images in the first column, followed by augmented versions. The first row shows Common Yellow Throat in varying habitats (marsh to grassland). The second row features it amidst different species sharing the same habitats. The last row demonstrates Mixed-Irrelevant, placing Black Footed Albatross (typically found near shores) in forest and grass backgrounds.

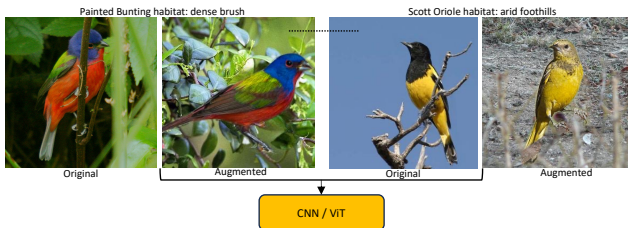


Figure 4. Bird classification with vision-only models (CNN, ViT) utilizes augmented datasets blending original and habitat-augmented images. The augmented images have more contextual habitat, for instance, the habitats of Painted Bunting and Scott Oriole are dense brush and arid foothills.

3.1. Improve Habitat Understanding in Vision-Only Models with Habitat-augmented Data

For vision-only models, we evaluate the effectiveness of our habitat-based augmentation methods on two representative models (Fig. 4): ResNet-50 [36] for CNN and TransFG [36] for ViT, which employs ViT-B/16 [14] as its backbone.

We introduce three augmentation methods: **Mixed-Same (Mixed-S)** and **Mixed-Group (Mixed-G)**, inspired by [17, 43], aimed to enhance habitat diversity. Moreover, **Mixed-Irrelevant (Mixed-I)**, designed to reduce habitat correlation with birds, serves as a control in evaluating the impact of habitat diversity on bird identification.

The essence of our augmentation approach lies in isolating the bird from an image and seamlessly integrating it into a distinct habitat image. To achieve this, we generate two specialized image collections. The first, **Only Bird Images**, in which birds against a uniform black background; the second, **Habitat Images**, images of avian environments with birds removed by LaMa [35]. We provide an example of these images in Fig. 6. Subsequently, these curated sets allow us to overlay the **Only Bird Images** onto the **Habitat Images**. This superimposition can include habitats that are either congruent with the bird’s class, aligned with its broader taxonomic group, or derived from an entirely different grouping.

Mixed-Same (Mixed-S) We randomly change the background of a bird within its class, this method is inspired by previous works [17, 43]. Specifically, this entails superimposing each “Only Bird Image” onto a corresponding “Habitat Image” that shares the same class index. This process ensures that the bird is depicted against a variety of backgrounds that are class-consistent, thereby enriching the dataset with diverse, yet relevant, environmental contexts. An example of this process for the Common Yellow Throat and Black-footed Albatross is given in Fig. 3.

Mixed-Group (Mixed-G) In light of the fact that certain avian species share habitats, our approach involves categorizing birds into clusters based on the similarity of their environmental settings, concretely, we use k-means [23] to cluster birds into groups based on their habitat descriptions sourced from allaboutbirds.org[3] (see algorithm details in Appendix Secs. A2 and A3). This insight has led to the development of a novel augmentation technique, termed Mixed-Group, which strategically superimposes each “Only Bird Image” onto a “Habitat Image” within the same ecological group.

For instance, as illustrated in the second row in Fig. 3, the Common Yellow Throat is placed onto different habitats of a group including Orange-crowned Warbler, Savannah Sparrow, Groove-billed Ani, and Florida Jay, these birds share the same habitat preference for deciduous shrub

environments.

We provide some details of habitat groups according to habitat descriptions in Appendix Sec. A2.

Mixed-Irrelevant (Mixed-I) To understand the importance of habitats to bird recognition, a bird will be isolated from its own habitat or habitat group and placed into a completely irrelevant one. In Mixed-Irrelevant, we randomly choose a habitat image from all classes that are not in the habitat groups of a specific bird to do image augmentation. Mixed-Irrelevant injects irrelevant habitat to the training images, therefore enforcing the model to utilize the bird information only. As can be seen from Fig. 3, after augmentation, the Black-footed Albatross is placed in a forest which is completely unnatural because its habitats are on low, sandy islands, or near shore, and far offshore.

3.2. Habitat Understanding in Multimodal Models

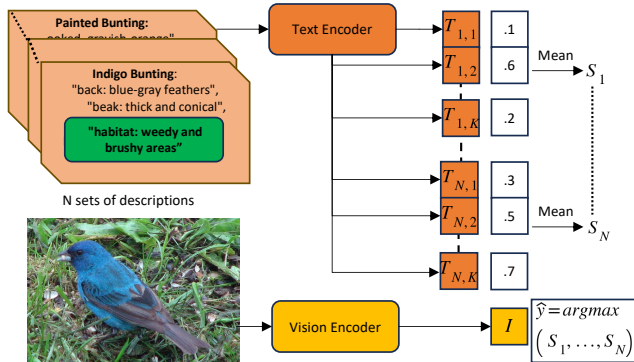


Figure 5. Integrating habitat data into CLIP during zero-shot enhances bird identification. Each class comes with descriptions; CLIP calculates and averages similarity scores between these and the input image. The class with the highest softmax score is then predicted.

In terms of multimodal models, we use CLIP (Fig. 5) and investigate its zero-shot capability in the presence of supplementary habitat descriptions.

Previously, M&V [26], or PEEB [4] employed fine-grained descriptions generated by LLMs as input prompts to CLIP. Although these descriptors provide rich information about bird appearance such as color, or shape, they still lack descriptors describing habitat.

Motivated by this, we employ habitat descriptors sourced from allaboutbirds.org[3], providing valuable insights into the environments where each bird species thrives.

4. Results

To establish the broad applicability and impact of the habitat, we evaluate vision-only models across diverse test sets (refer




Figure 6. Five test scenarios assess model robustness with variations: no habitat (black background), habitat only (no bird), and obscured bird images.

to Fig. 6) and assess CLIP’s performance with various description sets (detailed in Sec. 4.2). All tests were performed using PyTorch [30] on a single NVIDIA V100 GPU.

Dataset used in vision-only models We train and test models on splits of CUB and NABirds, infusing habitat information into the training process using Mixed-S and Mixed-G methods. Test outcomes are recorded in Tab. 1.

We also verify the advantage of habitats by testing trained models on the iNaturalist-birds dataset (1048 classes) featuring several challenges such as birds being partially occluded, or low lighting conditions (Fig. 7). Consequently, we derived two subsets, iNaturalist-CUB (200 classes) and iNaturalist-NABirds (555 classes), to facilitate focused evaluations (see Tab. 4), specifically:

- **iNaturalist-CUB** which includes 200 classes, with 144 overlapping classes both presenting in iNaturalist-birds and CUB and 56 classes sourced from CUB only.
- **iNaturalist-NABirds** which includes 555 classes, with 247 overlapping classes both presenting in iNaturalist-birds and NABirds and 308 classes sourced from NABirds only.

Note that, images of overlapping classes are from iNaturalist-birds, while images of non-overlapping classes are sourced from either CUB or NABirds.

The objective is to determine whether habitat information improves identification in real-world conditions where birds are occluded or appear diminutive. The results are detailed in Tab. 2.



Figure 7. Examples in iNaturalist-birds [39] where the birds *Dryocopus Martius* (Black Woodpecker) and *Pelecanus Crispus* (Dalmatian Pelican) being partially occluded by trees, poor lighting conditions, and the diminutive size of the bird.

Table 1. Accuracy comparison across various CUB and NABirds test sets using ResNet-50 [36] and TransFG [18] models shows Mixed-Same and Mixed-Group’s effectiveness, especially in challenging scenarios like **No Birds**, **Small Boxes**, and **Big Box**, indicating superior utilization of habitat information.

Test Data		ResNet-50 [36]				TransFG (ViT/B-16) [18]			
		Baseline	Mixed-I	Mixed-G	Mixed-S	Baseline	Mixed-I	Mixed-G	Mixed-S
CUB (200 classes)	Standard	86.81	86.26 (-0.55)	87.04(+0.23)	87.02	89.18	88.89 (-0.29)	89.25	89.39(+0.21)
	No Background	76.08	78.94(+2.86)	77.8	76.75	81.74	86.99(+5.25)	86.05	85.54
	No Birds	5.51	3.45	5.29	5.99(+0.48)	6.02	5.99	4.85	6.68(+0.66)
	Small Boxes	75.39	72.85	74.61	75.01 (-0.38)	86.9	87.57	87.06	87.78(+0.88)
	Big Box	60.41	58.84	60.7	61.10(+0.69)	77.42	77.56	77.25	78.98(+1.56)
NABirds (555 classes)	Standard	80.23	79.21 (-1.02)	81.06(+0.83)	80.72	88.42	87.76 (-0.66)	88.67	88.75(+0.33)
	No Background	65.18	69.18(+4.00)	67.14	67.36	80.83	85.99(+5.16)	84.83	84.32
	No Birds	3.77	1.64	3.35	3.81(+0.04)	7.34	3.69	6.72	8.09(+0.75)
	Black Boxes	61.5	59.77	61.67	61.82(+0.32)	85.21	84.48	85.37	85.47(+0.26)
	Big Box	51.48	49.06	51.81(+0.33)	51.76	76.67	74.60	76.41	77.66(+0.99)

Dataset used in CLIP CUB, NABirds, and iNaturalist-birds are used to test the performance of CLIP with a keen focus on the role of habitat information. Habitat details for dataset classes are meticulously sourced from *allaboutbirds.org*, a reputable avian resource.

For CUB, which consists of 200 classes, comprehensive habitat information is directly obtained for 183 classes. For the remainder, we utilize GPT-3 to generate the missing habitat data.

In the case of NABirds, the original 555 classes are streamlined to 267 classes for testing. This exclusion arises due to incomplete visual descriptions for classes that have variations like males, females, and juveniles.

Lastly, in iNaturalist-birds, out of 1486 classes, habitat information is successfully gathered for 425 classes, corresponding to the data available on *allaboutbirds.org*.

The impact of incorporating habitat descriptions on CLIP’s zero-shot accuracy for CUB, NABirds, and iNaturalist-birds is shown in Tabs. 3 and 4.

4.1. Habitat Information consistently improves classification accuracy of vision-only models

To investigate the hypothesis that applying habitat-based augmentation (Mixed-S and Mixed-G) enhances the accuracy of bird identification, we trained unimodal models, which are ResNet-50 [36], and TransFG [18], with and without the augmentation strategies, and compare the models trained with augmentations against their non-augmented counterpart across different test sets of CUB and NABirds as illustrated in Fig. 6.

Furthermore, to investigate the robustness of our models under complex conditions - where birds may be partially obscured, or hidden by objects (see Fig. 7), we tested them on the challenging iNaturalist-CUB and iNaturalist-NABirds datasets as described in Sec. 4.

Experiment First, we resize input images to 256*256. We fine-tune ResNet-50 from [36] using a batch size of 64 and a learning rate of $1e^{-4}$ over 20 epochs. For TransFG [18], we employed a batch size of 8, maintained the learning rate at

$1e^{-5}$, and extended training to 50 epochs. Adam [21] optimizer is employed with a step learning rate scheduler. The pre-trained models are provided in Sec. A1. In this experiment, three augmentation techniques Mixed-S, Mixed-G, and Mixed-I will be compared. For each type of augmentation, we test it with different test sets, as depicted in Fig. 6, there are five types of test sets:

- **Original:** Original test sets of CUB or NABirds.
- **Black background:** Removing the background of the original set.
- **No Bird:** Crop the birds in the original set and use LaMa [35] to fill in the cropped region.
- **Black Boxes:** Put eight small black boxes on the birds.
- **Big Box:** Put a big black box on the birds.

Results The results in Tab. 1 show that **the models trained with Mixed-S and Mixed-G augmentations consistently enhance the accuracy of bird identification** which means habitat backgrounds really help in bird recognition. Concretely, using Mixed-G increases the accuracy by **+0.23** and **+0.83** points compared to not using any habitat augmentation methods when training ResNet-50 [36] on CUB, and NABirds, respectively. While training ViT [18] on those datasets, Mixed-S also gains **+0.21**, and **+0.33** points. Although the gaps are not substantial, they still suggest that classifiers trained on habitat-augmented datasets might be more effective at identifying birds.

The results in Tab. 2 also suggest that models trained with Mixed-G and Mixed-S consistently achieve the highest accuracy on iNaturalist-CUB and iNaturalist-NABirds. Concretely, in iNaturalist-CUB, there is an average improvement of **+0.76** points in accuracy, while the improvement in iNaturalist-NABirds is **+0.48** points. This shows that in those cases, habitat background plays an important role in identifying a bird.

4.2. Improving Zero-shot and Few-shot Accuracy with the help of Habitat Description

To assess habitat efficacy in CLIP, we compare the zero-shot and few-shot accuracies across CUB (200 classes), NABirds

Table 2. Performance comparison on iNaturalist-CUB and iNaturalist-NABirds using VisualCorr [36] and TransFG [18] shows Mixed-Group and Mixed-Same outperform Baseline by +0.76 and +0.48 points, respectively, due to added 'habitat' in training.

	iNaturalist-CUB (200 classes)		iNaturalist-NABirds (555 classes)	
	ResNet-50	TransFG	ResNet-50	TransFG
Baseline	68.23	71.38	68.59	77.93
Mixed-I	68.17	71.45	66.95	76.39
Mixed-G	68.49	72.5 (+1.12)	69.03 (+0.44)	78.25
Mixed-S	68.62 (+0.39)	71.89	68.63	78.45 (+0.52)
Avg Δ	+0.76		+0.48	

(267 classes), and iNaturalist-birds (425 classes) both with and without integrating habitat descriptions into the visual concepts for each category.

Experiment We augment each set of textual descriptions with habitat information, and examine the improvement of CLIP models. Additionally, in the few-shot context, our methodology involves the addition of 30 images for each class, specifically chosen at random from the training dataset.

Note that, we obtain the visual appearance descriptions from three sources, specifically:

- **M&V** [26] utilizes GPT-3 [8] to generate visual descriptions of birds. Sometimes it includes abstract features that are not presented in the image, such as "This is a medium-sized bird", or "wingspan of up to 3.6 m (12 ft)". (Appendix A3)
- **PEEB** [4] leverages GPT-4 [29] to generate descriptions of twelve distinct parts of birds including wings, tail, eyes, back, forehead, nape, crown, leg, breast, throat, belly, beak. (Appendix A3)
- **Shape, Size, and Color (SSC)** [3] descriptions are human-annotated descriptions and are available on the allabout-birds.org. (Appendix A3)

Furthermore, in order to be consistent between scientific class names in the iNaturalist-birds dataset (see Fig. 7), and the common bird names in the habitat description, we initially substitute common names in habitat descriptions with their corresponding scientific names. Subsequently, we inverted this process by replacing the scientific class names with common names. This approach was based on the premise that CLIP may not effectively recognize birds' scientific nomenclature, potentially impairing its accuracy in generating prompts that contain such terminology.

Motivated by [26], we also modify the standard CLIP input prompt "A photo of a {c}". into "{c}, which (is/has/etc) {description}." where "{c}" is a class name. Subsequently, the modified prompts can be fed into CLIP's text encoder.

Results We conduct comparisons of zero-shot and few-shot accuracy, considering the use of descriptions with and

Table 3. Zero-shot accuracy on CUB and NABirds with M&V, PEEB, and SSC descriptions in CLIP models shows habitat integration boosts accuracy across all descriptions. Average gains with habitat in SSC are +1.1 for CUB and +0.99 for NABirds. Notably, adding habitat to M&V descriptions in CLIP outperforms class names alone by +2.73 points.

CUB (200 classes)							
	CLIP [31]	M&V [26]	PEEB [4]	SSC [3]			
Habitat	✗	✗	✓	✗	✓	✗	✓
B/32	51.95	52.35	53.56	52.73	53.16	52.43	53.02
B/16	56.35	57.51	58.56	57.92	58.5	57.02	58.63
L/14	63.08	64.03	64.27	64.31	65.17	63.81	64.91
Avg	57.96	57.96	58.80	58.32	58.94	57.75	58.85
Δ		+0.83		+0.62		+1.1	
NABirds (267 classes that do not have annotation)							
B/32	49.08	49.79	51.17	50.61	51.25	49.84	50.84
B/16	55.28	57.29	58.06	56.87	57.59	56.12	57.07
L/14	63.86	66.56	67.17	66.73	67.33	64.98	66.01
Avg	57.88	57.88	58.80	58.07	58.72	56.98	57.97
Δ		+0.92		+0.65		+0.99	

Table 4. Zeroshot Accuracy on iNaturalist-birds (425 classes) in two settings: common names to scientific names and vice versa. The results show habitat descriptions enhance zero-shot accuracy across all description sets, with common names notably yielding higher accuracy.

iNaturalist21 - only bird (425 classes, common names to scientific names)							
	CLIP	M&V [26]	PEEB [4]	SSC [3]			
Habitat	✗	✗	✓	✗	✓	✗	✓
B/32	4.22	5.92	6.83	5.21	5.80	8.72	8.84
B/16	5.36	7.76	9.08	6.61	7.58	10.85	11.32
L/14	7.94	11.29	13.08	9.09	10.26	14.07	14.89
Avg	8.32	9.66	9.66	6.97	7.88	11.21	11.68
Δ		+1.34		+0.91		+0.47	
iNaturalist21 - only bird (425 classes, scientific names to common names)							
B/32	29.56	30.52	30.67	30.13	30.47	29.46	30.08
B/16	35.41	36.75	37.24	36.48	37.00	35.15	36.59
L/14	43.54	45.47	45.93	45.51	45.90	43.74	45.03
Avg	37.58	37.95	37.95	37.37	37.79	36.12	37.23
Δ		+0.37		+0.42		+1.12	

without habitat information. The results, as presented in Tabs. 3 to 5, clearly demonstrate that incorporating habitat descriptions leads to a notable improvement in both settings. For instance, in the zero-shot context, the combination of Shape, Size, and Color (SSC) and habitat achieves +1.1 and +0.99 pts improvement in CUB and NABirds, respectively. Similarly, for the few-shot setting, using M&V descriptions with habitat also gains +4.63 and +1.09 pts in these two datasets.




Figure 8. Flybird images do not have the habitat cues.

Table 5. Few-shot accuracy on CUB and NABirds with M&V, PEEB, and SSC descriptions in CLIP models, reveals habitat integration enhances accuracy for all sets. Notably, habitat in M&V descriptions improves by +4.63 for CUB and +1.09 for NABirds.

CUB (200 classes)				
Description	B/32	B/16	L/14	Avg Δ
PEEB [4]	59.39	71.51	78.13	+1.25
+Habitat	62.93 (+3.54)	71.66 (+0.15)	78.18 (+0.05)	
M&V [26]	46.43	55.02	63.24	+4.63
+Habitat	50.38 (+3.95)	59.1 (+4.08)	69.09 (+5.85)	
SSC [3]	58.75	69.16	76.94	+0.56
+Habitat	59.37 (+0.62)	69.76 (+0.60)	77.39 (+0.45)	
NABirds (267 classes that do not have annotation)				
PEEB [4]	57.29	67.65	76.06	+0.19
+Habitat	57.55 (+0.26)	67.77 (+0.12)	76.25 (+0.19)	
M&V [26]	45.80	54.30	66.88	+1.09
+Habitat	47.05 (+1.25)	55.55 (+1.25)	67.64 (+0.76)	
SSC [3]	53.57	65.65	74.73	+0.44
+Habitat	54.13 (+0.56)	66.17 (+0.52)	74.96 (+0.23)	

4.3. Both vision-only Models and vision-language Models Encountering Similar Challenges in Bird Identification

To further analyze the joint effects of habitat on bird identification for vision-only and vision-language, we study how incorporating habit improves these models. That is, we wonder if both models will benefit from certain classes that strongly correlate with habitat.

Experiment We experiment on CUB by ranking the class-wise accuracy improvement of each class on vision-only and vision-language models separately (Fig. 9). Then, based on the habitat group we proposed in Sec. 3.1, we analyze the classes that fall into the same habitat group in the top 20 classes for both models.

Results As illustrated in Fig. 9, among the top 20 classes, both models include over eight classes belonging to the habitat group, as indicated by the gray color coding. This pattern suggests that both vision-only and vision-language models encounter similar challenges in identifying these habitat-related classes. Consequently, this observation emphasizes the significance of integrating habitat information into both vision-only and vision-language models for improved classification.

4.4. Models perform poorly on Fly-bird images

It is challenging to recognize the birds when they are flying [40] (see Fig. 8). With this premise, we design an experiment to investigate the performance of our models in such scenarios.

Fly Birds Detection For identifying images that feature flying birds, we employ the Mask2Former model, as outlined in [9]. This panoptic segmentation model first determines

Table 6. The table highlights the accuracy of various vision-only models on CUB’s FlyBird and Non-FlyBird (200 classes) and NABirds (555 classes), revealing a consistent trend where Non-FlyBird outperforms FlyBird.

		CUB (200 classes)		NABirds (555 classes)	
		FlyBird	Non-FlyBird	FlyBird	Non-FlyBird
ResNet-50	Baseline	86.06	86.93 (+0.87)	72.68	81.16 (+8.48)
	Mixed-S	85.89	87.21 (+1.32)	72.96	81.68 (+8.72)
	Mixed-G	83.97	86.55 (+2.58)	73.96	81.95 (+7.99)
	Mixed-I	85.71	87.27 (+1.56)	73.57	81.64 (+8.07)
TransFG	Baseline	88.33	89.3 (+0.97)	83.14	89.08 (+5.94)
	Mixed-S	89.02	89.47 (+0.45)	84.28	89.31 (+5.03)
	Mixed-G	87.11	89.13 (+2.02)	83.03	89.38 (+6.35)
	Mixed-I	88.68	89.36 (+0.68)	84.56	89.35 (+4.79)
Avg Δ		+1.31		+6.92	

the presence of elements such as rocks, grass, or water in the image. Subsequently, it assesses whether the sky is depicted. If the sky is indeed present, the image is classified as containing flying birds; otherwise, it is categorized as a non-flying bird image.

Experiment In this experiment, CUB and NABirds are examined and we found that the fly-bird percentage of CUB is 10%, while that of NABirds is 11.4%. Additionally, CUB and NABirds are divided into **FlyBird-CUB**, **Non-FlyBird-CUB**, and **FlyBird-NABirds**, **non-FlyBird-NABirds**, and for all these datasets, we test the classification accuracy of our models.

Results From Tab. 6, which showcases the results of vision-only models, and Tab. 7 which represents the performance of the CLIP model, several key observations can be made.

For both models, the Non-FlyBird results consistently achieve higher accuracy across almost all methods when compared to their FlyBird counterparts. Concretely, average improvements in CUB are +1.31 and +2.02 points, while in NABirds the improvements are +6.92 and +4.08 points.

Further insight can be derived in that there is a big gap in accuracy between Non-FlyBird and FlyBird of NABirds which are +6.92, and +4.08 in vision-only and CLIP, respectively. This is because there are 11.4% FlyBirds images in this dataset, and the accuracy improves by a large margin when removing these images.

5. Conclusion and Future Work

Limitation Our work suggests that including habitat information helps to improve bird recognition but getting correct habitat information for each bird is challenging due to the inherent variability in avian habitat, which may differ between nesting, foraging, and other activities, adding complexity to the task of obtaining precise and comprehensive habitat information. Furthermore, it is essential to develop a novel



Class-wise improvements using CLIP models

Class-wise improvements using vision-only models

Figure 9. Accuracy improvement of the top 20 class-wise for CLIP and vision-only models on CUB are shown in two charts, with colored bars indicating shared habitat groupings. Unique classes to each model without habitat matches are in gray. Eight colors, excluding gray, yellow, and orange, highlight groups challenging for both models. CLIP struggles with yellow-coded birds, and vision-only models with the orange-coded group.

Table 7. The table compares CLIP model performances using different descriptions on CUB’s FlyBird and Non-FlyBird (200 classes) and NABirds (267 classes). Descriptions combine habitat with SSC [3], M&V [26], or PEEB [4]. A notable trend is Non-FlyBird’s consistent outperformance over FlyBird.

		CUB (200 classes)		NABirds (267 classes)	
		FlyBird	Non-FlyBird	FlyBird	Non-FlyBird
ViT-B/32	SSC +Habitat	48.43	53.36 (+4.93)	45.75	51.5 (+5.75)
	M&V +Habitat	49.83	53.88 (+4.05)	45.47	51.16 (+5.69)
	PEEB +Habitat	49.83	53.42 (+3.59)	46.46	51.63 (+5.17)
ViT-B/16	SSC +Habitat	57.67	58.06 (+0.39)	54.11	57.45 (+3.34)
	M&V +Habitat	58.01	58.61 (+0.6)	54.18	58.09 (+3.91)
	PEEB +Habitat	57.49	58.4 (+0.91)	54.82	57.71 (+2.89)
ViT-L/14	SSC +Habitat	64.29	64.52 (+0.23)	62.96	66.41 (+3.45)
	M&V +Habitat	62.37	64.56 (+2.19)	64.09	67.45 (+3.36)
	PEEB +Habitat	63.59	64.90 (+1.31)	64.90	67.43 (+3.19)
Avg Δ		+2.02		+4.08	

methodology that quantifies the respective contributions of the habitat background and the bird’s presence within an image, which may be beneficial for understanding cases where occlusion happens.

Future Work Part-based recognition systems hold promise as a future direction for improving bird recognition. By breaking down a bird’s image into its constituent parts, such as beak, wings, tail, and body, habitat, and recognizing them individually, models can potentially enhance their accuracy and robustness.

Investigating the transferability of models trained with habitat-informed data to new geographic regions and diverse ecosystems also remains an essential aspect of future work.

Conclusion In conclusion, we have demonstrated the pivotal role of habitat information in enhancing the performance of both vision-only models, including Convolutional Neural Networks (CNN) and Vision Transformers (ViT), as well as vision-language models, with particular emphasis on CLIP in the zero-shot setting.

References

- [1] Habitat characteristics supporting bird species richness in mid-field woodlots. *Frontiers*, 2023. **2**
- [2] *Habitat Selection in Birds*, chapter Habitat Selection in Birds. ScienceDirect, 2023. **2**
- [3] All About Birds. All About Birds: Online Bird Guide, 2023. 17 Oct 2023. **1, 3, 4, 6, 7, 8**
- [4] Anonymous. Part-based bird classifiers with an explainable, editable language bottleneck. In *Submitted to The Twelfth International Conference on Learning Representations*, 2023. under review. **4, 6, 7, 8, 3**
- [5] Avian Report. Understanding bird habitats, 2023. Accessed: 2023-11-06. **1**
- [6] Birds & Blooms. Bird watching by habitat, 2023. Accessed: 2023-11-06. **1**
- [7] British Trust for Ornithology. The importance of habitat data, 2023. **2**
- [8] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020. **6, 3**
- [9] Bowen Cheng, Ishan Misra, Alexander G Schwing, Alexander Kirillov, and Rohit Girdhar. Masked-attention mask transformer for universal image segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1290–1299, 2022. **7**
- [10] Grace Chu, Brian Potetz, Weijun Wang, Andrew Howard, Yang Song, Fernando Brucher, Thomas Leung, and Hartwig Adam. Geo-aware networks for fine-grained recognition. In *Proceedings of the IEEE/CVF International Conference on Computer Vision Workshops*, pages 0–0, 2019. **1, 2**
- [11] Cornell Lab of Ornithology. Four keys to bird identification. <https://www.allaboutbirds.org/news/four-keys-to-bird-identification/>, 2023. Accessed: 2023-11-06. **1**
- [12] Qishuai Diao, Yi Jiang, Bin Wen, Jia Sun, and Zehuan Yuan. Metaformer: A unified meta framework for fine-grained recognition. *CoRR*, abs/2203.02751, 2022. **1, 2**
- [13] Jon Donnelly, Alina Jade Barnett, and Chaofan Chen. Deformable protopnet: An interpretable image classifier using deformable prototypes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10265–10275, 2022. **2**
- [14] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021. **2, 3**
- [15] Jianlong Fu, Heliang Zheng, and Tao Mei. Look closer to see better: Recurrent attention convolutional neural network for fine-grained image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4438–4446, 2017. **2**
- [16] Antonio Garcia-Quintas, Amédée Roy, Christophe Barbraud, Hervé Demarcq, Dennis Denis, and Sophie Lanco Bertrand. Machine and deep learning approaches to understand and predict habitat suitability for seabird breeding. *Ecology and Evolution*, 13(9):e10549, 2023. **1**
- [17] Golnaz Ghiasi, Yin Cui, Aravind Srinivas, Rui Qian, Tsung-Yi Lin, Ekin D Cubuk, Quoc V Le, and Barret Zoph. Simple copy-paste is a strong data augmentation method for instance segmentation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2918–2928, 2021. **3**
- [18] Ju He, Jie-Neng Chen, Shuai Liu, Adam Kortylewski, Cheng Yang, Yutong Bai, and Changhu Wang. Transfg: A transformer architecture for fine-grained recognition. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 852–860, 2022. **2, 5, 6, 1**
- [19] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016. **2**
- [20] Xiangteng He and Yuxin Peng. Fine-grained image classification via combining vision and language. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 5994–6002, 2017. **1**
- [21] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*, 2015. **5**
- [22] Tsung-Yu Lin, Aruni RoyChowdhury, and Subhransu Maji. Bilinear cnn models for fine-grained visual recognition. In *Proceedings of the IEEE international conference on computer vision*, pages 1449–1457, 2015. **1, 2**
- [23] Stuart Lloyd. Least squares quantization in pcm. *IEEE transactions on information theory*, 28(2):129–137, 1982. **3**
- [24] Oisín Mac Aodha, Elijah Cole, and Pietro Perona. Presence-only geographical priors for fine-grained image classification. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 9596–9606, 2019. **1, 2**
- [25] M. A. Marini et al. The role of different natural and human-related habitats for the conservation of birds in a high andean lake. *Link Springer*, 2019. **2**
- [26] Sachit Menon and Carl Vondrick. Visual classification via description from large language models. In *The Eleventh International Conference on Learning Representations, ICLR 2023, Kigali, Rwanda, May 1-5, 2023*. OpenReview.net, 2023. **2, 4, 6, 7, 8, 3**
- [27] Meike Nauta, Ron van Bree, and Christin Seifert. Neural prototype trees for interpretable fine-grained image recognition. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14933–14943, 2021. **2**
- [28] Meike Nauta, Annemarie Jutte, Jesper Provoost, and Christin Seifert. This looks like that, because... explaining prototypes for interpretable image recognition. In *Machine Learning and Principles and Practice of Knowledge Discovery in Databases: International Workshops of ECML PKDD 2021*,

- Virtual Event, September 13-17, 2021, Proceedings, Part I*, pages 441–456. Springer, 2022. 2
- [29] OpenAI. Gpt-4 technical report, 2023. 6, 3
- [30] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. *Advances in neural information processing systems*, 32, 2019. 4
- [31] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021. 1, 2, 6
- [32] Mikołaj Sacha, Dawid Rymarczyk, Łukasz Struski, Jacek Tabor, and Bartosz Zieliński. Protoseg: Interpretable semantic segmentation with prototypical parts. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 1481–1492, 2023. 2
- [33] Christoph Schuhmann, Richard Vencu, Romain Beaumont, Robert Kaczmarczyk, Clayton Mullis, Aarush Katta, Theo Coombes, Jenia Jitsev, and Aran Komatsuzaki. Laion-400m: Open dataset of clip-filtered 400 million image-text pairs. *arXiv preprint arXiv:2111.02114*, 2021. 2
- [34] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *Advances in Neural Information Processing Systems*, 35:25278–25294, 2022. 2
- [35] Roman Suvorov, Elizaveta Logacheva, Anton Mashikhin, Anastasia Remizova, Arsenii Ashukha, Aleksei Silvestrov, Naejin Kong, Harshith Goka, Kiwoong Park, and Victor Lempitsky. Resolution-robust large mask inpainting with fourier convolutions. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pages 2149–2159, 2022. 3, 5
- [36] Mohammad Reza Taesiri, Giang Nguyen, and Anh Nguyen. Visual correspondence-based explanations improve ai robustness and human-ai team accuracy. *Advances in Neural Information Processing Systems*, 35:34287–34301, 2022. 2, 3, 5, 6, 1
- [37] Kevin Tang, Manohar Paluri, Li Fei-Fei, Rob Fergus, and Lubomir Bourdev. Improving image classification with location context. In *Proceedings of the IEEE international conference on computer vision*, pages 1008–1016, 2015. 1
- [38] The Cornell Lab. Inside birding: Habitat, 2023. 2
- [39] Grant Van Horn, Elijah Cole, Sara Beery, Kimberly Wilber, Serge Belongie, and Oisín Mac Aodha. Benchmarking representation learning for natural world image collections. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12884–12893, 2021. 4
- [40] Catherine Wah, Steve Branson, Peter Welinder, Pietro Perona, and Serge Belongie. The caltech-ucsd birds-200-2011 dataset. 2011. 1, 7
- [41] Ke Wang, Harshitha Machiraju, Oh-Hyeon Choung, Michael H. Herzog, and Pascal Frossard. CLAD: A contrastive learning based approach for background debiasing. In *33rd British Machine Vision Conference 2022, BMVC 2022, London, UK, November 21-24, 2022*, page 449. BMVA Press, 2022. 2
- [42] Zhaojun Wang, Jiangning Wang, Congtian Lin, Yan Han, Zhaosheng Wang, and Liqiang Ji. Identifying habitat elements from bird images using deep convolutional neural networks. *Animals*, 11(5):1263, 2021. 1, 3
- [43] Kai Yuanqing Xiao, Logan Engstrom, Andrew Ilyas, and Aleksander Madry. Noise or signal: The role of image backgrounds in object recognition. In *9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021*. OpenReview.net, 2021. 1, 2, 3
- [44] Mengqi Xue, Qihan Huang, Haofei Zhang, Lechao Cheng, Jie Song, Minghui Wu, and Mingli Song. Protopformer: Concentrating on prototypical parts in vision transformers for interpretable image recognition. *arXiv preprint arXiv:2208.10431*, 2022. 2
- [45] Ze Yang, Tiange Luo, Dong Wang, Zhiqiang Hu, Jun Gao, and Liwei Wang. Learning to navigate for fine-grained classification. In *Proceedings of the European conference on computer vision (ECCV)*, pages 420–435, 2018. 1, 2
- [46] Lewei Yao, Runhui Huang, Lu Hou, Guansong Lu, Minzhe Niu, Hang Xu, Xiaodan Liang, Zhenguo Li, Xin Jiang, and Chunjing Xu. FILIP: fine-grained interactive language-image pre-training. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net, 2022. 2
- [47] Jiahui Yu, Zirui Wang, Vijay Vasudevan, Legg Yeung, Mojtaba Seyedhosseini, and Yonghui Wu. Coca: Contrastive captioners are image-text foundation models. *Trans. Mach. Learn. Res.*, 2022, 2022. 2
- [48] Heliang Zheng, Jianlong Fu, Tao Mei, and Jiebo Luo. Learning multi-attention convolutional neural network for fine-grained image recognition. In *Proceedings of the IEEE international conference on computer vision*, pages 5209–5217, 2017. 1, 2
- [49] Zhuotun Zhu, Lingxi Xie, and Alan Yuille. Object recognition with and without objects. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence*, page 3609–3615. AAAI Press, 2017. 2

Leveraging Habitat Information for Fine-grained Bird Identification

Supplementary Material

A1. Pretrained models

Sources We download the two pre-trained PyTorch models of ResNet-50, TransFG and three variants of CLIP (ViT/B-32, ViT/B-16, and ViT/L-14) from:

- ResNet-50 [36]: <https://github.com/anguyen8/visual-correspondence-XAI/tree/main/ResNet-50>
- TransFG [18]: <https://github.com/TACJu/TransFG>
- CLIP [31]: <https://github.com/openai/CLIP>

A2. Constructing Additional Data for Training vision-only Models

A2.1. Constructing Habitat Groups

In our study, we implement a text clustering algorithm to analyze and group birds based on habitat descriptions (see Fig. A1).

The algorithm begins by loading the textual descriptors, which are then transformed into a vector space using TF-IDF vectorization, excluding common English stop words for better feature representation.

To determine the optimal number of clusters for k-means, we iteratively compute the silhouette scores for different cluster counts, selecting the cluster number that yields the highest score as the most suitable for our data. With the optimal number of clusters established, we perform k-means clustering and categorize the descriptions accordingly. Each cluster is then mapped back to the corresponding bird classes, resulting in a collection of class clusters.

As detailed in Section 3.1, identifying bird groups based on habitats facilitates both Mixed-Group and Mixed-Irrelevant data augmentation processes. This categorization also enables a more nuanced analysis of class-wise accuracy between CLIP and unimodal models, which is further explored in Section 4.3.

For the CUB dataset, we organize 200 classes into 50 groups, whereas for the NABirds dataset, 555 classes were clustered into 196 groups.

A2.2. Example of Bird Groups and their corresponding habitat descriptions

The group containing the `Black-footed Albatross`, `Heerman Gull`, and `Elegant Tern`, usually prefers far offshore or sandy island (see Fig. A3 at row 1).

- **Black-footed Albatross:** Nests on low, sandy islands in the tropical North Pacific. Forages both near shore (though usually not within sight of land) and far offshore, in places where upwelling or converging currents concentrate nutrients and prey at the sea surface.
- **Heerman Gull:** Nests on rocky islands, mostly in the Gulf of California. Forages in ocean waters, usually within sight of land, often with terns, pelicans, cormorants, boobies, and sea lions. Also forages along beaches and in sheltered harbors and estuaries. Very rare inland.
- **Elegant Tern:** Nests on beaches and sandy islands. Forages close to the shore over ocean waters, where currents and upwelling concentrate prey (northern anchovy in particular). Usually forages within 10 miles of land, and often within sight of land.

Group containing the `Mallard`, `Seaside Sparrow`, `Barn Swallow`, and `Black Tern`, their hangouts usually are ponds, fresh and saltwater marshes (see Fig. A3 at row 3).

- **Mallard:** Mallards can live in almost any wetland habitat, natural or artificial. Look for them on lakes, ponds, marshes, rivers, and coastal habitats, as well as city and suburban parks and residential backyards.
- **Seaside Sparrow:** Salt marshes, including brackish marshes and (in the Everglades) freshwater marshes.
- **Barn Swallow:** You can find the adaptable Barn Swallow feeding in open habitats from fields, parks, and roadway edges to marshes, meadows, ponds, and coastal waters. Their nests are often easy to spot under the eaves or inside of sheds, barns,

```

# %%
import numpy as np
from sklearn.feature_extraction.text import TfidfVectorizer
from sklearn.cluster import KMeans
from sklearn.metrics import silhouette_score
import json

# load habitat descriptions
# The file contains a dict {class_1: {habitat_1}, ..., class_N: {habitat_N}}
description_path = "habitat_descriptors.json"
f = open(description_path, 'r')
class2docs = json.load(f)

# Reverse the dictionary to {habitat_1: {class_1}, ..., habitat_2:{class_N}}
docs2classes = {v:k for k, v in class2docs.items()}

# Get all the habitat descriptions to do clustering
documents = [v for v in class2docs.values()]

# Step 1: Vectorize the documents
vectorizer = TfidfVectorizer(stop_words='english')
X = vectorizer.fit_transform(documents)

# Step 2: Determine the optimal number of clusters (K) using silhouette score
max_clusters = 25 # Set a reasonable maximum number of clusters to consider
best_score = -1
best_k = 5
for k in range(2, max_clusters + 1):
    kmeans = KMeans(n_clusters=k, random_state=42)
    cluster_labels = kmeans.fit_predict(X)
    silhouette_avg = silhouette_score(X, cluster_labels)
    print(f"For k={k}, silhouette score: {silhouette_avg:.4f}")
    if silhouette_avg > best_score:
        best_score = silhouette_avg
        best_k = k

print(f"Best number of clusters: {best_k}")

# Step 3: Perform K-Means clustering with the optimal number of clusters
kmeans = KMeans(n_clusters=best_k, random_state=42)
cluster_labels = kmeans.fit_predict(X)

# Step 4: Print the clusters and their documents
clusters = {}
for doc, label in zip(documents, cluster_labels):
    if label not in clusters:
        clusters[label] = [doc]
    else:
        clusters[label].append(doc)

# Finally, each class will be assigned to a cluster index
class_clusters = []
for cluster_id, docs in clusters.items():
    print(f"Cluster {cluster_id + 1}:")
    classes = []
    for doc in docs:
        classes.append(docs2classes[doc])
    class_clusters.append(classes)

print("Length of Clusters: ", len(clusters.items()))

```

Figure A1. The algorithm used in this study to cluster bird species into groups based on their habitat settings.

bridges and other structures.

- **Black Tern:** Nests in freshwater marshes and bogs; winters in coastal lagoons, marshes, and open ocean waters. Migrants may stop over in almost any type of wetland.

A2.3. Augmenting additional data

The core aspect of our proposed augmentation technique involves cropping birds from their original images and superimposing them onto various backgrounds, a process detailed in Algorithm 1.

Algorithm 1 Pseudo code for combining a habitat image with a specific bird.

```

1: Input: habitat_img, only_bird_img, mask.
2:   habitat_img: an image after cropping the bird and inpainting the missing regions using LaMa [35].
3:   only_bird_img: an image of a bird with a black background (bird only).
4:   mask: binary mask of the bird in the only_bird_img.
5:   habitat_masked: binary mask of habitat image.
6:   combined_img: Combined image between the habitat_img and the bird in only_bird_img.
7: Output: combined_img
8: habitat_masked ← round(habitat_img × (1 − mask))
9: img_combined ← black_img + habitat_masked
10: Return: combined_img

```

Mixed-Same We implement a random alteration of the bird’s background while ensuring that it remains within the same class as the original.

Mixed-Group Under this scenario, the background for a bird is carefully chosen from its own bird group. This selection process is elaborated in Section A2.2.

Mixed-Irrelevant In the Mixed-Irrelevant case, the bird’s background is randomly selected from groups that are irrelevant or unrelated to the bird’s original group.

Having established the sources of the habitat images, we can readily apply Algorithm 1 to generate additional data.

A3. Descriptions Types in CLIP

Visual descriptions The visual descriptions used in this study were obtained from three sources:

- **M&V** [26] utilizes GPT-3 [8] to generate visual descriptions of birds. For instance, the class `Ovenbird` has descriptions:

```

Ovenbird: {
  It is a small, sparrow-like bird,
  It is brown or grey with streaks on its breast,
  It has a white belly,
  It has a black stripe on its head,
  It has a long, curved beak,
  It has dark eyes,
  It has long legs
}

```

- **PEEB** [4] leverages GPT-4 [29] to generate descriptions of twelve distinct parts of birds including wings, tail, eyes, back, forehead, nape, crown, leg, breast, throat, belly, beak. For instance, the class `Orange-crowned Warbler` has descriptions:

```

Orange-crowned Warbler: {
  back: olivegreen with darker streaks,
  beak: small and pointed,
  belly: pale yellowishgreen,
  breast: pale yellowishgreen with faint streaks,
  crown: dull olivegreen,
  forehead: dull olivegreen,
  eyes: dark brown,
  legs: dark grayishbrown,
  wings: olivegreen with two pale wing bars,
  nape: olivegreen with faint streaks,
}

```

```
tail: brownishgray with white outer feathers ,
throat: pale yellowishgreen with faint streaks
}
```

- **Shape, Size, and Color (SSC)** [3] descriptions are human-annotated descriptions and are available on the allaboutbirds.org. For instance, the class `Chestnut-sided Warbler` has descriptions:

```
Chestnut-sided Warbler: {
shape: An slim warbler with a relatively long tail that it often holds cocked ,
or raised above the body line , which makes the tail appear longer still ,
size: Larger than a Ruby-crowned Kinglet , smaller than a Song Sparrow
sparrow-sized or smaller ,
color: Breeding adults are crisp gray-and-white birds with a yellow crown ,
black face markings , and rich chestnut flanks . Males are more richly marked than
females . In nonbreeding plumage , adults and immatures are bright lime-green
above with a neat white eyering , two wingbars , and pale gray to white underparts
}
```

Habitat descriptions Additionally, habitat descriptions were also sourced from allaboutbirds.org[3]. For instance: The class `Red-headed Woodpecker` has habitat description:

```
Red-headed Woodpeckers: {
Red-headed Woodpeckers live in pine savannahs and other open forests with clear
understories . Open pine plantations , treerows in agricultural areas , and standing
timber in beaver swamps and other wetlands all attract Red-headed Woodpeckers
}
```

Or, The class `Cactus Wren` has habitat description:

```
Cactus Wren: {
Cactus Wrens live in deserts , arid foothills , coastal sage scrub , and urban areas
throughout the Southwestern deserts , especially in areas with thorny shrubs , cholla ,
and prickly pear
}
```

A3.1. Differentiating Habitats of Visually Similar Birds

Fig. A2 shows 6 pairs of birds where birds in each pair are visually similar but they have different habitat hangouts.



Figure A2. Comparative visual analysis of two bird species pairs, each exhibiting similar morphology yet distinct habitats. For example, the Swamp Sparrow (a) resides in swamps, contrasted with the Chipping Sparrow (b) which favors the common backyard. On the right, the Red-tailed Hawk (c) is adapted to mountains, whereas the Red-shoulder Hawk (d) is typically found near rivers.

Group 1: "Black-footed Albatross", "Heermann Gull", "Elegant Tern"

Preferred Habitat: far offshore, sandy island.



Group 2: "Black-throated Sparrow", "Common Raven", "Green-tailed Towhee"

Preferred Habitat: scrubby areas, desert scrub.



Group 3: "Mallard", "Seaside Sparrow", "Barn Swallow", "Black Tern"

Preferred Habitat: ponds, fresh and salt water marshes



Group 4: "White-necked Raven", "Geococcyx", "Sage Thrasher", "Rock Wren"

Preferred Habitat: Desert regions.



Group 5: "American Crow", "Fish Crow", "American Goldfinch", "Ring-billed Gull"

Preferred Habitat: agricultural fields, roadsides.



Group 6: "Brown Creeper", "Whip-poor-Will", "Scarlet Tanager", "Red-eyed Vireo", "Black-and-white Warbler", "Black-throated-Blue Warbler"

Preferred Habitat: deciduous forests.



Group 7: "Gray-crowned-Rosy Finch", "Pigeon Guillemot", "Glaucous-winged Gull", "Ivory Gull", "Slaty-backed Gull", "Western Gull"

Preferred Habitat: cliffs, ice field, maritime location.



Figure A3. Seven Bird Species Groups - Each group consists of birds sharing a common habitat. For example, the 7th group includes Gray-crowned-Rosy Finch, Pigeon Guillemot, Glaucous-winged Gull, Ivory Gull, Slaty-backed Gull, and Western Gull, they all prefer cliffs, mountains or beaches.