

PIXEL-LEVEL CHANGE DETECTION PSEUDO-LABEL LEARNING FOR REMOTE SENSING CHANGE CAPTIONING

Chenyang Liu¹, Keyan Chen¹, Zipeng Qi¹, Zili Liu¹, Haotian Zhang¹, Zhengxia Zou², Zhenwei Shi^{1,*}

¹Image Processing Center, School of Astronautics, Beihang University

²Department of Guidance, Navigation and Control, School of Astronautics, Beihang University

ABSTRACT

The existing Remote Sensing Image Change Captioning (RS-ICC) methods perform well in simple scenes but exhibit poorer performance in complex scenes. This limitation is primarily attributed to the model’s constrained visual ability to distinguish and locate changes. Acknowledging the inherent correlation between change detection (CD) and RSICC tasks, we believe pixel-level CD is significant for describing the differences between images through language. Regrettably, the current RSICC dataset lacks readily available pixel-level CD labels. To address this deficiency, we leverage a model trained on existing CD datasets to derive CD pseudo-labels. We propose an innovative network with an auxiliary CD branch, supervised by pseudo-labels. Furthermore, a semantic fusion augment (SFA) module is proposed to fuse the feature information extracted by the CD branch, thereby facilitating the nuanced description of changes. Experiments demonstrate that our method achieves state-of-the-art performance and validate that learning pixel-level CD pseudo-labels significantly contributes to change captioning.

Index Terms— Change captioning, change detection, pseudo-label learning

1. INTRODUCTION

Remote sensing image (RSI) change interpretation technology [1, 2], such as change detection and change captioning, has played a pivotal role in providing valuable insights into environmental changes, urban development, and disaster monitoring [3–5]. The RSI change captioning (CC) aiming to generate linguistic information describing changes has emerged as a promising avenue for enhancing the interpretability and communicative capacity of RSI.

The existing RSICC methods predominantly adopt the encoder-decoder architecture [6–9]. Pioneering efforts by Chouaf and Hoxha *et al.* [10, 11] delved into the RSICC task,

employing CNN-based visual encoders for bi-temporal image feature extraction and RNN-based decoders for the sequential generation of words. Extending the RSICC landscape, Liu *et al.* [12] proposed a large LEVIR-CC dataset and the RSICCformer model, leveraging a dual-branch Transformer to enhance bi-temporal features and highlight the changes of interest. Addressing the multi-scale challenge, PSNet [13] extracts multi-scale features by combining progressive difference perception layers and scale-aware enhancement modules. Chang *et al.* [14] proposed an attentive encoder comprising hierarchical self-attention blocks and a residual block to extract visual embeddings. PromptCC [15] efficiently utilizes a large language model as a language generator through a multi-prompt learning strategy determined by a coarse change classifier.

Despite significant advancements, current RSICC methods face challenges in achieving robust performance, especially when confronted with scenarios characterized by subtle alterations in building structures, adverse lighting conditions, and low-contrast images. The degradation in performance can be largely attributed to the model’s constrained visual capabilities, which hampers its ability to identify relevant changes while disregarding irrelevant ones accurately. Given the persistence of these challenges, it becomes imperative to explore innovative strategies that can improve the performance of RS-ICC models.

Acknowledging the intrinsic connection between change detection (CD) and RSICC, we propose that integrating pixel-level CD outcomes holds substantial promise. Pixel-level CD entails the meticulous identification and precise localization of changes at the pixel level, offering invaluable insights for generating nuanced and precise descriptions of differences between images. However, a significant impediment to realizing this potential lies in the absence of pixel-level CD labels within the current RSICC dataset.

In this paper, to bridge this crucial gap, we propose to leverage a model pre-trained on existing CD datasets to derive Change masks as our CD pseudo-labels. Then we propose a novel RSICC network with an auxiliary CD branch supervised by pseudo-labels. This pseudo-labeling strategy serves as a stepping stone toward enhancing the model’s capability to perceive changes accurately, particularly in scenes where previous RSICC methods encounter difficulties. Further-

The work was supported by the National Key Research and Development Program of China (Grant No. 2022ZD0160401), the National Natural Science Foundation of China under Grants 62125102 and 623B2013, the Beijing Natural Science Foundation under Grant JL23005, and the Fundamental Research Funds for the Central Universities. *Corresponding author: Zhenwei Shi (e-mail: shizhenwei@buaa.edu.cn).

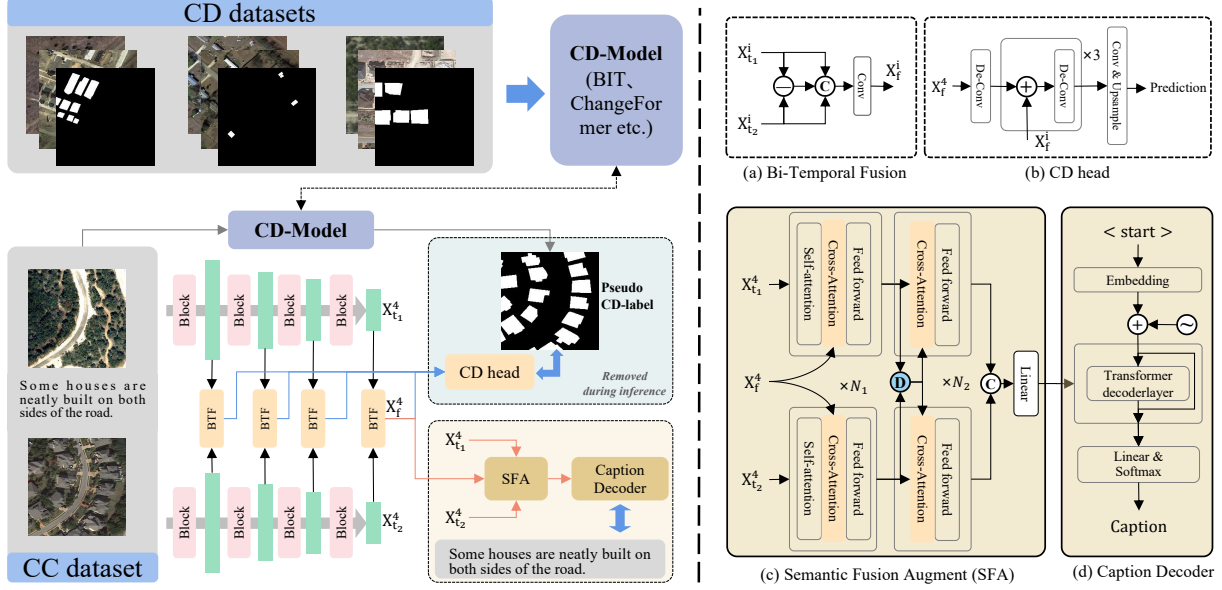


Fig. 1. Illustration of our Pix4cap method. **Left:** the overview of our model. The model comprises two branches: change captioning and auxiliary change detection. The SFA module acts as a pivotal bridge between the two branches. **Right:** the structure of some important modules.

more, we present a Semantic Fusion Augment (SFA) module to seamlessly integrate feature information from the CD branch into the caption branch. Experiments demonstrate that our proposed method achieves state-of-the-art performance, underscoring the efficacy of CD pseudo-label learning as a viable enhancement strategy for the RSICC task.

2. METHODOLOGY

2.1. Overview

Fig. 1 illustrates the overall structure of our proposed Pix4Cap (Pixel change detection for change Captioning). Pix4Cap comprises two branches dedicated to CD and RSICC, respectively. In the proposed Pix4Cap model, the SFA module acts as a pivotal bridge, facilitating the integration of features extracted by the auxiliary CD branch into the RSICC branch and contributing to the generation of change captions. Besides, the auxiliary CD branch is supervised by the pseudo-labels generated by the pre-trained CD models, such as BIT [16] and ChangeFormer [17].

2.2. Change Detection Branch

The architecture of the CD branch mirrors that of UNet. Bi-temporal images serve as inputs to the backbone network, yielding four-scale bi-temporal features $X_{t_1}^i, X_{t_2}^i$ ($i=1,2,3,4$). Subsequently, the bi-temporal fusion (BTF) module processes these features alongside their differential features to highlight changes of interest. The CD head then predicts the change map by progressively decoding multi-level features from the

BTF module. The structure of the BTF module and CD head are illustrated in Fig. 1 (a) and (b). For the multi-level bi-temporal features $X_{t_1}^i$ and $X_{t_2}^i$ extracted by the backbone, the processing of the BTF module can be expressed as:

$$\Phi_{\text{BTF}}(X_{t_1}^i, X_{t_2}^i) = \text{Conv}(\text{Concat}([X_{t_1}^i, X_{t_2}^i, X_d^i])) \quad (1)$$

$$X_d^i = X_{t_2}^i - X_{t_1}^i \quad (2)$$

In the CD head, through deconvolution, the multi-level features X_f^i are progressively integrated from bottom to top, generating accurate change masks.

2.3. Change Caption Branch

We anticipate that the CD branch will enhance the visual perception capability of the backbone, and the features from the BTF module serving as the neck of the CD branch can provide valuable supplementary information for the change captioning. To this end, we propose an SFA module based on the multi-head cross attention mechanism to seamlessly integrate the feature X_f^4 from the last BTF module into the RSICC branch, as illustrated in Fig. 1 (c), where D represents the following process:

$$X_{dif} = W(X_{t_2} - X_{t_1}) + b + \text{Cos}(X_{t_1}, X_{t_2}) \quad (3)$$

where W and b denote the projection matrix and bias of a linear layer, and Cos represents the operation of calculating cosine similarity. The subtraction operation and cosine similarity operation are used to measure the similarity between bi-temporal features from different perspectives. We believe this helps locate changed areas and capture distinctive features revealing changes of interest. For the input query X_q and X_c

that needs to be integrated, the multi-head cross attention can be formulated as follows:

$$\Phi_{\text{MCA}}(Q, K, V) = \text{Concat}(h_1; \dots; h_n)W^o \quad (4)$$

$$h_i = \text{Att}(X_qW_i^Q, X_cW_i^K, X_cW_j^V) \quad (5)$$

$$\Phi_{\text{Att}}(Q_i, K_i, V_i) = \text{Softmax}\left(\frac{Q_iK_i^T}{\sqrt{d}}\right)V_i \quad (6)$$

where $W_i^Q \in R^{C \times d}$, $W_i^K \in R^{C \times d}$, $W_i^V \in R^{C \times d}$, and $W^o \in R^{hd \times C}$ are learnable parameter matrices, d is the scaling factor, n is the number of heads.

Following the SFA module, we employ a Transformer decoder with a residual connection as the caption generator. This decoder utilizes visual embeddings to generate accurate and detailed sentences describing changes between images.

3. EXPERIMENTS

3.1. Experimental Setup

Quantitative Results: We conduct experiments on the LEVIR-CC dataset [12], a large RSICC dataset with 10077 image pairs. Among these, 5038 image pairs are changed, while 5039 image pairs are unchanged. Each image pair of the dataset has five annotated captions, totaling 50,385 descriptive captions, describing diverse ground surface transformations like buildings, roads, and vegetation.

Loss Function: The model parameters are updated in a supervised learning framework during the training phase. The cross-entropy loss function is used to compute both CD loss and caption loss as follows:

$$\mathcal{L}_{det} = -\frac{1}{N} \sum_{n=1}^N \sum_{j=1}^C y_n^{(j)} \log(p_n^{(j)}) \quad (7)$$

where C is the number of classes. N are the number of the change mask pixels. $\mathbf{p}_n = [p_n^{(0)}, \dots, p_{cls}^{(C)}]$ is the predicted probability vector. $\mathbf{y}_n = [y_n^{(0)}, \dots, y_n^{(C)}]$ is the one-hot vector of the ground-truth.

$$\mathcal{L}_{cap} = -\sum_{t=1}^L \sum_{v=1}^V \tilde{y}_t^{(v)} \log p_t^{(v)} \quad (8)$$

where $\mathbf{p}_t = [p_t^{(1)}, p_t^{(2)}, \dots, p_t^{(V)}]$ is the probability for predicting the t -th word. $\mathbf{y}_t = [y_t^{(1)}, y_t^{(2)}, \dots, y_t^{(V)}]$ is the t -th ground-truth word embedding. V is the vocabulary size, and L is the caption length.

Mathematically, the final total loss is as follows:

$$\mathcal{L}_{total} = \mathcal{L}_{det} + \mathcal{L}_{cap} \quad (9)$$

Training Details: The pre-trained BIT model [16] is utilized to generate CD pseudo-labels for each image pair of the LEVIR-CC dataset. ResNet32 is employed as the backbone

to extract visual features. Our model is implemented on PyTorch and trained using a single NVIDIA RTX 4090 GPU. During the training stage, we minimized the two losses and optimized the model parameters using the Adam optimizer.

Evaluation Metrics: Following previous change captioning works [10–12], for the evaluation of generated captions, we use metrics including BLEU-N (N=1,2,3,4), ROUGE_L, METEOR, CIDEr, and S_m^* [20] to quantitatively evaluate the quality of the generated sentences.

3.2. Comparison with the State-of-the-Art

We conduct ablation experiments and report the quantitative comparison results between our method and previous RSICC methods, including four LSTM-based methods (Capt-Rep-Diff [18], Capt-Att [18], Capt-Dual-Att [18], DUDA [18]) and four Transformer-based methods (MCCFormers-S [19], MCCFormers-D [19], RSICCFormer [12], PSNet [13]).

The experimental results are shown in Table 1. To confirm the effectiveness of CD pseudo-label learning, we set a baseline, which removes the CD branch and the first cross-attention operation of the SFA module. The ablation result verifies that CD pseudo-label learning can effectively improve the model performance on generating accurate captions, resulting in a 1.22% improvement on the S_m^* metric, establishing a new state-of-the-art (SOTA) performance. Additionally, we can see that our Pix4Cap model achieves SOTA performance and outperforms previous methods. Although the CD model only outputs pseudo-labels of changed buildings, this has significantly enhanced the model’s performance. We believe that exploring the use of multi-class object CD pseudo-labels in the future will lead to even greater performance improvements in change captioning.

3.3. Quantitative Results


Fig. 2 shows two examples of captions generated by our method. Despite illumination changes and low contrast between buildings and the surrounding environment, our method can accurately distinguish changes of interest and describe the changed object category, their spatial positions, and the relationship between the objects.

4. CONCLUSION

This paper addresses the significant challenge of weak change recognition in current RSICC techniques, particularly in complex scenes. To overcome this obstacle, we leverage a pre-trained CD model to generate CD pseudo-labels for image pairs in the RSICC dataset. We propose the innovative Pix4Cap model, featuring an auxiliary CD branch supervised by pseudo-labels and a seamlessly integrated SFA module. Our approach ensures the effective integration of pixel-level CD information into the RSICC branch. The experiments validate the effectiveness of learning CD pseudo-labels in improving overall RSICC performance.

Table 1. Comparisons experiments on the LEVIR-CC dataset, where the bolded results are the best.

Method	BLEU-1	BLEU-2	BLEU-3	BLEU-4	METEOR	ROUGE _L	CIDEr	S_m^*
Capt-Rep-Diff [18]	72.90	61.98	53.62	47.41	34.47	65.64	110.57	64.52
Capt-Att [18]	77.64	67.40	59.24	53.15	36.58	69.73	121.22	70.17
Capt-Dual-Att [18]	79.51	70.57	63.23	57.46	36.56	70.69	124.42	72.28
DUDA [18]	81.44	72.22	64.24	57.79	37.15	71.04	124.32	72.58
MCCFormer-S [19]	79.90	70.26	62.68	56.68	36.17	69.46	120.39	70.68
MCCFormer-D [19]	80.42	70.87	62.86	56.38	37.29	70.32	124.44	72.11
RSICCFFormer [12]	84.72	76.27	68.87	62.77	39.61	74.12	134.12	77.65
PSNet [13]	83.86	75.13	67.89	62.11	38.80	73.60	132.62	76.78
Baseline	84.87	76.38	69.15	63.25	39.47	74.08	133.96	77.69
Pix4Cap	85.56	77.08	69.79	63.78	39.96	75.12	136.76	78.91

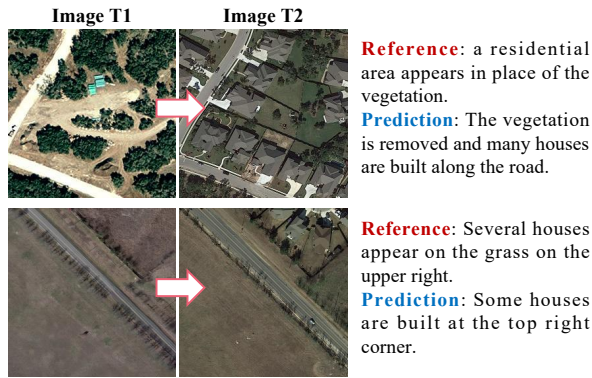**Fig. 2.** The comparison between one of five reference captions and the caption generated by our model.

References

- [1] D. Peng, L. Bruzzone, Y. Zhang, H. Guan, H. Ding, and X. Huang, "Semidnet: A semisupervised convolutional neural network for change detection in high resolution remote-sensing images," *IEEE Transactions on Geoscience and Remote Sensing*, pp. 1–16, 2020.
- [2] Haotian Zhang, Hao Chen, Chenyao Zhou, Keyan Chen, Chenyang Liu, Zhengxia Zou, and Zhenwei Shi, "Bifa: Remote sensing image change detection with bitemporal feature alignment," *IEEE Transactions on Geoscience and Remote Sensing*, 2024.
- [3] Keyan Chen, Zhengxia Zou, and Zhenwei Shi, "Building extraction from remote sensing images with sparse token transformers," *Remote Sensing*, vol. 13, no. 21, pp. 4441, 2021.
- [4] Keyan Chen, Chenyang Liu, Hao Chen, Haotian Zhang, Wenyuan Li, Zhengxia Zou, and Zhenwei Shi, "Rsprompter: Learning to prompt for remote sensing instance segmentation based on visual foundation model," *IEEE Transactions on Geoscience and Remote Sensing*, 2024.
- [5] Zipeng Qi, Hao Chen, Chenyang Liu, Zhenwei Shi, and Zhengxia Zou, "Implicit ray-transformers for multi-view remote sensing image segmentation," *IEEE Transactions on Geoscience and Remote Sensing*, 2023.
- [6] Qimin Cheng, Haiyan Huang, Yuan Xu, Yuzhuo Zhou, Huanying Li, and Zhongyuan Wang, "Nwpu-captions dataset and mlca-net for remote sensing image captioning," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1–19, 2022.
- [7] Xiutiao Ye, Shuang Wang, Yu Gu, Jihui Wang, Ruixuan Wang, Biao Hou, Fausto Giunchiglia, and Licheng Jiao, "A joint-training two-stage method for remote sensing image captioning," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1–16, 2022.
- [8] Chenyang Liu, Rui Zhao, and Zhenwei Shi, "Remote sensing image captioning based on multi-layer aggregated transformer," *IEEE Geoscience and Remote Sensing Letters*, pp. 1–1, 2022.
- [9] Chenyang Liu, Keyan Chen, Haotian Zhang, Zipeng Qi, Zhengxia Zou, and Zhenwei Shi, "Change-agent: Towards interactive comprehensive change interpretation and analysis from change detection and change captioning," *arXiv preprint arXiv:2403.19646*, 2024.
- [10] Seloua Chouaf, Genc Hoxha, Youcef Smara, and Farid Melgani, "Captioning changes in bi-temporal remote sensing images," in *2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS*, 2021, pp. 2891–2894.
- [11] Genc Hoxha, Seloua Chouaf, Farid Melgani, and Youcef Smara, "Change captioning: A new paradigm for multitemporal remote sensing image analysis," *IEEE Transactions on Geoscience and Remote Sensing*, pp. 1–1, 2022.
- [12] Chenyang Liu, Rui Zhao, Hao Chen, Zhengxia Zou, and Zhenwei Shi, "Remote sensing image change captioning with dual-branch transformers: A new method and a large scale dataset," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1–20, 2022.
- [13] Chenyang Liu, Jiajun Yang, Zipeng Qi, Zhengxia Zou, and Zhenwei Shi, "Progressive scale-aware network for remote sensing image change captioning," in *IGARSS 2023 - 2023 IEEE International Geoscience and Remote Sensing Symposium*, 2023, pp. 6668–6671.
- [14] Shizhen Chang and Pedram Ghamisi, "Changes to captions: An attentive network for remote sensing change captioning," *IEEE Trans. Image Process.*, 2023.
- [15] Chenyang Liu, Rui Zhao, Jianqi Chen, Zipeng Qi, Zhengxia Zou, and Zhenwei Shi, "A decoupling paradigm with prompt learning for remote sensing image change captioning," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 61, pp. 1–18, 2023.
- [16] Hao Chen, Zipeng Qi, and Zhenwei Shi, "Remote sensing image change detection with transformers," *IEEE Transactions on Geoscience and Remote Sensing*, 2021.
- [17] Wele Gedara Chaminda Bandara and Vishal M Patel, "A transformer-based siamese network for change detection," in *IGARSS 2022-2022 IEEE International Geoscience and Remote Sensing Symposium*. IEEE, 2022, pp. 207–210.
- [18] Dong Huk Park, Trevor Darrell, and Anna Rohrbach, "Robust change captioning," in *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, 2019, pp. 4623–4632.
- [19] Yue Qiu, Shintaro Yamamoto, Kodai Nakashima, Ryota Suzuki, Kenji Iwata, Hirokatsu Kataoka, and Yutaka Satoh, "Describing and localizing multiple changes with transformers," in *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, 2021, pp. 1951–1960.
- [20] Zhengyuan Zhang, Wenkai Zhang, Menglong Yan, Xin Gao, Kun Fu, and Xian Sun, "Global visual feature and linguistic state guided attention for remote sensing image captioning," *IEEE Transactions on Geoscience and Remote Sensing*, vol. 60, pp. 1–16, 2022.