
PROGRESSIVE KNOWLEDGE DISTILLATION OF *Stable Diffusion XL* USING LAYER LEVEL LOSS

TECHNICAL REPORT

Yatharth Gupta*
Segmind
yatharthg@segmind.com

Vishnu V. Jaddipal*
Segmind
vishnuj@segmind.com

Harish Prabhala
Segmind
harish@segmind.com

Sayak Paul
Hugging Face
sayak@huggingface.co

Patrick Von Platen
Hugging Face
patrick@huggingface.co

ABSTRACT

Stable Diffusion XL (SDXL) has become the best open source text-to-image model (T2I) for its versatility and top-notch image quality. Efficiently addressing the computational demands of SDXL models is crucial for wider reach and applicability. In this work, we introduce two scaled-down variants, Segmind Stable Diffusion (SSD-1B) and Segmind-Vega, with 1.3B and 0.74B parameter UNets, respectively, achieved through progressive removal using layer-level losses focusing on reducing the model size while preserving generative quality. We release these models weights at <https://hf.co/Segmind>.

Our methodology involves the elimination of residual networks and transformer blocks from the U-Net structure of SDXL, resulting in significant reductions in parameters, and latency. Our compact models effectively emulate the original SDXL by capitalizing on transferred knowledge, achieving competitive results against larger multi-billion parameter SDXL.

Our work underscores the efficacy of knowledge distillation coupled with layer-level losses in reducing model size while preserving the high-quality generative capabilities of SDXL, thus facilitating more accessible deployment in resource-constrained environments.

1 Introduction

Stable Diffusion (Rombach et al., 2022) has emerged as highly influential in the realm of text-to-image (T2I) synthesis, playing a pivotal role as an open-source framework. Its remarkable capabilities has spurred its integration as a backbone in various text-guided vision applications. Stable Diffusion, characterized as T2I-specialized latent diffusion models (LDMs), leverages diffusion operations within a semantically compressed space, enhancing computational efficiency. Central to the architecture of Stable Diffusion is a U-Net that employs iterative sampling to progressively denoise a random latent code. This process is further supported by a text encoder and an image decoder, orchestrating the generation of text-aligned images. SDXL (Podell et al., 2023) is the largest variant with a 2.6B Parameter UNet and two text encoders, providing the best quality among open source models.

Notably, distillation techniques have been applied to pretrained diffusion models to curtail the number of denoising steps, resulting in identically structured models with reduced sampling requirements. Additionally, methods such as post-training quantization and implementation optimizations have been explored. The exploration of removing architectural elements in large diffusion models has also been investigated for the base U-Net models (Kim et al., 2023). In this context, our work endeavors to apply knowledge distillation methods to the SDXL model (Podell et al., 2023), resulting in the creation of two streamlined variants, namely Segmind Stable Diffusion (SSD-1B) and Segmind-Vega. We use the base model as well as finetuned versions in the distillation process. These models, with 1.3B and 0.74B

*Equal Contribution

parameter UNets respectively, employ layer level losses to progressively reduce the model size to 20%, 40%, 50%, 60%, and ultimately 70%. This reduction in model size aims to strike a balance between computational efficiency and the preservation of generative capabilities, making SDXL more accessible for diverse applications.

2 Related Work

2.1 Large Latent Diffusion Models

The exploration of diffusion-based generative models has been instrumental in achieving high-fidelity synthesis with broad mode coverage by gradually removing noise from corrupted data. The integration of these models with pretrained language models has notably enhanced the quality of text-to-image (T2I) synthesis. In models such as Imagen (Saharia et al., 2022) and DeepFloyd IF (Shonenkov et al., 2023), text-conditional diffusion models generate small images, subsequently upsampled through super-resolution modules. DALL·E (Ramesh et al., 2021) style models, on the other hand, employ a text-conditional prior network to produce an image embedding, transformed via a diffusion decoder and further upscaled into higher resolutions. LDMs perform diffusion modeling in a low-dimensional latent space constructed through a pixel-space autoencoder.

2.2 Efficient Diffusion Models

Efforts to address the slow sampling process in diffusion models have been widespread. Diffusion-tailored distillation progressively transfers knowledge from a pretrained diffusion model to a model with fewer sampling steps while maintaining the same architecture. Latent Consistency Models (Luo et al., 2023a) also allow the models to generate images in very few steps. Combining this with Low Rank Adapters (LoRAs) (Luo et al., 2023b) provides a very easy way of enabling fast generation with large models. Fast high-order solvers for diffusion ordinary differential equations aim to boost sampling speed. In complement to these approaches, our network compression method reduces per-step computation and seamlessly integrates with models employing fewer sampling steps. Leveraging quantization and implementation optimizations designed for SDXL can further enhance the efficiency of our compact models.

2.3 Distillation-Based Compression

Knowledge Distillation (KD) has been successful in improving the performance of small-size models by exploiting output-level and feature-level information from larger source models. While classical KD has found applications in efficient GANs, and Stable Diffusion Base model. Our work demonstrates the extension of distillation pretraining techniques, proven successful in small yet capable general-purpose language models and vision transformers, to SDXL.

2.3.1 Concurrent Studies

Studies such as SnapFusion (Li et al., 2023) achieve an efficient U-Net for Stable Diffusion through architecture evolution and step distillation. Wuerstchen (Pernias et al., 2023) introduces two diffusion processes on low- and high-resolution latent spaces for economic training. While these works are valuable, it is essential to note that they often require significantly larger computational resources than our proposed approach. Additionally, As demonstrated on Stable Diffusion, BK-SDM proposes pruning the UNet via removal of blocks, showcasing promising compression.

This work uses the technique of classical architectural compression in achieving smaller and faster diffusion models. The approach involves the removal of multiple transformer layers from the U-Net of SDXL, followed by retraining with feature-level knowledge distillation for general-purpose T2I. The contributions of this study are summarized as follows:

- **Architectural Compression:** We compress SDXL by strategically removing architectural blocks from the U-Net, resulting in a notable reduction in model size (up to 70%) and increased inference speeds (up to 100% speedup).
- **Feature Distillation:** We use feature distillation for training diffusion models, demonstrating its remarkable benefits in achieving competitive T2I performance with significantly fewer resources. The cost-effectiveness of network compression is emphasized, particularly when compared to the substantial expense of training diffusion models from scratch.
- **Downstream benefits:** The method, to an extent preserves fidelity of generation with different LoRA and Controlnet networks, thus requiring less training to be used on the distilled model.

In summary, this research explores classical architectural compression for SDXL, providing a cost-effective strategy for building compact general-purpose diffusion models with compelling performance.

3 Methodology

In our pursuit of compressing SDXL models, we adopt a nuanced approach that centers on the removal of transformer layers within attention blocks. Our observation reveals a redundancy in numerous blocks, and our strategy involves judicious elimination without compromising the model’s generative prowess. We draw inspiration from the architectural compression techniques applied to Stable Diffusion v1.5’s ² U-Net and extend the methodology to SDXL, yielding two scaled-down variants: Segmind Stable Diffusion (SSD-1B) and Segmind-Vega.

3.1 Architecture

Our compression strategy is motivated by the recognition that certain layers are dispensable without significantly affecting the model’s performance. We leverage insights from various teacher models, including SDXL-base-1.0 and the fine-tuned Zavychroma-XL ³ and Juggernaut-XL ⁴, during the compression process.

We report similar findings as BK-SDM (Kim et al., 2023), in that the middle block of the U-Net can be removed without significantly affecting image quality. To add, we observe that removal of only the attention layers and the second residual network (He et al., 2015) block preserves image quality to a higher degree, as opposed to removal of the whole mid-block.

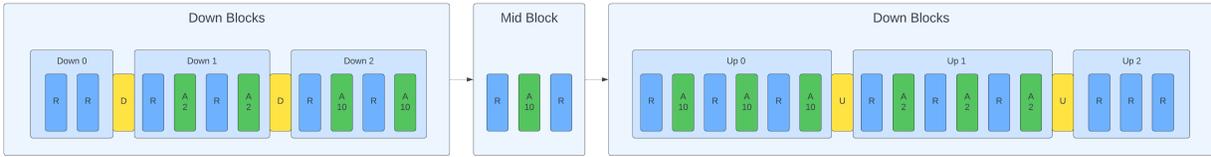


Figure 1: SDXL U-Net structure

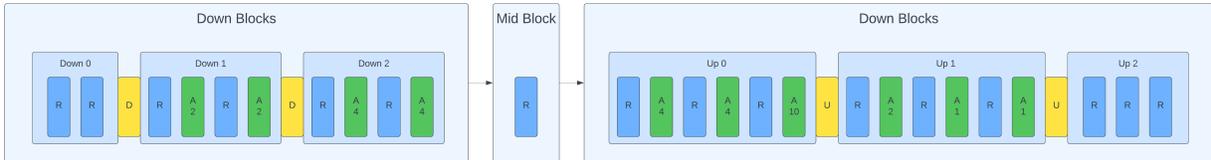


Figure 2: SSD-1B U-Net structure

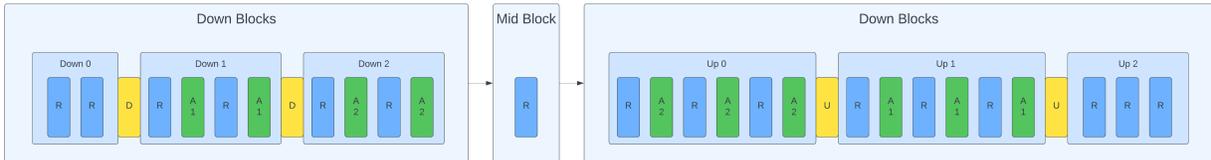


Figure 3: Vega U-Net structure

3.2 Loss

In contrast to the block-level losses employed in prior work, we introduce layer-level losses specific to each attention and ResNet layer. This refined approach allows for a more granular assessment of the model’s internal representations, enabling us to identify and retain essential features while discarding redundant elements. Our choice of layer-level losses is influenced by their efficacy in capturing the nuanced interactions within the model’s architecture.

²<https://huggingface.co/runwayml/stable-diffusion-v1-5>

³<https://civitai.com/models/119229/zavychromaxl>

⁴<https://civitai.com/models/133005?modelVersionId=240840>

3.2.1 Input Generation

To obtain the input for the U-Net, we employ pretrained text encoders for the to obtain the text embeddings. The latent representations of the image are obtained by the pretrained VAE. Both text encoders and the VAE are kept frozen during training and only the UNet is trained. The latent representation z of an image and its paired text embedding y form the basis for our training process.

3.2.2 Task Loss

We formulate the task loss, denoted as L_{Task} , which is computed through the reverse denoising process. The task loss measures the disparity between the sampled noise ϵ from the diffusion process and the estimated noise $\epsilon_S(z_t, y, t)$ generated by our compact UNet student. The objective is to align the noise distribution of the student with that of the teacher.

$$L_{Task} = \mathbb{E}_{z, \epsilon, y, t, t_h} \|\epsilon - \epsilon_S(z_t, y, t)\|_2^2$$

3.2.3 Output-Level Knowledge Distillation (KD)

The compact student is trained to imitate the outputs of the original U-Net teacher, denoted as ϵ_T , using an output-level KD objective. This objective ensures that the overall output distribution of the student aligns with that of the teacher.

$$L_{OutKD} = \mathbb{E}_{z, \epsilon, y, t, t_h} \|\epsilon_T - \epsilon_S(z_t, y, t)\|_2^2$$

3.2.4 Feature-Level Knowledge Distillation (KD)

A pivotal component of our approach is feature-level KD, providing rich guidance for the student’s training. The feature-level KD objective, denoted as L_{FeatKD} , measures the difference between the feature maps of corresponding layers in both the teacher and student models. Importantly, our approach eliminates the need for additional regressors by ensuring that the dimensionality of feature maps already matches at the end of each layer in both models.

$$L_{FeatKD} = \mathbb{E}_{h, X_t} \|f_l^T(z_t, y, t) - f_l^S(z_t, y, t)\|_2^2$$

3.2.5 Overall Objective

The final objective encompasses the task loss, output-level KD, and feature-level KD, weighted by coefficients λ_{OutKD} and λ_{FeatKD} . Without loss-weight tuning, our approach demonstrates effectiveness in empirical validation.

$$L = L_{Task} + \lambda_{OutKD} * L_{OutKD} + \lambda_{FeatKD} * L_{FeatKD}$$

Another advantage of this method of distillation is that LoRA weights created for the parent model tend to produce close results without retraining. This may reduce the number of training steps required to migrate models.

To expound on our compression strategy, we consider the analogy to DistilBERT (Sanh et al., 2020), which reduces the number of layers while initializing the compact model with original weights. Our compression methodology involves targeted removal strategies in both down and up stages.

3.3 Teacher Models

We initially take SDXL Base⁵ as the teacher, but later swap it for a finetuned model, ZavychromaXL⁶ and finally use JuggernautXL⁷. We find that swapping the teacher boosts the quality significantly even if the same dataset is used again. This showcases that using multiple expert models can aid in instilling new concepts as well as improving quality of the student.

Our compression methodology, inspired by proven techniques (Kim et al., 2023), not only reduces model size but also ensures that essential features are retained through the careful removal of redundant blocks. The introduction of layer-level losses further refines this process, contributing to the overall efficiency and efficacy of our compressed models—SSD-1B and Segmind-Vega.

⁵<https://huggingface.co/stabilityai/stable-diffusion-xl-base-1.0>

⁶<https://civitai.com/models/119229/zavychromaxl>

⁷<https://civitai.com/models/133005?modelVersionId=240840>

3.4 Pruning

We employ human evaluation of outputs along with heuristics to identify potential attention layers to remove.

To create SSD-1B, along with removal of the mid-block’s attention layers and the second Residual Network, we remove the following layers of SDXL:

- 4th, 5th,7th,8th,9th and 10th transformer blocks of all attention layers in the 3rd downsampling stage and the first two attention layers of the first upsampling stage of the U-Net.
- The second transformer block of the second and third attention layers of the second upsampling stage.

To create Segmind Vega, we remove the following layers:

- 3rd, 4th, 5th, 6th, 7th, 8th,9th and 10th transformer blocks of the first attention layer of the third downsampling stage and all attention layers in the first upsampling stage of the U-Net.
- 2nd, 4th, 5th, 6th, 7th, 8th,9th and 10th transformer blocks of the second attention layer of the third downsampling stage.
- The second transformer block of all attention layers of the second downsampling and upsampling stages.

4 Training

In our training methodology, we adopt a distillation-based retraining approach. We use a layer-level loss in an attempt to mimic the features at each stage of the teacher U-Net. This process is crucial for achieving efficient knowledge transfer and preserving the generative quality of SDXL even in significantly compressed models.

Our training strategy, inspired by distillation-based retraining, ensures that our compressed models inherit the essential knowledge from the teacher model, enabling them to efficiently mimic the behavior of the original U-Net across various layers, including attention and residual network (ResNet) layers.

We trained SSD-1B at fp16 mixed-precision for a total of 251,000 steps with a constant learning rate of 1e-5, using Adam Optimizer (Kingma & Ba, 2017), at 1024*1024 image resolutions, on four 80GB A100 GPUs at an effective batch size of 32. We trained Vega at fp16 mixed-precision for a total of 540,000 steps with a learning rate of 1e-5, at 1024*1024 image resolutions, on four 80GB A100 GPUs, at an effective batch size of 128. The datasets used for training and evaluation include GRIT (Peng et al., 2023) and images generated by Midjourney ⁸.

5 Results

We present two distilled versions of Stable Diffusion XL, Segmind Stable Diffusion(SSD-1B) and Segmind Vega, which closely mimic the outputs of the base model as shown in the Figure 4, 5, 6, 7, 8 and 9. All images are generated with the DDPM Scheduler, 25 inference steps and Guidance Scale set to 9.

We report up to 60% speedup with SSD-1B and up to 100% speedup with Segmind-Vega. The detailed metrics taken on an A100 at 25 steps with DDPM Scheduler at guidance scale 9 and batch size 1, are reported in Table 1.

Model	Inference Time (s) (↓)	Iteration/s (↑)
SD1.5 ⁹	1.699	16.79
SDXL	3.135	8.80
SSD-1B	2.169	13.37
Vega	1.616	18.95

Table 1: Benchmarking inference latency

⁸<https://www.midjourney.com/>

⁹Inference Times reported at resolution 768 * 768



Figure 4: "A royal flaming wolf emerging from a magical big forest, blue flames, front facing, portrait, closeup, dark, bokeh, dawn, god rays, highly detailed, highres, Cinematic, Cinemascope, astonishing, epic, gorgeous, ral-fluff"



Figure 5: "raw photo, close-up, punk band cover, red brick wall, red theme, a brutal man, 40 years old, mohawk, (manly, wide jaw:1.2), leather jacket, red shirt, (vibrant colors:0.9), film grain, bokeh, fashion magazine, hdr, highly detailed photography, (muted colors, cinematic, dim colors, soothing tones:1.2), vibrant, insanely detailed, hyperdetailed, (dark shot:1.2), (vsco:0.3), (intricate details:0.9), (hdr, hyperdetailed:1.2)"

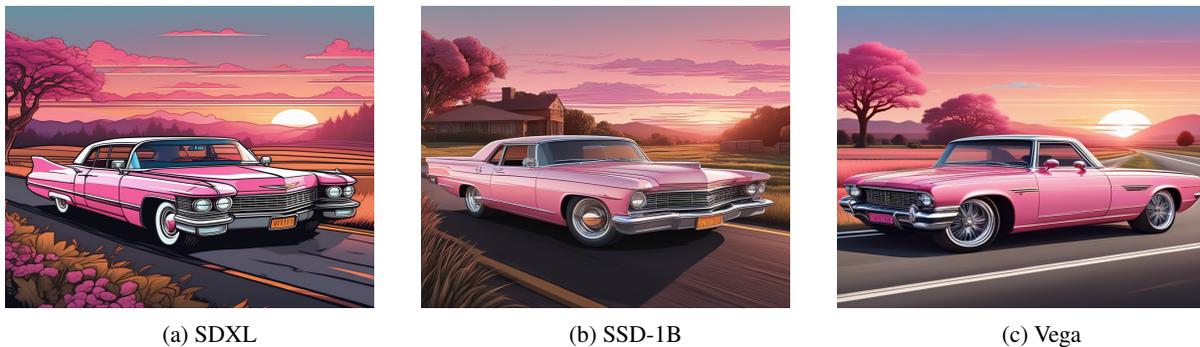


Figure 6: "(best quality:1.5), (intricate emotional details:1.5), (sharpen details), (ultra detailed), (cinematic lighting), pink Cadillac, car, driving through the country, sunset, relaxing vibes. cartoon style, line art, sticker style"



(a) SDXL



(b) SSD-1B



(c) Vega

Figure 7: "Swamp marsh Poison green red Soft watercolors digital watercolors painting illustration masterpiece raining shooting stars twinkling stars glistening stars glittery stars full moon stars full moon intricate motifs perfect composition masterpiece insanely-detailed extreme-detailed hyper-detailed beautiful volumetric deep rich colors volumetric lighting shadows Ray tracing, Mark Brooks and Dan Mumford, comic book art, perfect"



(a) SDXL



(b) SSD-1B



(c) Vega

Figure 8: "(best quality:1.5), (intricate emotional details:1.5), (sharpen details), (ultra detailed), (cinematic lighting), magical woods, unexplained lights, fantasy, otherworldly, mist, atmospheric, flowers, plants"



(a) SDXL



(b) SSD-1B



(c) Vega

Figure 9: "((fatty cat)) dracula, Victorian style, dracula-inspired, long red-black cloak, fangs, castle, in motion, furry paws, action-packed background, dark theme, glow"

5.1 Quality Study

PlaygroundAI¹⁰, a generative AI startup, conducted an extensive blind human preference study encompassing 1000 images and involving 1540 unique users to assess the comparative performance of SSD-1B and SDXL. Remarkably, the findings revealed that not only did SSD-1B maintain image quality, but it was also marginally preferred over the larger SDXL model. The comprehensive details of this study are presented in Table 2.

Model	Pairs Won (↑)	Percentage Pairs Won (↑)
SSD-1B	528	52.8
SDXL	472	47.2

Table 2: Human preference study

The table illustrates the outcomes of the study, with SSD-1B securing victory in 52.8% of the image pairs, whereas SDXL, although commendable, trailed slightly with 47.2%. These results not only underscore the noteworthy quality preservation of SSD-1B but also highlight its perceptible preference among the diverse user cohort involved in the blind study.

6 Conclusion

We show that distillation of large models like SDXL via using knowledge distillation using multiple models as teachers and using feature losses can quickly converge to give similar quality outputs as the base model despite having a significantly smaller student model. Some of its limitations include but are not limited to Text, Hands and Full Body shots.

Our work also highlights the importance of choice of dataset and teacher model as it can tremendously help boost the final model’s quality. We show that progressively distilling can reduce total training time significantly. In the future this technique can be further explored on other large models such as LLMs, MLMs etc,

References

- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition, 2015.
- Bo-Kyeong Kim, Hyoung-Kyu Song, Thibault Castells, and Shinkook Choi. Bk-sdm: A lightweight, fast, and cheap version of stable diffusion, 2023.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization, 2017.
- Yanyu Li, Huan Wang, Qing Jin, Ju Hu, Pavlo Chemerys, Yun Fu, Yanzhi Wang, Sergey Tulyakov, and Jian Ren. Snapfusion: Text-to-image diffusion model on mobile devices within two seconds, 2023.
- Simian Luo, Yiqin Tan, Longbo Huang, Jian Li, and Hang Zhao. Latent consistency models: Synthesizing high-resolution images with few-step inference, 2023a.
- Simian Luo, Yiqin Tan, Suraj Patil, Daniel Gu, Patrick von Platen, Apolinário Passos, Longbo Huang, Jian Li, and Hang Zhao. Lcm-lora: A universal stable-diffusion acceleration module, 2023b.
- Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei. Kosmos-2: Grounding multimodal large language models to the world. *ArXiv*, abs/2306.14824, 2023.
- Pablo Pernias, Dominic Rampas, Mats L. Richter, Christopher J. Pal, and Marc Aubreville. Wuerstchen: An efficient architecture for large-scale text-to-image diffusion models, 2023.
- Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis, 2023.
- Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation, 2021.
- Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 10684–10695, June 2022.

¹⁰<https://playgroundai.com/>

Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Burcu Karagol Ayan, S. Sara Mahdavi, Rapha Gontijo Lopes, Tim Salimans, Jonathan Ho, David J Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding, 2022.

Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter, 2020.

Alex Shonenkov, Misha Konstantinov, Daria Bakshandaeva, Christoph Schuhmann, Ksenia Ivanova, and Nadiia Klokova. If by deepfloyd lab at stabilityai, 2023.