

Using Natural Language Inference to Improve Persona Extraction from Dialogue in a New Domain

Alexandra DeLucia^{1, 2*}, Mengjie Zhao¹, Yoshinori Maeda¹,
Makoto Yoda¹, Keiichi Yamada¹, Hiromi Wakaki¹

¹Sony Group Corporation, Tokyo, Japan

²Center for Language and Speech Processing, Johns Hopkins University
adelucia@jhu.edu

{Mengjie.Zhao, Yoshinori.B.Maeda, Makoto.Yoda,
Keiichi.K.Yamada, Hiromi.Wakaki}@sony.com

Abstract

While valuable datasets such as PersonaChat provide a foundation for training persona-grounded dialogue agents (Zhang et al., 2018), they lack diversity in conversational and narrative settings, primarily existing in the “real” world. To develop dialogue agents with unique personas, models are trained to converse given a specific persona, but hand-crafting these persona can be time-consuming, thus methods exist to automatically extract persona information from existing character-specific dialogue (Wang et al., 2022). However, these persona-extraction models are also trained on datasets derived from PersonaChat and struggle to provide high-quality persona information from conversational settings that do not take place in the real world, such as the fantasy-focused dataset, LIGHT (Urbanek et al., 2019b). Creating new data to train models on a specific setting is human-intensive, thus prohibitively expensive. To address both these issues, we introduce a natural language inference method for post-hoc adapting a trained persona extraction model to a new setting. We draw inspiration from the literature of dialog natural language inference (NLI; (Welleck et al., 2019)), and devise NLI-reranking methods to extract structured persona information from dialogue. Compared to existing persona extraction models, our method returns higher-quality extracted persona and requires less human annotation.

1 Introduction

Dialog agents are assigned a persona or a description of a character identity to impersonate while responding to a user. These hand-crafted persona descriptions are supplied to the model’s context along with the conversation history (Urbanek et al., 2019a; Zhang et al., 2018) or via character-specific embeddings added to the encoder (Li et al., 2016b) during response generation.

*Work performed while interning at Sony.

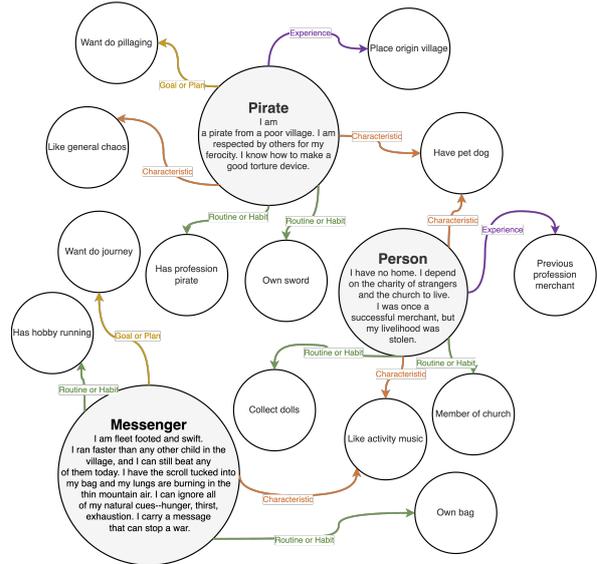


Figure 1: PeaCoK-style persona graph for a few characters from the LIGHT fantasy role-playing dataset. The graph was built from character utterances in conversations.

Constructing persona for these agents can be time-consuming, but *persona extraction* alleviates this by automatically extracting information about a character given past dialogue utterances (Wang et al., 2022; Lu et al., 2022; Zhou et al., 2023; Zhu et al., 2023b). The task is a precursor to developing personalized response generation models consistent with its assigned persona. Manually crafting persona can be arduous, and what a character says can be rich with information. However, current models and techniques for persona extraction are all trained on the same domain, i.e., casual chit-chat, since the standard dataset for training is based on PersonaChat (Zhang et al., 2018). PersonaChat is considered to exist in the “real world” and thus persona extraction models trained on it have difficulty extracting persona in new and distant narrative domains such as the fantasy world in LIGHT (Urbanek et al., 2019a).

Since data annotation for fine-tuning is costly,

we explore post-hoc methods on a trained model to mitigate domain adaptation issues. Our approach to this domain adaptation issue is to cast it as a natural language inference task, since we want to ensure that extracted persona information is reasonable given the original utterance. We start with a new model trained on PersonaExt (Zhu et al., 2023b), a semi-automatic labeled dataset for persona extraction from PersonaChat utterances. PersonaExt contains fine-grained relations that do not apply to all narrative settings (“domains”), so we categorize the 105 persona relation types into 4 that are general enough to work with various narratives and characters in varying domains: **experience**, **goal or plan**, **routine or habit**, and **characteristic**. For example, both a pirate in a fantasy world and a real-world accountant have persona knowledge about routines and goals, e.g., (I, goal or plan, want to pillage) and (I, goal or plan, want a raise), respectively (Figure 1). These relation types are from the only knowledge graph (KG) specifically designed for persona, PeaCoK (Gao et al., 2023).

For our methods, we cast persona extraction as a sequence-to-sequence (seq2seq) problem, mapping an utterance to a persona “triplet” that can be parsed and added to a KG (Ni et al., 2022; Wang et al., 2022; Zhu et al., 2023b). An important problem when generating from out-of-domain utterances is model hallucination or generation of low-quality, generic, or incorrect persona information. Since KGs should be precise, we introduce a *natural-language inference persona pruning* step, with a natural language inference (NLI) model trained specifically for determining if an extracted triplet can be inferred from the utterance. We explore three approaches: (1) guided decoding to force the model’s output to be in the correct format, (2) generate many and re-rank, and (3) generate many and classify. We show that this pruning step reduces false positives (extracting persona when there is no persona information) and improves the quality of extracted character persona when compared to the current state-of-the-art model PAED (Zhu et al., 2023b).

The converse relationship between utterances and persona has been investigated before, and even used to make persona extraction datasets (Wang et al., 2022), but the direction we explore allows us to determine if the extracted persona is *reasonable* given the utterance.

In this work, we contribute the following:¹

- **PersonaExt-PeaCoK**: a semi-automatically adapted dataset PersonaExt (Zhu et al., 2023b) for training PeaCoK-compatible persona extraction models from dialogue utterances
- A trained persona extraction model for extracting PeaCoK relations (experience, goal or plan, routine or habit, characteristic) from dialogue history for the purpose of expanding and adapting PeaCoK to specific narratives
- **Persona-NLI**: an NLI model for evaluating the entailment relationship between a dialogue utterance and extracted persona
- Qualitative analysis of model performance on fantasy dataset LIGHT (Urbanek et al., 2019a)

2 Related Work

Our work is relevant in the focus areas of persona-grounded dialogue, persona extraction, and dialogue-specific natural language inference (Dialogue-NLI).

Persona-grounded Dialogue The primary issues with dialogue agents are their boring and generic responses (Li et al., 2016a; Khayrallah and Sedoc, 2021) and their inability to maintain a consistent persona, often contradicting themselves in conversations (Shuster et al., 2022). An early, widely-used work to address this issue is PersonaChat (Zhang et al., 2018) which is a manually created dataset of crowdworker conversations paired with 3-4 sentence persona descriptions. Similarly, Learning in Interactive Games with Humans and Text (LIGHT; Urbanek et al. (2019a)) is a dataset created the same way and modeled after PersonaChat, but is set in a fantasy world with fairies, pirates, and kings. While other fantasy dialogue datasets exist, either they contain prose instead of dialogue (Zhu et al., 2023a) and/or do not have structured persona information paired with each character (Callison-Burch et al., 2022; Weir et al., 2023; van Stegeren and Theune, 2020) (see Appendix Table 9 for details).

A missing component of persona-grounded datasets is *commonsense* grounding. Gao et al. (2023) address this issue with PErsonA-grounded COmmonsense Knowledge graph (PeaCoK) which formalizes relations within and between personas. Personas are represented as graph nodes consisting of head (subject) and tail (verb phrase) entities connected by set labeled edges (i.e.,

¹All code and models will be released upon publication.

relations), e.g. (I am a famous pianist, characteristic, skilled in playing the piano, see Figure 1).

Persona Extraction While the task of persona extraction is new, methods for this task draw from the established field of relation extraction. In this work, we extract pre-defined relations from a character’s utterances to build/expand a persona knowledge graph.

Wang et al. (2022) separate persona extraction into extraction and inference subtasks, or whether or not the relation can be found verbatim in the utterance. They trained GPT-2 Small on Dialog-NLI (Welleck et al., 2019) and similar to our method, implemented constrained decoding to ensure proper relation format. While they also trained a separate model for re-ranking generated output, it was not fine-tuned for the NLI task like ours.

Ni et al. (2022); Zhu et al. (2023b) also cast persona extraction as a seq2seq mapping from dialogue utterance to a persona triplet, e.g., (subject/“head”, relation type, object/“tail”). Zhu et al. (2023b) used a variational auto-encoder (VAE) to create new synthetic examples to train the model to be able to distinguish between related relations (“like” and “dislike”). They introduced the BART-based zero-shot model PAED, and also released a modified Persona Extraction dataset (PersonaExt) built from the persona extraction dataset from Wang et al. (2022). Similar to Wang et al. (2022) and us, they use constrained decoding to ensure compliance with expected output format.

Related to persona extraction is persona *expansion*, where commonsense KGs are leveraged to add more information given a presented persona (typically from PersonaChat) (Kim et al., 2023; Liu et al., 2022) and character identification, where a speaker is identified given their persona information and/or past dialogue (Sang et al., 2022).

In summary, while we also use seq2seq modeling for persona extraction, we introduce NLI-based reranking and filtering for quality control in a new narrative setting (from “real world” to fantasy), and use PeaCoK (Gao et al., 2023) persona relations.

Persona NLI Most NLI datasets are not in the narrative or dialogue domain but Dialog-NLI addresses this issue Welleck et al. (2019). This dataset consists of manually annotated (persona sentence, character utterance) pairs for their entailment relationship from the aforementioned PersonaChat.

We incorporate a newly trained NLI model

fine-tuned for persona extraction from dialogue (Persona-NLI). Since Dialog-NLI is built from PersonaChat, which is also what PersonaExt was built from, we do not include it to train the Persona-NLI model due to test leakage concerns. Instead, we turn to a related dataset built for pairing sentences and facts. Commonsense Fact linking dataset (ComFact) (Gao et al., 2022) is a semi-automatically created dataset for linking statements and commonsense facts from Atomic₂₀ (Hwang et al., 2021). More details of adapting ComFact to the NLI task are in Section 4.

Ammanabrolu et al. (2021) introduced a commonsense knowledge graph for LIGHT (ATOMIC-LIGHT), but we do not include this data since it does not contain dialogue and our experimental setting assumes no narrative-specific information.

3 Persona Extraction from Dialogue

Our goal is to automatically adapt a persona KG to a new narrative, starting from character dialogue. PeaCoK (Gao et al., 2023) is the first and only KG for personas, and its relation types (i.e. edges) are general enough to fit any narrative setting (see Figure 1). However, PeaCoK was not built from dialogue utterances, so we use PersonaExt (Zhu et al., 2023b), a dataset of (utterance, persona relation) pairs to train a PeaCoK-persona extraction model.² We discuss the modification of PersonaExt to fit the PeaCoK persona format in Section 3.1.

For the persona extraction task, we fine-tune existing models with a variety of prompts and test different decoding methods. We compare our models to the persona attribute extraction in dialogues (PAED) model (Zhu et al., 2023b).

3.1 Dataset: PersonaExt-PeaCoK

PeaCoK is a KG consisting of head and tail entities with relation types of persona commonsenses, e.g. (“I am a famous pianist”, “characteristic”, “skilled in playing the piano”), and does not contain utterances. While the heads and tails are phrases, combining them into full sentences would lead to repetitive and unnatural utterances. Instead, we start from an annotated dialogue dataset, PersonaExt, and semi-automatically convert them into PeaCoK format by re-annotating the dialogue utterances on the *relation level* to PeaCoK relations.

²We use PersonaExt instead of the precursor dataset introduced by Wang et al. (2022) because Zhu et al. (2023b) improved upon the annotations and labels.

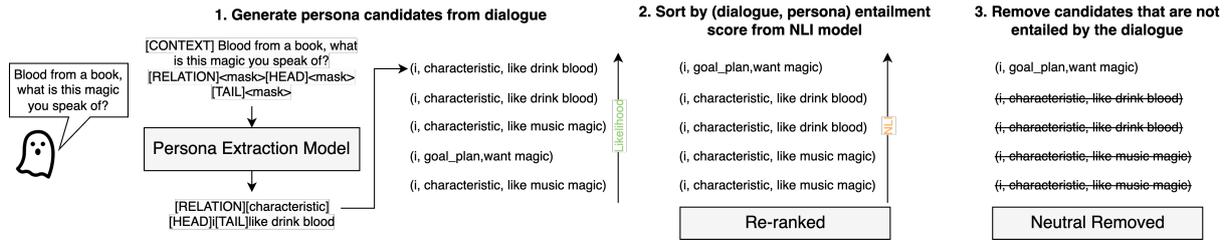


Figure 2: Overview of persona extraction process from dialogue with a trained seq2seq (BART) and natural language inference (NLI) model. The head, tail, and relation types are parsed from the model output. As seen from the selected example, the proposed NLI re-ranking step correctly adjusts the order of possible extracted persona, penalizing the non-entailed “(i, characteristic, like drink blood)”.

We refer to the relabeled PersonaExt dataset as **PersonaExt-PeaCoK**. The train, validation, and test sets for model training were stratified-split according to the labels. Appendix B reports more details.

3.2 Dataset: LIGHT

As discussed in Section 2, we select LIGHT (Urbanek et al., 2019a) as the new narrative dataset for evaluation. We take the best-performing persona extraction model from Section 3 and evaluate on LIGHT. Unlike PersonaExt-PeaCoK, there are no ground-truth dialogue-level persona annotations for LIGHT, so we provide a qualitative analysis alongside other intrinsic metrics instead of reporting accuracy metrics.

We download the LIGHT dataset from ParlAI (Miller et al., 2017).³ We found 10,268 dialogues (230 more than Urbanek et al. (2019a)) and 1,382 unique characters (e.g., “a baby dragon”). “Unique” characters were determined by counting the unique (character, description) pairs. We ignore the “objects”, “actions”, “emotes”, and “actions” portions of LIGHT since our persona extraction model is based only on dialogue. We compare the persona extracted from the character description (i.e., the persona profile of a character)⁴ to persona extracted from their dialogue utterances. There are roughly 3-4 persona description sentences per character. Although a single dialogue utterance, or conversation turn, can consist of more than one sentence, we do not separate into individual sentences.

³<https://github.com/facebookresearch/ParlAI/tree/main/projects/light>

⁴Persona descriptions are a paragraph where each sentence contains a character trait, we parse it into individual sentences.

3.3 Methods

For the persona extraction model, We fine-tuned the HuggingFace implementation of BART-Large (Lewis et al., 2020; Wolf et al., 2020) on PersonaExt-PeaCoK; Appendix C reports training details.

We created a structured input and output template based on the one used by PAED (Zhu et al., 2023b), shown in Table 2. Note that the template tokens are newly added to the model vocabulary with trainable parameters in the embedding lookup layer. After experimenting with other templates, we found that using special tokens for both the entity markers and relation types led to a better-performing model. Also, unlike the PAED template where the relation type is generated last, we found better performance when the template is ordered: relation, head entity, and then tail entity. Other work has used standard relation triplet ordering of head, relation, and tail (Wang et al., 2022). The benefit of the relation token in the beginning of the sequence is that the model can then be used to easily generate different relations from the same utterance by changing the relation type. We initialized embeddings of the added tokens to the average embedding of a short text description (Table 1).

Since the output needs to be in the correct format for parsing into a triplet, we impose constraints on the generation to ensure template adherence. These constraints are flexible and can be combined with any decoding method.

We compare generations from greedy search, beam search, and diverse beam search (Vijayaraj et al., 2018). For beam search, we set the number of beams to 5 and return all 5 sequences, with only the most likely sequence presented as the final output. For diverse beam search, we set the number of beam groups to 5 to thoroughly explore

Token	Description
[CONTEXT]	context
[RELATION]	relation
[HEAD]	head entity
[TAIL]	tail entity
[characteristic]	character trait
[no_relation]	no relation
[routine_habit]	regularly or consistently do
[goal_plan]	will do or achieve in the future
[experience]	did in the past

Table 1: Tokens added to BART vocabulary for training the persona extraction model. The descriptions for the relation types are from PeaCoK (Gao et al., 2023). Table 2 shows an example model input and output.

the search space and diversity strength $\lambda = 0.4$.

We trained the model on four 48GB NVIDIA RTX A6000 GPUs for 50 epochs, 128 batch size, AdamW optimizer, and $5e - 5$ learning rate. Training time was 1.5 hours.

3.4 Comparative Models

We compare our persona extraction model to PAED and ablated versions of our model.

PAED (zero-shot) PAED (see Section 2) is another fine-tuned BART model for persona extraction in zero-shot settings, and we test it with PeaCoK relations. We trained the PAED model from the author-provided codebase in the 10 unseen label setting.

PAED (fine-tuned) While PAED was designed as a zero-shot model to adapt to new relation types, we also include a fully fine-tuned version that is trained on the same train split of PersonaExt-PeaCoK as our model. We trained the PAED model from scratch on PersonaExt-PeaCoK with the same settings as Zhu et al. (2023b) (see Appendix C.2).

3.5 Evaluation

We evaluate persona extraction performance through reference and reference-free (intrinsic) metrics. PersonaExt-PeaCoK has ground-truth labels to measure accuracy. In the reference metrics, the head, tail, and relation are parsed from the structured output and compared against the respective gold-standard entity. However, the LIGHT dataset (in the new domain of fantasy) does not have ground-truth labels, and we rely on intrinsic and manual evaluations.

Reference Accuracy For evaluating the extraction we employ the same accuracy metric as in Zhu et al. (2023b). While Zhu et al. (2023b) only awards credit to the model if the entire (head, relation, tail) triplet is predicted correctly (shown in our results as “Triplet”), we additionally relax this metric and evaluate the model performance separately on identifying the head, relation, and tail entities from the triplet, similar to Wang et al. (2022).

Since there are no ground-truth persona triplets for LIGHT, we developed intrinsic (i.e., non-reference-based) metrics alongside qualitative analysis.

Intrinsic Metrics The non-accuracy-based metrics focus on the number of returned persona and unique persona. *The metrics are measured for each character, overall, and on the dialogue and description datasets.*

We define utterance **coverage** as the ratio of extracted persona to the number of utterances. If the extracted persona has the “not a relation” relation type, it is not considered.

We are curious about how many extracted relations are about the speaking character or other characters. This **first person** metric measures the ratio of first-person triplets, where the head is “I”, “me”, or “my”, as compared to all extracted triplets.

Regarding diversity and uniqueness, we want to ensure that the model is not assigning the same character traits to everyone. We look at the rate of unique head and tail entities, referred to as **unique head** and **unique tail**.

Persona “Recall” While there are no ground-truth labels for LIGHT on the utterance-level, we can consider the persona descriptions as “silver” labels. We define **recall** as, using persona triplets extracted from the provided persona descriptions, the ratio of persona relations successfully recovered from the utterances. For a consistent reference, we use the persona triplets extracted by the model with greedy decoding and no NLI re-ranking or filtering.

Human Evaluation For the qualitative analysis, two authors compared the extracted persona information from the dialogue to that extracted from the character description, and to the character description itself. The annotation descriptions are in Section 3.5.

Annotation guidelines were created by one author after qualitatively evaluating 5 random charac-

Utterance	i am a tour guide at a museum . what do you do for a living ?
Input	[CONTEXT] i am a tour guide at a museum . what do you do for a living ? [RELATION] <MASK> [HEAD] <MASK> [TAIL] <MASK>
Output	[RELATION] [routine_habit] [HEAD] i [TAIL] has profession tour guide

Table 2: The template for model input and output for BART-Large fine-tuned for persona extraction on PeaCoK-PersonaExt. <MASK> represents BART’s mask token, while the tokens in square brackets are special tokens added to the vocabulary. The relation types (e.g., routine_habit) are also in the model’s vocabulary.

Accepted	Sub-category	Guideline
Yes	Directly	Relates to the persona description
	Reasonable	Character trait given the persona description
No	Contradictory	Candidate persona goes against the persona description. E.g., persona is a dragon but the relation is (I, routine_habit, am a high priestess)
	Unreasonable	Unreasonable trait given character description
	Non-specific relation	E.g., (we, characteristic, like activity it)
	Malformed	Parsed triplet is missing an entity, e.g. the tail

Table 3: Guidelines for the human evaluation of extracted persona information. Evaluators were required to select a sub-category within “Yes” and “No” providing a reason for the selection.

ters (sampled with random seed 13). Each triplet was annotated against the provided character name and 3-4 sentence description (i.e., persona profile in Section 3.2). Triplets were annotated individually and not as a whole, e.g., two triplets that are contradictory could still be labeled as "reasonable". For example, if the description does not contain information about the character’s family, "has sibling sister" and "has no siblings" are both reasonable. Also, triplets were annotated based on the present. If the description specifies "I am a pirate" and the triplet says "I want to be a pirate" it’s labeled as a contradiction since the character already is a pirate. Further, some triplets were near-duplicates of each other and were consolidated by merging triplets with first-person heads into one subject "self". Also, triplets were lowercased before merging. Note this consolidation was only performed for annotations and thus the number of triplets differs from those present in Table 7.

4 NLI for Narrative Adaptation

When applying the trained persona extraction model to LIGHT, we noticed that a persona relation is always extracted, regardless of the input statement/utterance. This is expected because persona extraction training data does not contain nega-

tive examples (i.e., statement/utterance without a persona). As a result, it is important to have an automatic method for filtering “hallucinated” persona output from the persona extraction model.

We leverage natural language inference (NLI) – whether a statement *follows* or *can be inferred from* another statement (MacCartney and Manning, 2008) – for filtering out the hallucinated persona. The relationship between dialogue and a corresponding persona statement differs from the typical statement pairs used in conventional NLI training, which often come from formally written text (Bowman et al., 2015; Williams et al., 2018). To alleviate potential issues caused by a domain shift, we fine-tune an existing NLI model on (dialogue) utterance-persona statement pairs. As discussed in Section 2, we use the ComFact dataset instead of Dialog-NLI due to train-test leakage with our training dataset, PersonaExt. We refer to this fine-tuned model as “NLI-Persona” and the non-fine-tuned version as “NLI-base”.

4.1 Persona-NLI Model

4.1.1 Persona-NLI Dataset

ComFact contains many annotations at the conversation- or paragraph-level, including whether a fact is relevant at a specific timestep or

I silently swoop down into the forest to carry off another. I do what I can to please the high priestess, who is my mother. I feast on the bones of the hunter. I like being scratched behind my ear and laying by the fire.

Extracted Persona Triplet	Annotation
(self, characteristic, like food nutritious)	Yes – Reasonable
(self, goal_plan, want do hurts)	Yes – Reasonable
(self, characteristic, like food venison)	Yes – Reasonable
(my mother, routine_habit, has profession high priestess)	Yes – Directly
(self, routine_habit, has profession priestess)	No - Contradictory
(self, characteristic, like activity play)	Yes - Reasonable

Table 4: Example annotations for extracted persona triplets for the “a dragon” character in LIGHT.

context window. To match our utterance-fact setup, we reduce ComFact to only the current statement and facts that were labeled as “relevant without context” (RPA) in Gao et al. (2022). Pairs without relation labels were kept as negative examples. We also filter non-persona related relation types and limit to HasProperty, CapableOf, Desires, xNeed, xAttr, xEffect, xReact, xWant, xIntent, which were identified as persona-related by Gao et al. (2023). We use the original train/dev/test splits in ComFact. Since PersonaExt is derived from PersonaChat, we removed any entries in ComFact Persona-Atomic subset that also occurred in our test split to make sure there is no training-testing overlap. We also include the training and dev splits of PeaCoK-PersonaExt and ablate the model training over each data subset (PeaCoK-PersonaExt, ComFact-Persona, and combined PeaCoK-PersonaExt + ComFact-Persona).

4.1.2 Training

Starting from an existing high-performing NLI model, `nli-deberta-v3-base` (Reimers and Gurevych, 2019)⁵ we fine-tune on our ComFact-derived Persona-NLI dataset for 5 epochs, batch size of 32, learning rate of $2e - 05$, and AdamW optimizer on a single 48GB NVIDIA RTX A6000 GPU. `nli-deberta-v3-base` was trained on SNLI (Bowman et al., 2015) and MNLI (Williams et al., 2018). While MNLI does contain training data in the fiction domain ($\approx 20\%$), it is prose from contemporary fiction and not dialogue utterances.

We chose the final Persona-NLI model based on F1 score (binary). Since we only care about “entailment” versus “no entailment”, we do not penalize the model for incorrectly predicting “neutral”

versus “contradiction”, and merge those two labels into a binary task.⁶

Table 5 shows the results across training (rows) and testing (columns) on the different versions of Persona-NLI dataset. The model trained on the ComFact-Persona + PeaCoKPersonaExt dataset performed the best and we refer to it as **Persona-NLI**. An important note is while the PeaCoK-PersonaExt appears to have perfect scores, this dataset is very skewed towards the positive class and never predicts “no entailment”, thus we use the model trained on the more balanced combined dataset of ComFact-Persona + PeaCoKPersonaExt. The fine-tuning is needed since the NLI model (“w/o fine-tuning”) does not perform as well, which is expected due to domain adaptation issues.

4.2 NLI-Reranking

As shown in Section 2, we can adjust the model’s final generated output by first generating multiple candidates, scoring each candidate with the Persona-NLI model, and then selecting the one with the new highest score. The NLI score for each candidate is based on the entailment score of (utterance, candidate triplet) pairs.

Since Persona-NLI expects a sentence and not a triplet, we provide each candidate as a sentence by concatenating the head and tail, e.g., “i want magic” (Section 2). If the pair is determined to have an entailment relationship, we then adjust the final score of the candidate as the language model score (average token log probability) plus the log probability of entailment. If there is no entailment relation, the score is kept the same, i.e., only the language model score. This new score is designed

⁵https://www.sbert.net/docs/pretrained_cross-encoders.html#nli

⁶The loss is still measured on all three labels, only the accuracy and F1 metrics are measured on the binary classification.

Persona-NLI Dataset	PeaCoK-PersonaExt				ComFact-Persona				ComFact-Persona+PeaCoKPersonaExt			
	Acc.	F1	Precision	Recall	Acc.	F1	Precision	Recall	Acc.	F1	Precision	Recall
w/o fine-tuning	0.51	0.38	0.51	0.54	0.81	0.55	0.55	0.56	0.67	0.66	0.70	0.67
PeaCoK-PersonaExt	1.00	1.00	1.00	1.00	0.11	0.10	0.50	0.50	0.52	0.38	0.74	0.52
+ComFact-Persona	1.00	1.00	1.00	1.00	0.89	0.75	0.72	0.79	0.94	0.94	0.94	0.94

Table 5: Results for NLI-Base model fine-tuned and evaluated on three persona data subsets. The base “w/o fine-tuning” model is not trained and only evaluated. F1 metrics are macro-F1. The model fine-tuned on ComFact-Persona+PeaCoK-PersonaExt performs the best. Accuracy is shortened to “Acc.” for space. The 100% accuracy is due to the large class imbalance in PersonaExt-PeaCoK, which is mostly positive examples.

to promote candidates that have high entailment scores, but not penalize the candidates determined to be highly likely by the language model.

This method can only be used with a model that can output multiple candidates, such as BART with a beam search or sampling-based decoding methods. We refer to this as **NLI-re-ranking**.

4.3 NLI Classification

A stricter use of the NLI model is to completely remove any candidates that cannot be entailed by the utterance, i.e., has a neutral or contradictory relationship. Since there is no re-ranking, it can be used by models that only generate one candidate. We refer to this as **Neutral Removed**.

5 Persona Extraction Results

We first evaluate the extraction model performance on the PeaCoK-PersonaExt dataset and then evaluate the best-performing models on the new narrative setting of LIGHT.

5.1 PersonaExt-PeaCoK (“In-domain”)

The summarized results are shown in Table 6 (see Appendix D.1 for detailed results). We do not include the Persona-NLI re-ranking and removal since those are for adapting the model to the new narrative setting. The takeaways are as follows:

Our model and PAED perform similarly. While PAED is the best-performing model, with an overall triplet accuracy of 0.61, our model is close behind with an accuracy of 0.60. PAED in its original zero-shot setting performs poorly. Upon further examination, this is due to the “not” label having the highest likelihood compared to the other labels. The original PersonaExt relation types were detailed (e.g., “school_status”), so perhaps the model would perform better with more explicitly named relations (e.g., “attribute_of” instead of “characteristic”).

Relation-label accuracy is impacted by training prevalence. As seen in the per-label scores (Table 17), all models are best at identifying the “Characteristic” and “Routine or Habit” relations, which are the most prevalent in the training dataset. The models are the least accurate at identifying “Experience”, “Goal or Plan”, and the “Not a Relation” categories.

Predicting head entity is a simple task. All models, except PAED (zero-shot) have 0.95+ accuracy on identifying the Head entity in the triplet. This is because there are only a few options for head entities and the vast majority are “i” or “my” in the training set. This could impact the generalizability of the model, which we analyze in Section 5.2.

Triplet accuracy is penalized by tail entity. All models perform poorly on predicting the tail entity, with an accuracy of only 0.55-0.62. This low tail accuracy lowers the overall triplet accuracy, which is mostly accurate for the head entities and relations, with accuracy above 0.97 and 0.81, respectively. The difficulty in tail predicting is most likely due to the length, which is often several tokens as compared to the 1-3 tokens in the head entity, and not all the tail entity tokens are taken directly from the context. This is clear from the results shown in Appendix Table 20, where the original PAED model is trained and tested on a version of PersonaExt-PeaCoK with the original tail entities (i.e., no tail phrase). While the tail entity accuracy is significantly better at 0.8, the overall accuracy remains very similar at 0.63.

Decoding method has no impact on results. Our model performs similarly with regard to triplet accuracy across the three evaluated decoding methods of greedy, beam, and diverse beam search. Our theory is the model is well-trained for the PeaCoK-PersonaExt dataset and thus the most likely candi-

		Label				Head	Tail		Triplet
		Precision	Recall	F1	Acc.	Acc.	Overlap	Acc.	Acc.
Our Model	Greedy Search	0.85	0.84	0.84	0.84	0.96	0.78	0.67	0.66
	Beam Search	0.85	0.83	0.84	0.83	0.96	0.78	0.67	0.66
	Diverse Beam Search	0.85	0.83	0.83	0.83	0.96	0.78	0.67	0.66
PAED	(fine-tuned)	0.83	0.83	0.83	0.83	0.95	0.75	0.62	0.61
	(zero-shot)	0.52	0.06	0.03	0.06	0.08	0.07	0.07	0.06

Table 6: Results on the “in-domain” dataset, PersonaExt-PeaCoK. Evaluated on the test split. Accuracy is abbreviated to “Acc”.

dates are similar across decoding methods.

5.2 New Narrative Setting (LIGHT)

As discussed in Section 3.5, there are no ground-truth labels for the LIGHT dataset so we turn to intrinsic and human evaluation instead. The results are shown in Tables 7 and 8, respectively. For human evaluation, we annotated extracted triplets from 10 randomly sampled characters across all the models (5304 generations with 1556 unique relations). The overall annotations (i.e., “Yes” or “No”) had an inter-annotator agreement (IAA) of 0.90 and an IAA of 0.85 for the detailed annotations as measured by Krippendorff’s Alpha.⁷ The takeaways are as follows:

NLI Removal has the largest impact. Removing non-entailed triplets reduces the number of extracted triplets (i.e., not [no_relation]) by roughly 90%. This extreme reduction also impacts persona recall and utterance coverage. There is also a difference between Persona-NLI and the general NLI models, as Persona-NLI setting keeps more candidates. This is most likely due to Persona-NLI model having more exposure to the format of (utterance, persona) pairs.

Intrinsic metrics show no difference between decoding methods. Similar to the results on PersonaExt-PeaCoK, there is little performance difference (± 0.2) between decoding methods within a setting (e.g., Neutral Removed with NLI model) according to the automated (intrinsic) metrics. The differences are more apparent in the human evaluation.

Most extracted persona are about the character. Across all models, except PAED, there are high ratios of extracted persona that are first-person

(0.9+, e.g., head entity is “I”). The lowest rates of first-person relations are from the PAED models, with only 67% and 43% of relations being first-person from the retrained and zero-shot versions, respectively.

Greedy Search with removing non-entailed triplets from with Persona-NLI is the best model.

The differences in extracted persona relations are more apparent with human evaluation than from automatic evaluation alone (Table 8). The number of extracted relations are different for each method, so we focus on the ratio of accepted (i.e., labeled “Yes”) relations. With this metric, using Persona-NLI to remove non-entailed persona generated with greedy search is the best performing, with 68% of extracted relations being accepted. Interestingly, removing the non-entailed relations hurts performance across all other models, as compared to the base setup (i.e., no re-ranking or removal).

6 Discussion

The use-case of our persona extraction model is to adapt a character knowledge graph (PeaCoK) given past dialogue from a narrative setting that differs from the original training data. We showcase the ability of our best-performing model by building a graph with a few of the manually annotated LIGHT characters from Urbanek et al. (2019a), shown in Figure 1. Only three of the ten annotated characters with the extracted persona manually determined to be related are shown (Section 5.2). This graph can then be used for persona-grounded dialogue (Gao et al., 2023).

From the dialogue, the persona extraction model was able to extract persona information beyond the persona. For example, while the Pirate obviously (from the description) works as a pirate and is from a village, they also have a pet dog and own a sword.

Not surprisingly, the model with greedy search

⁷<https://github.com/LightTag/simplifiedorff>

			Per character					Overall				
			Recall	Cov.	Cov. (unique)	1st person	Unique persona	N. persona	Cov.	Cov. (unique)	1st person	N. persona
Neutral Removed	NLI	Beam Search	0.02	0.09	0.08	0.87	0.90	7.55	0.09	0.05	0.92	6053
		Diverse Beam Search	0.02	0.08	0.07	0.84	0.87	6.46	0.08	0.04	0.91	5020
		Greedy Search	0.02	0.06	0.05	0.83	0.82	4.71	0.06	0.03	0.94	3756
	Persona-NLI	Beam Search	0.07	0.21	0.20	0.97	0.93	17.69	0.21	0.06	0.99	7806
		Diverse Beam Search	0.07	0.15	0.14	0.95	0.92	12.38	0.15	0.04	0.98	5783
		Greedy Search	0.06	0.09	0.08	0.94	0.90	7.54	0.09	0.03	0.94	0.99
Re-ranking	NLI	Beam Search	0.30	0.85	0.78	0.89	0.91	69.65	0.85	0.31	0.89	40331
		Diverse Beam Search	0.31	0.89	0.81	0.89	0.91	72.77	0.89	0.32	0.88	42469
	Persona-NLI	Beam Search	0.29	0.87	0.79	0.90	0.92	70.93	0.87	0.31	0.89	40226
		Diverse Beam Search	0.31	0.89	0.81	0.89	0.92	72.96	0.89	0.32	0.89	41866
Base		Beam Search	0.30	0.85	0.78	0.89	0.91	69.44	0.85	0.31	0.89	40100
		Diverse Beam Search	0.31	0.89	0.81	0.89	0.91	72.57	0.89	0.32	0.89	42288
		Greedy Search	0.31	0.87	0.79	0.89	0.91	70.64	0.87	0.32	0.88	41709
PAED		(fine-tuned)	0.06	0.83	0.79	0.67	0.96	72.99	0.83	0.46	0.66	59787
		(zeroshot)	0.00	0.03	0.03	0.43	0.71	2.77	0.03	0.02	0.57	2417

Table 7: Quantitative results with intrinsic metrics across all models on the new narrative setting (fantasy, LIGHT). “Cov.” is short for utterance coverage. The Overall metrics are across all extracted persona and not analyzed for each character, thus the persona recall metric is not applicable.

		NLI Model	Decoding Method	No	Yes	Ratio accepted
Neutral Removed	NLI		Beam Search	30	38	0.56
			Diverse Beam Search	21	32	0.60
			Greedy Search	18	27	0.60
	Persona-NLI		Beam Search	75	82	0.52
			Diverse Beam Search	49	68	0.58
			Greedy Search	23	49	0.68
Re-ranking	NLI		Beam Search	195	332	0.63
			Diverse Beam Search	202	334	0.62
	Persona-NLI		Beam Search	209	324	0.61
			Diverse Beam Search	206	333	0.62
Base			Beam Search	193	331	0.63
			Diverse Beam Search	202	335	0.62
			Greedy Search	194	338	0.64

Table 8: Qualitative, human evaluations for our model evaluated on the new fantasy narrative setting (LIGHT). Inter-annotator agreement (IAA, Krippendorff’s Alpha measured with two annotators) of 0.90. “Ratio Accepted” refers to extracted persona annotated with the “Yes” category (i.e., marked as appropriate by both annotators).

performed the best, with regards to manually accepted persona, over the diverse decoding methods of beam and diverse beam search. This nods to the “quality vs diversity” trade-off seen in other areas of text generation.

Another trade-off was “quality over quantity”, since the Neutral Removed models returned significantly less persona than the Base and Re-ranking models. This was a benefit since there were less personas to annotate (e.g., an average of 4-20 extracted persona per character instead of 70 (Table 7)). Since even the best model had an acceptance rate of only 68%, there is still a need for a human evaluation step. This is further enforced by the lack of clear relationship between the intrinsic, quantitative metrics and the annotations. The silver persona “recall” metric proved uninformative and ended up having higher correlation with the number of returned persona than an indication of quality.

7 Conclusion

Our goal was to address the challenges in adapting a persona extraction model trained on one narrative setting (e.g., real-world “chit-chat”) to another setting (fantasy). We modeled persona extraction as a seq2seq problem and fine-tuned BART on PersonaExt, a dataset of (utterance, persona) pairs built from DialogNLI and PersonaChat. In order to extract persona information applicable to any narrative setting, we converted the “chit-chat” PersonaExt to the general relations from PeaCoK (e.g., “characteristic”). With our trained BART-based persona extraction model, we evaluated two different post-hoc techniques to extract persona from dialogue from a different narrative setting, the fantasy world of LIGHT. We experimented with natural language inference (NLI)-based re-ranking and removal of persona candidates, and determined that leveraging inference information to remove persona candidates that can not be inferred from the utterance worked the best according to human evaluation.

Limitations

The main limitation of this work is assuming that existing dialogue from a character is available to extract persona information from. Further, our methods are only evaluated on dialogue utterances and not on other character-related text such as prose (see Appendix A).

Ethical Considerations

The ethical concerns of this work center on the possibility of automatically impersonating an existing person, rather than the intended use case of fictional characters. Further, our model is trained on the PersonaExt dataset (derived from the crowdsourced PersonaChat), so we cannot guarantee no presence of offensive language. Manual evaluation is always the best final step, and we encourage developers who use our method for persona extraction to add a toxicity (e.g., hate or offensive speech) evaluation step in addition to quality evaluation.

References

- Nader Akoury, Shufan Wang, Josh Whiting, Stephen Hood, Nanyun Peng, and Mohit Iyyer. 2020. [STORIUUM: A Dataset and Evaluation Platform for Machine-in-the-Loop Story Generation](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6470–6484, Online. Association for Computational Linguistics.
- Prithviraj Ammanabrolu, Jack Urbanek, Margaret Li, Arthur Szlam, Tim Rocktäschel, and Jason Weston. 2021. [How to motivate your dragon: Teaching goal-driven agents to speak and act in fantasy worlds](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 807–833, Online. Association for Computational Linguistics.
- Samuel R. Bowman, Gabor Angeli, Christopher Potts, and Christopher D. Manning. 2015. [A large annotated corpus for learning natural language inference](#). In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pages 632–642, Lisbon, Portugal. Association for Computational Linguistics.
- Faeze Brahman, Meng Huang, Oyvind Tafjord, Chao Zhao, Mrinmaya Sachan, and Snigdha Chaturvedi. 2021. [“let your characters tell their story”: A dataset for character-centric narrative understanding](#). In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 1734–1752, Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Chris Callison-Burch, Gaurav Singh Tomar, Lara Martin, Daphne Ippolito, Suma Bailis, and David Reitter. 2022. [Dungeons and dragons as a dialog challenge for artificial intelligence](#). In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 9379–9393, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Silin Gao, Beatriz Borges, Soyoung Oh, Deniz Bayazit, Saya Kanno, Hiromi Wakaki, Yuki Mitsufuji, and Antoine Bosselut. 2023. [PeaCoK: Persona commonsense knowledge for consistent and engaging narratives](#). In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 6569–6591, Toronto, Canada. Association for Computational Linguistics.
- Silin Gao, Jena D. Hwang, Saya Kanno, Hiromi Wakaki, Yuki Mitsufuji, and Antoine Bosselut. 2022. [ComFact: A benchmark for linking contextual commonsense knowledge](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 1656–1675, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Jena D. Hwang, Chandra Bhagavatula, Ronan Le Bras, Jeff Da, Keisuke Sakaguchi, Antoine Bosselut, and Yejin Choi. 2021. [\(Comet-\) Atomic 2020: On Symbolic and Neural Commonsense Knowledge Graphs](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 35(7):6384–6392. Number: 7.
- Huda Khayrallah and João Sedoc. 2021. [Measuring the ‘I don’t know’ problem through the lens of Gricean quantity](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5659–5670, Online. Association for Computational Linguistics.
- Donghyun Kim, Youbin Ahn, Chanhee Lee, Wongyu Kim, Kyong-Ho Lee, Donghoon Shin, and Yeonsoo Lee. 2023. [Concept-based persona expansion for improving diversity of persona-grounded dialogue](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 3471–3481, Dubrovnik, Croatia. Association for Computational Linguistics.
- Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. [BART: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 7871–7880, Online. Association for Computational Linguistics.
- Aaron W. Li, Veronica Jiang, Steven Y. Feng, Julia Sprague, Wei Zhou, and Jesse Hoey. 2020. [ALOHA: Artificial Learning of Human Attributes for Dialogue Agents](#). *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(05):8155–8163. Number: 05.
- Jiwei Li, Michel Galley, Chris Brockett, Jianfeng Gao, and Bill Dolan. 2016a. [A diversity-promoting objective function for neural conversation models](#). In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 110–119, San Diego, California. Association for Computational Linguistics.
- Jiwei Li, Michel Galley, Chris Brockett, Georgios Spithourakis, Jianfeng Gao, and Bill Dolan. 2016b. [A persona-based neural conversation model](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 994–1003, Berlin, Germany. Association for Computational Linguistics.
- Yifan Liu, Wei Wei, Jiayi Liu, Xianling Mao, Rui Fang, and Dangyang Chen. 2022. [Improving Personality Consistency in Conversation by Persona Extending](#). In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management, CIKM ’22*, pages 1350–1359, New York, NY, USA. Association for Computing Machinery.

- Hongyuan Lu, Wai Lam, Hong Cheng, and Helen Meng. 2022. [Partner personas generation for dialogue response generation](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5200–5212, Seattle, United States. Association for Computational Linguistics.
- Bill MacCartney and Christopher D. Manning. 2008. [Modeling semantic containment and exclusion in natural language inference](#). In *Proceedings of the 22nd International Conference on Computational Linguistics (Coling 2008)*, pages 521–528, Manchester, UK. Coling 2008 Organizing Committee.
- A. H. Miller, W. Feng, A. Fisch, J. Lu, D. Batra, A. Borde, D. Parikh, and J. Weston. 2017. Parlai: A dialog research software platform. *arXiv preprint arXiv:1705.06476*.
- Jian Ni, Gaetano Rossiello, A. Gliozzo, and Radu Florian. 2022. [A Generative Model for Relation Extraction and Classification](#). *ArXiv*.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Yisi Sang, Xiangyang Mou, Mo Yu, Shunyu Yao, Jing Li, and Jeffrey Stanton. 2022. [TVShowGuess: Character comprehension in stories as speaker guessing](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 4267–4287, Seattle, United States. Association for Computational Linguistics.
- Kurt Shuster, Jack Urbanek, Arthur Szlam, and Jason Weston. 2022. [Am I me or you? state-of-the-art dialogue models cannot maintain an identity](#). In *Findings of the Association for Computational Linguistics: NAACL 2022*, pages 2367–2387, Seattle, United States. Association for Computational Linguistics.
- Jack Urbanek, Angela Fan, Siddharth Karamcheti, Saachi Jain, Samuel Humeau, Emily Dinan, Tim Rocktäschel, Douwe Kiela, Arthur Szlam, and Jason Weston. 2019a. [Learning to speak and act in a fantasy text adventure game](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 673–683, Hong Kong, China. Association for Computational Linguistics.
- Jack Urbanek, Angela Fan, Siddharth Karamcheti, Saachi Jain, Samuel Humeau, Emily Dinan, Tim Rocktäschel, Douwe Kiela, Arthur Szlam, and Jason Weston. 2019b. [Learning to Speak and Act in a Fantasy Text Adventure Game](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 673–683, Hong Kong, China. Association for Computational Linguistics.
- Judith van Stegeren and Mariet Theune. 2020. [Fantastic Strings and Where to Find Them: The Quest for High-Quality Video Game Text Corpora](#). In *Proceedings of the 12th Intelligent Narrative Technologies (INT) workshop*, volume 2862, page 8. CEUR.
- Ashwin K. Vijayakumar, Michael Cogswell, Ramprasath R. Selvaraju, Qing Sun, Stefan Lee, David Crandall, and Dhruv Batra. 2018. [Diverse Beam Search: Decoding Diverse Solutions from Neural Sequence Models](#). *ArXiv:1610.02424 [cs]*.
- Zhilin Wang, Xuhui Zhou, Rik Koncel-Kedziorski, Alex Marin, and Fei Xia. 2022. [Extracting and inferring personal attributes from dialogue](#). In *Proceedings of the 4th Workshop on NLP for Conversational AI*, pages 58–69, Dublin, Ireland. Association for Computational Linguistics.
- Nathaniel Weir, Ryan Thomas, Randolph D’Amore, Kellie Hill, Benjamin Van Durme, and Harsh Jhamtani. 2023. [Ontologically Faithful Generation of Non-Player Character Dialogues](#). *ArXiv:2212.10618 [cs]*.
- Sean Welleck, Jason Weston, Arthur Szlam, and Kyunghyun Cho. 2019. [Dialogue natural language inference](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3731–3741, Florence, Italy. Association for Computational Linguistics.
- Adina Williams, Nikita Nangia, and Samuel Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1112–1122, New Orleans, Louisiana. Association for Computational Linguistics.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. 2018. [Personalizing dialogue agents: I have a dog, do you](#)

have pets too? In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2204–2213, Melbourne, Australia. Association for Computational Linguistics.

Wangchunshu Zhou, Qifei Li, and Chenle Li. 2023. Learning to predict persona information for dialogue personalization without explicit persona description. In *Findings of the Association for Computational Linguistics: ACL 2023*, pages 2979–2991, Toronto, Canada. Association for Computational Linguistics.

Andrew Zhu, Karmanya Aggarwal, Alexander Feng, Lara Martin, and Chris Callison-Burch. 2023a. FIREBALL: A dataset of dungeons and dragons actual-play with structured game state information. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 4171–4193, Toronto, Canada. Association for Computational Linguistics.

Luyao Zhu, Wei Li, Rui Mao, Vlad Pandealea, and Erik Cambria. 2023b. PAED: Zero-shot persona attribute extraction in dialogues. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 9771–9787, Toronto, Canada. Association for Computational Linguistics.

A Narrative-Specific Datasets

While there are many existing datasets to support narrative analyses, we require a dataset that supports our tasks of *persona extraction from dialogue* and *dialogue agent roleplay*. The datasets we considered are in Table 9. The datasets varied in size, type of dialogue, and type of persona description. The dialogue from a character can either be presented in prose or conversational dialogue form, e.g., “as the knight slew the dragon he yelled ”for glory!” versus “Knight: For glory!”. Also, to evaluate our extracted person graph we need ground-truth persona data in the form of character-level information. This persona information can either be absent, structured, or unstructured. Structured persona information is either provided as sentences, as in LIGHT (Urbanek et al., 2019a), or in tabular format (Li et al., 2020; Zhu et al., 2023a).

B PersonaExt-PeaCoK Dataset Details

We modified the PersonaExt dataset (Zhu et al., 2023b) for compatibility with PeaCoK (Gao et al., 2023) by re-labeling the relations and converting the single-word tails to phrases. We refer to the relabeled PersonaExt dataset as **PersonaExt-PeaCoK**. The train, validation, and test sets for model training were stratified-split according to the new labels (see Table 12 for details.)

Conversion to PeaCoK Labels The 105 PersonaExt labels were mapped to one of four PeaCoK labels: routine or habit, characteristic, goal or plan, and experience. While there is also a “relationship” label, this is a meta-label that can occur between attributes *across* characters, so we do not include it as a label for the extractor. Two authors manually mapped the labels and disagreements were discussed until annotations were unanimous. The relation mappings are shown in Table 11.

Tail Phrase Creation To create the tail phrases we combine a PersonaExt relation with the tail, e.g., “(have_family, wife)” becomes “have family wife.” This can create phrases which are not proper English and we leave addressing this to future experiments.

C Persona Extraction Model Training Details

We fine-tuned BART (Lewis et al., 2020) with the HuggingFace Seq2SeqTrainer (Wolf et al., 2020). The hyperparameter settings are shown in Table 14.

C.1 BART Fine-tuning Templates

We experimented with variations of the structured input and output templates for fine-tuning BART. The templates are shown in Table 15 and the results are in Table 17 (summarized in Table 16).

Our models perform similarly on the overall accuracy (i.e., triplet accuracy) regardless of the input or output template, other than Relation-first, with scores around 0.55. The model with the Relation-first template had a higher overall accuracy score of 0.60, which is comparable to the score from comparative model PAED (0.61). We use the Relation-first template for all other experiments.

C.2 Comparative Model: PAED

Since we need the model to generate tail phrases, we trained PAED on the modified PersonaExt dataset with tail phrases Appendix B. We train two versions of the model: zero-shot on PersonaExt (with tail phrases) and fine-tuned on PersonaExt-PeaCoK. We use the authors’ released codebase (Zhu et al., 2023b) and their default hyperparameters (we release our copy of their codebase for reproducibility).

Zero-shot We trained the model in the zero-shot setting with 10 unseen labels and seed 0 (Table 19). The reported results for zero-shot PAED on their PersonaExt dataset are as follows: 0.40 for $n = 5$, 0.32 for $n = 10$, and 0.23 for $n = 15$. The triplet accuracy score of 0.34 is close to the reported score of 0.32, despite the tail phrase modification of the dataset.

Non-zero shot (fine-tuned) To evaluate the PAED model equally with our model, we train PAED in a non-zero-shot setting on PersonaExt-PeaCoK. We use the same default settings as in the released PAED codebase.

D Detailed Results

D.1 PeaCoK-PersonaExt

The detailed per-label results are in Table 18.

D.2 LIGHT

The detailed annotations are in Table 21.

Name	Source of Data	World Setting	N. characters	Dialogue?	Persona?
Dungeons and Dragons (Callison-Burch et al., 2022)	Play-By-Post	Dungeons and Dragons	7168 (est.)	prose	No
LIGHT (Urbanek et al., 2019a)	LIGHT crowdsourcing platform	LIGHT	1755	dialogue	structured
TorchLight II (van Stegeren and Theune, 2020)	Torchlight II	Torchlight	82	dialogue	No
Fireball (Zhu et al., 2023a)	Avrae bot on Discord	Dungeons and Dragons	160K	prose	unstructured
KNUDGE (Weir et al., 2023)	The Outer Worlds video game	The Outer Worlds video game	81	dialogue	unstructured
Storium (Akoury et al., 2020)	Storium	Multiple	25,955	prose	unstructured
TVShowGuess (Sang et al., 2022)	TVMegaSite	Multiple		dialogue	No
Star Wars: KOTOR (van Stegeren and Theune, 2020)	Star Wars: KOTOR	Star Wars universe	556	dialogue	No
HLA-Chat (Li et al., 2020)	TV Tropes	Multiple	45,821	dialogue	structured
LiSCU (Brahman et al., 2021)	schmoop, SparkNotes, cliffNotes, LitCharts	Multiple	9,499	prose	no

Table 9: Datasets from the literature considered in this work for persona knowledge graph narrative adaptation. LIGHT stands for Learning in Interactive Games with Humans and Text. KOTOR stands for Knights of the Old Republic. LiSCU stands for Literature Summary and Character Understanding.

Utterance	PersonaExt Triplet	PeaCoK Triplet
clothes . i am going to auburn for med school .	(i, attend_school, auburn)	(i, routine_habit, attend school auburn)
lol , maybe . i usually wear band shirts and ruffle sleeves , skinny jeans and leggings	(i, favorite, ruffle sleeves)	(i, characteristic, favorite ruffle sleeves)
hmmm . i would travel more if i had the money . you travel or sing ?	(i, want, money)	(i, goal_plan, want money)
i never flew a plane , but i have flown from france to canada where i live	(i, place_origin, france)	(i, experience, place origin france)
do you have friends here , i have lots here . You going back to school ?	(i, misc_attribute, friends)	(i, not, misc attribute friends)

Table 10: Example datapoints from PersonaExt modified to fit PeaCoK format.

Relation	PersonaExt Relations
Characteristic	belief, favorite, favorite_activity, favorite_animal, favorite_book, favorite_color, favorite_drink, favorite_food, favorite_hobby, favorite_movie, favorite_music, favorite_music_artist, favorite_place, favorite_season, favorite_show, favorite_sport, gender, has_ability, has_age, have_children, have_children, have_family, have_no, have_no_children, have_no_family, have_no_sibling, have_pet, have_sibling, have_vehicle, health_status, like_activity, like_animal, like_character, like_color, like_drink, like_food, like_general, like_goto, like_movie, like_music, like_read, like_sport, like_sports, like_subject, like_watching, name, physical_attribute, race, scared_of, sexual_orientation, weakness
Experience	has_degree, international_exp, nationality, place_origin, pre_employed_by_company, pre_employed_by_general, previous_profession, raised_by, used_to
Goal plan	want, want_do, want_job, want_no
Not	fall_out, have, industry, misc_attribute, other, work_schedule
Routine habit	allergy_to, attend_school, collect, diet, dislike, dislike_activity, dislike_animal, dislike_color, dislike_drink, dislike_food, dislike_job, dislike_music, dislike_sport, dislike_subject, do_not_do, do_not_drink, do_not_eat, doing, employed_by_company, employed_by_general, get_along, has_hobby, has_profession, job_status, live_in_citystatecountry, live_in_general, live_with, marital_status, member_of, never_do, own, relationship, school_status, teach, worry_about

Table 11: Corresponding PeaCoK relation type for each of the 105 PersonaExt relations. The 'not' category refers to not being mapped to a PeaCoK relation type.

	Train	Dev	Test	Total
Characteristic	0.57	0.57	0.57	0.57
Experience	0.03	0.03	0.03	0.03
Goal or Plan	0.04	0.04	0.04	0.04
Routine or Habit	0.31	0.31	0.31	0.31
Not a Relation	0.04	0.04	0.04	0.04
All	28412	3157	3508	35077

Table 12: Size and label distribution for each split in the PeaCoK-PersonaExt dataset. The Characteristic and Routine or Habit attributes are the most frequent. The train, validation, and test sets for model training were stratified-split according to the labels.

Top Entity Values	
Head	i (2920), my (309), me (90), we (33), my dad (27), my mom (25), mine (17), my mother (17), my parents (16), my brother (8), my father (7), dog (5), parents (4), my wife (4), my boyfriend (4), my family (4), family (3), my husband (2), best friend (2), friends (1), our (1), friend (1), mom (1), my girlfriend (1), us (1), cat (1), my dads (1), my son (1), my grandma (1), my best friend (1)
Tail	have pet dog (39), have pet cat (37), favorite food pizza (24), diet vegan (21), have pet cats (18), like animal dogs (18), marital status married (18), like music country (17), has profession teacher (17), have friends (17), attend school high school (17), like activity hiking (15), has profession nurse (15), like activity video games (15), have vehicle car (14), like activity shopping (14), have pet dogs (14), like animal dog (13), like color blue (13), like activity travel (13), has profession artist (11), have sibling sister (11), physical attribute short (11), like sports basketball (10), like goto beach (10), physical attribute tall (10), like drink coffee (10), like activity reading (10), place origin farm (10)

Table 13: The most prevalent values for the Head and Tail entities in the PeaCoK-PersonaExt dataset. Only the tail entities with at least 10 occurrences are shown. There are 30 unique head entities and 1708 unique tail entities.

Param.	Value
Batch size	32
Epochs	20
Seed	42
Optimizer	AdamW
Learning Rate	$5e - 5$
Scheduler	linear
Warmup	1 epoch
weight decay	0
adam_beta1	0.9
adam_beta2	0.999
adam_epsilon	$1e - 8$

Table 14: Hyperparameter settings for the persona extraction model. The best model was saved at the end according to evaluation loss on the validation set. Model was trained on 4 GPUs, batch size shown is the effective batch size.

Name	Input	Output
PAED	Context : {context} Head Entity : <mask>, Tail Entity : <mask> , Relation : <mask> .	Head Entity : {head} , Tail Entity : {tail} , Relation : {relation} .
Tokens	[CONTEXT] {context} [HEAD] <mask> [TAIL] <mask> [RELATION] <mask>	[HEAD] {head} [TAIL] {tail} [RELATION] {relation}
Relation-first	[CONTEXT] context [RELATION] <mask> [HEAD] <mask> [TAIL] <mask>	[RELATION] {relation} [HEAD] {head} [TAIL] {tail}
Relation-first-nomask	[CONTEXT] {context}	[RELATION] {relation} [HEAD] {head} [TAIL] {tail}

Table 15: Evaluated input and output prompts for fine-tuning BART for persona extraction task.

		Relation				Head	Tail	Triplet
		Prec.	Recall	F1	Acc.	Acc.	Acc.	Acc.
BART	Token prompt	0.81	0.81	0.81	0.81	0.97	0.56	0.55
	Relation-first	0.83	0.83	0.83	0.83	0.98	0.61	0.60
	Relation-first-nomask	0.81	0.81	0.81	0.81	0.98	0.55	0.55
	PAED prompt	0.81	0.81	0.81	0.81	0.97	0.56	0.56
PAED		0.83	0.83	0.83	0.83	0.98	0.62	0.61

Table 16: Summary results for our model (BART) trained with the variety of input and output templates (Table 15) and comparative model PAED trained and tested on the PersonaExt-PeaCoK dataset. Results are on the test set.

		Relation				Head	Tail	Triplet	
		Prec.	Recall	F1	Acc.	Acc.	Acc.	Acc.	
BART	PAED prompt	Char.	0.85	0.91	0.88	0.91	0.99	0.57	0.56
		Exp.	0.70	0.64	0.67	0.64	0.91	0.54	0.50
		Goal	0.64	0.76	0.69	0.76	0.99	0.64	0.64
		Routine	0.79	0.70	0.75	0.70	0.96	0.57	0.56
		Not	0.69	0.54	0.61	0.54	0.95	0.46	0.46
		Overall	0.81	0.81	0.81	0.81	0.97	0.56	0.56
	Tokens	Char.	0.84	0.91	0.88	0.91	0.98	0.57	0.57
		Exp.	0.65	0.67	0.66	0.67	0.92	0.57	0.52
		Goal	0.66	0.73	0.70	0.73	0.98	0.58	0.58
		Routine	0.80	0.69	0.74	0.69	0.97	0.54	0.54
		Not	0.67	0.58	0.62	0.58	0.96	0.49	0.49
		Overall	0.81	0.81	0.81	0.81	0.97	0.56	0.55
	Relation-first	Char.	0.86	0.93	0.89	0.93	0.99	0.62	0.62
		Exp.	0.80	0.66	0.73	0.66	0.93	0.61	0.58
		Goal	0.69	0.67	0.68	0.67	0.98	0.57	0.57
		Routine	0.80	0.74	0.77	0.74	0.97	0.60	0.59
		Not	0.84	0.55	0.66	0.55	0.94	0.47	0.45
		Overall	0.83	0.83	0.83	0.83	0.98	0.61	0.60
Relation-first-nomask	Char.	0.87	0.87	0.87	0.87	0.98	0.54	0.53	
	Exp.	0.71	0.68	0.70	0.68	0.93	0.58	0.53	
	Goal	0.64	0.70	0.67	0.70	0.98	0.60	0.59	
	Routine	0.75	0.76	0.75	0.76	0.97	0.58	0.58	
	Not	0.70	0.58	0.64	0.58	0.94	0.48	0.47	
	Overall	0.81	0.81	0.81	0.81	0.98	0.55	0.55	
PAED	Char.	0.87	0.91	0.89	0.91	0.99	0.63	0.62	
	Exp.	0.70	0.68	0.69	0.68	0.92	0.65	0.60	
	Goal	0.73	0.75	0.74	0.75	0.98	0.67	0.67	
	Routine	0.81	0.74	0.78	0.74	0.97	0.62	0.60	
	Not	0.69	0.65	0.67	0.65	0.97	0.60	0.60	
	Overall	0.83	0.83	0.83	0.83	0.98	0.62	0.61	

Table 17: Detailed results for our model (BART) trained with the variety of input and output templates (Table 15) and comparative model PAED trained and tested on the PersonaExt-PeaCoK dataset. Results are on the test set.

		Label				Head	Tail		Triplet	
		Precision	Recall	F1	Acc	Acc	Overlap	Acc	Acc	
BART	Greedy Search	Characteristic	0.93	0.83	0.88	0.83	0.98	0.75	0.62	0.62
		Experience	0.78	0.73	0.75	0.73	0.92	0.77	0.67	0.64
		Goal plan	0.68	0.75	0.71	0.75	0.97	0.77	0.67	0.67
		Routine habit	0.73	0.88	0.80	0.88	0.98	0.83	0.75	0.74
		Not	0.82	0.69	0.75	0.69	0.69	0.69	0.69	0.69
		Overall	0.85	0.84	0.84	0.84	0.96	0.78	0.67	0.66
	Beam Search	Characteristic	0.93	0.83	0.88	0.83	0.98	0.75	0.62	0.62
		Experience	0.78	0.74	0.76	0.74	0.92	0.78	0.69	0.65
		Goal plan	0.65	0.77	0.70	0.77	0.97	0.78	0.69	0.69
		Routine habit	0.73	0.87	0.79	0.87	0.98	0.83	0.75	0.74
		Not	0.83	0.68	0.75	0.68	0.68	0.68	0.68	0.68
		Overall	0.85	0.83	0.84	0.83	0.96	0.78	0.67	0.66
	Diverse Beam Search	Characteristic	0.93	0.83	0.88	0.83	0.98	0.76	0.63	0.62
		Experience	0.78	0.74	0.76	0.74	0.92	0.78	0.67	0.64
		Goal plan	0.67	0.76	0.71	0.76	0.98	0.77	0.67	0.67
		Routine habit	0.73	0.88	0.79	0.88	0.98	0.83	0.75	0.74
		Not	0.85	0.63	0.73	0.63	0.63	0.63	0.63	0.63
		Overall	0.85	0.83	0.83	0.83	0.96	0.78	0.67	0.66
PAED	(fine-tuned)	Characteristic	0.87	0.91	0.89	0.91	0.97	0.77	0.61	0.61
		Experience	0.70	0.68	0.69	0.68	0.88	0.74	0.65	0.60
		Goal plan	0.73	0.75	0.74	0.75	0.97	0.75	0.67	0.67
		Routine habit	0.81	0.74	0.78	0.74	0.96	0.72	0.62	0.60
		Not	0.69	0.65	0.67	0.65	0.66	0.66	0.66	0.65
		Overall	0.83	0.83	0.83	0.83	0.95	0.75	0.62	0.61
	(zeroshot)	Characteristic	0.87	0.01	0.01	0.01	0.02	0.01	0.01	0.00
		Experience	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00
		Goal plan	0.48	0.42	0.45	0.42	0.42	0.40	0.39	0.39
		Routine habit	0.00	0.00	0.00	0.00	0.03	0.02	0.02	0.00
		Not	0.04	1.00	0.08	1.00	1.00	1.00	1.00	1.00
		Overall	0.52	0.06	0.03	0.06	0.08	0.07	0.07	0.06

Table 18: Detailed per-label results on PersonaExt-PeaCoK test split.

	Label				Head	Tail	Triplet
	Precision	Recall	F1	Acc.	Acc.	Acc.	Acc.
dislike	0.79	0.57	0.67	0.57	0.92	0.50	0.32
favorite_place	0.38	0.50	0.43	0.50	1.00	0.72	0.42
get_along	0.00	0.00	0.00	0.00	0.89	0.71	0.00
have_no_children	0.00	0.00	0.00	0.00	1.00	0.79	0.00
have_no_sibling	0.00	0.00	0.00	0.00	1.00	0.90	0.00
have_sibling	0.51	0.89	0.65	0.89	0.85	0.64	0.56
like_color	0.00	0.00	0.00	0.00	0.99	0.80	0.00
like_general	0.49	0.60	0.54	0.60	0.98	0.40	0.25
used_to	0.18	0.16	0.17	0.16	1.00	0.68	0.11
want_job	0.84	0.88	0.86	0.88	0.99	0.73	0.68
Overall	0.52	0.58	0.54	0.58	0.95	0.58	0.34

Table 19: Results for original PAED model on PersonaExt (with “tail phrases” (see Appendix B)) with 10 unseen labels and seed 0. We refer to this model as PAED (zero-shot).

	Precision	Relation			Head	Tail	Overall
		Recall	F1	Acc.	Acc.	Acc.	Acc.
Characteristic	0.92	0.79	0.85	0.79	0.99	0.80	0.65
Experience	0.33	0.90	0.48	0.90	0.90	0.83	0.75
Goal or Plan	0.41	0.85	0.55	0.85	0.99	0.78	0.77
Routine or Habit	0.77	0.65	0.71	0.65	0.97	0.80	0.57
Not	0.46	0.83	0.59	0.83	0.97	0.74	0.72
Overall	0.81	0.75	0.77	0.75	0.98	0.80	0.63

Table 20: PAED results on the PersonaExt-PeaCoK dataset on the test set without the tail phrase modification.

		Not Accepted (No)				Accepted (Yes)		Ratio Accepted	
		Contradictory	Malformed	Non-specific relation	Unreasonable	Directly	Reasonable		
Neutral Removed	NLI	Beam Search	8	0	12	10	3	36	0.57
		Diverse Beam Search	6	0	8	7	2	31	0.61
		Greedy Search	2	0	8	8	1	26	0.60
	Persona-NLI	Beam Search	10	0	51	14	9	75	0.53
		Diverse Beam Search	5	3	32	9	8	61	0.58
		Greedy Search	3	0	14	6	6	44	0.68
Re-ranking	NLI	Beam Search	60	1	85	61	40	320	0.63
		Diverse Beam Search	61	4	92	62	38	326	0.62
	Persona-NLI	Beam Search	58	1	99	63	36	313	0.61
		Diverse Beam Search	58	4	99	62	37	324	0.62
Base	Beam Search	57	1	86	61	40	320	0.64	
	Diverse Beam Search	59	4	92	64	39	326	0.62	
	Greedy Search	54	4	86	62	44	325	0.64	

Table 21: Detailed results for human evaluation on personas extracted from LIGHT dataset. IAA is 0.85.