

Bogush A.A., Ovsyuk E.M., Red'kov V.M.

**MAXWELL EQUATIONS IN DUFFIN – KEMMER TETRAD FORM,
SPHERICAL WAVES IN RIEMANN SPACE S_3**

Institute of Physics, National Academy of Sciences of Belarus
redkov@dragon.bas-net.by

The Duffin – Kemmer form of massless vector field (Maxwell field) is extended to the case of arbitrary pseudo-Riemannian space – time in accordance with the tetrad recipe of Tetrode – Weyl – Fock – Ivanenko. In this approach, the Maxwell equations are solved exactly on the background of simplest static cosmological model, space of constant curvature of Riemann parameterized by spherical coordinates. Separation of variables is realized in the basis of Schrödinger – Pauli type, description of angular dependence in electromagnetic field functions is given in terms of Wigner D -functions. A discrete frequency spectrum for electromagnetic modes depending on the curvature radius of space and three discrete parameters is found. 4-potentials for spherical electromagnetic waves of magnetic and electric type have been constructed in explicit form.

1 Maxwell electrodynamics in the Duffin – Kemmer tetrad form, separation of variables in Riemann space S_3

The task of the present paper is to obtain in explicit form spherical waves solutions to Maxwell equations in space of positive curvature, spherical Riemann S_3 model, when it is parameterized by spherical coordinates. This paper continues investigation of similar problems on searching solutions of the Maxwell equations in symmetric space-time model [1, 2]. We will use the known Duffin - -Kemmer approach to Maxwell theory extended to arbitrary curved space – times in accordance with general tetrad formalism by Tetrode – Weyl – Fock – Ivanenko [3, 4, 5]; also see [6]).

The Duffin – Kemmer equation for massless vector field is [6].

$$\begin{aligned} & [i \beta^\alpha(x) (\partial_\alpha + B_\alpha(x)) - P_6] \Phi(x) = 0 , \\ & \beta^\alpha(x) = \beta^a e_{(a)}^\alpha(x) , \quad B_\alpha(x) = \frac{1}{2} J^{ab} e_{(a)}^\beta \nabla_\alpha (e_{(b)\beta}) , \\ & J^{ab} = \beta^a \beta^b - \beta^b \beta^a , \quad P_6 = \begin{vmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & I & 0 \\ 0 & 0 & 0 & I \end{vmatrix} , \end{aligned} \quad (1)$$

or with the use of notation for Ricci rotation coefficients [7]

$$\begin{aligned} & \{ i \beta^c (e_{(c)}^\alpha \partial_\alpha + \frac{1}{2} J^{ab} \gamma_{abc}) - P_6 \} \Psi = 0 , \\ & \gamma_{bac} = -\gamma_{abc} = -e_{(b)\beta;\alpha} e_{(a)}^\beta e_{(c)}^\alpha . \end{aligned} \quad (2)$$

In spherical coordinates [8] of the Riemann space S_3

$$dS^2 = c^2 dt^2 - d\chi^2 - \sin^2 \chi (d\theta^2 + \sin^2 \theta d\phi^2)$$

let us take the following tetrad

$$e_{(0)}^\alpha = (1, 0, 0, 0), \quad e_{(3)}^\alpha = (0, 1, 0, 0),$$

$$e_{(1)}^\alpha = (0, 0, \frac{1}{\sin \chi}, 0), \quad e_{(2)}^\alpha = (1, 0, 0, \frac{1}{\sin \chi \sin \theta}).$$

Christoffel symbols [7] are

$$\Gamma_{\phi\phi}^\chi = -\sin \chi \cos \chi \sin^2 \theta, \quad \Gamma_{\theta\theta}^\chi = -\sin \chi \cos \chi,$$

$$\Gamma_{\phi\phi}^\theta = -\sin \theta \cos \theta, \quad \Gamma_{\theta\chi}^\theta = \frac{\cos \chi}{\sin \chi},$$

$$\Gamma_{\phi\theta}^\phi = \text{ctg } \theta, \quad \Gamma_{\chi\phi}^\phi = \frac{\cos \chi}{\sin \chi}.$$

Ricci rotation coefficients are $\gamma_{ab0} = 0$, $\gamma_{ab3} = 0$ and

$$\gamma_{ab1} = \begin{vmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -\frac{1}{\text{tg } \chi} \\ 0 & 0 & 0 & 0 \\ 0 & +\frac{1}{\text{tg } \chi} & 0 & 0 \end{vmatrix}, \quad \gamma_{ab2} = \begin{vmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & +\frac{1}{\text{tg } \theta \sin \chi} & 0 \\ 0 & -\frac{1}{\text{tg } \theta \sin \chi} & 0 & -\frac{1}{\text{tg } \chi} \\ 0 & 0 & +\frac{1}{\text{tg } \chi} & 0 \end{vmatrix}.$$

Therefore, eq. (2) takes the form

$$[i \beta^0 \frac{\partial}{\partial t} + i \beta^3 \frac{\partial}{\partial \chi} + \frac{i}{\sin \chi} (\beta^1 J^{31} + \beta^2 J^{32}) + \frac{1}{\sin \chi} \Sigma_{\theta,\phi}^\kappa - P_6] \Phi(x) = 0,$$

$$\Sigma_{\theta,\phi}^\kappa = i \beta^1 \partial_\theta + \beta^2 \frac{i\partial + iJ^{12} \cos \theta}{\sin \theta}. \quad (3)$$

Below we will use Duffin – Kemmer matrices in cyclic basis [9]:

$$\beta^0 = \begin{vmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & +i & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & +i & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & +i & 0 & 0 & 0 \\ 0 & -i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -i & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ i & 0 & 0 & -i & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{vmatrix},$$

$$\beta^3 = \begin{vmatrix} 0 & 0 & 0 & 0 & 0 & i & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & +1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & +1 & 0 & 0 & i & 0 & 0 & 0 & 0 \end{vmatrix},$$

$$\beta^1 = \frac{1}{\sqrt{2}} \begin{pmatrix} 0 & 0 & 0 & 0 & -i & 0 & +i & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & +1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & +1 & 0 & +1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & +1 & 0 \\ -i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ +i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -1 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix},$$

$$\beta^2 = \frac{1}{\sqrt{2}} \begin{pmatrix} 0 & 0 & 0 & 0 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -i & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & +i & 0 & -i \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & +i & 0 \\ -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & +i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & -i & 0 & +i & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -i & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix},$$

when the matrix iJ^{12} has a diagonal structure

$$iJ^{12} = \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & t_3 & 0 & 0 \\ 0 & 0 & t_3 & 0 \\ 0 & 0 & 0 & t_3 \end{pmatrix}, \quad t_3 = \begin{pmatrix} +1 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & -1 \end{pmatrix}.$$

The components of a total conserved angular momentum read as

$$J_1 = l_1 + \frac{\cos \phi}{\sin \theta} iJ^{12}, \quad J_2 = l_2 + \frac{\sin \phi}{\sin \theta} iJ^{12}, \quad J_3 = l_3. \quad (4)$$

The field function of a vector particle with parameters (ϵ, j, m) should be constructed as follows

$$\Phi_{\omega jm}(x) = e^{-i\omega t} [f_1(r) D_0, f_2(r) D_{-1}, f_3(r) D_0, f_4(r) D_{+1}, f_5(r) D_{-1}, f_6(r) D_0, f_7(r) D_{+1}, f_8(r) D_{-1}, f_9(r) D_0, f_{10}(r) D_{+1}]. \quad (5)$$

We need the following recurrent relations [9]:

$$\begin{aligned} \partial_\theta D_{-1} &= (1/2) (a D_{-2} - \sqrt{j(j+1)} D_0), \\ \frac{-m + \cos \theta}{\sin \theta} D_{-1} &= (1/2) (-a D_{-2} - \sqrt{j(j+1)} D_0), \\ \partial_\theta D_0 &= (1/2) \sqrt{j(j+1)} (D_{-1} - D_{+1}), \\ \frac{-m}{\sin \theta} D_0 &= (1/2) \sqrt{j(j+1)} (-D_{-1} - D_{+1}), \\ \partial_\theta D_{+1} &= (1/2) (\sqrt{j(j+1)} D_0 - a D_{+2}), \\ \frac{-m - \cos \theta}{\sin \theta} D_{+1} &= (1/2) (-\sqrt{j(j+1)} D_0 - a D_{+2}), \\ a &= \sqrt{(j-1)(j+2)}, \end{aligned} \quad (6)$$

with the use of these we readily find

$$\Sigma_{\theta,\phi}^{\kappa} \Phi = \exp(-i\omega t) \sqrt{j(j+1)} \begin{pmatrix} (-f_5 - f_7) D_0 \\ -i f_9 D_{-1} \\ (-if_8 + if_{10}) D_0 \\ -if_9 D_{+1} \\ f_1 D_{-1} \\ 0 \\ f_1 D_{+1} \\ -if_3 D_{-1} \\ (+if_2 - if_4) D_0 \\ +if_3 D_{+1} \end{pmatrix}. \quad (7)$$

Allowing for (7) and identities

$$i \beta^0 \partial_t \Phi = \omega \exp(-i\omega t) \begin{pmatrix} 0 \\ if_5 D_{-1} \\ if_6 D_0 \\ if_7 D_{+1} \\ -if_2 D_{-1} \\ -if_3 D_0 \\ -if_4 D_{+1} \\ 0 \\ 0 \\ 0 \end{pmatrix},$$

$$i \left(\beta^3 \frac{\partial}{\partial \chi} + \frac{\beta^1 \beta^{31} + \beta^2 \beta^{32}}{\sin \chi} \right) \Phi_{\omega jm} = \exp(-i\omega t) \begin{pmatrix} (-d/d\chi - 2/\sin \chi) f_6 D_0 \\ (id/d\chi + i/\sin \chi) f_8 D_{-1} \\ 0 \\ (-id/d\chi - i/\sin \chi) f_{10} D_{+1} \\ 0 \\ 0 \\ 0 \\ (-id/d\chi - i/\sin \chi) f_2 D_{-1} \\ 0 \\ (id/d\chi + i/\chi) f_4 D_{+1} \end{pmatrix},$$

we arrive at 10 radial equations ($\nu = \sqrt{j(j+1)}/2$):

$$\begin{aligned} - \left(\frac{d}{d\chi} + \frac{2}{\text{tg } \chi} \right) f_6 - \frac{\nu}{\chi} (f_5 + f_7) &= 0, \\ i\omega f_5 + i \left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi} \right) f_8 + i \frac{\nu}{\sin \chi} f_9 &= 0, \\ i\epsilon f_6 + i \frac{\nu}{\sin \chi} (-f_8 + f_{10}) &= 0, \\ i\omega f_7 - i \left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi} \right) f_{10} - i \frac{\nu}{\sin \chi} f_9 &= 0, \\ -i\omega f_2 + \frac{\nu}{\sin \chi} f_1 - f_5 &= 0, \\ -i\omega f_3 - \frac{d}{d\chi} f_1 - f_6 &= 0, \end{aligned}$$

$$\begin{aligned}
& -i\omega f_4 + \frac{\nu}{\sin \chi} f_1 - f_7 = 0, \\
& -i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_2 - i\frac{\nu}{\sin \chi} f_3 - f_8 = 0, \\
& \quad i\frac{\nu}{r} (f_2 - f_4) - f_9 = 0, \\
& i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_4 + i\frac{\nu}{\sin \chi} f_3 - f_{10} = 0.
\end{aligned} \tag{8}$$

Let us diagonalize additionally the P -inversion operator (its form is given in cyclic basis)

$$\hat{P}_{sph.}^{cycl.} = \begin{pmatrix} 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 & 0 & 0 & 0 \end{pmatrix} \otimes \hat{P},$$

the eigenvalues equation $\hat{P}_{sph.}^{cycl.} \Phi_{jm} = P \Phi_{jm}$ leads us to

$$\begin{aligned}
P &= (-1)^{j+1}, \\
f_1 &= f_3 = f_6 = 0, \quad f_4 = -f_2, \quad f_7 = -f_5, \quad f_{10} = +f_8;
\end{aligned} \tag{9}$$

$$\begin{aligned}
P &= (-1)^j, \\
f_9 &= 0, \quad f_4 = +f_2, \quad f_7 = +f_5, \quad f_{10} = -f_8.
\end{aligned} \tag{10}$$

Correspondingly, we have two different systems:

$$\begin{aligned}
P &= (-1)^{j+1}, \\
i\omega f_5 + i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_8 + i\frac{\nu}{\sin \chi} f_9 &= 0, \quad -i\omega f_2 - f_5 = 0, \\
-i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_2 - f_8 &= 0, \quad 2i\frac{\nu}{\sin \chi} f_2 - f_9 = 0;
\end{aligned} \tag{11}$$

$$\begin{aligned}
P &= (-1)^j, \\
\left(\frac{d}{d\chi} + \frac{2}{\text{tg } \chi}\right) f_6 + \frac{2\nu}{\sin \chi} f_5 &= 0, \quad i\omega f_5 + i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_8 = 0, \\
i\omega f_6 - \frac{2i\nu}{\sin \chi} f_8 &= 0, \quad -i\omega f_2 + \frac{\nu}{\sin \chi} f_1 - f_5 = 0, \\
i\omega f_3 + \frac{d}{d\chi} f_1 + f_6 &= 0, \quad i\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right) f_2 + i\frac{\nu}{\sin \chi} f_3 + f_8 = 0.
\end{aligned} \tag{12}$$

2 Solution of radial equations for waves with parity $P = (-1)^{j+1}$

Let us consider eqs. (11). Expressing f_5, f_8, f_9 through f_2 and substituting them into the first equation we get to

$$\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right)\left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi}\right)f_2 + \left(\omega^2 - \frac{j(j+1)}{\sin^2 \chi}\right) f_2 = 0 \quad (13)$$

it is simplified by $f_2 = \sin^{-1} \chi f(\chi)$:


$$\frac{d^2}{d\chi^2} f + \left(\omega^2 - \frac{j(j+1)}{\sin^2 \chi}\right) f = 0 \quad (14)$$

In new variable

$$z = 1 - e^{-2i\chi}, \quad z = 2 \sin \chi e^{i(-\chi+\pi/2)} ;$$

which can be clarified by the scheme

Fig. 1 Complex variable z

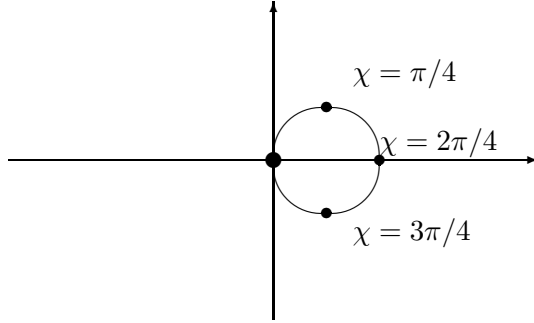

$$\frac{d}{d\chi} = 2i(1-z)\frac{d}{dz}, \quad \frac{\cos \chi}{\sin \chi} = i\frac{2-z}{z}, \quad \frac{1}{\sin^2 \chi} = -\frac{4(1-z)}{z^2},$$

eq. (14) transforms to

$$4(1-z)^2 \frac{d^2 f}{dz^2} - 4(1-z) \frac{df}{dz} - \omega^2 f - \frac{4(1-z)\nu^2}{z^2} f = 0. \quad (15)$$

With the substitution

$$\begin{aligned} f &= z^a(1-z)^b F(z), \\ f' &= az^{a-1}(1-z)^b F(z) - bz^a(1-z)^{b-1} F(z) + z^a(1-z)^b \frac{dF(z)}{dz}, \\ f'' &= a(a-1)z^{a-2}(1-z)^b F(z) - abz^{a-1}(1-z)^{b-1} F(z) + az^{a-1}(1-z)^b \frac{dF(z)}{dz} - \\ &\quad - abz^{a-1}(1-z)^{b-1} F(z) + b(b-1)z^a(1-z)^{b-2} F(z) - bz^a(1-z)^{b-1} \frac{dF(z)}{dz} + \\ &\quad + az^{a-1}(1-z)^b \frac{dF(z)}{dz} - bz^a(1-z)^{b-1} \frac{dF(z)}{dz} + z^a(1-z)^b \frac{d^2 F(z)}{dz^2} \end{aligned}$$

eq. (15) gives

$$z(1-z)\frac{d^2F}{dz^2} + [2a - (2a + 2b + 1)z]\frac{dF}{dz} + \left[\frac{\omega^2}{4} - (a+b)^2 + (a(a-1) - \nu^2)\frac{1}{z} + (b^2 - \frac{\omega^2}{4})\frac{1}{1-z} \right] F = 0.$$

Requiring

$$a(a-1) - \nu^2 = 0, \quad b^2 - \frac{\omega^2}{4} = 0$$

or

$$a = j + 1, -j, \quad b = \pm \frac{\omega}{2} \quad (16)$$

we get

$$z(1-z)\frac{d^2F}{dz^2} + [2a - (2a + 2b + 1)z]\frac{dF}{dz} - \left[(a+b)^2 - \frac{\omega^2}{4} \right] F = 0. \quad (17)$$

It is of hypergeometric type equation

$$z(1-z)F'' + [\gamma - (\alpha + \beta + 1)z]F' - \alpha\beta F = 0$$

with parameters

$$\gamma = 2a, \quad \alpha + \beta = 2a + 2b, \quad \alpha\beta = (a+b)^2 - \frac{\omega^2}{4},$$

or

$$\alpha = a + b - \frac{\omega}{2}, \quad \beta = a + b + \frac{\omega}{2}. \quad (18)$$

The function $f(z)$ is

$$f = z^a(1-z)^b F(z) = [2i \sin \chi e^{-i\chi}]^a [1 - 2i \sin \chi e^{-i\chi}]^b F(z); \quad (19)$$

it is finite at the points $\chi = 0$ and $\chi = \pi$ only if (see (3.3)) $a = j + 1$; and if $b = -\omega/2$ - then one can reduce the hypergeometric series to a polynomial (supposing $\omega > 0$):

$$\alpha = j + 1 - \omega = -n = \{0, -1, -2, \dots\} \implies \omega = n + 1 + j.$$

Thus, solution with parity $P = (-1)^{j+1}$ is given by (this is a spherical wave of magnetic type)

$$P = (-1)^{j+1}$$

$$f_2 = \frac{1}{\sin \chi} f(\chi), \quad f = z^a(1-z)^b F(z) = [2i \sin \chi e^{-i\chi}]^a [1 - 2i \sin \chi e^{-i\chi}]^b F(z),$$

$$F(z) = F(-n, j + 1, 2j + 2; z) = F(-n, j + 1, 2j + 2; 2i \sin \chi e^{-i\chi}) \quad (20)$$

for frequency ω only special values are permitted:

$$\omega = n + 1 + j, \quad j = 0, 1, 2, \dots, \quad n = 0, 1, 2, \dots; \quad (21)$$

or in usual units

$$\omega = \frac{c}{\rho} (n + 1 + j) , \quad (22)$$

ρ stands for the curvature radius. Let us write down (tetrad) 4-potential of these waves (they are spherical waves of magnetic type)

$$\begin{vmatrix} A_{(0)} \\ A_{(1)} \\ A_{(2)} \\ A_{(3)} \end{vmatrix} = \begin{vmatrix} 0 \\ +f_2 D_{-1} \\ 0 \\ -f_2 D_{+1} \end{vmatrix} . \quad (23)$$

3 The Lorentz gauge in spherical space

Let us detail the Lorentz condition

$$\nabla_\beta \Phi^\beta(x) = 0 . \quad (24)$$

In tetrad components it reads

$$\Phi_{(a)} e^{(a)\alpha}_{;\alpha} + e^{(a)\alpha} \partial_a \Phi_{(a)} = 0 , \quad (25)$$

where $\Phi_{(a)}$ are components of 4-vector in Cartesian basis:

$$\begin{vmatrix} \Phi_{(0)} \\ \Phi_{(1)} \\ \Phi_{(2)} \\ \Phi_{(3)} \end{vmatrix} = \begin{vmatrix} 1 & 0 & 0 & 0 \\ 0 & -1/\sqrt{2} & 0 & 1/\sqrt{2} \\ 0 & -i/\sqrt{2} & 0 & -i/\sqrt{2} \\ 0 & 0 & 1 & 0 \end{vmatrix} \begin{vmatrix} f_1 D_0 \\ f_2 D_{-1} \\ f_3 D_0 \\ f_4 D_{+1} \end{vmatrix} . \quad (26)$$

With the use of the known formula

$$e^{(a)\alpha}_{;\alpha} = \frac{1}{\sqrt{-g}} \frac{\partial}{\partial x^\alpha} \sqrt{-g} e^{(a)\alpha} ,$$

we get

$$e^{(0)\alpha}_{;\alpha} = 0 , \quad e^{(3)\alpha}_{;\alpha} = -\frac{2}{\text{tg } \chi} , \quad e^{(1)\alpha}_{;\alpha} = -\frac{1}{\sin \chi} \frac{\cos \theta}{\sin \theta} , \quad e^{(2)\alpha}_{;\alpha} = 0 \quad (27)$$

and therefore eq. (25) gives

$$\Phi_1 \left(-\frac{1}{\sin \chi} \frac{\cos \theta}{\sin \theta} \right) + \Phi_3 \left(-\frac{2}{\text{tg } \chi} \right) + \partial_t \Phi_0 - \partial_\chi \Phi_3 - \frac{1}{\sin \chi} \partial_\theta \Phi_1 - \frac{1}{\sin \chi \sin \theta} \partial_\phi \Phi_2 = 0 ,$$

or

$$\begin{aligned} & \frac{1}{\sqrt{2}} (-f_2 D_{-1} + f_4 D_{+1}) \left(-\frac{1}{\sin \chi} \frac{\cos \theta}{\sin \theta} \right) + f_3 D_0 \left(-\frac{2}{\text{tg } \chi} \right) - i\omega f_1 D_0 - \partial_\chi f_3 D_0 - \\ & - \frac{1}{\sin \chi} \partial_\theta \frac{1}{\sqrt{2}} (-f_2 D_{-1} + f_4 D_{+1}) - \frac{1}{\sin \chi \sin \theta} \partial_\phi \frac{1}{\sqrt{2}} (-if_2 D_{-1} - if_4 D_{+1}) = 0 , \end{aligned}$$

and further

$$-i\omega f_1 D_0 - \partial_\chi f_3 D_0 - \frac{2}{\text{tg } \chi} f_3 D_0 +$$

$$+ \frac{1}{\sqrt{2} \sin \chi} \left[f_2 \left(\frac{-m + \cos \theta}{\sin \theta} D_{-1} + \partial_\theta D_{-1} \right) - f_4 \left(\frac{m + \cos \theta}{\sin \theta} D_{+1} + \partial_\theta D_{+1} \right) \right] = 0. \quad (28)$$

Now we are to use the known recurrent formulas [9]

$$\begin{aligned} \frac{-m + \cos \theta}{\sin \theta} D_{-1} + \partial_\theta D_{-1} &= -\sqrt{j(j+1)} D_0, \\ \frac{+m + \cos \theta}{\sin \theta} D_{+1} + \partial_\theta D_{+1} &= +\sqrt{j(j+1)} D_0, \end{aligned} \quad (29)$$

then eq. (28) leads us to

$$-i\omega f_1 - \left(\frac{\partial}{\partial \chi} + \frac{2}{\text{tg } \chi} \right) f_3 - \frac{\sqrt{j(j+1)}}{\sqrt{2} \sin \chi} (f_2 + f_4) = 0. \quad (30)$$

it is the Lorentz gauge in radial form. There exist restrictions (2.5a,b) due to P -parity. For waves with $P = (-1)^{j+1}$ the Lorentz gauge (30) holds identically. When $P = (-1)^j$ the Lorentz gauge (30) looks simpler

$$P = (-1)^j, \quad i\omega f_1 + \left(\frac{\partial}{\partial \chi} + \frac{2}{\text{tg } \chi} \right) f_3 + 2 \frac{\nu}{\sin \chi} f_2 = 0. \quad (31)$$

The Lorentz condition being imposed substantially confines the gauge freedom, however it still remains. The known way to exclude the freedom is to impose Landau gauge:

$$\Phi_0 = 0, \quad \nabla^j \Phi_j = 0; \quad (32)$$

and instead (31) we have

$$P = (-1)^j, \quad f_1 = 0, \quad \left(\frac{\partial}{\partial \chi} + \frac{2}{\text{tg } \chi} \right) f_3 + 2 \frac{\nu}{\sin \chi} f_2 = 0. \quad (33)$$

4 Waves of electric type

Now, let us turn to radial equations (12) for waves with $P = (-1)^j$ in Landau gauge:

$$\begin{aligned} \left(\frac{d}{d\chi} + \frac{2}{\text{tg } \chi} \right) f_6 + \frac{2\nu}{\sin \chi} f_5 &= 0, & i\omega f_5 + i \left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi} \right) f_8 &= 0, \\ i\omega f_6 - \frac{2i\nu}{\sin \chi} f_8 &= 0, & -i\omega f_2 - f_5 &= 0, & i\omega f_3 + f_6 &= 0, \\ i \left(\frac{d}{d\chi} + \frac{1}{\text{tg } \chi} \right) f_2 + i \frac{\nu}{\sin \chi} f_3 + f_8 &= 0. \end{aligned} \quad (34)$$

After substitutions

$$f_2 = \frac{F_2}{\sin \chi}, \quad f_3 = F_3, \quad f_5 = \frac{F_5}{\sin \chi}, \quad f_6 = \frac{F_6}{\sin^2 \chi}, \quad f_8 = \frac{F_8}{\sin \chi}, \quad (35)$$

eqs. (34) become simpler

$$\begin{aligned} \frac{d}{d\chi} F_6 + 2\nu F_5 &= 0, & \omega F_5 + \frac{d}{d\chi} F_8 &= 0, & \omega F_6 - 2\nu F_8 &= 0, \\ -i\omega F_2 - F_5 &= 0, & i\omega F_3 + \frac{F_6}{\sin^2 \chi} &= 0, & i \frac{d}{d\chi} F_2 + i\nu F_3 + F_8 &= 0. \end{aligned} \quad (36)$$

System (36) gives

$$\begin{aligned}
F_5 &= -\frac{1}{\omega} \frac{d}{d\chi} F_8, & F_6 &= \frac{2\nu}{\omega} F_8, \\
F_2 &= -\frac{i}{\omega^2} \frac{d}{d\chi} F_8, & F_3 &= \frac{2i\nu}{\omega^2} \frac{1}{\sin^2 \chi} F_8, \\
&& & \left(\frac{d^2}{d\chi^2} + \omega^2 - \frac{j(j+1)}{\sin^2 \chi} \right) F_8 = 0.
\end{aligned} \tag{37}$$

the second order differential equation for F_8 has been solved in **3**. Thus, the waves of electric type have been constructed (compare it with (23)):

$$\begin{vmatrix} A_{(0)} \\ A_{(1)} \\ A_{(2)} \\ A_{(3)} \end{vmatrix} = \begin{vmatrix} 0 \\ +f_2 D_{-1} \\ f_3 D_0 \\ f_2 D_{+1} \end{vmatrix}. \tag{38}$$

Authors are thankful to all participants of scientific seminar of Laboratory of Theoretical Physics of Institute of Physics on NASB for discussion and advice.

References

- [1] A.A. Bogush, Yu.A. Kurochkin, V.S. Otchik, E.M. Bychkovskaya. Analogue of the plane electromagnetic waves in the Lobachevsky space. Proceedings of the International Conference BGL-5, Minsk, October 10-13, 2006. National Academy of Sciences of Belarus, B.I. Stepanov Institute of Physics; Eds.: Yu. Kurochkin, V. Red'kov. – Minsk, 2006.
- [2] Bychkovskaya E.M. On solutions of Maxwell equations in 3-dimensional Lobachevsky space. Vesti National Academy of Sciences of Belarus. Ser. fiz.-mat. 2006. **5**. 45-48.
- [3] Tetrode H. Allgemein relativistische Quantentheorie des Elektrons // Zeit. Phys. 1928. Bd. 50. S. 336.
- [4] Weyl H. Gravitation and the electron // Proc. Nat. Acad. Sci. Amer. 1929. Vol. 15. P. 323 – 334; Gravitation and the electron // Rice Inst. Pamphlet. 1929. Vol. 16. P. 280 – 295; Elektron und Gravitation // Zeit. Phys. 1929. Bd. 56. S. 330 – 352.
- [5] Fock V., Ivanenko D. Über eine mögliche geometrische Deutung der relativistischen Quantentheorie // Zeit. Phys., 1929. Bd. 54. S. 798 – 802; Géométrie quantique linéaire et déplacement parallèle // C. R. Acad. Sci. Paris. 1929. Vol. 188. P. 1470 – 1472; Fock V. Geometrisierung der Diracschen Theorie des Elektrons // Zeit. Phys. 1929. Bd. 57. S. 261 – 277.
- [6] Red'kov V.M. Fields in Riemannian space and Lorentz group. Belarussian Science: Minsk, 2009.
- [7] Landau L.D., Lifshitz E.M. The field theory. Voskow, 1973.
- [8] Olevskiy M.N. Three-orthogonal systems in spaces of constant curvature in which equation $\Delta_2 U + \lambda U = 0$ permits the full separation of variables. Matem. Sbornik. 1950 P. 379-426.
- [9] Varshalovich D.A., Moskalev A.N., Xersonskiy V.K. Quantum theory of angular momentum. Leningrad. 1975 (in Russian).