



Detecting Brain Tumors through Multimodal Neural Networks

Antonio Curci¹^a, Andrea Esposito¹^b

¹Department of Computer Science, University of Bari Aldo Moro, Via E. Orabona 4, 70125 Bari, Italy
{antonio.curci, andrea.esposito}@uniba.it

Keywords: DenseNet, Brain Tumor, Classification, Multimodal Model

Abstract: Tumors can manifest in various forms and in different areas of the human body. Brain tumors are specifically hard to diagnose and treat because of the complexity of the organ in which they develop. Detecting them in time can lower the chances of death and facilitate the therapy process for patients. The use of Artificial Intelligence (AI) and, more specifically, deep learning, has the potential to significantly reduce costs in terms of time and resources for the discovery and identification of tumors from images obtained through imaging techniques. This research work aims to assess the performance of a multimodal model for the classification of Magnetic Resonance Imaging (MRI) scans processed as grayscale images. The results are promising, and in line with similar works, as the model reaches an accuracy of around 98%. We also highlight the need for explainability and transparency to ensure human control and safety.

1 INTRODUCTION

Brain tumors refer to a heterogeneous group of tumors arising from cells within the Central Nervous System (CNS) (WHO Classification of Tumours Editorial Board, 2022). These tumors can manifest in various forms, ranging from benign to malignant, and may originate within the brain tissue or spread from other parts of the body through metastasis (Lapointe et al., 2018). In this regard, it is crucial to underline that tumors that spread in brains are incredibly complex to treat because of the extreme delicacy that the organ in question is characterized by.

Brain tumors can rise several symptoms in individuals who suffer from them, such as strong and recurring headaches, nausea, altered mental status, papilledema, and seizures; the implications of these symptoms in individuals can worsen over time if the tumor is not detected in time, resulting, eventually, in death (Alentorn et al., 2016). This implies that the prompt detection, diagnosis, and removal of tumors must be supported by proper tools and techniques to assist professionals and increase their efficiency when performing these tasks. Therefore, there needs to be tools and instruments featuring the newest technologies that can support and facilitate this process for physicians (McFaline-Figueroa and Lee, 2018).


The aid of technology, more specifically Arti-

cial Intelligence (AI), can provide significant advantages concerning the precision, speed, and overall efficacy of detecting these tumors, thereby improving therapy outcomes and quality of life (Ranjbarzadeh et al., 2023). In fact, the landscape of AI models for the detection of brain tumors is vivid (Anaya-Isaya et al., 2023; Vermeulen et al., 2023; Huang et al., 2022; Ranjbarzadeh et al., 2023).

Traditionally, brain tumors are diagnosed by using imaging techniques, such as *Magnetic Resonance Imaging (MRI)*, *Computed Tomography (CT)*, or *Positron Emission Tomography (PET)*, which are incredibly useful and effective. However, the integration of AI in this context can further improve and enhance their outputs and maximize efficiency (Villanueva-Meyer et al., 2017). Recent research has focused on using machine learning and deep learning techniques for brain tumor classification, segmentation, and feature extraction, as well as developing AI tools to assist neurosurgeons during treatment (Vermeulen et al., 2023; Huang et al., 2022).

The current scenario of the application of Neural Networks employed in the field of medicine and in brain tumor detection encompasses various models and techniques, and still represents a very challenging issue. For instance, Mohesen et al. use Deep Neural Networks (DNN), combined with Principal Component Analysis (PCA), and Discrete Wavelet Transform, achieving a good accuracy, around 97% (Mohsen et al., 2018). Pei et al., instead, used 3D

^a <https://orcid.org/0000-0001-6863-872X>

^b <https://orcid.org/0000-0002-9536-3087>

Convolutional Neural Networks (CNN), reaching a training accuracy of around 81% and a validation accuracy of around 75% (Pei et al., 2020). In addition, Nayak et al. developed another CNN as a variant of Efficient DenseNets with dense and drop-out layers, obtaining an accuracy close to 99% (Nayak et al., 2022).

The employment of these models in classification tasks in medicine can be significantly useful. At the same time, it remains crucial for professionals to maintain control and be able to check the output of these instruments to have the final say over the model’s predictions. The employment of multimodal models, instead, is still under development and research in the literature. It is possible to find cases in which these models are built with Multi-Layer Perceptrons (MLP) or with DenseNets for 3D images image classification, in which researchers could not achieve high-performance rates (Ma and Jia, 2020; Latif et al., 2017).

This research work aims at creating and employing a multi-modal model to classify brain images as healthy or ill (i.e., containing a tumor) and proposing an approach towards stronger explainability and transparency to increase physicians’ trust levels when using AI in medicine. The model in question was built through a Densely Connected Convolutional Network (DenseNet) and it was trained over a labeled dataset composed of tabular data and 2D brain tumor images.

This paper is organized as follows: section 2 encompasses all the materials used during this study, defining the dataset, its provenance, and the distribution of the classes; section 3 explores the model, its structure, and the parameters set for the experiment. In section 4, we describe the tools used to carry out the experiment and we analyze the results; section 5, instead, provides an overview of the research work, its outcomes, and the future directions that we intend to undertake for this project, highlighting the need for explainability and control.

2 MATERIALS

This research work was conducted using a dataset derived from the BRATS 2015 challenge (Menze et al., 2015), freely available on *Kaggle.com* (Jakesh Bohaju,). The dataset comprises 3762 instances. Each instance consists in a 240×240 three-channel MRI scans of the brain, and in a set of 13 numeric features (with an additional feature that allows to identify the scan associated with the numeric values).

The dataset is fully labeled. The labels are binary and mutually exclusive: a value of “0” represents the

absence of a tumor (in the following, we will refer to this class as “healthy”); a value of “1” indicates the presence of a tumor (in the following, we will refer to this class as “ill”). The dataset is slightly unbalanced, with 2079 instances labeled as healthy and 1683 labeled as ill. To avoid the potential introduction of artifacts or unrealistic samples using data augmentation (Chlap et al., 2021), the class-imbalance problem was solved by dropping randomly selected instances from the “healthy” class. The numeric features of the dataset have been standardized in order to have mean $\mu = 0$ and variance $\sigma^2 = 1$. The dataset has no missing values, making it unnecessary to perform any additional pre-processing. Figure 2 provides examples of images labeled as healthy and ill.

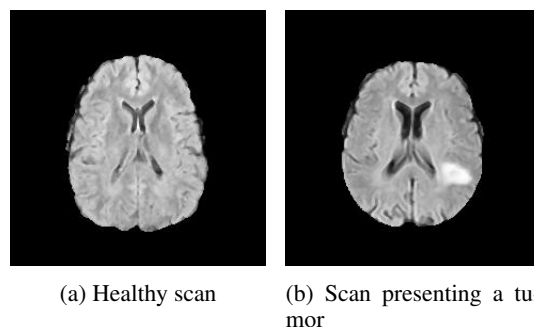


Figure 2: Examples of MRI scans available in the dataset




Figure 3: Distribution of the two classes in the entire dataset

3 METHODS

The model used for this research work is a multi-modal neural network. The model architecture, depicted in Figure 1, is composed of two heads (one for each type of input data). The first head is responsible for the feature extraction from the MRI scans: it consists in a DenseNet121 network (Huang et al., 2018) with input size $240 \times 240 \times 3$ and output size $7 \times 7 \times 1024$, that is then flattened. The second head, responsible for the encoding of the tabular data, con-

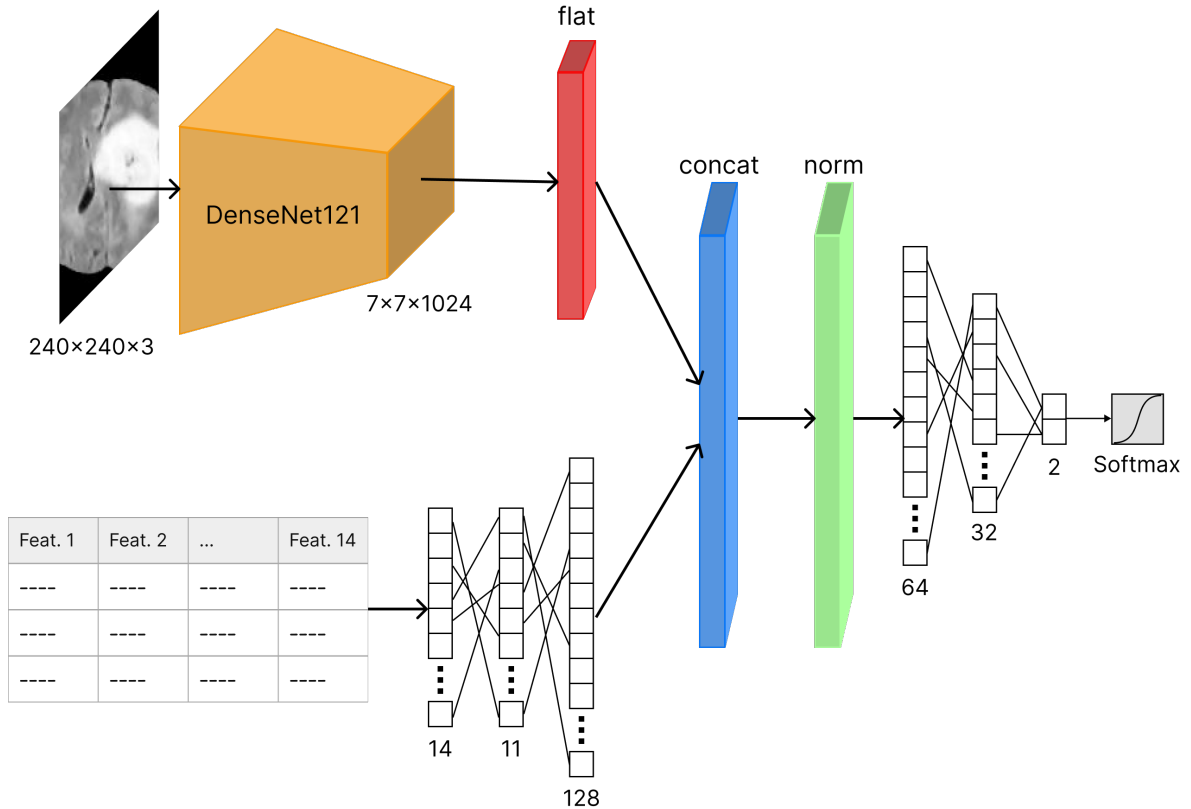


Figure 1: Architecture of the multi-modal deep neural network

sists in a simple fully-connected neural network, using the Rectified Linear Unit (ReLU) activation function. The outputs of the two heads are then concatenated and normalized. The resulting vector is then provided as input to an additional fully-connected neural network (also using the ReLU activation function), which terminates in two SoftMax-activated neurons that provide the final prediction. The model is shown in Figure 1.

4 RESULTS

The experiment was performed using an Apple Silicon M2 Pro chip with an integrated 16-core GPU, using the Tensorflow library.

To evaluate the proposed method, a *stratified* 10-fold cross-validation was used (i.e., each fold contained roughly the same proportion of the two class labels). For the training phase, we used sparse categorical cross-entropy as the loss function, defined in Equation 1, where y is the ground truth label, while p is the model output for an individual observation.

$$\mathcal{H}(y, p) = -(y \log(p) + (1 - y) \log(1 - p)) \quad (1)$$

Cross-entropy was minimized using the Adam optimizer, with a static learning rate of 10^{-3} and a batch size of 32. The maximum number of epochs was set to 10^2 , with an early stopping criterion based on the validation loss with a minimum delta of 10^{-4} and a patience of 5 epochs.

As performance metrics, we opted for the most commonly used metric in classification problems: Accuracy, defined as the proportion of the correctly classified samples (both positives and negatives) in the selected population.

The training phase on the 10 folds exhibited quite good performances, shown in Table 1; each fold generated accuracy rates higher than 95%, with an average of 98%. Whereas the loss has values of around 0.4, as shown in Figure 1. The only exception is the eighth fold, which has a loss value close to 1: further inspection is needed to uncover the reasons for this sudden peak.

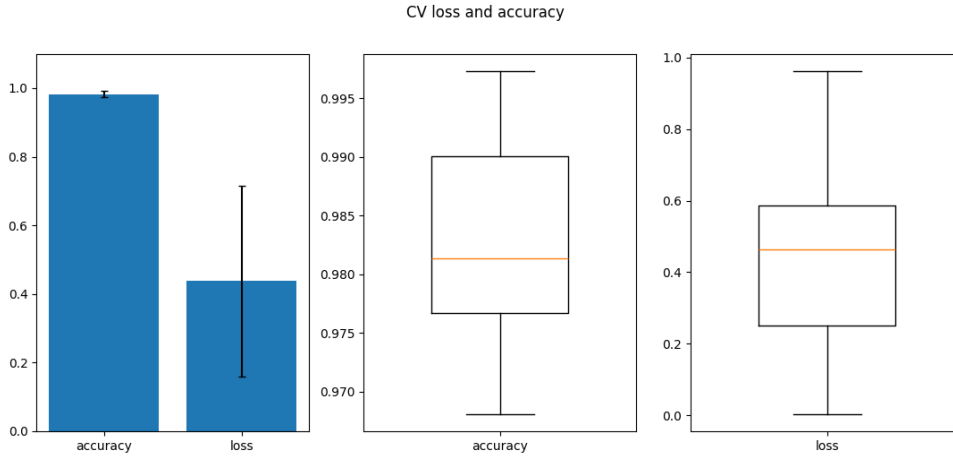


Figure 4: Results of the cross-validation

CV Fold	Accuracy	Loss
1	99.20%	0.258
2	99.20%	0.184
3	99.73%	0.004
4	98.13%	0.575
5	98.40%	0.249
6	98.13%	0.628
7	97.87%	0.591
8	97.60%	0.963
9	96.80%	0.565
10	97.34%	0.361

Table 1: Results of the cross validation

5 CONCLUSIONS AND FUTURE WORKS

In this article, we explore the use of multi-modal DenseNets for brain tumor images classification. The presented model is useful when dealing with data of different types with intrinsically different representations, in this case, tabular data and images. The multi-modal Deep Neural Network created and exploited in this case study provides promising results for classifying brain tumor images, achieving an average accuracy of 98%. The results are on par with other techniques found in the literature (Nayak et al., 2022; Mohsen et al., 2018).

The work presented in this article provides a starting ground for future research. An initial aspect that needs further exploring is the model generalizability: future work may delve in testing the model with additional parameters and/or another dataset with the same structure and belonging to the same medical domain, to observe its behavior and efficacy in different settings.

In addition, explainability and transparency are needed to provide users (i.e., physicians) with more efficient instruments to understand and comprehend the outputs it provides. As neural networks' outputs are usually obscure to users without expertise in computer science and, specifically, in AI, explainability has the potential of demystifying the process that lies behind the final predictions and output of models. Moreover, it is crucial for physicians to fully understand the reasons why an AI systems provided a specific outcome (Combi et al., 2022), as this ensure human control. In fact, from an ethical point of view, the responsibility that physicians undertake when making decisions about the health state of their patients cannot depend merely on algorithms that they do not comprehend properly.

It emerges that the goal is to approach a *symbiotic* relationship between AI and humans. The use of AI in medicine, especially Neural Networks, can be beneficial both diagnostically and to foster and guide future research (e.g., through machine teaching (Selvaraju et al., 2016)).

The multi-modal neural network presented in this article provides an interesting proving ground, to evaluate the balance between accuracy, model complexity, and explainability in a challenging high-risk domain.

ACKNOWLEDGEMENTS

Omitted for double-blind peer-review.

REFERENCES

- Alentorn, A., Hoang-Xuan, K., and Mikkelsen, T. (2016). Presenting signs and symptoms in brain tumors. In *Handbook of Clinical Neurology*, volume 134, pages 19–26. Elsevier.
- Anaya-Isaza, A., Mera-Jiménez, L., Verdugo-Alejo, L., and Sarasti, L. (2023). Optimizing MRI-based brain tumor classification and detection using AI: A comparative analysis of neural networks, transfer learning, data augmentation, and the cross-transformer network. *European Journal of Radiology Open*, 10:100484.
- Chlap, P., Min, H., Vandenberg, N., Dowling, J., Holloway, L., and Haworth, A. (2021). A review of medical image data augmentation techniques for deep learning applications. *Journal of Medical Imaging and Radiation Oncology*, 65(5):545–563.
- Combi, C., Amico, B., Bellazzi, R., Holzinger, A., Moore, J. H., Zitnik, M., and Holmes, J. H. (2022). A Manifesto on Explainability for Artificial Intelligence in Medicine. *Artificial Intelligence in Medicine*, (133):102423.
- Huang, G., Liu, Z., van der Maaten, L., and Weinberger, K. Q. (2018). Densely Connected Convolutional Networks.
- Huang, J., Shlobin, N. A., Lam, S. K., and DeCuyper, M. (2022). Artificial Intelligence Applications in Pediatric Brain Tumor Imaging: A Systematic Review. *World Neurosurgery*, 157:99–105.
- Jakesh Bohaju. Brain Tumor.
- Lapointe, S., Perry, A., and Butowski, N. A. (2018). Primary brain tumours in adults. *The Lancet*, 392(10145):432–446.
- Latif, G., Mohsin Butt, M., Khan, A. H., Omair Butt, M., and Al-Asad, J. F. (2017). Automatic Multimodal Brain Image Classification Using MLP and 3D Glioma Tumor Reconstruction. In *2017 9th IEEE-GCC Conference and Exhibition (GCCCE)*, pages 1–9, Manama. IEEE.
- Ma, X. and Jia, F. (2020). Brain Tumor Classification with Multimodal MR and Pathology Images. In Crimi, A. and Bakas, S., editors, *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, volume 11993, pages 343–352. Springer International Publishing, Cham.
- McFaline-Figueroa, J. R. and Lee, E. Q. (2018). Brain Tumors. *The American Journal of Medicine*, 131(8):874–882.
- Menze, B. H., Jakab, A., Bauer, S., Kalpathy-Cramer, J., Farahani, K., Kirby, J., Burren, Y., Porz, N., Slotboom, J., Wiest, R., Lanczi, L., Gerstner, E., Weber, M.-A., Arbel, T., Avants, B. B., Ayache, N., Buendia, P., Collins, D. L., Cordier, N., Corso, J. J., Criminisi, A., Das, T., Delingette, H., Demiralp, C., Durst, C. R., Dojat, M., Doyle, S., Festa, J., Forbes, F., Geremia, E., Glocker, B., Golland, P., Guo, X., Hamamci, A., Iftekharuddin, K. M., Jena, R., John, N. M., Konukoglu, E., Lashkari, D., Mariz, J. A., Meier, R., Pereira, S., Precup, D., Price, S. J., Raviv, T. R., Reza, S. M. S., Ryan, M., Sarikaya, D., Schwartz, L., Shin, H.-C., Shotton, J., Silva, C. A., Sousa, N., Subbanna, N. K., Szekely, G., Taylor, T. J., Thomas, O. M., Tustison, N. J., Unal, G., Vasseur, F., Wintermark, M., Ye, D. H., Zhao, L., Zhao, B., Zikic, D., Prastawa, M., Reyes, M., and Van Leemput, K. (2015). The Multimodal Brain Tumor Image Segmentation Benchmark (BRATS). *IEEE Transactions on Medical Imaging*, 34(10):1993–2024.
- Mohsen, H., El-Dahshan, E.-S. A., El-Horbaty, E.-S. M., and Salem, A.-B. M. (2018). Classification using deep learning neural networks for brain tumors. *Future Computing and Informatics Journal*, 3(1):68–71.
- Nayak, D. R., Padhy, N., Mallick, P. K., Zymbler, M., and Kumar, S. (2022). Brain Tumor Classification Using Dense Efficient-Net. *Axioms*, 11(1):34.
- Pei, L., Vidyaratne, L., Hsu, W.-W., Rahman, M. M., and Iftekharuddin, K. M. (2020). Brain Tumor Classification Using 3D Convolutional Neural Network. In Crimi, A. and Bakas, S., editors, *Brainlesion: Glioma, Multiple Sclerosis, Stroke and Traumatic Brain Injuries*, volume 11993, pages 335–342. Springer International Publishing, Cham.
- Ranjbarzadeh, R., Caputo, A., Tirkolaee, E. B., Jafarzadeh Ghouschi, S., and Bendechache, M. (2023). Brain tumor segmentation of MRI images: A comprehensive review on the application of artificial intelligence tools. *Computers in Biology and Medicine*, 152:106405.
- Selvaraju, R. R., Das, A., Vedantam, R., Cogswell, M., Parikh, D., and Batra, D. (2016). Grad-CAM: Why did you say that? Visual explanations from deep networks via gradient-based localization. *CoRR*, abs/1610.02391.
- Vermeulen, C., Pagès-Gallego, M., Kester, L., Kranendonk, M. E. G., Wesseling, P., Verburg, N., de Witt Hamer, P., Kooi, E. J., Dankmeijer, L., van der Lugt, J., van Baarsen, K., Hoving, E. W., Tops, B. B. J., and de Ridder, J. (2023). Ultra-fast deep-learned CNS tumour classification during surgery. *Nature*, 622(7984):842–849.
- Villanueva-Meyer, J. E., Mabray, M. C., and Cha, S. (2017). Current Clinical Brain Tumor Imaging. *Neurosurgery*, 81(3):397–415.
- WHO Classification of Tumours Editorial Board, editor (2022). *WHO Classification of Tumours: Central Nervous System Tumours*. World Health Organization, Lyon, 5th edition edition.