LVC-LGMC: JOINT LOCAL AND GLOBAL MOTION COMPENSATION FOR LEARNED VIDEO COMPRESSION

Wei Jiang, Junru Li, Kai Zhang, Li Zhang

Multimedia Lab, Bytedance Inc., San Diego CA. 92122 USA

wei.jiang1999@outlook.com

ABSTRACT

Existing learned video compression models employ flow net or deformable convolutional networks (DCN) to estimate motion information. However, the limited receptive fields of flow net and DCN inherently direct their attentiveness towards the local contexts. Global contexts, such as large-scale motions and global correlations among frames are ignored, presenting a significant bottleneck for capturing accurate motions. To address this issue, we propose a joint local and global motion compensation module (LGMC) for leaned video coding. More specifically, we adopt flow net for local motion compensation. To capture *global* context, we employ the cross attention in feature domain for motion compensation. In addition, to avoid the quadratic complexity of vanilla cross attention, we divide the softmax operations in attention into two independent softmax operations, leading to linear complexity. To validate the effectiveness of our proposed LGMC, we integrate it with DCVC-TCM and obtain learned video compression with joint local and global motion compensation (LVC-LGMC). Extensive experiments demonstrate that our LVC-LGMC has significant rate-distortion performance improvements over baseline DCVC-TCM.

Index Terms— Motion estimation, neural video compression

1. INTRODUCTION

The rapid development of social media and video applications triggers the increases of the video date volume, bringing challenges to video compression [1, 2]. In recent years, learned video compression has attracted lots of attentions. Most learned video compression models [1, 2, 3, 4] are based on predictive coding paradigm, which employs a flow net or Deformable Convolutional Networks (DCN) [5] to predict the motion information between the reference frame and current frame. Subsequently, a motion codec is cooperated to compress the motion information. Meanwhile, residual codec [1] or a contextual codec [2] is used to compress the residuals or contexts. To enhance the compression performance, advanced entropy models [6] and flow coding techniques [7] are investigated in recent years. Some models [8]

even outperform the Versatile Video Coding (VVC) under the Low Delay configuration.

Traditional video coding is block-based, which is capable of search over a predefined region for motion estimation. Flow-based or DCN-based motion estimation can only handle small motions due to the limited receptive field of Convolution Neural Networks (CNN), which can only capture *local* redundancy. *Global* redundancies are existed even in the scenario of small motions, which has not been sufficiently explored in learned video compression.

To address above issues, we propose a novel mixed flowattention based motion estimation and motion compensation module in feature space for joint *local* and *global* redundancy capturing. Our module is built upon the conditional coding paradigm [2, 9]. We integrate the proposed joint *local* and global module to DCVC-TCM to obtain the learned video compression model LVC-LGMC. In the LVC-LGMC, multiscale motion compensation is adopted. More specifically, when compressing the current P-frame x_t , we use a flow net to estimate the motion offset. By warping the multi-scale features using the decoded estimated offset, the local redundancies between frames can be well captured. To achieve global motion estimation, we propose to employ the cross attention between the propagated features and middle features of current frame for the long-range modeling. The attention map contains the global similarity between frames without consuming additional bits for representation. However, the quadratic complexity of vanilla attention impedes the compression of high-resolution videos. To address this issue, we propose to divide the softmax in vanilla attention into two softmax operations [10]. The dot product features after two independent softmax operations is treated as the similarity metric. Such division of softmax operation makes the complexity increases linearly with the resolution, leading the operation more efficient. When compared with the baseline DCVC-TCM [9], the proposed LVC-LGMC reduces 10% bit-rates on MCL-JCV test sequences [11].

The contributions of this paper are summarized as follows:

 We propose a novel attention-based motion compensation module to handle large-scale movements and cap-




Fig. 1. Overall frame work of the proposed LVC-LGMC. E_C is the contextual encoder, and D_C is the contextual decoder. E_M is the MV encoder, and D_M is the MV decoder. LGMC is the proposed joint local and global motion compensation module.

ture global redundancy between frames but with linear complexity and without extra bits. To our knowledge, this is the first attempt to use cross attention for motion compensation.

 We incorporate proposed attention-based motion compensation with flow-based motion compensation for joint local and global motion compensation. The proposed method significantly boosts the model performance.

2. THE PROPOSED LVC-LGMC METHOD

The paradigm of the proposed LVC-LGMC is illustrated in Fig. 1. We reproduce the DCVC-TCM [9] and build LVC-LGMC on top of it. Following DCVC-TCM, we adopt temporal propagated multi-scale features for local compensation.

2.1. Flow-based Local Compensation

When compressing the t-th frame \boldsymbol{x}_t , first, we conduct the local compensation [9]. In particular, multi-scale features $\hat{\boldsymbol{f}}_t^0, \hat{\boldsymbol{f}}_t^1, \hat{\boldsymbol{f}}_t^2$ are extracted from propagated feature $\hat{\boldsymbol{F}}_{t-1}$. Motion vector $\hat{\boldsymbol{v}}_t$ is employed to warp the multi-scale features to multi-scale local contexts $\hat{\boldsymbol{l}}_t^0, \hat{\boldsymbol{l}}_t^1, \hat{\boldsymbol{l}}_t^2$. The $\hat{\boldsymbol{l}}_t^0, \hat{\boldsymbol{l}}_t^1, \hat{\boldsymbol{l}}_t^2$ are concatenated with the current frame \boldsymbol{x}_t , middle-feature \boldsymbol{y}_t^1 and middle-feature $\hat{\boldsymbol{y}}_t^2$ respectively. As such, the network could well understand how to conduct conditional coding. During decoding, the multi-scale contexts are also concatenated to recover the frame. The overall process can be formulated as:

$$\hat{\boldsymbol{x}}_t = D_C \left(\left[E_C(\boldsymbol{x}_t | \hat{\boldsymbol{l}}_t^0, \hat{\boldsymbol{l}}_t^1, \hat{\boldsymbol{l}}_t^2) \right] | \hat{\boldsymbol{l}}_t^0, \hat{\boldsymbol{l}}_t^1, \hat{\boldsymbol{l}}_t^2 \right), \tag{1}$$

where E_{C} and D_{C} are the contextual encoder and the contextual decoder.

2.2. Attention-based Global Compensation

The *vanilla* approach for global compensation is introduced first. Due to the limitations of flow-based motion compensa-




Fig. 2. Illustration of the joint local and global motion compensation module (LGMC) at encoder side.

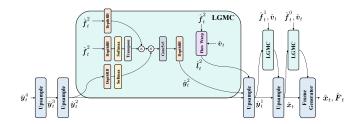


Fig. 3. Illustration of the joint local and global motion compensation module (LGMC) at decoder side.

tion, global motion compensation is utilized for learned video compression. It has been recognized that the CNN has limited receptive fields, such that global attention is adopted for global motion compensation. Regarding the compression of \boldsymbol{x}_t , given multi-scales features $\hat{\boldsymbol{f}}_t^0, \hat{\boldsymbol{f}}_t^1, \hat{\boldsymbol{f}}_t^2$, current frame \boldsymbol{x}_t , and middle features $\boldsymbol{y}_t^1, \boldsymbol{y}_t^2$, we take $\boldsymbol{y}_t^2 \in \mathbb{R}^{C \times \frac{L}{16}}, \hat{\boldsymbol{f}}_t^1 \in \mathbb{R}^{C \times L}$ as an example. where C is the channel number, and $L = H \cdot W$, H is the height and W is the width of the frame. The \boldsymbol{y}_t^2 and $\hat{\boldsymbol{f}}_t^2$ are first fed into a Depth Residual Bottleneck [12] for nonlinear embedding. The *vanilla* approach adopts cross attention [13, 14], which is formulated as:

$$\hat{\boldsymbol{g}}_{t}^{2} = \underbrace{\operatorname{softmax}\left(\boldsymbol{y}_{t}^{2} \left(\hat{\boldsymbol{f}}_{t}^{2}\right)^{\top}\right)}_{\text{non-negative}} \hat{\boldsymbol{f}}_{t}^{2}. \tag{2}$$

The softmax $\left(\boldsymbol{y}_t^2\left(\hat{\boldsymbol{f}}_t^2\right)^{\top}\right) \in \mathbb{R}^{\frac{L}{16} \times \frac{L}{16}} \geq 0$, and it can be treated as the similarity metric. It computes the similarity between a symbol and all other symbols, such that the similarity can be captured. The attention and \boldsymbol{y}_t^2 are then concatenated to conduct conditional coding on the basis of global dependency.

However, the computational complexity of Eqn. 2 is $O(L^2)$. The quadratic complexity makes it hard to employ the *vanilla* approach for high-resolution video coding. The quadratic is caused by the softmax operation, which specifies the order of matrix multiplication. To solve the quadratic complexity, we employ efficient attention [10, 16], which employs the softmax operation on y_t^2 in row and the softmax

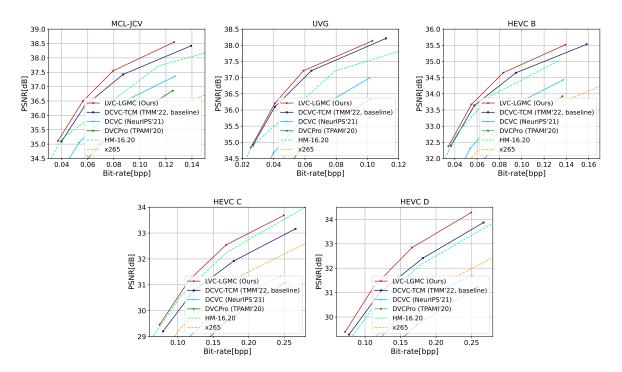


Fig. 4. Illustration of rate-distortion performance of the proposed LVC-LGMC, DCVC-TCM [9], DCVC [2], DVCPro [15], HM-16.20 and x265 codec. The distortion is PSNR. Please zoom in for better view.

operation on $\hat{\boldsymbol{f}}_t^2$ in column,

$$\hat{\boldsymbol{g}}_{t}^{2} = \underbrace{\operatorname{softmax}\left(\boldsymbol{y}_{t}^{2}\right)\operatorname{softmax}\left(\hat{\boldsymbol{f}}_{t}^{2}\right)^{\top}}_{\text{non-negative}}\hat{\boldsymbol{f}}_{t}^{2}.$$
 (3)

Since softmax (\boldsymbol{y}_t^2) softmax $(\hat{\boldsymbol{f}}_t^2)^{\top} \geq 0$, which makes is can be used as a similarity metric. Larger values denotes higher similarity. In practice, softmax $(\hat{\boldsymbol{f}}_t^2)^{\top} \hat{\boldsymbol{f}}_t^2$ is computed first, resulting in the $O(C^2L)$ complexity.

During decompression, the attention-based global compensation is also conducted. When conducting global motion Compensation, the overall process is

$$\hat{x}_t = D_C \left(\left[E_C(x_t | \hat{g}_t^0, \hat{g}_t^1, \hat{g}_t^2) \right] | \hat{g}_t^0, \hat{g}_t^1, \hat{g}_t^2 \right).$$
 (4)

2.3. Joint Local and Global Motion Compensation for Learned Video Compression

Our proposed joint local and global motion compensation (LGMC) is illustrated in Fig. 2 and Fig. 3. Flow is employed to warp to obtain local contexts \hat{l}_t^0 , \hat{l}_t^1 , \hat{l}_t^2 and attention is used to obtain global contexts \hat{g}_t^0 , \hat{g}_t^1 , \hat{g}_t^2 . We concatenate the local context, global context with current frames or middle feature. In this manner, local and global contexts can be utilized for

conditional coding. The overall process can be described as follows,

$$\hat{\boldsymbol{y}}_{t} = \left[E_{C}(\boldsymbol{x}_{t} | \hat{\boldsymbol{l}}_{t}^{0}, \hat{\boldsymbol{l}}_{t}^{1}, \hat{\boldsymbol{l}}_{t}^{2}, \hat{\boldsymbol{g}}_{t}^{0}, \hat{\boldsymbol{g}}_{t}^{1}, \hat{\boldsymbol{g}}_{t}^{2}) \right],
\hat{\boldsymbol{x}}_{t} = D_{C}\left(\hat{\boldsymbol{y}}_{t} | \hat{\boldsymbol{l}}_{t}^{0}, \hat{\boldsymbol{l}}_{t}^{1}, \hat{\boldsymbol{l}}_{t}^{2}, \hat{\boldsymbol{g}}_{t}^{0}, \hat{\boldsymbol{g}}_{t}^{1}, \hat{\boldsymbol{g}}_{t}^{2} \right),$$
(5)

where \hat{y}_t is the latent representation of x_t .

3. EXPERIMENTS

3.1. Experimental Setup

We train the LVC-LGMC on Vimeo-90k dataset [22]. Frames are randomly cropped into 256×256 patches. The proposed models are optimized with the rate-distortion loss as follows,

$$\mathcal{L} = \mathcal{R} + \lambda \times \mathcal{D},\tag{6}$$

where \mathcal{D} denotes the distortion metric Mean Square Error (MSE) or MS-SSIM [17]. To cover wide range of coding rates, the λ is set as $\{256,512,1024,2048\}$ for MSE and $\{256,512,1024,2048\} \times \frac{1}{50}$ for MS-SSIM. Following DCVC-TCM [9], we adopt the multi-stage training strategy with the AdamW optimizer, and the batch size is set as 4.

3.2. Rate Distortion Performance

To demonstrate the effectiveness of the proposed method, the rate-distortion performance and model complexity is eval-

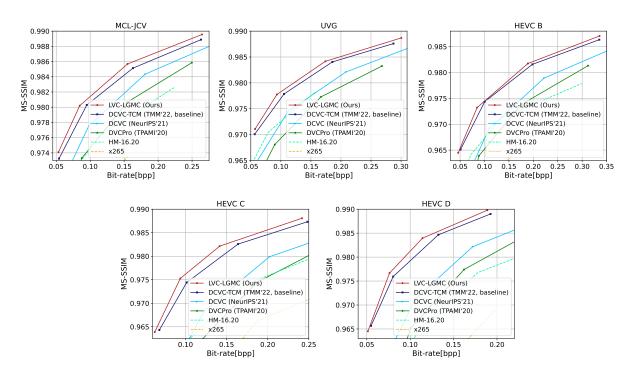


Fig. 5. Illustration of rate-distortion performance of the proposed LVC-LGMC, DCVC-TCM [9], DCVC [2], DVCPro [15], HM-16.20 and x265 codec. The distortion metric is MS-SSIM [17]. Please zoom in for better view.

uated. We compare our LVC-LGMC with existing video coding schemes, including DCVC-TCM [9], CANF-VC [21], DCVC [2], MLVC [20], RLVC [19], DVCPro [15], HM-16.20, x265. The UVG [18], MCL-JCV [11], and HEVC test sequences (class B, class C and class D) are all involved for performance evaluation. In particular, for learned coding schemes, we employ the official models for testing. First 96 frames in each sequences are involved in testing, and the intra period is set to 32. The height and width of frames are padded to the multiples of 64 to facilitate testing. Fig. 4, Fig. 5 and Table 1 present the rate-distortion performance. The proposed global and local motion compensation model LVC-LGMC outperforms the baseline DCVC-TCM model [9] on all datasets, indicating the effectiveness of employing global and local motion compensation for motion estimation in learning-based video coding. Moreover, the proposed LVC-LGMC shows superior rate-distortion performance when compared with the CANF-VC, DCVC, MLVC, RLVC, DVCPro, HM-16.20, and x265. When compared with baseline model DCVC-TCM, the proposed LVC-LGMC achieves significant bit-rate savings. More specifically, the BD-rate gains on MCL-JCV are 10.09% in terms of PSNR and 9.74% BD-rate savings are obtained in terms of MS-SSIM. Moreover, it is interesting to see that we could constant achieve the rate-distortion performance improvement on different resolutions and contents, indicating the effectiveness of the proposed method. We compare the LVC-LGMC

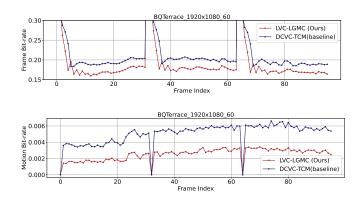


Fig. 6. Bit allocation of LVC-LGMC and baseline model DCVC-TCM [9].

with the baseline model DCVC-TCM regarding the parameter numbers, and coding complexity. The test environment is Tesla A100 GPU. The parameter numbers of the proposed LVC-LGMC and DCVC-TCM are 14.09M and 10.71M, respectively. The coding complexity increament of the LVC-LGMC is marginal, which increases the decoding time by 20% on 1080p sequences. The complexity increases of the LVC-LGMC is tolerable as the rate-distortion performance improvements are significant.

Methods	MCL-JCV [11]		UVG [18]		HEVC B		HEVC C		HEVC D	
	PSNR	MS-SSIM	PSNR	MS-SSIM	PSNR	MS-SSIM	PSNR	MS-SSIM	PSNR	MS-SSIM
HM-16.20	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DVCPro [15] (TPAMI'20)	99.3	7.8	137.7	36.2	123.7	23.5	124.0	17.0	93.6	-7.8
RLVC [19] (CVPR'20)	124.8	34.5	140.1	49.4	122.6	28.3	118.9	30.0	81.2	0.2
MLVC [20] (CVPR'20)	66.8	50.3	66.5	64.7	61.4	50.2	124.1	53.1	96.1	40.4
DCVC [2] (NeurIPS'21)	42.8	-16.3	67.3	9.2	56.0	0.9	76.9	-8.9	52.8	-24.2
CANF-VC [21] (ECCV'22)	8.5	-21.9	6.2	-4.4	9.0	-6.8	21.0	-9.4	12.5	-18.1
DCVC-TCM [9] (TMM'22)	-3.2	-38.3	-9.0	-25.5	-5.3	-40.8	15.1	-42.4	-5.4	-52.6
LVC-LGMC (Ours)	-13.0	-44.3	-13.2	-32.4	-13.1	-44.8	-5.3	-48.4	-19.1	-56.3

Table 1. BD-rate (%) for PSNR and MS-SSIM [17].




Fig. 7. Ablation Studies on MCL-JCV dataset.

3.3. Analyses and Discussions

3.3.1. Bit Allocation

We analyze the proposed mixed attention-flow based motion estimation and compensation via bit-allocation. We take sequence BQTerrace from HEVC B as an example, where the resolution is 1920×1080 and the frame rate is 60. The average PSNR of LVC-LGMC is 33.878 dB and the average PSNR of DCVC-TCM is 33.871 dB. The associated bitrate and motion bit-rate of individual frame are presented in Fig. 6. The proposed LVC-LGMC consumes lower coding bits in motion representation, and the overall bit consumption is lower than the DCVC-TCM. It is worthy of noting that the proposed global module is bit-free for motion representation. Long-range similarities can be well estimated with the global module, such that fewer bits are required for representing the flow map. Consequently, the enhanced prediction leads to the overall bit reduction of the frame-level information coding.

3.3.2. Ablation Studies

To comprehensively evaluate the effectiveness of the proposed attention-based global context for motion compensation, we remove the global module at the encoder-side and remove the global module at the decoder-side. Removing global at the encoder-side is quite similar with distributed source coding. The results are presented in Fig. 7. Global at encoder and global at decoder both lead to performance degradation, but performs better than baseline DCVC-TCM [9].

4. CONCLUSION

In this paper, we propose joint global and local motion compensation (LGMC) for learned video coding. We propose to employ the cross attention to capture global contexts for global motion compensation. To reduce the complexity, we divide the softmax operation in vanilla attention into two independent softmax operations, leading to linear complexity. We employ existing flow-based motion comprensation for local contexts. To evaluate our proposed module, we incorporate it with DCVC-TCM and we get video compression model LVC-LGMC. Extensive experiments demonstrate that our LVC-LGMC have significant improvements over corresponding baseline DCVC-TCM. Our methods are plug-and-play and can be employed in other conditional coding based models [2, 6, 8] for further performance improvements.

5. REFERENCES

- [1] Guo Lu, Wanli Ouyang, Dong Xu, Xiaoyun Zhang, Chunlei Cai, and Zhiyong Gao, "Dvc: An end-to-end deep video compression framework," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2019, pp. 11006–11015.
- [2] Jiahao Li, Bin Li, and Yan Lu, "Deep contextual video compression," *Advances in Neural Information Processing Systems*, vol. 34, pp. 18114–18125, 2021.
- [3] Kai Lin, Chuanmin Jia, Xinfeng Zhang, Shanshe Wang, Siwei Ma, and Wen Gao, "Dmvc: Decomposed motion modeling for learned video compression," *IEEE Transactions on Circuits and Systems for Video Technology*, 2022.
- [4] Haifeng Guo, Sam Kwong, Chuanmin Jia, and Shiqi Wang, "Enhanced motion compensation for deep video compression," *IEEE Signal Processing Letters*, 2023.
- [5] Jifeng Dai, Haozhi Qi, Yuwen Xiong, Yi Li, Guodong Zhang, Han Hu, and Yichen Wei, "Deformable convo-

- lutional networks," in *Proceedings of the IEEE international conference on computer vision*, 2017, pp. 764–773.
- [6] Jiahao Li, Bin Li, and Yan Lu, "Hybrid spatial-temporal entropy modelling for neural video compression," in *Proceedings of the 30th ACM International Conference on Multimedia*, 2022, pp. 1503–1511.
- [7] Zhihao Hu, Guo Lu, Jinyang Guo, Shan Liu, Wei Jiang, and Dong Xu, "Coarse-to-fine deep video coding with hyperprior-guided mode prediction," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2022, pp. 5921–5930.
- [8] Jiahao Li, Bin Li, and Yan Lu, "Neural video compression with diverse contexts," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 22616–22626.
- [9] Xihua Sheng, Jiahao Li, Bin Li, Li Li, Dong Liu, and Yan Lu, "Temporal context mining for learned video compression," *IEEE Transactions on Multimedia*, 2022.
- [10] Zhuoran Shen, Mingyuan Zhang, Haiyu Zhao, Shuai Yi, and Hongsheng Li, "Efficient attention: Attention with linear complexities," in *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 2021, pp. 3531–3539.
- [11] Haiqiang Wang, Weihao Gan, Sudeng Hu, Joe Yuchieh Lin, Lina Jin, Longguang Song, Ping Wang, Ioannis Katsavounidis, Anne Aaron, and C-C Jay Kuo, "Mcljcv: a jnd-based h. 264/avc video quality assessment dataset," in 2016 IEEE international conference on image processing (ICIP). IEEE, 2016, pp. 1509–1513.
- [12] Wei Jiang, Peirong Ning, and Ronggang Wang, "Slic: Self-conditioned adaptive transform with large-scale receptive fields for learned image compression," *arXiv* preprint arXiv:2304.09571, 2023.
- [13] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin, "Attention is all you need," Advances in neural information processing systems, vol. 30, 2017.
- [14] Wei Jiang, Jiayu Yang, Yongqi Zhai, Peirong Ning, Feng Gao, and Ronggang Wang, "Mlic: Multi-reference entropy model for learned image compression," in *Proceedings of the 31st ACM International Conference on Multimedia*, 2023, pp. 7618–7627.
- [15] Guo Lu, Xiaoyun Zhang, Wanli Ouyang, Li Chen, Zhiyong Gao, and Dong Xu, "An end-to-end learning framework for video compression," *IEEE transactions on pattern analysis and machine intelligence*, vol. 43, no. 10, pp. 3292–3308, 2020.

- [16] Wei Jiang and Ronggang Wang, "Mlic++: Linear complexity multi-reference entropy modeling for learned image compression," *arXiv preprint arXiv:2307.15421*, 2023.
- [17] Zhou Wang, Eero P Simoncelli, and Alan C Bovik, "Multiscale structural similarity for image quality assessment," in *The Thrity-Seventh Asilomar Conference on Signals, Systems & Computers*, 2003. Ieee, 2003, vol. 2, pp. 1398–1402.
- [18] Alexandre Mercat, Marko Viitanen, and Jarno Vanne, "Uvg dataset: 50/120fps 4k sequences for video codec analysis and development," in *Proceedings of the 11th ACM Multimedia Systems Conference*, 2020, pp. 297–302.
- [19] Ren Yang, Fabian Mentzer, Luc Van Gool, and Radu Timofte, "Learning for video compression with hierarchical quality and recurrent enhancement," in *Proceed*ings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, 2020, pp. 6628–6637.
- [20] Jianping Lin, Dong Liu, Houqiang Li, and Feng Wu, "M-lvc: Multiple frames prediction for learned video compression," in *Proceedings of the IEEE/CVF Con*ference on Computer Vision and Pattern Recognition (CVPR), June 2020.
- [21] Yung-Han Ho, Chih-Peng Chang, Peng-Yu Chen, Alessandro Gnutti, and Wen-Hsiao Peng, "Canf-vc: Conditional augmented normalizing flows for video compression," in *European Conference on Computer Vision*. Springer, 2022, pp. 207–223.
- [22] Tianfan Xue, Baian Chen, Jiajun Wu, Donglai Wei, and William T Freeman, "Video enhancement with task-oriented flow," *International Journal of Computer Vision (IJCV)*, vol. 127, no. 8, pp. 1106–1125, 2019.