

Hirota bilinear forms of the AKNS(N) systems

Metin Gürses *

Department of Mathematics, Faculty of Science
Bilkent University, 06800 Ankara - Turkey

Aslı Pekcan †

Department of Mathematics, Faculty of Science
Hacettepe University, 06800 Ankara - Turkey

Abstract

We study the AKNS(N) hierarchy for $N = 3, 4, 5, 6$. We give the Hirota bilinear forms of these systems and present local and nonlocal reductions of them. We give the Hirota bilinear forms of the reduced equations. The compatibility of the commutativity diagrams of the application of the recursion operator, reductions of the AKNS(N) systems, and Hirota bilinearization is also studied.

1 Introduction

There are several works about finding new integrable nonlocal nonlinear partial differential equations and obtaining different kinds of solutions of these nonlocal equations after Ablowitz and Musslimani introduced nonlocal type of reductions [1]-[3]. If these nonlocal reductions are done consistently, the integrable systems can be reduced to the reverse space, the reverse time, and the reverse space-time nonlocal equations, which are also integrable. Particularly, there are works on nonlocal nonlinear Schrödinger equations (NLS) [1]-[14], nonlocal modified Korteweg-de Vries (mKdV) equations [2]-[4], [8], [15]-[18], nonlocal sine-Gordon (SG) equations [2]-[4], [19], and so on [20]-[33].

The systems admitting nonlocal reductions have discrete symmetry transformations leaving the systems invariant. In [34] we showed that a special case of discrete symmetry transformations are actually the nonlocal reductions of the same systems. The connection between local and nonlocal reductions was given in [35], [36].

The AKNS hierarchy [37] can be written as

$$au_{t_N} = \mathcal{R}^N u_x \text{ where } u = \begin{pmatrix} p \\ q \end{pmatrix} \text{ i.e. } \begin{pmatrix} p_{t_N} \\ q_{t_N} \end{pmatrix} = \mathcal{R}^N \begin{pmatrix} p_x \\ q_x \end{pmatrix}, \quad (1)$$

*gurses@fen.bilkent.edu.tr

†aslipekcan@hacettepe.edu.tr

for $N = 1, 2, \dots$, where \mathcal{R} is the recursion operator,

$$\mathcal{R} = \begin{pmatrix} 2pD^{-1}q - D & 2pD^{-1}p \\ -2qD^{-1}q & -2qD^{-1}p + D \end{pmatrix}, \quad (2)$$

and a is an arbitrary constant. Here D is the total x -derivative and $D^{-1} = \int^x$ is the standard anti-derivative.

For $N = 1$ the system (1) gives the coupled NLS system, which we call the AKNS(1) system,

$$ap_{t_1} = -p_{xx} + 2p^2q, \quad (3)$$

$$aq_{t_1} = q_{xx} - 2pq^2. \quad (4)$$

Letting $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (3) and (4) yields the Hirota bilinear form of this system as

$$(aD_{t_1} + D_x^2)\{g \cdot f\} = 0, \quad (5)$$

$$(aD_{t_1} - D_x^2)\{h \cdot f\} = 0, \quad (6)$$

$$D_x^2\{f \cdot f\} = -2gh. \quad (7)$$

We have studied soliton solutions, local and nonlocal reductions of this system in [7], [8]. Similarly if we consider the case for $N = 2$ we have the coupled mKdV system, which we call the AKNS(2) system,

$$ap_{t_2} = -p_{xxx} + 6pqp_x, \quad (8)$$

$$aq_{t_2} = -q_{xxx} + 6pqq_x. \quad (9)$$

If we let $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (8) and (9), we get the Hirota bilinear form of the system (8) and (9) as

$$(aD_{t_2} + D_x^3)\{g \cdot f\} = 0, \quad (10)$$

$$(aD_{t_2} - D_x^3)\{h \cdot f\} = 0, \quad (11)$$

$$D_x^2\{f \cdot f\} = -2gh. \quad (12)$$

We have studied soliton solutions, local and nonlocal reductions of this system in [8], [15].

For general $N + 1$, the Hirota bilinear form of AKNS($N + 1$) system can be represented by [38]

$$(aD_{t_{N+1}} - D_x D_{t_N})\{g \cdot f\} = 0, \quad (13)$$

$$(aD_{t_{N+1}} - D_x D_{t_N})\{h \cdot f\} = 0, \quad (14)$$

$$D_x^2\{f \cdot f\} = -2gh. \quad (15)$$

This is a recurrence relation for the Hirota bilinear forms of the AKNS hierarchy. Double Wronskian solutions of the AKNS hierarchy expressed by (13)-(15) are obtained in [39] and [40]. Chen et al. [4] gave nonlocal reductions of the AKNS hierarchy (13)-(15). They also derived exact solutions in double Wronskian form of the reduced nonlocal equations from those double Wronskian solutions of the AKNS hierarchy. Ankiewicz et al. [41] analyzed the infinite

hierarchy of AKNS equations in two parts; even-order members and odd-order members. They gave the generalized soliton solutions, plane wave solutions, Kuznetsov-Ma breathers, Akhmediev breathers, rogue and periodic wave solutions for this hierarchy.

In studying Hirota bilinear forms and reduction of AKNS(N) systems we face up with the commutativity of certain operations, such as application of the recursion operator and then reduction of systems illustrated in the diagram below.

$$\begin{array}{ccc}
 \text{AKNS}(N) & \xrightarrow{\mathcal{R}} & \text{AKNS}(N+1) \\
 \text{Reduction} \downarrow & & \downarrow \text{Reduction} \\
 \text{AKNS}_{\text{red}}(N) & \xrightarrow{\mathcal{R}_{\text{red}}} & \text{AKNS}_{\text{red}}(N+1)
 \end{array}$$

Figure 1: Relation between reductions and hierarchy

Here \mathcal{R} is the recursion operator (2), \mathcal{R}_{red} is the same operator with a reduction applied, and $\text{AKNS}_{\text{red}}(N)$ is the AKNS(N) system (1) with a reduction applied. In general, we have the recursion operator, reduction of the system, and Hirota bilinearization. We study the compatibility of the commutativity diagrams for each pair of the operators.

In this paper we study the system AKNS(N) given by (1) for higher orders, particularly for $N = 3, 4, 5, 6$. The recurrence relation (13)-(15) is not very useful to obtain the Hirota bilinear form of the system AKNS(N) for $N \geq 3$. For $N \geq 3$, the Hirota bilinear form for the system AKNS(N) is not as simple as these for $N = 1, 2$. We show that the Hirota bilinear forms of AKNS(N) systems are not homogeneous for $N = 3, 4, 5, 6$. In Section 2, we give the Hirota bilinear forms of AKNS(3) and AKNS(4) systems. Then we consider the local and nonlocal reductions of these systems. We present the Hirota bilinear forms of the reduced equations. Similarly, in Section 3 we study the AKNS(5) and AKNS(6) systems. In Section 4, we analyze the commutativity of three diagrams giving the relations between the reductions, recursion operators, bilinearization, and soliton solutions.

2 Hirota bilinear forms of AKNS(N) systems for $N = 3, 4$

A. AKNS(N) system for $N = 3$

For $N = 3$, we have the AKNS(3) system

$$ap_{t_3} = -p_{xxxx} + 6qp_x^2 + 4pp_xq_x + 8pqp_{xx} + 2p^2q_{xx} - 6p^3q^2, \quad (16)$$

$$aq_{t_3} = q_{xxxx} - 6p^2q_x^2 - 4qp_xq_x - 8pqq_{xx} - 2q^2p_{xx} + 6p^2q^3. \quad (17)$$

If we let $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (16) and (17), we get the Hirota bilinear form of AKNS(3) system,

$$(aD_{t_3} + D_x^4)\{g \cdot f\} = -3hs, \quad (18)$$

$$(aD_{t_3} - D_x^4)\{h \cdot f\} = 3g\tau, \quad (19)$$

$$D_x^2\{g \cdot g\} = fs, \quad (20)$$

$$D_x^2\{h \cdot h\} = f\tau, \quad (21)$$

$$D_x^2\{f \cdot f\} = -2gh, \quad (22)$$

where s and τ are auxiliary functions.

a. Local reductions for AKNS(3) system

The AKNS(3) system does not have $q(x, t_3) = kp(x, t_3)$ type local reduction but we can consider the local reduction $q(x, t_3) = k\bar{p}(x, t_3)$, k is a real constant, for this case.

a.i. $q(x, t_3) = k\bar{p}(x, t_3)$, k is a real constant.

Under this reduction the AKNS(3) system (16) and (17) consistently reduces to the local complex AKNS(3) equation

$$ap_{t_3} + p_{xxxx} - 6k\bar{p}p_x^2 - 4kpp_x\bar{p}_x - 8kpp\bar{p}_{xx} - 2kp^2\bar{p}_{xx} + 6k^2\bar{p}^2p^3 = 0, \quad (23)$$

where $\bar{a} = -a$. For $k = -1$ and $a = i$, this equation is known as fourth order NLS equation or Lakshmanan-Porsezian-Daniel equation [42]-[48].

We can also obtain the Hirota bilinear form of the reduced equation (23). From the reduction $q(x, t_3) = k\bar{p}(x, t_3)$ we have

$$\frac{h(x, t_3)}{f(x, t_3)} = k\frac{\bar{g}(x, t_3)}{\bar{f}(x, t_3)}. \quad (24)$$

By equating numerator and denominator separately that is by using Type 1 approach [7], [8], [15] we have $h(x, t_3) = k\bar{g}(x, t_3)$ and $f(x, t_3) = \bar{f}(x, t_3)$. When we use these relations in (18)-(22) we get the Hirota bilinear form of the reduced local complex AKNS(3) equation (23) as

$$(aD_{t_3} + D_x^4)\{g \cdot f\} = -3k\bar{g}s, \quad (25)$$

$$D_x^2\{g \cdot g\} = fs, \quad (26)$$

$$D_x^2\{f \cdot f\} = -2k|g|^2, \quad (27)$$

where a is a pure imaginary number.

b. Nonlocal reductions for AKNS(3) system

b.i. $q(x, t_3) = kp(\varepsilon_1 x, \varepsilon_2 t_3) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

When we apply this reduction to the AKNS(3) system (16) and (17), it occurs that to have a consistent reduction of this type we must have $a\varepsilon_2 = -a$ that is $\varepsilon_2 = -1$. Therefore we have the following nonlocal reduced equations:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6kp(\varepsilon_1 x, -t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)p_x(\varepsilon_1 x, -t_3) \\ & + 8kp(x, t_3)p(\varepsilon_1 x, -t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)p_{xx}(\varepsilon_1 x, -t_3) - 6k^2p^3(x, t_3)p^2(\varepsilon_1 x, -t_3), \end{aligned} \quad (28)$$

which are written explicitly as

(1) $(\varepsilon_1, \varepsilon_2) = (1, -1)$ Reverse time nonlocal AKNS(3) equation:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6kp(x, -t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)p_x(x, -t_3) \\ & + 8kp(x, t_3)p(x, -t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)p_{xx}(x, -t_3) - 6k^2p^3(x, t_3)p^2(x, -t_3). \end{aligned} \quad (29)$$

(2) $(\varepsilon_1, \varepsilon_2) = (-1, -1)$ Reverse space-time nonlocal AKNS(3) equation:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6kp(-x, -t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)p_x(-x, -t_3) \\ & + 8kp(x, t_3)p(-x, -t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)p_{xx}(-x, -t_3) - 6k^2p^3(x, t_3)p^2(-x, -t_3). \end{aligned} \quad (30)$$

From the reduction, Type 1 approach gives $h(x, t_3) = kg(\varepsilon_1 x, t_3) = kg^\varepsilon$ and $f(x, t_3) = f(\varepsilon_1 x, -t_3)$. Using these relations in (18)-(22) yields the Hirota bilinear forms of the equations given by (28) as

$$(aD_{t_3} + D_x^4)\{g \cdot f\} = -3kg^\varepsilon s, \quad (31)$$

$$D_x^2\{g \cdot g\} = fs, \quad (32)$$

$$D_x^2\{f \cdot f\} = -2kgg^\varepsilon, \quad (33)$$

where s is an auxiliary function and $\varepsilon_1 = \pm 1, \varepsilon_2 = -1$.

b.ii. $q(x, t_3) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_3) = k\bar{p}^\varepsilon, \varepsilon_1^2 = \varepsilon_2^2 = 1, k$ is a real constant.

When we use this reduction on the AKNS(3) system (16) and (17), it yields that to have a consistent reduction of this type we must have $\bar{a}\varepsilon_2 = -a$. We get the nonlocal reduced equations,

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)\bar{p}_x(\varepsilon_1 x, \varepsilon_2 t_3) \\ & + 8kp(x, t_3)\bar{p}(\varepsilon_1 x, \varepsilon_2 t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)\bar{p}_{xx}(\varepsilon_1 x, \varepsilon_2 t_3) - 6k^2p^3(x, t_3)\bar{p}^2(\varepsilon_1 x, \varepsilon_2 t_3). \end{aligned} \quad (34)$$

Explicitly, we have three nonlocal reduced equations:

(1) $(\varepsilon_1, \varepsilon_2) = (-1, 1)$ Reverse space nonlocal complex AKNS(3) equation:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6k\bar{p}(-x, t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)\bar{p}_x(-x, t_3) \\ & + 8kp(x, t_3)\bar{p}(-x, t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)\bar{p}_{xx}(-x, t_3) - 6k^2p^3(x, t_3)\bar{p}^2(-x, t_3), \end{aligned} \quad (35)$$

where a is a pure imaginary number.

(2) $(\varepsilon_1, \varepsilon_2) = (1, -1)$ Reverse time nonlocal complex AKNS(3) equation:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6k\bar{p}(x, -t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)\bar{p}_x(x, -t_3) \\ & + 8kp(x, t_3)\bar{p}(x, -t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)\bar{p}_{xx}(x, -t_3) - 6k^2p^3(x, t_3)\bar{p}^2(x, -t_3), \end{aligned} \quad (36)$$

where $a \in \mathbb{R}$.

(3) $(\varepsilon_1, \varepsilon_2) = (-1, -1)$ Reverse space-time nonlocal complex AKNS(3) equation:

$$\begin{aligned} ap_{t_3}(x, t_3) = & -p_{xxxx}(x, t_3) + 6k\bar{p}(-x, -t_3)p_x^2(x, t_3) + 4kp(x, t_3)p_x(x, t_3)\bar{p}_x(-x, -t_3) \\ & + 8kp(x, t_3)\bar{p}(-x, -t_3)p_{xx}(x, t_3) + 2kp^2(x, t_3)\bar{p}_{xx}(-x, -t_3) - 6k^2p^3(x, t_3)\bar{p}^2(-x, -t_3), \end{aligned} \quad (37)$$

where $a \in \mathbb{R}$.

From the reduction, Type 1 gives $h(x, t_3) = k\bar{g}(\varepsilon_1 x, \varepsilon_2 t_3) = k\bar{g}^\varepsilon$ and $f(x, t_3) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t_3)$. Hence the Hirota bilinear forms of the equations expressed by (34) are given by

$$(aD_{t_3} + D_x^4)\{g \cdot f\} = -3k\bar{g}^\varepsilon s, \quad (38)$$

$$D_x^2\{g \cdot g\} = fs, \quad (39)$$

$$D_x^2\{f \cdot f\} = -2kg\bar{g}^\varepsilon, \quad (40)$$

where s is an auxiliary function and $\bar{a}\varepsilon_2 = -a$.

B. AKNS(N) system for $N = 4$

For $N = 4$, we have the following system from (1) that we call AKNS(4) system:

$$ap_{t_4} = -p_{xxxxx} + 10pqp_{xxx} + 10pp_xq_{xx} - 30p^2q^2p_x + 10pp_{xx}q_x + 20qp_xp_{xx} + 10p_x^2q_x, \quad (41)$$

$$aq_{t_4} = -q_{xxxxx} + 10pqq_{xxx} + 10qq_xp_{xx} - 30p^2q^2q_x + 10qq_{xx}p_x + 20pq_xq_{xx} + 10p_xq_x^2. \quad (42)$$

Letting $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (41) and (42) yields

$$(aD_{t_4} + D_x^5)\{g \cdot f\} = 5D_x\{h \cdot s\}, \quad (43)$$

$$(aD_{t_4} + D_x^5)\{h \cdot f\} = 5D_x\{g \cdot \tau\}, \quad (44)$$

$$D_x^2\{f \cdot f\} = -2gh, \quad (45)$$

$$D_x^2\{g \cdot g\} = fs, \quad (46)$$

$$D_x^2\{h \cdot h\} = f\tau, \quad (47)$$

where s and τ are auxiliary functions.

a. Local reductions for AKNS(4) system

a.i. $q(x, t_4) = kp(x, t_4)$, k is a real constant.

Different than the AKNS(3) system, the AKNS(4) system (41) and (42) has such type of local reduction consistently. The reduced local AKNS(4) equation is

$$ap_{t_4} = -p_{xxxxx} + 10kp^2p_{xxx} + 10kpp_xp_{xx} - 30k^2p^4p_x + 10kpp_xp_{xx} + 20kpp_xp_{xx} + 10kp_x^3, \quad (48)$$

without any constraint on the parameters. By Type 1, we obtain the Hirota bilinear form of this reduced local equation as

$$(aD_{t_4} + D_x^5)\{g \cdot f\} = 5kD_x\{g \cdot s\}, \quad (49)$$

$$D_x^2\{g \cdot g\} = fs, \quad (50)$$

$$D_x^2\{f \cdot f\} = -2kg^2, \quad (51)$$

where s is an auxiliary function.

a.ii. $q(x, t_4) = k\bar{p}(x, t_4)$, k is a real constant.

When we apply this reduction to the AKNS(4) system (41) and (42) it consistently reduces to the local complex AKNS(4) equation

$$ap_{t_4} = -p_{xxxxx} + 10kpp\bar{p}_{xxx} + 10kpp_x\bar{p}_{xx} - 30k^2p^2\bar{p}^2p_x + 10kpp_{xx}\bar{p}_x + 20k\bar{p}p_xp_{xx} + 10kp_x^2\bar{p}_x, \quad (52)$$

where $\bar{a} = a$. This equation for $a = 1, k = -1$ is named as fifth-order NLS equation. Soliton, breather, and rogue wave solutions of this equation were considered in [49]-[55]. When we use Type 1 approach on (43)-(47) with this reduction we obtain the Hirota bilinear form of the local complex AKNS(4) equation (52) as,

$$(aD_{t_4} + D_x^5)\{g \cdot f\} = 5kD_x\{\bar{g} \cdot s\}, \quad (53)$$

$$D_x^2\{g \cdot g\} = fs, \quad (54)$$

$$D_x^2\{f \cdot f\} = -2k|g|^2, \quad (55)$$

where s is an auxiliary function and $a \in \mathbb{R}$. Here $f(x, t_4) = \bar{f}(x, t_4)$.

b. Nonlocal reductions for AKNS(4) system

b.i. $q(x, t_4) = kp(\varepsilon_1x, \varepsilon_2t_4) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

If we use this reduction on the AKNS(4) system (41) and (42) we get the condition $a\varepsilon_1\varepsilon_2 = a$ i.e. $\varepsilon_1 = \varepsilon_2 = -1$ to have a consistent nonlocal reduction. Hence we obtain the following reverse space-time nonlocal AKNS(4) equation:

$$\begin{aligned} ap_{t_4}(x, t_4) = & -p_{xxxxx}(x, t_4) + 10kp(x, t_4)p(-x, -t_4)p_{xxx} + 10kp(x, t_4)p_x(x, t_4)p_{xx}(-x, -t_4) \\ & - 30k^2p^2(x, t_4)p^2(-x, -t_4)p_x + 10kp(x, t_4)p_{xx}(x, t_4)p_x(-x, -t_4) \\ & + 20kp(-x, -t_4)p_x(x, t_4)p_{xx}(x, t_4) + 10kp_x^2(x, t_4)p_x(-x, -t_4). \end{aligned} \quad (56)$$

Using Type 1 gives the Hirota bilinear form of the above equation as

$$(aD_{t_4} + D_x^5)\{g \cdot f\} = 5kD_x\{g^\varepsilon \cdot s\}, \quad (57)$$

$$D_x^2\{g \cdot g\} = fs, \quad (58)$$

$$D_x^2\{f \cdot f\} = -2kgg^\varepsilon, \quad (59)$$

where s is an auxiliary function, $g^\varepsilon = g(-x, -t_4)$, and $f(x, t_4) = f(-x, -t_4)$.

b.ii. $q(x, t_4) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_4) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

When we use this nonlocal reduction on the AKNS(4) system (41) and (42), it occurs that to have a consistent reduction we must have $a = \bar{a}\varepsilon_1\varepsilon_2$. We get the nonlocal reduced equations,

$$\begin{aligned} ap_{t_4}(x, t_4) &= -p_{xxxxx}(x, t_4) + 10kpp\bar{p}(\varepsilon_1 x, \varepsilon_2 t_4)p_{xxx}(x, t_4) + 10kp(x, t_4)p_x(x, t_4)\bar{p}_{xx}(\varepsilon_1 x, \varepsilon_2 t_4) \\ &\quad - 30k^2p^2(x, t_4)\bar{p}^2(\varepsilon_1 x, \varepsilon_2 t_4)p_x(x, t_4) + 10kp(x, t_4)p_{xx}(x, t_4)\bar{p}_x(\varepsilon_1 x, \varepsilon_2 t_4) \\ &\quad + 20k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_4)p_x(x, t_4)p_{xx}(x, t_4) + 10kp_x^2(x, t_4)\bar{p}_x(\varepsilon_1 x, \varepsilon_2 t_4). \end{aligned} \quad (60)$$

Explicitly, we have three nonlocal reduced equations.

(1) $(\varepsilon_1, \varepsilon_2) = (-1, 1)$ Reverse space nonlocal complex AKNS(4) equation:

$$\begin{aligned} ap_{t_4}(x, t_4) &= -p_{xxxxx}(x, t_4) + 10kpp\bar{p}(-x, t_4)p_{xxx}(x, t_4) + 10kp(x, t_4)p_x(x, t_4)\bar{p}_{xx}(-x, t_4) \\ &\quad - 30k^2p^2(x, t_4)\bar{p}^2(-x, t_4)p_x(x, t_4) + 10kp(x, t_4)p_{xx}(x, t_4)\bar{p}_x(-x, t_4) \\ &\quad + 20k\bar{p}(-x, t_4)p_x(x, t_4)p_{xx}(x, t_4) + 10kp_x^2(x, t_4)\bar{p}_x(-x, t_4), \end{aligned} \quad (61)$$

where a is a pure imaginary number.

(2) $(\varepsilon_1, \varepsilon_2) = (1, -1)$ Reverse time nonlocal complex AKNS(4) equation:

$$\begin{aligned} ap_{t_4}(x, t_4) &= -p_{xxxxx}(x, t_4) + 10kpp\bar{p}(x, -t_4)p_{xxx}(x, t_4) + 10kp(x, t_4)p_x(x, t_4)\bar{p}_{xx}(x, -t_4) \\ &\quad - 30k^2p^2(x, t_4)\bar{p}^2(x, -t_4)p_x(x, t_4) + 10kp(x, t_4)p_{xx}(x, t_4)\bar{p}_x(x, -t_4) \\ &\quad + 20k\bar{p}(x, -t_4)p_x(x, t_4)p_{xx}(x, t_4) + 10kp_x^2(x, t_4)\bar{p}_x(x, -t_4), \end{aligned} \quad (62)$$

where a is a pure imaginary number.

(3) $(\varepsilon_1, \varepsilon_2) = (-1, -1)$ Reverse space-time nonlocal complex AKNS(4) equation:

$$\begin{aligned} ap_{t_4}(x, t_4) &= -p_{xxxxx}(x, t_4) + 10kpp\bar{p}(-x, -t_4)p_{xxx}(x, t_4) + 10kp(x, t_4)p_x(x, t_4)\bar{p}_{xx}(-x, -t_4) \\ &\quad - 30k^2p^2(x, t_4)\bar{p}^2(-x, -t_4)p_x(x, t_4) + 10kp(x, t_4)p_{xx}(x, t_4)\bar{p}_x(-x, -t_4) \\ &\quad + 20k\bar{p}(-x, -t_4)p_x(x, t_4)p_{xx}(x, t_4) + 10kp_x^2(x, t_4)\bar{p}_x(-x, -t_4), \end{aligned} \quad (63)$$

where $a \in \mathbb{R}$.

Let $\bar{g}(\varepsilon_1 x, \varepsilon_2 t_4) = \bar{g}^\varepsilon$. By Type 1 we have the Hirota bilinear forms of the equations expressed by (60) as

$$(aD_{t_4} + D_x^5)\{g \cdot f\} = 5kD_x\{\bar{g}^\varepsilon \cdot s\}, \quad (64)$$

$$D_x^2\{g \cdot g\} = fs, \quad (65)$$

$$D_x^2\{f \cdot f\} = -2kg\bar{g}^\varepsilon, \quad (66)$$

where s is an auxiliary function, $a = \bar{a}\varepsilon_1\varepsilon_2$, and $f(x, t_4) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t_4)$.

3 Hirota bilinear forms of AKNS(N) systems for $N = 5, 6$

Note that there are also some works on successive members of the AKNS hierarchy (1). But as N gets larger it becomes harder to obtain the Hirota bilinear forms of AKNS(N), $N \geq 5$. The recurrence relation (13)-(15) is not helpful.

A. AKNS(N) system for $N = 5$

For $N = 5$, the system (1) gives the AKNS(5) system

$$\begin{aligned} ap_{t_5} = & -p_{6x} + 12ppq_{xxxx} + 2p^2q_{xxxx} + 18pq_xp_{xxx} + 8pp_xq_{xxx} + 30qp_xp_{xxx} + 22pp_{xx}q_{xx} \\ & - 50p^2q^2p_{xx} + 20qp^2p_{xx} - 20p^3qq_{xx} + 20p_x^2q_{xx} + 50p_xq_xp_{xx} - 60p^2qq_xp_x - 70pq^2p_x^2 \\ & - 10p^3q_x^2 + 20p^4q^3, \end{aligned} \quad (67)$$

$$\begin{aligned} aq_{t_5} = & q_{6x} - 12ppq_{xxxx} - 2q^2p_{xxxx} - 18qp_xq_{xxx} - 8qq_xp_{xxx} - 30pq_xq_{xxx} - 22qq_{xx}p_{xx} \\ & + 50q^2p^2q_{xx} - 20pq_x^2 + 20q^3pp_{xx} - 20q_x^2p_{xx} - 50q_xp_xq_{xx} + 60q^2pp_xq_x + 70qp^2q_x^2 \\ & + 10q^3p_x^2 - 20q^4p^3. \end{aligned} \quad (68)$$

Letting $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (67) and (68) gives

$$(aD_{t_5} + D_x^6)\{g \cdot f\} = -10h_{xx}s + 5hs_{xx} + 5h_x s_x + \mu, \quad (69)$$

$$(aD_{t_5} - D_x^6)\{h \cdot f\} = 10\tau g_{xx} - 5g\tau_{xx} - 5g_x\tau_x - \nu, \quad (70)$$

$$30hD_x\{g \cdot g_{xxx}\} + 15h_x f_x s + 30h f_x s_x = \mu f, \quad (71)$$

$$30gD_x\{h \cdot h_{xxx}\} + 15\tau g_x f_x + 30g f_x \tau_x = \nu f, \quad (72)$$

$$D_x^2\{f \cdot f\} = -2gh, \quad (73)$$

$$D_x^2\{g \cdot g\} = fs, \quad (74)$$

$$D_x^2\{h \cdot h\} = f\tau, \quad (75)$$

where $s, \mu, \tau,$ and ν are auxiliary functions.

a. Local reductions for AKNS(5) system

Similar to the AKNS(3) system, the AKNS(5) system does not have $q(x, t_5) = kp(x, t_5)$ type local reduction. We consider the local reduction $q(x, t_5) = k\bar{p}(x, t_5)$, k is a real constant.

a.i. $q(x, t_5) = k\bar{p}(x, t_5)$, k is a real constant.

The reduction $q(x, t_5) = k\bar{p}(x, t_5)$ reduces the system (67) and (68) to the local complex AKNS(5) equation,

$$\begin{aligned} ap_{t_5} = & -p_{6x} + 12k|p|^2 p_{xxxx} + 2kp^2 \bar{p}_{xxxx} + 18kpp_x p_{xxx} + 8kpp_x \bar{p}_{xxx} + 30k\bar{p}p_x p_{xxx} + 22k|p|p_{xx}|^2 \\ & - 50k^2|p|^4 p_{xx} + 20k\bar{p}p_{xx}^2 - 20k^2 p^2 |p|^2 \bar{p}_{xx} + 20kp_x^2 \bar{p}_{xx} + 50k|p_x|^2 p_{xx} - 60k^2 p|p|^2 |p_x|^2 \\ & - 70k^2 \bar{p}|p|^2 p_x^2 - 10k^2 p^3 \bar{p}_x^2 + 20k^3 |p|^6 p, \end{aligned} \quad (76)$$

where $\bar{a} = -a$. This equation is known as the fifth member of reduced AKNS hierarchy or sixth order NLS equation [43]. Bilinear form and soliton solutions of the above equation were given in [56]. Multiple dromion solutions, solitons, breather, and rogue wave solutions of this equation were presented in [57]-[59]. If we use Type 1 approach on (69)-(75) we obtain the Hirota bilinear form of the equation (76) as,

$$(aD_{t_5} + D_x^6)\{g \cdot f\} = k(-10\bar{g}_{xx}s + 5\bar{g}s_{xx} + 5\bar{g}_x s_x + \psi), \quad (77)$$

$$30\bar{g}D_x\{g \cdot g_{xxx}\} + 15\bar{g}_x f_x s + 30\bar{g}f_x s_x = \psi f, \quad (78)$$

$$D_x^2\{g \cdot g\} = fs, \quad (79)$$

$$D_x^2\{f \cdot f\} = -2k|g|^2, \quad (80)$$

where s and ψ are auxiliary functions and $\bar{a} = -a$. Here $f(x, t_5) = \bar{f}(x, t_5)$.

b. Nonlocal reductions for AKNS(5) system

b.i. $q(x, t_5) = kp(\varepsilon_1 x, \varepsilon_2 t_5) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

This reduction reduces the system (67) and (68) to the nonlocal AKNS(5) equations,

$$\begin{aligned} ap_{t_5} = & -p_{6x} + 12kpp^\varepsilon p_{xxxx} + 2kp^2 p^\varepsilon_{xxxx} + 18kpp_x^\varepsilon p_{xxx} + 8kpp_x p^\varepsilon_{xxx} + 30kp^\varepsilon p_x p_{xxx} \\ & + 22kpp_{xx} p^\varepsilon_{xx} - 50k^2 p^2 (p^\varepsilon)^2 p_{xx} + 20kp^\varepsilon p_{xx}^2 - 20k^2 p^3 p^\varepsilon p^\varepsilon_{xx} + 20kp_x^2 p^\varepsilon_{xx} + 50kp_x p^\varepsilon_{xx} p_{xx} \\ & - 60k^2 p^2 p^\varepsilon p^\varepsilon_{xx} p_x - 70k^2 p (p^\varepsilon)^2 p_x^2 - 10k^2 p^3 (p^\varepsilon)^2 + 20k^3 p^4 (p^\varepsilon)^3, \end{aligned} \quad (81)$$

where $\varepsilon_2 = -1$ and $\varepsilon_1 = \pm 1$. Here we have the reverse time and the reverse space-time nonlocal AKNS(5) equations.

The Hirota bilinear forms of the equations (81) obtained by Type 1, are given by

$$(aD_{t_5} + D_x^6)\{g \cdot f\} = k(-10g_{xx}^\varepsilon s + 5g_x^\varepsilon s_x + 5g^\varepsilon s_{xx} + \psi), \quad (82)$$

$$30g^\varepsilon D_x\{g \cdot g_{xxx}\} + 15g_x^\varepsilon f_x s + 30g^\varepsilon f_x s_x = \psi f, \quad (83)$$

$$D_x^2\{g \cdot g\} = fs, \quad (84)$$

$$D_x^2 = \{f \cdot f\} = -2gg^\varepsilon, \quad (85)$$

where s and ψ are auxiliary functions, $g^\varepsilon = g(\varepsilon_1 x, -t_5)$, and $f(x, t_5) = f(\varepsilon_1 x, -t_5)$.

b.ii. $q(x, t_5) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_5) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

By this reduction the system (67) and (68) reduces to the nonlocal complex AKNS(5) equation,

$$\begin{aligned} ap_{t_5} = & -p_{6x} + 12kpp\bar{p}^\varepsilon p_{xxxx} + 2kp^2\bar{p}^\varepsilon p_{xxx} + 18kpp\bar{p}^\varepsilon p_{xxx} + 8kpp_x\bar{p}^\varepsilon p_{xxx} + 30k\bar{p}^\varepsilon p_x p_{xxx} \\ & + 22kpp_{xx}\bar{p}^\varepsilon p_{xx} - 50k^2 p^2 (\bar{p}^\varepsilon)^2 p_{xx} + 20k\bar{p}^\varepsilon p^2 p_{xx} - 20k^2 p^3 \bar{p}^\varepsilon p_{xx} + 20kp_x^2 \bar{p}^\varepsilon p_{xx} + 50kp_x \bar{p}^\varepsilon p_{xx} \\ & - 60k^2 p^2 \bar{p}^\varepsilon p_x p_x - 70k^2 p (\bar{p}^\varepsilon)^2 p_x^2 - 10k^2 p^3 (\bar{p}^\varepsilon)^2 + 20k^3 p^4 (\bar{p}^\varepsilon)^3, \end{aligned} \quad (86)$$

where $\bar{a}\varepsilon_2 = -a$. Here we have three nonlocal complex AKNS(5) equations; the reverse space $(\varepsilon_1, \varepsilon_2) = (-1, 1)$, the reverse time $(\varepsilon_1, \varepsilon_2) = (1, -1)$, and the reverse space-time $(\varepsilon_1, \varepsilon_2) = (-1, -1)$ nonlocal equations.

By Type 1 that is by using $h(x, t_5) = k\bar{g}(\varepsilon_1 x, \varepsilon_2 t_5) = k\bar{g}^\varepsilon$ and $f(x, t_5) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t_5)$ on (69)-(75) we get Hirota bilinear forms of the equations (86) as

$$(aD_{t_5} + D_x^6)\{g \cdot f\} = k(-10\bar{g}_{xx}^\varepsilon s + 5\bar{g}_x^\varepsilon s_x + 5\bar{g}^\varepsilon s_{xx} + \psi), \quad (87)$$

$$30\bar{g}^\varepsilon D_x\{g \cdot g_{xxx}\} + 15\bar{g}_x^\varepsilon f_x s + 30\bar{g}^\varepsilon f_x s_x = \psi f, \quad (88)$$

$$D_x^2\{g \cdot g\} = f s, \quad (89)$$

$$D_x^2\{f \cdot f\} = -2kg\bar{g}^\varepsilon, \quad (90)$$

where s and ψ are auxiliary functions, and $\bar{a}\varepsilon_2 = -a$.

B. AKNS(N) system for $N = 6$

For $N = 6$, the system (1) gives the AKNS(6) system

$$\begin{aligned} ap_{t_6} = & -p_{7x} + 14ppq_{5x} + 28pq_x p_{xxxx} + 42qp_x p_{xxxx} + 14pp_x q_{xxxx} + 70qp_{xx} p_{xxx} + 28pp_{xx} q_{xxx} \\ & + 98p_x q_x p_{xxx} + 42pq_{xx} p_{xxx} - 70p^2 q^2 p_{xxx} + 28p_x^2 q_{xxx} + 112p_x p_{xx} q_{xx} - 280pq^2 p_x p_{xx} \\ & - 140p^2 qq_x p_{xx} - 140p^2 qp_x q_{xx} + 70p^2 p_x q_x^2 + 140p^3 q^3 p_x - 280ppq_x p_x^2 - 70q^2 p_x^3, \end{aligned} \quad (91)$$

$$\begin{aligned} aq_{t_6} = & -q_{7x} + 14ppq_{5x} + 28qp_x q_{xxxx} + 42pq_x q_{xxxx} + 14qq_x p_{xxxx} + 70pq_{xx} q_{xxx} + 28qq_{xx} p_{xxx} \\ & + 98q_x p_x q_{xxx} + 42qp_{xx} q_{xxx} - 70q^2 p^2 q_{xxx} + 28q_x^2 p_{xxx} + 112q_x q_{xx} p_{xx} - 280qp^2 q_x q_{xx} \\ & - 140q^2 pp_x q_{xx} - 140q^2 pq_x p_{xx} + 70q^2 q_x p_x^2 + 140q^3 p^3 q_x - 280qpp_x q_x^2 - 70p^2 q_x^3. \end{aligned} \quad (92)$$

Letting $p = \frac{g}{f}$ and $q = \frac{h}{f}$ in (91) and (92) gives the Hirota bilinear form of this system as

$$(aD_{t_6} + D_x^7)\{g \cdot f\} = 14h_{xxx} s + 14h_x s_{xx} - 14h_{xx} s_x + \mu_1 + \mu_2, \quad (93)$$

$$(aD_{t_6} + D_x^7)\{h \cdot f\} = 14g_{xxx} \tau + 14g_x \tau_{xx} - 14g_{xx} \tau_x + \nu_1 + \nu_2, \quad (94)$$

$$49h_x f_x s_x - 28f_x h_{xx} s + 35h f_x s_{xx} + 98h_x D_x\{g_x \cdot g_{xxx}\} + 28h D_x\{g \cdot g_{xxxx}\} = -\mu_1 f, \quad (95)$$

$$49g_x f_x \tau_x - 28f_x g_{xx} \tau + 35g f_x \tau_{xx} + 98g_x D_x\{h_x \cdot h_{xxx}\} + 28g D_x\{h \cdot h_{xxxx}\} = -\nu_1 f, \quad (96)$$

$$14h f_x^2 s_x + 14gh h_x s + 7g_x h^2 s + 14h f_x D_x\{g \cdot g_{xxx}\} = -\mu_2 f^2 \quad (97)$$

$$14g f_x^2 \tau_x + 14h g g_x \tau + 7h_x g^2 \tau + 14g f_x D_x\{h \cdot h_{xxx}\} = -\nu_2 f^2 \quad (98)$$

$$D_x^2\{g \cdot g\} = f s, \quad (99)$$

$$D_x^2\{h \cdot h\} = f \tau, \quad (100)$$

$$D_x^2\{f \cdot f\} = -2gh, \quad (101)$$

where s , μ_1 , μ_2 , τ , ν_1 , and ν_2 are auxiliary functions.

a. Local reductions for AKNS(6) system

a.i. $q(x, t_6) = kp(x, t_6)$, k is a real constant.

When we apply the reduction $q(x, t_6) = kp(x, t_6)$ to the AKNS(6) system (91) and (92) it reduces to the local equation

$$\begin{aligned} ap_{t_6} = & -p_{7x} + 14kp^2p_{5x} + 84kpp_xp_{xxxx} + 140kpp_{xx}p_{xxx} - 560k^2p^3p_xp_{xx} + 126kp_x^2p_{xxx} \\ & + 112kp_xp_{xx}^2 - 70k^2p^4p_{xxx} - 280k^2p^2p_x^3 + 140k^3p^6p_x. \end{aligned} \quad (102)$$

By using Type 1 approach on (93)-(101) we get the Hirota bilinear form of this reduced local equation as

$$(aD_{t_6} + D_x^7)\{g \cdot f\} = k(14g_{xxx}s + 14g_x s_{xx} - 14g_{xx}s_x + \psi_1 + \psi_2), \quad (103)$$

$$49g_x f_x s_x - 28f_x g_{xx} s + 35g f_x s_{xx} + 98g_x D_x \{g_x \cdot g_{xx}\} + 28g D_x \{g \cdot g_{xxx}\} = -\psi_1 f, \quad (104)$$

$$14g f_x^2 s_x + 14k g^2 g_x s + 7k g_x g^2 s + 14g f_x D_x \{g \cdot g_{xxx}\} = -\psi_2 f^2 \quad (105)$$

$$D_x^2 \{g \cdot g\} = f s, \quad (106)$$

$$D_x^2 \{f \cdot f\} = -2k g^2, \quad (107)$$

where s , ψ_1 , and ψ_2 are auxiliary functions.

a.ii. $q(x, t_6) = k\bar{p}(x, t_6)$, k is a real constant.

This system reduces to the following equation under $q(x, t_6) = k\bar{p}(x, t_6)$ consistently,

$$\begin{aligned} ap_{t_6} = & -p_{7x} + 14k|p|^2p_{5x} + 28kpp_{xx}p_{xxxx} + 42k\bar{p}p_xp_{xxxx} + 14kpp_x\bar{p}_{xxx} + 70k\bar{p}p_{xx}p_{xxx} \\ & + 28kpp_{xx}\bar{p}_{xxx} + 98k|p_x|^2p_{xxx} + 42k\bar{p}p_{xx}p_{xxx} - 70k^2|p|^4p_{xxx} + 28k\bar{p}_x^2\bar{p}_{xxx} + 112kp_x|p_{xx}|^2 \\ & - 280k^2\bar{p}|p|^2p_xp_{xx} - 140k^2p|p|^2\bar{p}_xp_{xx} - 140k^2p|p|^2p_x\bar{p}_{xx} + 70k^2p^2\bar{p}_x|p_x|^2 \\ & + 140k^3|p|^6p_x - 280k^2|p|^2|p_x|^2p_x - 70k^2p_x^3\bar{p}^2 = 0. \end{aligned} \quad (108)$$

Here $a = \bar{a}$. Using Type 1 approach on (93)-(101) gives the Hirota bilinear form of the reduced local AKNS(6) equation as

$$(aD_{t_6} + D_x^7)\{g \cdot f\} = k(14\bar{g}_{xxx}s + 14\bar{g}_x s_{xx} - 14\bar{g}_{xx}s_x + \psi_1 + \psi_2), \quad (109)$$

$$49\bar{g}_x f_x s_x - 28f_x \bar{g}_{xx} s + 35\bar{g} f_x s_{xx} + 98\bar{g}_x D_x \{g_x \cdot g_{xx}\} + 28\bar{g} D_x \{g \cdot g_{xxx}\} = -\psi_1 f, \quad (110)$$

$$14\bar{g} f_x^2 s_x + 14k|g|^2\bar{g}_x s + 7k g_x \bar{g}^2 s + 14\bar{g} f_x D_x \{g \cdot g_{xxx}\} = -\psi_2 f^2 \quad (111)$$

$$D_x^2 \{g \cdot g\} = f s, \quad (112)$$

$$D_x^2 \{f \cdot f\} = -2k|g|^2, \quad (113)$$

where s , ψ_1 , and ψ_2 are auxiliary functions.

b. Nonlocal reductions for the AKNS(6) system

b.i. $q(x, t_6) = kp(\varepsilon_1 x, \varepsilon_2 t_6) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

When we apply this nonlocal reduction to the system (91) and (92), we get $\varepsilon_1 = \varepsilon_2 = -1$ and it reduces to the reverse space-time nonlocal AKNS(6) equation,

$$\begin{aligned} ap_{t_6} = & -p_{7x} + 14kpp^\varepsilon p_{5x} + 28kpp_x^\varepsilon p_{xxxx} + 42kp^\varepsilon p_x p_{xxxx} + 14kpp_x p_{xxxx}^\varepsilon + 70kp^\varepsilon p_{xx} p_{xxx} \\ & + 28kpp_{xx} p_{xxx}^\varepsilon + 98kp_x p_x^\varepsilon p_{xxx} + 42kpp_{xx}^\varepsilon p_{xxx} - 70k^2 p^2 (p^\varepsilon)^2 p_{xxx} + 28kp_x^2 p_{xxx}^\varepsilon \\ & + 112kp_x p_{xx} p_{xx}^\varepsilon - 280k^2 p (p^\varepsilon)^2 p_x p_{xx} - 140k^2 p^2 p^\varepsilon p_x^\varepsilon p_{xx} - 140k^2 p^2 p^\varepsilon p_x p_x^\varepsilon \\ & + 70k^2 p^2 p_x (p^\varepsilon)^2 + 140k^3 p^3 (p^\varepsilon)^3 p_x - 280k^2 pp^\varepsilon p_x^\varepsilon p_x^2 - 70k^2 (p^\varepsilon)^2 p_x^3, \end{aligned} \quad (114)$$

where $p^\varepsilon = p(-x, -t_6)$.

By Type 1, we take $h(x, t_6) = kg(-x, -t_6) = kg^\varepsilon$ and $f(x, t_6) = f(-x, -t_6)$. Therefore we get the Hirota bilinear form of the equation (114) as

$$(aD_{t_6} + D_x^7)\{g \cdot f\} = k(14g_{xxx}^\varepsilon s - 14g_{xx}^\varepsilon s_x + 14g_x^\varepsilon s_{xx} + \psi_1 + \psi_2), \quad (115)$$

$$49g_x^\varepsilon f_x s_x - 28g_{xx}^\varepsilon f_x s + 35g_x^\varepsilon f_x s_{xx} + 98g_x^\varepsilon D_x\{g_x \cdot g_{xx}\} + 28g_x^\varepsilon D_x\{g \cdot g_{xxx}\} = -\psi_1 f, \quad (116)$$

$$14g_x^\varepsilon f_x^2 s_x + 14kgg_x^\varepsilon g_x^\varepsilon s + 7kg_x(g_x^\varepsilon)^2 s + 14g_x^\varepsilon f_x D_x\{g \cdot g_{xxx}\} = -\psi_2 f^2 \quad (117)$$

$$D_x^2\{g \cdot g\} = fs, \quad (118)$$

$$D_x^2\{f \cdot f\} = -2gg^\varepsilon, \quad (119)$$

where s , ψ_1 , and ψ_2 are auxiliary functions.

b.ii. $q(x, t_6) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t_6) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Under this reduction the system (91) and (92) reduces to the reduced nonlocal complex AKNS(6) equation consistently,

$$\begin{aligned} ap_{t_6} = & -p_{7x} + 14kpp\bar{p}^\varepsilon p_{5x} + 28kpp\bar{p}_x^\varepsilon p_{xxxx} + 42k\bar{p}^\varepsilon p_x p_{xxxx} + 14kpp_x \bar{p}_{xxxx}^\varepsilon + 70k\bar{p}^\varepsilon p_{xx} p_{xxx} \\ & + 28kpp_{xx} \bar{p}_{xxx}^\varepsilon + 98kp_x \bar{p}_x^\varepsilon p_{xxx} + 42kpp_{xx}^\varepsilon p_{xxx} - 70k^2 p^2 (\bar{p}^\varepsilon)^2 p_{xxx} + 28kp_x^2 \bar{p}_{xxx}^\varepsilon \\ & + 112kp_x p_{xx} \bar{p}_{xx}^\varepsilon - 280k^2 p (\bar{p}^\varepsilon)^2 p_x p_{xx} - 140k^2 p^2 \bar{p}^\varepsilon \bar{p}_x^\varepsilon p_{xx} - 140k^2 p^2 \bar{p}^\varepsilon p_x \bar{p}_{xx}^\varepsilon \\ & + 70k^2 p^2 p_x (\bar{p}^\varepsilon)^2 + 140k^3 p^3 (\bar{p}^\varepsilon)^3 p_x - 280k^2 p\bar{p}^\varepsilon \bar{p}_x^\varepsilon p_x^2 - 70k^2 (\bar{p}^\varepsilon)^2 p_x^3, \end{aligned} \quad (120)$$

where $a = \bar{a}\varepsilon_1\varepsilon_2$. Here we have three nonlocal equations; the reverse space, the reverse time, and the reverse space-time nonlocal complex AKNS(6) equations.

By Type 1 we get the Hirota bilinear forms of the nonlocal equations expressed by (120) as

$$(aD_{t_6} + D_x^7)\{g \cdot f\} = k(14\bar{g}_{xxx}^\varepsilon s - 14\bar{g}_{xx}^\varepsilon s_x + 14\bar{g}_x^\varepsilon s_{xx} + \psi_1 + \psi_2), \quad (121)$$

$$49\bar{g}_x^\varepsilon f_x s_x - 28\bar{g}_{xx}^\varepsilon f_x s + 35\bar{g}_x^\varepsilon f_x s_{xx} + 98\bar{g}_x^\varepsilon D_x\{g_x \cdot g_{xx}\} + 28\bar{g}_x^\varepsilon D_x\{g \cdot g_{xxx}\} = -\psi_1 f \quad (122)$$

$$14\bar{g}_x^\varepsilon f_x^2 s_x + 14k\bar{g}\bar{g}_x^\varepsilon \bar{g}_x^\varepsilon s + 7k\bar{g}_x(\bar{g}_x^\varepsilon)^2 s + 14\bar{g}_x^\varepsilon f_x D_x\{g \cdot g_{xxx}\} = -\psi_2 f^2 \quad (123)$$

$$D_x^2\{g \cdot g\} = fs, \quad (124)$$

$$D_x^2\{f \cdot f\} = -2k\bar{g}\bar{g}^\varepsilon, \quad (125)$$

where s , ψ_1 , and ψ_2 are auxiliary functions, $a = \bar{a}\varepsilon_1\varepsilon_2$, $\bar{g}^\varepsilon = \bar{g}(\varepsilon_1 x, \varepsilon_2 t_6)$, and $f(x, t_6) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t_6)$.

4 Reductions, recursion operator, bilinearization, and soliton solutions by Hirota method

In studying the AKNS system we encounter four different operations. AKNS(N) system has two coupled nonlinear equations of order $N + 1$. Reduction is a process which decreases the number of dependent variables to one in a consistent way. Recursion operator increases the order of the differential equations by one. Bilinearization is a process to put the given equation, if possible, in the Hirota bilinear form. Finally, the last process is obtaining the soliton solutions of the equations by using the Hirota method. In this section we investigate how these operations commute.

4.1 Reductions and Solutions

We consider first the Hirota method to find the soliton solutions and reductions. Consider the following diagram.

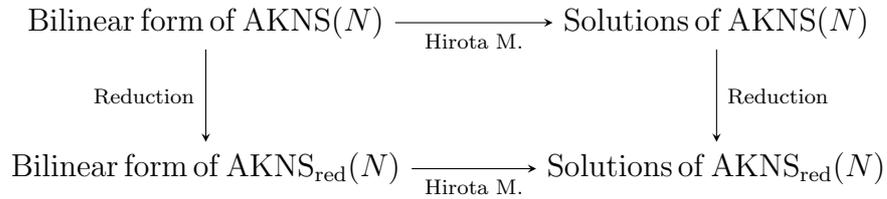


Figure 2: Relations between reductions and solutions

Here $\text{AKNS}_{\text{red}}(N)$ is the reduced equation obtained from the $\text{AKNS}(N)$ system (1) by applying a reduction. We analyze this diagram by following two paths. Path 1 is the one starting from the bilinear form of $\text{AKNS}(N)$ system, followed by obtaining solutions of this system via Hirota method then finalized by getting solutions of the $\text{AKNS}_{\text{red}}(N)$ equation by applying local and nonlocal reductions. Path 2 also starts from the bilinear form of the $\text{AKNS}(N)$ system. But the next step here is applying reduction to get the Hirota bilinear form of the reduced equation $\text{AKNS}_{\text{red}}(N)$. The reduction is done by using Type 1 approach that has been introduced in [7] and [15]. Then we use Hirota method on this bilinear form of the reduced equation to obtain solutions of the $\text{AKNS}_{\text{red}}(N)$ equation. Here the question is that whether we reach to the same solutions by following these two paths or not. In other words, is the above diagram commutative?

Through Path 1, one can use both Type 1 and Type 2 approaches [7], [8], [15] while finding soliton solutions of the $\text{AKNS}_{\text{red}}(N)$ equation via Hirota method. These two approaches give different solutions. Clearly, through Path 2 we can only use Type 1 since we reduce the Hirota bilinear form of $\text{AKNS}(N)$ system to the Hirota bilinear form of $\text{AKNS}_{\text{red}}(N)$ according to Type 1 approach.

We obtain same solutions through both Path 1 and Path 2 if we apply Type 1 approach i.e. the diagram in Figure 2 is commutative if we use Type 1. We note that if we apply Type

1 approach, we get trivial solution for the nonlocal AKNS($2N$) or AKNS($2N + 1$) equations reduced by $q(x, t) = kp(-x, -t)$ through each path for any N .

4.2 Reductions and Bilinearization

We consider now the relation between the bilinearization and the reductions. Consider the following diagram. Here we show that this diagram is commutative for $N = 1, 2, 3$. Note that

$$\begin{array}{ccc}
 \text{AKNS}(N) & \xrightarrow{\text{Transformation}} & \text{Bilinear form of AKNS}(N) \\
 \text{Reduction} \downarrow & & \downarrow \text{Reduction} \\
 \text{AKNS}_{\text{red}}(N) & \xrightarrow{\text{Transformation}} & \text{Bilinear form of AKNS}_{\text{red}}(N)
 \end{array}$$

Figure 3: Relations between reductions and Hirota bilinear forms

while applying the local and nonlocal reductions to the Hirota bilinear forms we use Type 1.

1) $N = 1$ case:

For $N = 1$ we have the AKNS(1) system that is the coupled NLS system (3) and (4). Now we will follow two paths in the Figure 3 separately.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant. There is no such local reduction in both paths. If we use it we get $a = 0$.

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. If we let $p = \frac{g}{f}$ and $q = \frac{h}{\bar{f}}$ in (3) and (4) we get the Hirota bilinear form of the AKNS(1) system as (5)-(7). Apply now the local reduction $q(x, t) = k\bar{p}(x, t)$ to the Hirota bilinear form. Let us use Type 1 approach. This means $h = k\bar{g}$ and $f = \bar{f}$. Then we get the reduced the Hirota bilinear form as

$$(aD_t + D_x^2)\{g \cdot f\} = 0, \quad (126)$$

$$D_x^2\{f \cdot f\} = -2kg\bar{g}, \quad (127)$$

where $\bar{a} = -a$ and $f = \bar{f}$.

Path 2. We now first apply the reduction to the AKNS(1) system and obtain the reduced local equation

$$ap_t(x, t) = -p_{xx}(x, t) + 2kp^2(x, t)\bar{p}(x, t), \quad (128)$$

where $\bar{a} = -a$. Letting $p = \frac{g}{f}$ gives the same Hirota bilinear form of the reduced equation given in (126) and (127) with $f = \bar{f}$.

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. We first obtain the Hirota bilinear form of the AKNS(1) system (5)-(7) by taking $p = \frac{q}{f}$ and $q = \frac{h}{f}$ and then use the nonlocal reduction $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$. This gives $h = kg^\varepsilon$ and $f = f^\varepsilon$ if we use Type 1 approach. Then the Hirota bilinear form reduces to

$$(aD_t + D_x^2)\{g \cdot f\} = 0, \quad (129)$$

$$D_x^2\{f \cdot f\} = -2kgg^\varepsilon, \quad (130)$$

where $\varepsilon_2 = -1$ and $f(x, t) = f(\varepsilon_1 x, -t)$.

Path 2. First apply the nonlocal reduction to the AKNS(1) system. We have the reduced nonlocal equation

$$ap_t(x, t) = -p_{xx}(x, t) + 2kp^2(x, t)p(\varepsilon_1 x, \varepsilon_2 t), \quad (131)$$

with the constraint $\varepsilon_2 = -1$. Letting $p = \frac{q}{f}$ and $p^\varepsilon = \frac{q^\varepsilon}{f^\varepsilon}$ gives the same Hirota bilinear form (129) and (130) as in Path 1 where $f(x, t) = f(\varepsilon_1 x, -t)$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. After obtaining the Hirota bilinear form of the AKNS(1) system we use the nonlocal reduction $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$ giving $h = k\bar{g}^\varepsilon$ and $f = \bar{f}^\varepsilon$ by Type 1 approach. Hence the Hirota bilinear form reduces to

$$(aD_t + D_x^2)\{g \cdot f\} = 0, \quad (132)$$

$$D_x^2\{f \cdot f\} = -2k\bar{g}\bar{g}^\varepsilon, \quad (133)$$

where $a = -\bar{a}\varepsilon_2$ and $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

Path 2. Applying this nonlocal reduction to the AKNS(1) system yields the reduced nonlocal equation

$$ap_t(x, t) = -p_{xx}(x, t) + 2kp^2(x, t)\bar{p}(\varepsilon_1 x, \varepsilon_2 t), \quad (134)$$

with the constraint $a = -\bar{a}\varepsilon_2$. If we take $p = \frac{q}{f}$ and $\bar{p}^\varepsilon = \frac{\bar{q}^\varepsilon}{\bar{f}^\varepsilon}$ we have the same Hirota bilinear form (132) and (133) as in Path 1 where $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

2) $N = 2$ case:

For $N = 2$ we have the AKNS(2) system that is the coupled mKdV system (8) and (9). Now we will analyze the Figure 3.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant.

Path 1. We first obtain the Hirota bilinear form of the AKNS(2) system as (10)-(12) by letting $p = \frac{g}{f}$ and $q = \frac{h}{f}$. Then we use the reduction $q(x, t) = kp(x, t)$ which gives $h = kg$. Hence the Hirota bilinear form (10)-(12) reduces to

$$(aD_t + D_x^3)\{g \cdot f\} = 0, \quad (135)$$

$$D_x^2\{f \cdot f\} = -2kg^2, \quad (136)$$

without any constraint.

Path 2. We reduce the system to the following local reduced equation:

$$ap_t = -p_{xxx} + 6kp^2p_x. \quad (137)$$

If we let $p = \frac{g}{f}$ we get the same Hirota bilinear form (135)-(136) for the above reduced equation.

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. After obtaining the Hirota bilinear form of the AKNS(2) system by taking $p = \frac{g}{f}$ and $q = \frac{h}{f}$ as (10)-(12), we apply the local reduction $q(x, t) = k\bar{p}(x, t)$. We have $h = k\bar{g}$ and $f = \bar{f}$. Then we get the reduced Hirota bilinear form as

$$(aD_t + D_x^3)\{g \cdot f\} = 0, \quad (138)$$

$$D_x^2\{f \cdot f\} = -2kg\bar{g}, \quad (139)$$

where $\bar{a} = a$ and $f = \bar{f}$.

Path 2. We first reduce the AKNS(2) system by using this reduction. We get

$$ap_t(x, t) = -p_{xxx}(x, t) + 6kp(x, t)\bar{p}(x, t)p_x, \quad (140)$$

where $\bar{a} = a$. We then let $p = \frac{g}{f}$ and obtain the same Hirota bilinear form (138) and (139) as in Path 1 for the reduced local equation with $f = \bar{f}$.

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. Apply the reduction $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$ to the Hirota bilinear form of the AKNS(2) system (10)-(12) by taking $h = kg^\varepsilon$ and $f = f^\varepsilon$. The Hirota bilinear form reduces to the following bilinear form consistently:

$$(aD_t + D_x^3)\{g \cdot f\} = 0, \quad (141)$$

$$D_x^2\{f \cdot f\} = -2kgg^\varepsilon, \quad (142)$$

for $\varepsilon_1 = \varepsilon_2 = -1$. Here $f(x, t) = f(-x, -t)$.

Path 2. Reduce the AKNS(2) system by this reduction. We only have the following reduced nonlocal equation

$$ap_t(x, t) = -p_{xxx}(x, t) + 6kp(x, t)p(-x, -t)p_x(x, t), \quad (143)$$

consistently. Now let $p = \frac{q}{f}$. We obtain the same Hirota bilinear form (141) and (142) as in Path 1 with $f(x, t) = f(-x, -t)$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. We use the reduction $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$ on the Hirota bilinear form (10)-(12) by taking $h = k\bar{g}^\varepsilon$ and $f = \bar{f}^\varepsilon$. The Hirota bilinear form reduces to

$$(aD_t + D_x^3)\{g \cdot f\} = 0, \quad (144)$$

$$D_x^2\{f \cdot f\} = -2k g \bar{g}^\varepsilon, \quad (145)$$

consistently if $a = \bar{a}\varepsilon_1\varepsilon_2$. Here $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

Path 2. Under this reduction the AKNS(2) system reduces to

$$ap_t(x, t) = -p_{xxx}(x, t) + 6kp(x, t)\bar{p}(\varepsilon_1 x, \varepsilon_2 t)p_x(x, t), \quad (146)$$

where $a = \bar{a}\varepsilon_1\varepsilon_2$. Take $p = \frac{q}{f}$. Here again we get the same Hirota bilinear form (144) and (145) as in Path 1 with $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

3) $N = 3$ case:

For $N = 3$ we have the AKNS(3) system (16) and (17). Let us now follow two paths in the Figure 3 separately.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant. There is no such local reduction in both paths as in the AKNS(1) case.

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. We have obtained the Hirota bilinear form of AKNS(3) system (18)-(22) and the reduced Hirota bilinear form (25)-(27) by this reduction in Section 2. Here we get the constraint $a = -\bar{a}$ and $f(x, t)$ is a real-valued function.

Path 2. Applying this reduction to the AKNS(3) system gives the equation (23) with $a = -\bar{a}$. If we let $p = \frac{q}{f}$, we get the same Hirota bilinear form (25)-(27) as in the Path 1. Here $f = \bar{f}$.

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. When we apply this reduction to the Hirota bilinear form of AKNS(3) system (18)-(22) we get the reduced Hirota bilinear form (31)-(33) with $a = -a\varepsilon_2$ i.e. $\varepsilon_2 = -1$, $\varepsilon_1 = \pm 1$. Here $f(x, t) = f(\varepsilon_1 x, -t)$.

Path 2. First apply the nonlocal reduction to the AKNS(3) system. We get the reduced nonlocal equation (28) where $\varepsilon_2 = -1$, $\varepsilon_1 = \pm 1$. Hence we have two types of nonlocal reduced equations here. Taking $p = \frac{g}{f}$ yields the same Hirota bilinear forms expressed by (31)-(33) for the nonlocal reduced equations as in the Path 1. Here also $f(x, t) = f(\varepsilon_1 x, -t)$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. After obtaining the Hirota bilinear form of the AKNS(3) system which is given by (18)-(22), we use the nonlocal reduction $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$ giving $h = k\bar{g}^\varepsilon$ and $f = \bar{f}^\varepsilon$. Hence the Hirota bilinear form reduces to (38)-(40). Here $a = -\bar{a}\varepsilon_2$ and $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

Path 2. When we apply this nonlocal reduction to the AKNS(3) system we get three types of reduced nonlocal equations represented by (34) where $a = -\bar{a}\varepsilon_2$. If we take $p = \frac{g}{f}$ we have the same Hirota bilinear form (38)-(40) as in Path 1. Here $f(x, t) = \bar{f}(\varepsilon_1 x, \varepsilon_2 t)$.

4.3 Reductions and Hierarchy

The third commutativity diagram is for the reductions and the hierarchy.

$$\begin{array}{ccc}
\text{AKNS}(N) & \xrightarrow{\mathcal{R}} & \text{AKNS}(N+1) \\
\downarrow \text{Reduction} & & \downarrow \text{Reduction} \\
\text{AKNS}_{\text{red}}(N) & \xrightarrow{\mathcal{R}_{\text{red}}} & \text{AKNS}_{\text{red}}(N+1)
\end{array}$$

Figure 4: Relation between reductions and hierarchy

Here \mathcal{R} is the recursion operator (2), \mathcal{R}_{red} is the same operator with a reduction applied, and $\text{AKNS}_{\text{red}}(N)$ is the $\text{AKNS}(N)$ system (1) with a reduction applied.

Here the question is whether the above diagram is commutative or not. In other words by starting from $\text{AKNS}(N)$ system and following two different paths we will check whether we reach to the same system $\text{AKNS}_{\text{red}}(N+1)$ consistently or not. We begin with the case $N = 1$ and check also $N = 2, 3$ cases by considering all reductions -two local and two nonlocal reductions.

1) $N = 1$ case:

For $N = 1$ we have the $\text{AKNS}(1)$ system (3) and (4). Now we will follow two paths in the Figure 4 separately.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant.

Path 1. First, apply the recursion operator to $\text{AKNS}(1)$ system. We get the $\text{AKNS}(2)$ system (8) and (9). Now use the local reduction $q(x, t) = kp(x, t)$ yielding

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kp^2p_x \\ -k\frac{1}{4}p_{xxx} + 6k^2p^2p_x \end{pmatrix}. \quad (147)$$

Here we have a consistent system without any additional condition.

Path 2. Firstly, use the local reduction $q(x, t) = kp(x, t)$ on the $\text{AKNS}(1)$ system (3) and (4). We have

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xx} + 2kp^3 \\ kp_{xx} - 2k^2p^3 \end{pmatrix}. \quad (148)$$

Notice that the above equality is satisfied if and only if $a = 0$. Hence it is not possible to get the same system (147) obtained from the Path 1. Thus the diagram given in Figure 4 is not commutative when $N = 1$ for the local reduction (a).

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. Previously, we obtain the system (8) and (9) by applying the recursion operator to $\text{AKNS}(1)$ system. When we use the local reduction $q(x, t) = k\bar{p}(x, t)$ we get

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kp\bar{p}p_x \\ -k\bar{p}_{xxx} + 6k^2p\bar{p}p_x \end{pmatrix}. \quad (149)$$

For consistency we must have $a = \bar{a}$.

Path 2. We first use the local reduction $q(x, t) = k\bar{p}(x, t)$ on the AKNS(1) system (3) and (4). We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xx} + 2k\bar{p}p^2 \\ k\bar{p}_{xx} - 2k^2\bar{p}^2p \end{pmatrix}. \quad (150)$$

Note that the above equality is satisfied if $a = -\bar{a}$ which contradicts to the condition $a = \bar{a}$ for nonzero a , obtained for Path 1. Therefore it is not possible to get the same system (149) obtained in Path 1. Hence the diagram given in Figure 4 is not commutative when $N = 1$ for the local reduction (b).

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1x, \varepsilon_2t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. The first step has been already done in (8) and (9). Now we use the nonlocal reduction (a) on (8) and (9), and get

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kpp^\varepsilon p_x \\ -kp_{xxx}^\varepsilon + 6k^2pp^\varepsilon p_x^\varepsilon \end{pmatrix}. \quad (151)$$

This system is consistent if $a = a\varepsilon_1\varepsilon_2$ that is $\varepsilon_1 = \varepsilon_2 = -1$.

Path 2. Let us use the nonlocal reduction $q = kp^\varepsilon$ on the AKNS(1) system (3) and (4). We have

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xx} + 2kp^\varepsilon p^2 \\ kp_{xx}^\varepsilon - 2k^2(p^\varepsilon)^2p \end{pmatrix}. \quad (152)$$

The above system is valid if $a = -a\varepsilon_2$ that is $\varepsilon_2 = -1$. Now we apply the reduced recursion operator to (152). We get

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} 2kpD^{-1}p^\varepsilon - D & 2pD^{-1}p \\ -2k^2p^\varepsilon D^{-1}p^\varepsilon & -2kp^\varepsilon D^{-1}p + D \end{pmatrix} \begin{pmatrix} -p_{xx} + 2kp^\varepsilon p^2 \\ kp_{xx}^\varepsilon - 2k^2(p^\varepsilon)^2p \end{pmatrix} \quad (153)$$

$$= \begin{pmatrix} -p_{xxx} + 6kpp^\varepsilon p_x \\ -kp_{xxx}^\varepsilon + 6k^2pp^\varepsilon p_x^\varepsilon \end{pmatrix}. \quad (154)$$

The above equality is satisfied if $a = a\varepsilon_1\varepsilon_2$ i.e. $\varepsilon_1 = \varepsilon_2 = -1$. Since we get the same systems in both Path 1 and Path 2 without any contradiction in constraints, we conclude that the diagram given Figure 4 is commutative when $N = 1$ for the nonlocal reduction (a) with $\varepsilon_1 = \varepsilon_2 = -1$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1x, \varepsilon_2t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. Use the system (8) and (9) obtained by applying recursion operator to (3) and (4). We apply the nonlocal reduction (b) on the system (8) and (9) and get

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kpp^\varepsilon p_x \\ -k\bar{p}_{xxx}^\varepsilon + 6k^2p\bar{p}^\varepsilon \bar{p}_x^\varepsilon \end{pmatrix}. \quad (155)$$

This system is consistent if $a = \bar{a}\varepsilon_1\varepsilon_2$.

Path 2. Firstly, apply the nonlocal reduction $q = k\bar{p}^\varepsilon$ to the AKNS(1) system (3) and (4). We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xx} + 2k\bar{p}^\varepsilon p^2 \\ k\bar{p}_{xx}^\varepsilon - 2k^2(\bar{p}^\varepsilon)^2 p \end{pmatrix}. \quad (156)$$

The above system is consistent if $a = -\bar{a}\varepsilon_2$. Now we apply the reduced recursion operator to (156) and obtain

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} 2kpD^{-1}\bar{p}^\varepsilon - D & 2pD^{-1}p \\ -2k^2\bar{p}^\varepsilon D^{-1}\bar{p}^\varepsilon & -2k\bar{p}^\varepsilon D^{-1}p + D \end{pmatrix} \begin{pmatrix} -p_{xx} + 2k\bar{p}^\varepsilon p^2 \\ k\bar{p}_{xx}^\varepsilon - 2k^2(\bar{p}^\varepsilon)^2 p \end{pmatrix} \quad (157)$$

$$= \begin{pmatrix} -p_{xxx} + 6k\bar{p}^\varepsilon p_x \\ -k\bar{p}_{xxx}^\varepsilon + 6k^2\bar{p}^\varepsilon \bar{p}_x^\varepsilon \end{pmatrix}. \quad (158)$$

The above equality is satisfied if $a = \bar{a}\varepsilon_1\varepsilon_2$. If we combine this constraint with the condition $a = -\bar{a}\varepsilon_2$ obtained previously we can conclude that the diagram given Figure 4 is commutative when $N = 1$ for the nonlocal reduction (b) with $a = -\bar{a}\varepsilon_2$ and $\varepsilon_1 = -1$.

2) $N = 2$ case:

For $N = 2$ we get the AKNS(2) system that is coupled mKdV system (8) and (9). Now we will follow two paths in the Figure 4 separately.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant.

Path 1. As a first step we apply the recursion operator (2) to the AKNS(2) system (8) and (9), and obtain AKNS(3) system

$$a \begin{pmatrix} p_t \\ q_t \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 6qp_x^2 + 4pp_xq_x + 8pqq_{xx} + 2p^2q_{xx} - 6p^3q^2 \\ q_{xxxx} - 6pq_x^2 - 4qp_xq_x - 8pqq_{xx} - 2q^2p_{xx} + 6p^2q^3 \end{pmatrix}. \quad (159)$$

Now apply the local reduction (a) to the above system. We get

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 10kpp_x^2 + 10kp^2p_{xx} - 6k^2p^5 \\ kp_{xxxx} - 10k^2pp_x^2 - 10k^2p^2p_{xx} + 6k^3p^5 \end{pmatrix}. \quad (160)$$

This equality is valid only if $a = 0$. Therefore there is not such a consistent local reduction.

Path 2. Use first the reduction on the AKNS(2) system (8) and (9). We have

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kp^2p_x \\ -kp_{xxx} + 6k^2p^2p_x \end{pmatrix}. \quad (161)$$

This system is consistent without any condition. As a second step, we apply the reduced recursion operator to the above system and get again the system (160) which is valid only if $a = 0$. Hence in either path we do not have a consistent local reduction (a).

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. Previously we have obtained AKNS(3) system (159). Now we apply the local reduction (b) to that system and get

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 6k\bar{p}p_x^2 + 4kpp_x\bar{p}_x + 8kpp\bar{p}_{xx} + 2kp^2\bar{p}_{xx} - 6k^2p^3\bar{p}^2 \\ k\bar{p}_{xxxx} - 6k^2p\bar{p}_x^2 - 4k^2\bar{p}p_x\bar{p}_x - 8k^2p\bar{p}\bar{p}_{xx} - 2k^2\bar{p}^2p_{xx} + 2k^3p^2\bar{p}^3 \end{pmatrix}. \quad (162)$$

This system is consistent if $a = -\bar{a}$.

Path 2. We use first the reduction on (8) and (9), and we have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kpp\bar{p}_x \\ -k\bar{p}_{xxx} + 6k^2p\bar{p}\bar{p}_x \end{pmatrix}, \quad (163)$$

which is valid if $a = \bar{a}$. If we also apply the reduced recursion operator to that system and we again obtain the system (162) which is valid only if $a = -\bar{a}$. These two conditions on a yields $a = 0$. Therefore the results obtained from Path 1 and Path 2 do not coincide. Hence the diagram given in Figure 4 is not commutative when $N = 2$ for the local reduction (b).

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1x, \varepsilon_2t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. After obtaining the AKNS(3) system (159), we apply the nonlocal reduction (a) to that system. We get

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} p_{xxxx} + 6kp^\varepsilon p_x^2 + 4kpp_x p_x^\varepsilon + 8kpp^\varepsilon p_{xx} + 2kp^2 p_{xx}^\varepsilon - 6k^2p^3 (p^\varepsilon)^2 \\ kp_{xxxx}^\varepsilon - 6k^2p (p_x^\varepsilon)^2 - 4k^2p^\varepsilon p_x p_x^\varepsilon - 8k^2p^\varepsilon p p_{xx}^\varepsilon - 2k^2 (p^\varepsilon)^2 p_{xx} + 6k^3 (p^\varepsilon)^3 p^2 \end{pmatrix}. \quad (164)$$

This equality is valid if $a = -a\varepsilon_2$ that is $\varepsilon_2 = -1$.

Path 2. At first use the nonlocal reduction (a) on AKNS(2) system (8) and (9), and get

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6kpp^\varepsilon p_x \\ -kp_{xxx}^\varepsilon + 6k^2pp^\varepsilon p_x^\varepsilon \end{pmatrix}. \quad (165)$$

The above system is consistent if $a = a\varepsilon_1\varepsilon_2$ yielding $\varepsilon_1 = \varepsilon_2 = -1$. In addition to that if we also apply the reduced recursion operator to this system we get (164) which is valid if $a = -a\varepsilon_2$ i.e. $\varepsilon_2 = -1$. Since we get the same systems in both Path 1 and Path 2 without any contradiction in constraints, we conclude that the diagram given Figure 4 is commutative when $N = 2$ for the nonlocal reduction (a) with $\varepsilon_1 = \varepsilon_2 = -1$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1x, \varepsilon_2t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. After obtaining the AKNS(3) system (159), we apply the nonlocal reduction (b) to that system. We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} p_{xxxx} + 6k\bar{p}^\varepsilon p_x^2 + 4kpp_x\bar{p}_x^\varepsilon + 8kpp\bar{p}^\varepsilon p_{xx} + 2kp^2\bar{p}_{xx}^\varepsilon - 6k^2p^3(\bar{p}^\varepsilon)^2 \\ k\bar{p}_{xxxx}^\varepsilon - 6k^2p(\bar{p}_x^\varepsilon)^2 - 4k^2\bar{p}^\varepsilon p_x\bar{p}_x^\varepsilon - 8k^2\bar{p}^\varepsilon p\bar{p}_{xx}^\varepsilon - 2k^2(\bar{p}^\varepsilon)^2 p_{xx} + 6k^3(\bar{p}^\varepsilon)^3 p^2 \end{pmatrix}. \quad (166)$$

This system is consistent if $a = -\bar{a}\varepsilon_2$.

Path 2. We first use the nonlocal reduction (b) on AKNS(2) system (8) and (9), and obtain

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxx} + 6k p \bar{p}^\varepsilon p_x \\ -k \bar{p}_{xxx}^\varepsilon + 6k^2 p \bar{p}^\varepsilon \bar{p}_x^\varepsilon \end{pmatrix}. \quad (167)$$

The above system is consistent if $a = \bar{a}\varepsilon_1\varepsilon_2$. After that we apply the reduced recursion operator to this system and we get (166) which is valid if $a = -\bar{a}\varepsilon_2$. If we combine this constraint with the condition $a = \bar{a}\varepsilon_1\varepsilon_2$ obtained previously we can conclude that the diagram given Figure 4 is commutative when $N = 1$ for the nonlocal reduction (b) with $a = -\bar{a}\varepsilon_2$ and $\varepsilon_1 = -1$.

3) $N = 3$ case:

For $N = 3$ we have the AKNS(3) system (16) and (17). Now we will follow two paths in the Figure 1 separately.

Local reduction (a) $q(x, t) = kp(x, t)$, k is a real constant.

Path 1. We apply the recursion operator (2) to the AKNS(3) system (16) and (17) and obtain AKNS(4) system (41) and (42). When we use the local reduction (a) on the above system we get

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xxxxx} + 10kp^2p_{xxx} + 40kpp_xp_{xx} - 30k^2p^4p_x + 10kp_x^3 \\ -kp_{xxxxx} + 10k^2p^2p_{xxx} + 40k^2pp_xp_{xx} - 30k^3p^4p_x + 10k^2p_x^3 \end{pmatrix}. \quad (168)$$

This system is consistent without any condition.

Path 2. We apply first the reduction on the AKNS(3) system (16) and (17), and have

$$a \begin{pmatrix} p_t \\ kp_t \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 10kpp_x^2 + 10kp^2p_{xx} - 6k^2p^5 \\ kp_{xxxx} - 10k^2pp_x^2 - 10k^2p^2p_{xx} + 6k^3p^5 \end{pmatrix}. \quad (169)$$

Obviously, the above equality is satisfied only when $a = 0$. However if we apply the reduced recursion operator to the above system we get (168) as in Path 1. But since the first step of Path 2 gives a system which is not consistent we can conclude that the diagram given in Figure 4 is not commutative when $N = 3$ for the local reduction (a) which is similar to the case when $N = 1$.

Local reduction (b) $q(x, t) = k\bar{p}(x, t)$, k is a real constant.

Path 1. Use the AKNS(4) system (41) and (42), and apply the local reduction (b) to that system. We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xxxxx} + 10k p \bar{p} p_{xxx} + 10k p p_x \bar{p}_{xx} - 30k^2 p^2 \bar{p}^2 p_x + 10k p p_{xx} \bar{p}_x \\ \quad + 20k \bar{p} p_x p_{xx} + 10k p_x^2 \bar{p}_x \\ -k \bar{p}_{xxxxx} + 10k^2 p \bar{p} p_{xxx} + 10k^2 p p_x \bar{p}_{xx} - 30k^3 p^2 \bar{p}^2 p_x + 10k^2 p p_{xx} \bar{p}_x \\ \quad + 20k^2 \bar{p} p_x p_{xx} + 10k^2 p_x^2 \bar{p}_x \end{pmatrix}. \quad (170)$$

This system is consistent if $a = \bar{a}$.

Path 2. At first use the reduction on (16) and (17). We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 6k\bar{p}p_x^2 + 4kpp_x\bar{p}_x + 8kpp\bar{p}_{xx} + 2kp^2\bar{p}_{xx} - 6k^2p^3\bar{p}^2 \\ k\bar{p}_{xxxx} - 6k^2p\bar{p}_x^2 - 4k^2\bar{p}\bar{p}_x p_x - 8k^2\bar{p}p\bar{p}_{xx} - 2k^2\bar{p}^2 p_{xx} + 6k^3\bar{p}^3 p^2 \end{pmatrix}, \quad (171)$$

which is valid if $a = -\bar{a}$. Then we apply the reduced recursion operator to that system and we again obtain the system (170) which is consistent if $a = \bar{a}$. These two conditions on the constant a yields $a = 0$. Therefore the results obtained from Path 1 and Path 2 do not coincide. Hence the diagram given in Figure 4 is not commutative when $N = 3$ for the local reduction (b) as in the case $N = 1$.

Nonlocal reduction (a) $q(x, t) = kp(\varepsilon_1 x, \varepsilon_2 t) = kp^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. After obtaining the AKNS(4) system (41) and (42), applying the nonlocal reduction (a) to that system gives

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxxxx} + 10kpp^\varepsilon p_{xxx} + 10kpp_x p_{xx}^\varepsilon - 30k^2 p^2 (p^\varepsilon)^2 p_x + 10kpp_{xx} p_x^\varepsilon \\ \quad + 20kp^\varepsilon p_x p_{xx} + 10kp_x^2 p_x^\varepsilon \\ -kp_{xxxxx}^\varepsilon + 10k^2 pp^\varepsilon p_{xxx}^\varepsilon + 10k^2 p^\varepsilon p_x p_{xx}^\varepsilon - 30k^3 p^2 (p^\varepsilon)^2 p_x^\varepsilon + 10k^2 p^\varepsilon p_{xx}^\varepsilon p_x \\ \quad + 20k^2 pp_x^\varepsilon p_{xx}^\varepsilon + 10k^2 (p_x^\varepsilon)^2 p_x \end{pmatrix}. \quad (172)$$

This system is consistent if $a = a\varepsilon_1\varepsilon_2$ i.e. $\varepsilon_1 = \varepsilon_2 = -1$.

Path 2. At first use the nonlocal reduction (a) on AKNS(3) system (16) and (17), and get

$$a \begin{pmatrix} p_t \\ kp_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 6kp^\varepsilon p_x^2 + 4kpp_x p_x^\varepsilon + 8kpp^\varepsilon p_{xx} + 2kp^2 p_{xx}^\varepsilon - 6k^2 p^3 (p^\varepsilon)^2 \\ +kp_{xxxx}^\varepsilon - 6k^2 p (p_x^\varepsilon)^2 - 4k^2 p^\varepsilon p_x^\varepsilon p_x - 8k^2 pp^\varepsilon p_{xx}^\varepsilon - 2k^2 (p^\varepsilon)^2 p_{xx} + 6k^3 (p^\varepsilon)^3 p^2 \end{pmatrix}. \quad (173)$$

This system is consistent if $a = -a\varepsilon_2$ yielding $\varepsilon_2 = -1$. When we apply the reduced recursion operator to the above system we get the same system (172) which is valid if $\varepsilon_1 = \varepsilon_2 = -1$. Hence we conclude that the diagram given Figure 4 is commutative when $N = 3$ for the non-local reduction (a) with $\varepsilon_1 = \varepsilon_2 = -1$.

Nonlocal reduction (b) $q(x, t) = k\bar{p}(\varepsilon_1 x, \varepsilon_2 t) = k\bar{p}^\varepsilon$, $\varepsilon_1^2 = \varepsilon_2^2 = 1$, k is a real constant.

Path 1. We apply the nonlocal reduction (b) to the AKNS(4) system (41) and (42). We have

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxxxx} + 10kpp\bar{p}^\varepsilon p_{xxx} + 10kpp_x \bar{p}_{xx}^\varepsilon - 30k^2 p^2 (\bar{p}^\varepsilon)^2 p_x + 10kpp_{xx} \bar{p}_x^\varepsilon \\ \quad + 20k\bar{p}^\varepsilon p_x p_{xx} + 10kp_x^2 \bar{p}_x^\varepsilon \\ -k\bar{p}_{xxxxx}^\varepsilon + 10k^2 p\bar{p}^\varepsilon \bar{p}_{xxx}^\varepsilon + 10k^2 \bar{p}^\varepsilon \bar{p}_x^\varepsilon p_{xx} - 30k^3 p^2 (\bar{p}^\varepsilon)^2 \bar{p}_x^\varepsilon + 10k^2 \bar{p}^\varepsilon \bar{p}_{xx}^\varepsilon p_x \\ \quad + 20k^2 p\bar{p}_x^\varepsilon \bar{p}_{xx}^\varepsilon + 10k^2 (\bar{p}_x^\varepsilon)^2 p_x \end{pmatrix}. \quad (174)$$

This system is consistent if $a = \bar{a}\varepsilon_1\varepsilon_2$.

Path 2. Firstly, we use the nonlocal reduction (b) on AKNS(3) system (16) and (17), and get

$$a \begin{pmatrix} p_t \\ k\bar{p}_t^\varepsilon \end{pmatrix} = \begin{pmatrix} -p_{xxxx} + 6k\bar{p}^\varepsilon p_x^2 + 4kpp_x\bar{p}_x^\varepsilon + 8kpp_x^\varepsilon p_{xx} + 2k^2\bar{p}_x^\varepsilon - 6k^2p^3(\bar{p}^\varepsilon)^2 \\ k\bar{p}_{xxxx}^\varepsilon - 6k^2p(\bar{p}_x^\varepsilon)^2 - 4k^2\bar{p}^\varepsilon\bar{p}_x^\varepsilon p_x - 8k^2p\bar{p}_x^\varepsilon - 2k^2(\bar{p}^\varepsilon)^2 p_{xx} + 6k^3(\bar{p}^\varepsilon)^3 p^2 \end{pmatrix}. \quad (175)$$

The above system is consistent if $a = -\bar{a}\varepsilon_2$. When we apply the reduced recursion operator to that system we get again the system (174) which is consistent if $a = \bar{a}\varepsilon_1\varepsilon_2$. If we combine both of these constraints and consider also Path 1, we conclude that the diagram given by Figure 4 is commutative when $N = 3$ for the nonlocal reduction (b) with $a = -\bar{a}\varepsilon_2$ and $\varepsilon_1 = -1$.

5 Conclusion

In this work we considered the AKNS(N) hierarchy for $N = 3, 4, 5, 6$. We gave the Hirota bilinear forms of these systems. The Hirota bilinear forms of these systems are different than the ones for AKNS(1) and AKNS(2) systems. They are indeed inhomogeneous and hard to obtain from the recurrence relation given previously. We presented the local and nonlocal reductions of the AKNS(3), AKNS(4), AKNS(5), and AKNS(6) systems. We gave also the Hirota bilinear forms of the reduced local and nonlocal equations.

In studying Hirota bilinearization and reduction of the AKNS(N) systems we have analyzed commutativity diagrams of the operations involved in. These are recursion operator, reduction of the systems, and Hirota bilinearization. All these diagrams turn out to be compatible under certain conditions.

6 Acknowledgment

This work is partially supported by the Scientific and Technological Research Council of Turkey (TÜBİTAK).

References

- [1] M.J. Ablowitz and Z.H. Musslimani, Integrable nonlocal nonlinear Schrödinger equation, Phys. Rev. Lett. 2013; 110: 064105.
- [2] M.J. Ablowitz and Z.H. Musslimani, Inverse scattering transform for the integrable nonlocal nonlinear Schrödinger equation, Nonlinearity 2016; 29: 915.
- [3] M.J. Ablowitz and Z.H. Musslimani, Integrable nonlocal nonlinear equations, Stud. Appl. Math. 2016; 139 (1): 7.
- [4] K. Chen, X. Deng, S. Lou, and D. Zhang, Solutions of local and nonlocal equations reduced from the AKNS hierarchy, Stud. Appl. Math. 2018; 141 (1): 113–141.

- [5] B.F. Feng, X.D. Luo, M.J. Ablowitz, and Z.H. Musslimani, General soliton solution to a nonlocal nonlinear Schrödinger equation with zero and nonzero boundary conditions, *Nonlinearity* 2018; 31 (12): 5385.
- [6] V.S. Gerdjikov, A. Saxena, Complete integrability of nonlocal nonlinear Schrödinger equation, *J. Math. Phys.* 2017; 58(1): 013502
- [7] M. Gürses and A. Pekcan, Nonlocal nonlinear Schrödinger equations and their soliton solutions, *J. Math. Phys.* 2018; 59: 051501.
- [8] Gürses M, Pekcan A. Integrable Nonlocal Reductions. "Symmetries, Differential Equations and Applications SDEA-III, Istanbul, Turkey, August 2017", In: Kac VG, Olver PJ, Winternitz P, Ozer T, editors. Springer Proceedings in Mathematics and Statistics, 2018, No:266, p. 27–52.
- [9] X. Huang and L. Ling, Soliton solutions for the nonlocal nonlinear Schrödinger equation, *Eur. Phys. J. Plus* 2016; 131: 148.
- [10] M. Li and T. Xu, Dark and antidark soliton interactions in the nonlocal nonlinear Schrödinger equation with the self-induced parity-time-symmetric potential, *Phys. Rev. E* 2015; 91: 033202.
- [11] M.J. Ablowitz, B.F. Feng, X.D. Luo, and Z.H. Musslimani, Inverse scattering transform for the nonlocal reverse space-time nonlinear Schrödinger equation, *Theor. Math. Phys.* 2018: 196 (3); 1241–1267.
- [12] X.Y. Wen, Z. Yan, and Y. Yang, Dynamics of higher-order rational solitons for the nonlocal nonlinear Schrödinger equation with the self-induced parity-time-symmetric potential, *Chaos* 2015; 26: 063123.
- [13] A. Khare and A. Saxena, Periodic and hyperbolic soliton solutions of a number of nonlocal nonlinear equations, *J. Math. Phys.* 2015; 56: 032104.
- [14] J. Yang, General N-solitons and their dynamics in several nonlocal nonlinear Schrödinger equations, *Phys. Lett A* 2019; 383 (4): 328–337.
- [15] M. Gürses and A. Pekcan, Nonlocal nonlinear modified KdV equations and their soliton solutions, *Commun. Nonlinear Sci. Numer. Simul.* 2019; 67: 427.
- [16] J.L. Ji and Z.N. Zhu, On a nonlocal modified Korteweg-de Vries equation: Integrability, Darboux transformation and soliton solutions, *Commun. Non. Sci. Numer. Simul.* 2017; 42: 699.
- [17] J.L. Ji and Z.N. Zhu, Soliton solutions of an integrable nonlocal modified Korteweg-de Vries equation through inverse scattering transform, *J. Math. Anal. and Appl.* 2017; 453: 973.
- [18] L.Y. Ma, S.F. Shen, and Z.N. Zhu, Soliton solution and gauge equivalence for an integrable nonlocal complex modified Korteweg-de Vries equation, *J. Math. Phys.* 2017; 58: 103501.

- [19] M.J. Ablowitz, B.F. Feng, X.D. Luo, and Z.H. Musslimani, Reverse space-time nonlocal sine-Gordon/sinh-Gordon equations with nonzero boundary conditions, *Stud. Appl. Math.* 2018; 141 (3): 267–307.
- [20] A.S. Fokas, Integrable multidimensional versions of the nonlocal Schrödinger equation, *Nonlinearity* 2016; 29: 319.
- [21] J. Rao, Y. Zhang, A.S. Fokas, and J. He, Rogue waves of the nonlocal Davey-Stewartson I equation, *Nonlinearity* 2018; 31: 4090–4107.
- [22] T. Xu, M. Li, Y. Huang, Y. Chen, and C. Yu, Nonsingular localized wave solutions for the nonlocal Davey-Stewartson I equation with zero background, *Modern Phys. Lett. B* 2017; 31 (35): 1750338.
- [23] Z.-X. Zhou, Darboux transformations global explicit solutions for nonlocal Davey-Stewartson I equation, *Stud. Appl. Math.* 2018; 141 (2): 186–204.
- [24] Y. Zhang and Y. Liu, Breather and lump solutions for nonlocal Davey-Stewartson II equation, *Nonlinear Dyn.* 2019; 96: 107–113.
- [25] M. Gürses, Nonlocal Fordy-Kulish equations on symmetric spaces, *Phys. Lett. A* 2017; 381: 1791.
- [26] V.S. Gerdjikov, G.G. Grahovski, and R.I. Ivanov, On the N-wave equations with PT symmetry, *Theor. and Math. Phys.* 2016; 188(3): 1305.
- [27] D. Sinha and P.K. Ghosh, Integrable nonlocal vector nonlinear Schrödinger equation with self-induced parity-time symmetric potential, *Phys. Lett. A* 2017; 381: 124.
- [28] Z. Yan, Integrable PT-symmetric local and nonlocal vector nonlinear Schrödinger equations: A unified two parameter model, *Appl. Math. Lett.* 2015; 47: 61.
- [29] V.S. Gerdjikov, G.G. Grahovski, and R.I. Ivanov, On integrable wave interactions and Lax pairs on symmetric spaces, *Wave Motion* 2017; 71: 53.
- [30] V.S. Gerdjikov, On nonlocal models of Kulish-Sklyanin type and generalized Fourier transforms, *Stud. Comp. Int.* 2017; 681: 37.
- [31] M. Gürses and A. Pekcan, (2+1)-dimensional local and nonlocal reductions of the negative AKNS system: Soliton solutions, *Commun. Nonlinear Sci. Numer. Simul.* 2019; 71: 161–173.
- [32] A. Pekcan, Nonlocal coupled HI-MKdV systems, *Commun. Nonlinear Sci. Numer. Simul.* 2019; 72: 493–515.
- [33] M. Gürses, A. Pekcan, and K. Zheltukhin, Nonlocal hydrodynamic type of equations, arXiv: 1906.08475 [nlin.SI].
- [34] M. Gürses, A. Pekcan, K. Zheltukhin, Discrete symmetries and nonlocal reductions, *Phys. Lett. A* 2020; 384: 120065, arXiv:1906.10871 [nlin.SI] [Preprint]. 2019 cited[2019 Jun 26]: [12p.]. Available from: <https://arxiv.org/abs/1906.10871>

- [35] V. Caudrelier, Interplay between the inverse scattering method and Fokas's unified transform with an application. *Stud. Appl. Math.* 2017; 140: 3.
- [36] B. Yang and J. Yang, Transformations between nonlocal and local integrable equations, *Stud. Appl. Math.* 2017; 140: 178.
- [37] M.J. Ablowitz, D.J. Kaup, A.C. Newell, H. Segur, The inverse scattering transform-Fourier analysis for nonlinear problems, *Stud. Appl. Math.* 1974; 53(4): 249.
- [38] A.C. Newell, *Solitons in Mathematics and Physics*, SIAM, Philadelphia, 1985.
- [39] Q.-M. Liu, Double Wronskian solutions of the AKNS and the classical Boussinesq hierarchies, *J. Phys. Soc. Jpn.* 1990; 59 (10): 3520–3527.
- [40] Y. Fu-Mei, S. Ye-Peng, C. Fu-Qing, C. Deng-Yuan, Solving the AKNS hierarchy by its bilinear form: Generalized double Wronskian solutions, *Commun. Theor. Phys. (Beijing, China)* 2008; 49: 401–408.
- [41] A. Ankiewicz, D.J. Kedziora, A. Chowdury, U. Bandelow, N. Akhmediev, Infinite hierarchy of nonlinear Schrödinger equations and their solutions, *Phys. Rev. E.* 2016; 93: 012206.
- [42] Y. Yang, T. Suzuki, X. Cheng, Darboux transformations and exact solutions for the integrable nonlocal Lakshmanan-Porsezian-Daniel equation, *Appl. Math. Lett.* 2020; 99: 105998.
- [43] A.O. Smirnov, V.B. Matveev, Some comments on continuous symmetries of AKNS hierarchy equations and their solutions arXiv:1509.01134v2 [math-ph] [Preprint]. 2015 cited [2015 Sep 27]:[10p.]. Available from: <https://arxiv.org/abs/1509.01134v2>
- [44] P. Wang, F.-H. Qi, J.-R. Yang, Soliton solutions and conservation laws for an inhomogeneous fourth-order nonlinear Schrödinger equation, *Comp. Math. Math. Phys.* 2018; 58 (11): 1856–1964.
- [45] A. Chowdury, W. Krolkowski, N. Akhmediev, Breather solutions of a fourth-order nonlinear Schrödinger equation in the degenerate, soliton, and rogue wave limits, *Phys. Rev. E* 2017; 96: 042209.
- [46] M. Lakshmanan, K. Porsezian, M. Daniel, Effect of discreteness on the continuum limit of the Heisenberg spin chain, *Phys. Lett. A* 1988; 133 (9): 483–488.
- [47] K. Porsezian, M. Daniel, M. Lakshmanan, On the integrability aspects of the one-dimensional classical continuum isotropic biquadratic Heisenberg spin chain, *J. Math. Phys.* 1992; 33 (5): 1807–1816.
- [48] M. Daniel, K. Porsezian, M. Lakshmanan, On the integrable models of the higher order water wave equation, *Phys. Lett. A* 1993; 174 (3): 237–240.
- [49] E. Yomba, G.-A. Zakeri, Collisions of N -solitons in a fifth-order nonlinear Schrödinger equation, *Wave Motion* 2017; 72: 101–112.
- [50] A. Chowdury, D.J. Kedziora, A. Ankiewicz, N. Akhmediev, Soliton solutions of an integrable nonlinear Schrödinger equation with quintic terms, *Phys. Rev. E* 2014; 90: 032922.

- [51] Z.-Z. Lan, Y.-T. Gao, C. Zhao, J.-W. Yang, C.-Q. Su, Dark soliton interactions for a fifth-order nonlinear Schrödinger equation in a Heisenberg ferromagnetic spin chain, Superlattices Microst. 2016; 100: 191–197.
- [52] C. Yang, W. Liu, Q. Zhou, D. Mihalache, B.A. Malomed, One-soliton shaping and two-soliton interaction in the fifth-order variable-coefficient nonlinear Schrödinger equation, Nonlinear Dyn. 2019; 95: 369–380.
- [53] A.O. Smirnov, V.B. Matveev, Yu.A. Gusman, N.V. Landa, Spectral curves for the rogue waves, arXiv:1712.09309v1 [math-ph] [Preprint]. 2017 cited [2017 Dec 26]:[15p.]. Available from: <https://arxiv.org/abs/1712.09309v1>
- [54] W.-R. Sun, B. Tian, H.-L. Zhen, Y. Sun, Breathers and rogue waves of the fifth-order nonlinear Schrödinger equation in the Heisenberg ferromagnetics spin chain, Nonlinear Dyn. 2015; 81: 725–732.
- [55] Z.-Z. Kang, T.-C. Xia, X. Ma, Riemann-Hilbert approach for multi-soliton solutions of a fifth-order nonlinear Schrödinger equation, arXiv:1810.12559v1 [math-ph] [Preprint]. 2018 cited [2018 Oct 30]:[12p.]. Available from: <https://arxiv.org/abs/1810.12559v1>
- [56] J.-J. Su, Y.-T. Gao, Bilinear form and solitons for a generalized sixth-order nonlinear Schrödinger equation in an optical fiber, Eur. Phys. J. Plus 2017; 132: 53.
- [57] N. Prathapa, S. Arunprakash, M.S.M. Rajanp, K. Subramanian, Multiple dromion excitations in sixth order NLS equation with variable coefficients, Optik 2018; 158: 1179–1185.
- [58] S.-L. Jia, Y.-T. Gao, C. Zhao, Z.-Z. Lan, Y.-J. Feng, Solitons, breathers and rogue waves for a sixth-order variable-coefficient nonlinear Schrödinger equation in an ocean or optical fiber, Eur. Phys. J. Plus 2017; 132: 34.
- [59] Q.-M. Huang, Y.-T. Gao, L. Hu, Breather-to-soliton transition for a sixth-order nonlinear Schrödinger equation in an optical fiber, Appl. Math. Lett. 2017; 75: 135–140.