Copycats: the many lives of a publicly available medical imaging dataset

Amelia Jiménez-Sánchez¹ Natalia-Rozalia Avlona² Dovile Juodelyte¹ Théo Sourget¹ Caroline Vang-Larsen¹ Anna Rogers¹ Hubert Dariusz Zając² Veronika Cheplygina¹ IT University of Copenhagen ²University of Copenhagen {amji,vech}@itu.dk

Disclaimer: this is a working paper, and represents research in progress. We welcome contributions from the community, for comments or questions please email us at amji@itu.dk and vech@itu.dk.

Abstract

Medical Imaging (MI) datasets are fundamental to artificial intelligence in healthcare. The accuracy, robustness, and fairness of diagnostic algorithms depend on the data (and its quality) used to train and evaluate the models. MI datasets used to be proprietary, but have become increasingly available to the public, including on community-contributed platforms (CCPs) like Kaggle or HuggingFace. While open data is important to enhance the redistribution of data's public value, we find that the current CCP governance model fails to uphold the quality needed and recommended practices for sharing, documenting, and evaluating datasets. In this paper, we conduct an analysis of publicly available machine learning datasets on CCPs, discussing datasets' context, and identifying limitations and gaps in the current CCP landscape. We highlight differences between MI and computer vision datasets, particularly in the potentially harmful downstream effects from poor adoption of recommended dataset management practices. We compare the analyzed datasets across several dimensions, including data sharing, data documentation, and maintenance. We find vague licenses, lack of persistent identifiers and storage, duplicates, and missing metadata, with differences between the platforms. Our research contributes to efforts in responsible data curation and AI algorithms for healthcare.

1 Introduction

Datasets are fundamental to the fields of machine learning (ML) and computer vision (CV), from interpreting performance metrics and conclusions of research papers to assessing adverse impacts of algorithms on individuals, groups, and society. Within these fields, medical imaging (MI) datasets are especially important to the safe realization of Artificial Intelligence (AI) in healthcare. Although MI datasets share certain similarities to general CV datasets, they also possess distinctive properties, and treating them as equivalent can lead to various harmful effects. In particular, we highlight three properties of MI datasets: (i) de-identification is required for patient-derived data; (ii) since multiple images can belong to one patient, data splits should clearly differentiate images from each patient; and (iii) metadata containing crucial information such as demographics or hospital scanner is necessary, as models without this information could lead to inaccurate and biased results.

In the past, MI datasets were frequently proprietary, confined to particular institutions, and stored in private repositories. In this particular setting, there is a pressing need for alternative models of data sharing, documentation, and governance. Within this context, the emergence of Community-Contributed Platforms (CCPs) presented a potential for the public sharing of medical datasets.

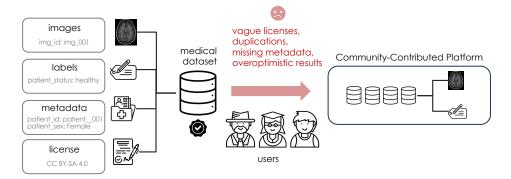


Figure 1: A Medical Imaging (MI) dataset containing images, labels, metadata (patient id, patient sex, etc.), and license (left). After user interaction, on Community-Contributed Platforms we find duplicated data, missing licenses and metadata, which can lead to overoptimistic results (right).

Nowadays, more MI datasets have become publicly available and are hosted on open platforms such as grand-challenges¹, or CCP - including companies like Kaggle or HuggingFace.

Although the increasing availability of MI datasets is generally an advancement for sharing and adding public value, it also presents several challenges. First, according to the FAIR (Findable, Accessible, Interoperable, Reusable) guiding principles for scientific data management and stewardship [106], (meta)data should be released with a clear and accessible data usage license and should be permanently accessible. Second, tracking dataset versions is becoming increasingly difficult, especially when publications use derived versions [75] or the citation practices are not followed [93]. This hampers the analysis of usage patterns to identify possible ethical concerns that might arise after releasing a dataset [28], potentially leading to its retraction [54, 75]. To mitigate the harms associated with datasets, ongoing maintenance, and stewardship are necessary [75]. Lastly, rich documentation is essential to avoiding over-optimistic and biased results [10, 27, 59, 72, 109], attributed to a lack of meta-data in MI datasets, such as information linking images to specific patients and their demographics. Documentation needs to reflect all the stages in the dataset development cycle, such as acquisition, storage, and maintenance [34, 44]. Although CCPs offer ways to enhance the redistribution of data's public value and alleviate some of these problems providing structured summaries, we find that the current CCP governance model fails to uphold the quality needed and recommended practices for sharing, documenting, and evaluating MI datasets.

In this paper, we investigate MI datasets hosted on CCPs, particularly how they are documented, shared, and maintained. First, we provide relevant background information, highlighting the differences between open MI and CV datasets, especially in the potential for harmful downstream effects of poor documentation and distribution practices (Section 2.1). Second, we present key aspects of data governance in the context of ML and healthcare, specifically affecting MI datasets (Section 2.2). Third, we analyze *access*, *quality* and *documentation* of 30 popular datasets hosted on CCPs (10 medical, 10 computer vision, and 10 natural language processing). We find issues across platforms related to vague licenses, lack of persistent identifiers and storage, duplicates, and missing metadata (Section 3). We discuss the limitations of the current dataset management practices and data governance on CCPs, provide recommendations for MI datasets, and conclude with a discussion of limitations of our work and open questions (Section 4).

2 Background

2.1 Characteristics of medical imaging datasets

Anatomy of a medical imaging dataset. A MI dataset begins with a collection of images from various imaging modalities, such as X-rays, magnetic resonance imaging (MRI), computed tomography (CT) scans, and others. The scans are often initially captured for a clinical purpose, such as diagnosis or treatment planning, and are associated with a specific patient and their medical data.

https://grand-challenge.org

The scans might undergo various processing steps, such as denoising, registration (aligning different scans together), or segmentation (delineating anatomical structures or pathologies). Clinical experts might then associate the scans with additional information, *e.g.*, free text reports or diagnostic labels.

A collection of scans and associated annotations, *i.e.*, a MI dataset, might be later used for the purpose of training and evaluating ML models supporting the work of medical professionals [99, 115]. However, before a dataset is "ready" for ML, further steps are required [107], including cleaning (for example, removing scans that are too blurry), sampling (for example, only selecting scans with a particular disease), and removing identifying patient information. Additional annotations, not collected during clinical practice, may be required to train ML models, *e.g.*, organ delineations for patients not undergoing radiotherapy. These annotations might be provided by clinical experts, PhD students, or paid annotators at tech companies.

Not just "small computer vision"! While MI datasets share some similarities with general CV datasets, they also have unique properties. Treating them as equivalent to benchmark CV datasets is problematic and leads to various harmful effects, also termed *data cascades* by [87].

First, unlike traditional CV datasets, medical images often require de-identification processes to remove personally identifiable data, which are more complex than complete anonymization. Certain attributes like sex and age, need to be preserved for clinical tasks. These attributes are typically included in an "original release" of MI datasets, they might be removed later in a dataset's lifecycle. For example, when medical datasets are shared on CCPs, often only the input desired by ML practitioners remains: inputs (images) and outputs (disease labels), as depicted in Fig. 1.

Second, MI datasets often include multiple images associated with a single patient. This can occur if a patient has multiple skin lesions, follow-up chest X-rays, or 3D scans split into 2D images. If images from the same patient end up in both training and test data, reported results may be overly optimistic as classifiers memorize patients rather than disease characteristics. Therefore, data splitting at the patient level is crucial to avoid model overfitting. While this practice is common in the MI community, it may be overlooked if datasets are simply shared as a general CV dataset.

Third, MI datasets should contain metadata about patient demographics. Several studies have shown how demographic data may alleviate systematic biases and impact disease classification performance in chest X-rays [59, 91] and skin lesions [1]. These datasets are often the subject of research on bias and fairness because they include variables for age and sex or gender (typically not described which). However, many MI datasets lack these variables, possibly due to removal in a ML-ifying step rather than actual anonymization. Unlike CV datasets where bias can be identified by annotating individuals in the images based on their gender expression [113], such information is often unrecoverable from medical images. Additionally, images may be duplicated; see, *e.g.*, [14] for an analysis of the ISIC datasets, with overlaps between versions and duplication of cases between training and test sets.

Finally, MI datasets should include metadata about the origin of scans. Lack of such data may lead to "shortcuts" and other systematic biases. For example, if disease severity correlates with the hospital where the scans were made (general vs. cancer clinic), a model might learn the clinic's scanner signature as a shortcut for the disease [23]. In other words, the shortcut is a spurious correlation between an artifact in the image and the diagnostic label. Some examples of shortcuts include patient position in COVID-19 [27], chest drains in pneumothorax classification [50, 72], or pen marks in skin lesion classification [10, 22, 109]. High overall performance can hide biases in benchmark evaluations serving underrepresented groups. This cannot be detected without appropriate metadata.

Evolution of MI datasets. Historically, MI datasets were often proprietary, limited to specific institutions, and held in private repositories. Due to the privacy concerns and high cost associated with expert annotations, the sizes of MI datasets were quite small, often in the tens or hundreds of patients, which limited the use of machine learning techniques. Over the years some datasets have become publicly available and increased in size, for example, INBreast [68] and LIDC-IDRI [5] with thousands, and some even with tens or hundreds of thousands of patients, like chest X-ray datasets (NIH-CXR14 [102], MIMIC-CXR [51], CheXpert [45]), and skin lesions datasets (ISIC [16, 22]). To augment the dataset's size and alleviate the high cost of annotation, dataset creators used NLP techniques to automatically extract labels from medical reports, at the expense of annotation reliability [71]. Lately, advancements in large language models have redirected the attention of the

MI community towards multi-modal models with both text and images. MI datasets are increasingly used to benchmark general ML and CV research.

Next to unreliable annotations, publicly available MI datasets have increasingly exhibited biases and spurious correlations or shortcuts. For example, several studies have shown differences in the performance of disease classification in chest X-rays [59, 91] and skin lesions [1] according to patient demographics. Spurious correlations could also bias results, like chest drains affecting pneumothorax classification [50, 72], or pen marks influencing skin lesion classification [10, 109].

Thus, MI datasets need to be updated, similar to ML datasets which may be audited or retracted [28, 54, 75]. These practices are currently not formalized. Even tracking follow-up work on specific datasets is challenging due to the lack of stable identifiers and proper citations [93]. Data citation is crucial for making data findable and accessible, offering persistent and unique identifiers along with metadata [18, 38]. Instead, datasets are often referenced by a mix of names or URLs in footnotes. When datasets are updated, it often occurs informally. For instance, the LIDC-IDRI website uses red font size to signal errors and updated labels, while the NIH-CXR14 website hosts derivative datasets and job announcements. Ther exist some systematic reviews of MI datasets [26, 63, 103], however, this is not a common practice. Furthermore, changes to datasets cannot be captured with traditional literature-based reviews.

2.2 Data management practices in the medical imaging context

Data governance, documentation, and data hosting practices. Data governance is a nebulous concept with evolving definitions that vary depending on context [3]. Some definitions relate to strategies for data management [3], others to formulation and implementation of data stewards' responsibilities [25]. The goals of data governance are ensuring the quality and proper use of data, meeting compliance requirements, and helping utilize data to create public value [47]. In the context of research data, a relevant initiative is the FAIR guiding principles for scientific data management and stewardship [106]. These principles ensure that data is *findable*, easily located by humans and computers with unique identifiers and rich metadata; *accessible*, retrievable using standard protocols; *interoperable*, *i.e.* it uses shared, formal languages and standards for data and metadata; *reusable*, clearly licensed, well-documented, and meeting community standards for future use. The CARE principles for Indigenous data governance [13] complement FAIR, ensuring that data practices respect Indigenous sovereignty and promote equitable outcomes.

At this point there are multiple studies proposing and discussing data governance models for the ML community and its various subfields [47, 48, 58, 67]. For example, a model proposed for radiology data in [67] is based on the principles of stewardship, ownership, policies, and standards². A relevant line of research is the efforts by ML researchers raising awareness about the importance of dataset documentation and proposing guidelines, frameworks, or datasheets [8, 29, 34, 40, 44, 80]. Despite the existence of many excellent data governance and documentation proposals, the challenge lies in the implementation of their principles. One of the most common ways to share and manage ML datasets is for the developers to host data themselves upon release, often on platforms like GitHub or personal websites. Coupled with the lack of agreement on which data governance principles should be implemented, this means the lack of standardization and consistent implementation of any data governance frameworks. Another common solution is to host data on CCPs such as Kaggle or HuggingFace. CCPs resemble a centralized structure, but they heavily rely on user contributions for both sourcing datasets and governance. For example, while HuggingFace developed the infrastructure for providing data sheets and model cards, this is not enforced, and many models or datasets are uploaded with minimal or no documentation as we show in this paper. In theory, Wikimedia sets a precedent for some standardization in a highly collaborative and largely self-regulated project [31], but data documentation is a more challenging task for someone other than the original contributor, and it is unfortunately also a less rewarded and prestigious task in the ML community [87].

²Stewardship considers accountability for data management and involves establishing roles and responsibilities to ensure data quality, security, and protection. *Ownership* identifies the relationship between people and their data and is distinct from stewardship in that the latter maintains ownership by accountable institutions. *Policies*: considers organizational rules and regulations overseeing data management. These rules are, for example, to protect data from unauthorized access or theft, as well as to consider the impact of data, ethics, and legal statutes. *Standards*: specific criteria and rules informing proper handling, storage, and maintenance of data throughout its lifecycle.

Data governance for healthcare data. Health data is considered a high-risk domain due to the sensitive and personal nature of the information it contains. Thus, releasing MI datasets poses regulatory, ethical, and legal challenges, related to privacy and data protection [83]. Furthermore, patient demographics could include information about vulnerable populations such as children [67], or underrepresented or minority groups, including Indigenous peoples [37]. To take into account underrepresented populations and ensure transparency, ML researchers moving into medical applications could adhere to standard reporting guidelines such as TRIPOD [20] and CONSORT [88], which are now being adapted for ML applications [6, 19]. These guidelines set reasonable standards for transparent reporting and help communicate the analysis method to the scientific community. Various guidelines exist for preparing datasets for ML [107], including the FUTURE-AI principles [62], which aim to foster the development of ethically trustworthy AI solutions for clinical practice.

A key challenge in MI, as in ML in general, is the sparsity of consistent implementation of data governance principles. For example, Datasheets [34] was adopted for CheXpert in [33], but such practices remain uncommon, as our study shows. Besides the common CCPs and self-hosting options discussed above, some MI datasets are also hosted on platforms like grand-challenges, Zenodo [30], Physionet [36], and Open Science Framework [32]. Of these platforms, only Physionet consistently collects detailed documentation for the datasets. These platforms are not integrated into the commonly used ML libraries and hence tend to be less well-known in the ML community.

3 Findings

Study setup. We investigate dataset sharing, documentation, and hosting practices for the 30 most cited CV, NLP, and MI datasets by selecting top-10 datasets for each field by querying Papers with Code with "Images", "Text", and "Medical" in the Modality field. In Table 1 we show the original source where each dataset is hosted, the distribution terms (for use, sharing, or access), the license, and other platforms where the datasets can be found. In particular, we investigate dataset distribution in CCPs such as Kaggle and HuggingFace (HF), and regulated platforms (RP) such as Tensorflow (TF), Keras, and PyTorch. Furthermore, we analyse the Kaggle and HuggingFace datasets by automatically extracting the documentation elements associated with each dataset using their APIs. We obtain the parameters in data cards as specified in their dataset creation guides [43, 52].

Missing licenses on CCPs. Licenses or terms of use represent legal agreements between dataset creators and users, yet we observe in Table 1 (top) that the majority of the most used CV datasets were not released with a clear license or terms of use. This observation aligns with [65], who report that over 70% of widely used dataset hosting sites omit licenses, indicating a significant issue of misattribution. Regarding MI datasets, we observe in Table 1 (bottom) that only half of the most used datasets were released with a license. Even if DRIVE dataset has a CC-BY-4.0 license, on Kaggle we find an instance with a description that reads "No license was specified, yet all credits are due to the original authors." We observe that CV and NLP datasets are available both on CCP and RP. This is not the case for MI datasets, which are not commonly accessible on RP, but some of them are on CCP.

Lack of persistent identifiers and storage. CV and NLP datasets are mostly hosted on authors or university websites. This is not aligned with the FAIR guiding principles. In contrast, MI datasets are hosted on a variety of websites: university, grand-challenge, or PhysioNet. We find some examples of datasets that follow the FAIR principles [106], like HAM10000 with a persistent identifier, or MIMIC-CXR stored in PhysioNet [36], which offers permanent access to datasets with a Digital Object Identifier (DOI). Without a persistent identifier and storage, access to the (meta)data is uncertain, which is problematic for reproducibility.

Duplicate datasets and missing metadata on CCPs. We present a case study of "uncontrolled" spread of skin lesion datasets from the ISIC archive [46], focused on the automated diagnosis of melanoma from dermoscopic images. These datasets originated from challenges held between 2016 and 2020 at different conferences. Each challenge introduced a new compilation of the archive data, with potentially overlapping data with previous instances [14]. The ISIC datasets can be downloaded from their website³, and depending on the dataset, there are various licenses like CC-0 and CC-BY-

³https://challenge.isic-archive.com/data/

_						C	CP		RP	
	Dataset	Original hosting source	Distribution terms (use, access, sharing)	License	Please cite this paper	Kaggle	Ħ	Ŧ	Keras	PyTorch
1	CIFAR-10 [56]	□ cs.toronto.edu/kriz/cifar.html		□ Unspecified	Yes	~	$\overline{}$	$\overline{}$	~	$\overline{}$
2	ImageNet [86]	□ image-net.org	Terms of access	 Unspecified 	Yes	~	~	/		~
3	CIFAR-100 [56]	 cs.toronto.edu/kriz/cifar.html 		 Unspecified 	Yes	~	~	/	~	~
4	MNIST [61]	□ yann.lecun.com/exdb/mnist/		□ Unspecified	Yes	~	~	/	~	~
5	SVHN [69]	□ ufldl.stanford.edu/housenumbers/		 Unspecified 	Yes	~	~	/		~
6	CelebA [64]	 mmlab.ie.cuhk.edu.hk/projects/CelebA.html 	Agreement	□ Unspecified	Yes	~	~	/		~
7	Fashion-MNIST [110]	▲ github.com/zalandoresearch/fashion-mnist		MIT	Yes	~	~	/	~	✓
8	CUB-200-2011 [100]	□ vision.caltech.edu/datasets/cub_200_2011/		□ Unspecified	Yes	~	~	/		
9	Places [114]	□ places.csail.mit.edu			Yes	~		/		✓
10	STL-10 [15]	□ cs.stanford.edu/ acoates/stl10/		□ Unspecified	Yes	~	~	/	~	✓
1	GLUE [101]	△ gluebenchmark.com/		See original datasets	Yes	✓	~	V		$\overline{}$
2	SST [92]	□ nlp.stanford.edu/sentiment/		□ Unspecified	Yes	~	~	/		✓
3	SquAD [81]	□ rajpurkar.github.io/SQuAD-explorer/		 CC-BY-SA 4.0 	No	~	~	/		~
4	MultiNLI [108]	□ cims.nyu.edu/sbowman/multinli/		 Various CC 	Yes	~	~	/		✓
5	iMDB reviews [66]	□ ai.stanford.edu/amaas/data/sentiment/		□ Unspecified	Yes	~	~	/		✓
6	VQA [4]	□ visualqa.org/	Terms of use		Yes	~	~			~
7	SNLI [11]	□ nlp.stanford.edu/projects/snli/		 CC-BY-SA 4.0 	Yes	~	~	/		~
8	Visual Genome [55]	□ homes.cs.washington.edu/[]visualgenome		 CC-BY 4.0 	Yes	~	~	/		
9	QNLI	▲ gluebenchmark.com/ - derived from SQUAD		 Unspecified 	No	~	~	/		✓
10	Natural Questions [57]	∆ ai.google.com/research/NaturalQuestions		 CC-SA 3.0 	No	~	~	/		
1	CheXpert [45]	$\ \ \Box \ stanfordmlgroup.github.io/competitions/chexpert/$	Research Use	□ Unspecified	Yes	~		/		
2	DRIVE [94]	 drive.grand-challenge.org 		 CC-BY-4.0 	No	~				
3	fastMRI [53]	☐ fastmri.med.nyu.edu	Sharing Agreement	□ Unspecified	Yes		~			
4	LIDC-IDRI [5]	 wiki.cancerimagingarchive.net/[]pageId=[] 	TCIA Data Usage	 CC-BY-3.0 	Yes	~				
5	NIH-CXR14 [102]	∧ nihcc.app.box.com/v/ChestXray-NIHCC		 Unspecified 	Yes	~				
6	HAM10000 [97]	 dataverse.harvard.edu/[]persistentId=doi[] 	Use Agreem.	 CC-BY-NC-4.0 	Yes	~	~			
7	MIMIC-CXR [51]	 physionet.org/content/mimic-cxr/2.0.0/ 	Phys. Use Ag. 1.5.0	 PhysioNet 1.5.0 	Yes	~	~			
8	Kvasir-SEG [49]	△ datasets.simula.no/kvasir-seg/	Terms of use	□ Unspecified	Yes	~	~			
9	STARE [41]	cecas.clemson.edu/ ahoover/stare/		 Unspecified 	Yes	~				
10	LUNA [90]	 luna16.grand-challenge.org 		 CC-BY-4.0-DEED 	Yes	~				
_		11 1 11 11	4.							

Table 1: Original hosting source, distribution terms, license, and alternative hosting platforms for the top-10 datasets from Papers with Code for the modality "Images" (top), "Text" (middle), and "Medical" (bottom). Hosting: □ author or university website; △ open but not permanent access; ● open and permanent access. License: □ unspecified; △ copyright; ● MIT, CC or Physionet. CCP: Community-Contributed Platforms. RP: Regulated Platforms. HF: HuggingFace, TF: TensorFlow.

NC, and researchers are requested to cite the challenge paper and/or the original sources of the data (HAM10000 [97], BCN20000 [21], MSK [17]).

As of May 2024, there are 27 datasets explicitly related to ISIC on HuggingFace. Some of these datasets are preprocessed (*e.g.*, cropped images), others provide extra annotations (*e.g.*, segmentation masks). Kaggle has a whopping 640 datasets explicitly related to ISIC. While the size of the original ISIC datasets is 38 GB, Kaggle stores 2.35 TB of data (see Fig. 2). Several highly downloaded versions (≈13k downloads) lack original sources or license information. This proliferation of duplicate datasets not only wastes resources but also poses a significant impediment to the reproducibility of research outcomes. Besides ISIC, we find other examples of unnecessary duplication of data. On Kaggle, there are 24 datasets of INBreast [68], one of them with the rephrased description "I'm just uploading here this data as a backup"; and 10 instances of PAD-UFES-20 [74] (also a skin lesion dataset, one instance actually contains data from ISIC). The lack of documentation for these datasets hampers tracking their usage and potentially violates sharing agreements or licenses.

Limited implementation of structured summaries. We find that overall HuggingFace follows a much more structured and complete documentation than Kaggle, as reflected in their guides [43, 52]. From our list of MI datasets, on HF we find an instance of MIMIC-CXR with no documentation or reference at all, and other medical datasets (e.g. Alzheimer's disease or skin cancer classification) without source citation. We find the lack of source citations for patient-related data deeply concerning. Kaggle automatically computes usability score, which is associated with the tag "well-documented" and used for ranking results when searching for a dataset. This score is based on completeness, credibility, and compatibility, we show detailed information about these parameters in Suppl. Material. However, we find that even datasets with 100% usability present some issues. For example, the parameter update frequency from maintenance is rarely used, nonetheless, it can be set to "never" to still get a high score. Information about provenance might not be specific, e.g. "uses internet sources".

We compare the categories analyzed in Kaggle and HuggingFace's data cards with those in Datasheets [34]. Despite making various efforts to integrate dataset documentation, such as the recent inclusion of Croissant [2], a metadata format designed for ML-ready datasets, we have noticed a prevalent issue: many of the documentation fields remain empty. While these platforms strive to provide structured summaries, the practical outcome often falls short. Overall, we find composition and collection

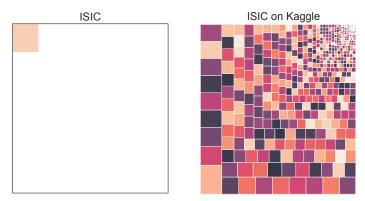


Figure 2: Representation of the storage size for ISIC (skin lesion) datasets. While the ISIC website hosts a total of 38 GB of data (left), on Kaggle there are a total of 640 datasets related to ISIC (some preprocessed, other with additional annotations), that sum up to 2.35 TB of data (right).

process are the two fields most represented; motivation of the creation of the dataset is rarely included in the general description of the dataset; information about preprocessing/cleaning/labeling or about uses is usually missing. Only for HuggingFace the field *task_categories* can point to some possible uses, potentially enabling systematic analysis of a specific task or tag. Kaggle provides a parameter for maintenance of the dataset, although we have already mentioned its limitations. HuggingFace does not provide a specific parameter for maintenance but it is possible to track on their website the history of files and versions. We detail the parameter categorization in Table 2 (Suppl. Material).

4 Discussion

Asymmetry between open data and proprietary datasets. Commercial AI systems in clinical settings are unlikely to rely solely on open MI datasets for training. They ensure data quality through agreements or obtaining high-quality medical images [82]. Companies providing proprietary MI datasets or labeling services handle challenges such as licensing, documentation, and data quality, offering greater customization and flexibility. Such proprietary datasets remain unaffected by the mentioned challenges [82, 112]. Similarly, [112] have shown how regulatory compliance and internal organizational requirements, transverse and often define dataset quality.

This asymmetry between the issues of open data and the value offered by proprietary datasets highlights the shortcomings of publicly available MI data. While open data initiatives like CCPs offer the potential to redistribute data value for the common good and public interest, the current status of MI datasets falls short in reliably training high-performing, equitable, and responsible AI models. Due to these limitations, we suggest rethinking and evaluating open datasets within CCPs through the concepts of *access*, *quality*, *and documentation* drawing upon the FAIR principles [106]. We argue that these concerns need to be accounted for if the MI datasets are to live up to the ideals of open data.

Access to open datasets should be predictable, compliant with open licensing, and persistent. In this paper, we show that a proper dataset infrastructure (both legal and technical) is crucial for their effective utilization. Open datasets must be properly licensed to prevent harm to end-users by models trained on legally ambiguous open data with the potential for bias and unfairness [60, 89]. Moreover, vague licensing pushes the users of open datasets into a legal grey zone [35]. [24] noticed such a legal gap in the "inappropriate" use of open AI models and pointed out the danger of their possible unrestricted and unethical use. To ensure the responsible use of AI models, they envisioned enforceable licensing. Legal clarity should also span persistent and deterministic storage. The most popular ML datasets are mostly hosted by established academic institutions. However, the CCPs host a plethora of duplicated or altered MI datasets. Instead of boosting the opportunities for AI creators, this abundance may become a hindrance when *e.g.*, developers cannot possibly track changes introduced between different versions of a dataset. We argue that open data has to be predictably and persistently accessible under clear conditions and for clear purposes.

Open datasets should be evaluated against the context of real-world use. The understanding of high-quality data for AI training purposes is constantly evolving [104]. After a thorough evaluation focused on real-world use, MI datasets, once considered high-quality [17, 45, 97, 102], were revealed to contain flaws questioning their clinical usefulness [10, 50, 72, 99]. Maintaining open datasets is often an endeavour that is too costly for their creators, resulting in the deteriorating quality of available datasets. Moreover, we showed the prevalence of information about shortcuts and missing metadata in MI datasets hosted on CCPs. These issues can reduce the clinical usefulness of developed systems and, in extreme scenarios, potentially cause harm to the intended beneficiaries. We encourage the MI and other ML communities to expand the understanding of high-quality data by incorporating rich metadata and emphasizing real-world evaluations, including testing to uncover biases or shortcuts.

Datasets documentation should be complete and up-to-date. Research has shown that access to large amounts of data does not necessarily warrant the creation of responsible and equitable AI models [80]. Instead, it is the connection between the dataset's size and the understanding of the work that resulted in the creation of a dataset. This connection is the premise behind the creation of proprietary datasets designed for use in private enterprises. When that direct connection is broken, a fairly common scenario in the case of open datasets, the knowledge of the decisions taken during dataset creation is lost. Critical data and data science scholars are concerned about the social and technical consequences of using such undocumented data. Thus, a range of documentation frameworks were proposed [8, 34, 39, 44]. Each documentation method slightly differs, focusing on various aspects of dataset quality. However, their overall goal is to introduce greater transparency and accountability in design choices. These conscious approaches aim to foster greater reproducibility and contribute to the development of responsible AI. Unfortunately, as shown in this paper, the real-world implementation of these frameworks is lacking. Even when a CCP provides a documentation framework, the content rarely aligns with the frameworks' principles. CCPs could take inspiration from PhysioNet [36], which implements checks on new contributions. Any new submissions are first vetted⁴ by the editors and may require re-submission if the expected metadata is not provided. When the supplied documentation does not adhere to the frameworks' principles, it fails to fulfil its intended purpose, placing users of open datasets at a disadvantage compared to users of proprietary datasets.

CCPs could benefit from commons-based governance. Data governance can help mitigate the issues of accountability, fairness, discrimination, and trust. Inspired by the Wikipedia model [31], we recommend that CCPs implement norms and principles derived from this commons-based governance model. We suggest incorporating at least the roles of *data administrator*, and *data steward*. We define the role of *data administrator* as the first-level of data stewardship, a sanctioning mechanism that ensures proper (1) licensing, (2) persistent identifiers, and (3) completeness of metadata for open MI datasets that enter the platform. We define as the second-level of data stewardship, the role of *data steward*, who will be responsible for the ongoing monitoring of the (1) maintenance, (2) storage, and (3) implementation of documentation practices.

Nevertheless, these data stewardship proposals, as a commons-based governance model, need further exploration within a broader community of CCP practitioners. Recognizing the limited resources (monetary and/or human labour) in CCP initiatives, we are very careful in suggesting a complex governance system that would solely rely on the unpaid labor of dataset creators. Instead, we propose this direction for future applied research to enhance the dataset management and stewardship of MI datasets on CCP through commons-based approaches. We sincerely hope that more institutions will support efforts to improve the value of open datasets, which will require additional structural support, such as permanent and paid roles for data stewards [76].

Initiatives to work on data and improve the data lifecycle. Several fairly recent initiatives aim to address the overlooked role of datasets like the NeurIPS Dataset and Benchmark Track or the Journal of Data-centric Machine Learning Research (DMLR). Other newly born initiative is Croissant [2], a metadata format for ML-ready datasets, which is currently supported by Kaggle, HuggingFace and other platforms. ML and NLP conferences have started to require ethics statements and various checklists with submissions [9, 12, 84] for the reviewer use, and even include them in the camera-ready versions of accepted papers [85] to incentive better documentation. Such checklists typically include questions about data license and documentation, and they could be extended to help develop the norm of not just sharing, but also documenting any new data accompanying research papers, or

⁴https://physionet.org/about/publish/

encourage the use of the 'official' documented dataset versions. In the MI context, conferences like MICCAI have incorporated a structured format for challenge datasets to ensure high-quality data.

More insights needed from all people involved. A limitation of our study is that it is primarily based on our quantitative evidence and our subjective perceptions of the fields and practices we describe of a limited number of screened datasets, yet the most cited ones. However, a recent study [111] has quantitatively and qualitatively confirmed our observations about the lack of documentation for datasets on HuggingFace. However, we did not reach out to Kaggle or HuggingFace. To gain a better understanding of data curation, maintenance, and re-use practices, it would be valuable to do a qualitative analysis with MI and ML practitioners to understand their use of datasets. For example, [112] is a recent study, based on interviews with researchers from companies and the public health sector, of how several medical datasets were created. It would be interesting to investigate how researchers select datasets to work on, looking beyond mere correlations with popularity and quantitative metrics. We might be able to learn valuable lessons from other communities that we have not explored in this paper, for example neuroimaging (which might appear to be a subset of medical imaging, but in terms of people and conferences is a fairly distinct community), where various issues around open data have been explored [7, 42, 70, 77, 78, 98, 105].

However, we should not forget that understanding research practices around datasets is not just of relevance to ML and adjacent communities. These datasets have broader importance as these datasets are affecting people who are not necessarily represented at research conferences, so further research should involve these most affected groups [96]. Alternative data sharing, documenting, and governance models are crucial to addressing power imbalances and enhancing data's generation of value as a common good [73, 79, 95]. Furthermore, neglecting the importance of recognizing and prioritizing the foundational role of data when working with MI datasets can lead to downstream harmful effects, such as *data cascades* [87]. **In conclusion**, our observations reveal that the existing CCP governance model falls short of maintaining the necessary quality standards and recommended practices for sharing, documenting, and evaluating open MI datasets. Our recommendations aim to promote better data governance in the context of MI datasets to mitigate these risks and uphold the reliability and fairness of AI models in healthcare.

Acknowledgments and Disclosure of Funding

This project has received funding from the Independent Research Council Denmark (DFF) Inge Lehmann 1134-00017B.

References

- [1] Samaneh Abbasi-Sureshjani, Ralf Raumanns, Britt EJ Michels, Gerard Schouten, and Veronika Cheplygina. Risk of training diagnostic algorithms on data with demographic bias. In *MICCAI LABELS workshop*, *Lecture Notes in Computer Science*, volume 12446, pages 183–192. Springer, 2020.
- [2] Mubashara Akhtar, Omar Benjelloun, Costanza Conforti, Joan Giner-Miguelez, Nitisha Jain, Michael Kuchnik, Quentin Lhoest, Pierre Marcenac, Manil Maskey, Peter Mattson, et al. Croissant: A metadata format for ml-ready datasets. arXiv preprint arXiv:2403.19546, 2024.
- [3] Majid Al-Ruithe, Elhadj Benkhelifa, and Khawar Hameed. A systematic literature review of data governance and cloud data governance. *Personal and Ubiquitous Computing*, 23:839–859, 2019.
- [4] Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C. Lawrence Zitnick, and Devi Parikh. VQA: Visual Question Answering. In *International Conference on Computer Vision (ICCV)*, 2015.
- [5] Samuel G Armato III, Geoffrey McLennan, Luc Bidaut, Michael F McNitt-Gray, Charles R Meyer, Anthony P Reeves, Binsheng Zhao, Denise R Aberle, Claudia I Henschke, Eric A Hoffman, et al. The lung image database consortium (lidc) and image database resource initiative (idri): a completed reference database of lung nodules on ct scans. *Medical physics*, 38(2):915–931, 2011.

- [6] Andrew L Beam, Arjun K Manrai, and Marzyeh Ghassemi. Challenges to the reproducibility of machine learning models in health care. *Jama*, 323(4):305–306, 2020.
- [7] Michael JS Beauvais, Bartha Maria Knoppers, and Judy Illes. A marathon, not a sprint–neuroimaging, open science and ethics. *Neuroimage*, 236:118041, 2021.
- [8] Emily M. Bender and Batya Friedman. Data statements for natural language processing: Toward mitigating system bias and enabling better science. *Transactions of the Association for Computational Linguistics*, 6:587–604, 2018. doi: 10.1162/tacl_a_00041. URL https://aclanthology.org/Q18-1041.
- [9] Alina Beygelzimer, Yann Dauphin, Percy Liang, and Jennifer Wortman Vaughan. Introducing the NeurIPS 2021 Paper Checklist, March 2021. URL https://neuripsconf.medium.com/introducing-the-neurips-2021-paper-checklist-3220d6df500b.
- [10] Alceu Bissoto, Eduardo Valle, and Sandra Avila. Debiasing skin lesion datasets and models? not so fast. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops*, pages 740–741, 2020.
- [11] Samuel R Bowman, Gabor Angeli, Christopher Potts, and Christopher D Manning. A large annotated corpus for learning natural language inference. *arXiv preprint arXiv:1508.05326*, 2015.
- [12] Marine Carpuat, Marie-Catherine de Marneffe, and Ivan Vladimir Meza Ruiz. Responsible NLP research Checklist, December 2021. URL http://aclrollingreview.org/responsibleNLPresearch/.
- [13] Stephanie Russo Carroll, Ibrahim Garba, Oscar L Figueroa-Rodríguez, Jarita Holbrook, Raymond Lovett, Simeon Materechera, Mark Parsons, Kay Raseroka, Desi Rodriguez-Lonebear, Robyn Rowe, et al. The care principles for indigenous data governance. *Data Science Journal*, 2020.
- [14] Bill Cassidy, Connah Kendrick, Andrzej Brodzicki, Joanna Jaworek-Korjakowska, and Moi Hoon Yap. Analysis of the ISIC image datasets: Usage, benchmarks and recommendations. *Medical image analysis*, 75:102305, 2022.
- [15] Adam Coates, Andrew Ng, and Honglak Lee. An analysis of single-layer networks in unsupervised feature learning. In Geoffrey Gordon, David Dunson, and Miroslav Dudík, editors, *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, volume 15 of *Proceedings of Machine Learning Research*, pages 215–223, Fort Lauderdale, FL, USA, 11–13 Apr 2011. PMLR. URL https://proceedings.mlr.press/v15/coates11a.html.
- [16] Noel CF Codella, David Gutman, M Emre Celebi, Brian Helba, Michael A Marchetti, Stephen W Dusza, Aadi Kalloo, Konstantinos Liopyris, Nabin Mishra, Harald Kittler, et al. Skin lesion analysis toward melanoma detection: A challenge at the 2017 International Symposium on Biomedical Imaging (ISBI), hosted by the International Skin Imaging Collaboration (ISIC). arXiv preprint arXiv:1710.05006, 2017.
- [17] Noel CF Codella, David Gutman, M Emre Celebi, Brian Helba, Michael A Marchetti, Stephen W Dusza, Aadi Kalloo, Konstantinos Liopyris, Nabin Mishra, Harald Kittler, et al. Skin lesion analysis toward melanoma detection: A challenge at the 2017 international symposium on biomedical imaging (isbi), hosted by the international skin imaging collaboration (isic). In 2018 IEEE 15th international symposium on biomedical imaging (ISBI 2018), pages 168–172. IEEE, 2018.
- [18] Giovanni Colavizza, Iain Hrynaszkiewicz, Isla Staden, Kirstie Whitaker, and Barbara McGillivray. The citation advantage of linking publications to research data. *PloS one*, 15(4):e0230416, 2020.
- [19] Gary S Collins and Karel GM Moons. Reporting of artificial intelligence prediction models. *The Lancet*, 393(10181):1577–1579, 2019.

- [20] Gary S Collins, Karel G M Moons, Paula Dhiman, Richard D Riley, Andrew L Beam, Ben Van Calster, Marzyeh Ghassemi, Xiaoxuan Liu, Johannes B Reitsma, Maarten van Smeden, Anne-Laure Boulesteix, Jennifer Catherine Camaradou, Leo Anthony Celi, Spiros Denaxas, Alastair K Denniston, Ben Glocker, Robert M Golub, Hugh Harvey, Georg Heinze, Michael M Hoffman, André Pascal Kengne, Emily Lam, Naomi Lee, Elizabeth W Loder, Lena Maier-Hein, Bilal A Mateen, Melissa D McCradden, Lauren Oakden-Rayner, Johan Ordish, Richard Parnell, Sherri Rose, Karandeep Singh, Laure Wynants, and Patricia Logullo. Tripod+ai statement: updated guidance for reporting clinical prediction models that use regression or machine learning methods. *BMJ*, page e078378, April 2024. ISSN 1756-1833. doi: 10.1136/bmj-2023-078378. URL http://dx.doi.org/10.1136/bmj-2023-078378.
- [21] Marc Combalia, Noel CF Codella, Veronica Rotemberg, Brian Helba, Veronica Vilaplana, Ofer Reiter, Cristina Carrera, Alicia Barreiro, Allan C Halpern, Susana Puig, et al. Bcn20000: Dermoscopic lesions in the wild. *arXiv preprint arXiv:1908.02288*, 2019.
- [22] Marc Combalia, Noel Codella, Veronica Rotemberg, Cristina Carrera, Stephen Dusza, David Gutman, Brian Helba, Harald Kittler, Nicholas R Kurtansky, Konstantinos Liopyris, Michael A Marchetti, Sebastian Podlipnik, Susana Puig, Christoph Rinner, Philipp Tschandl, Jochen Weber, Allan Halpern, and Josep Malvehy. Validation of artificial intelligence prediction models for skin cancer diagnosis using dermoscopy images: the 2019 international skin imaging collaboration grand challenge. *The Lancet Digital Health*, 4(5):e330–e339, 2022. ISSN 2589-7500. doi: https://doi.org/10.1016/S2589-7500(22)00021-8. URL https://www.sciencedirect.com/science/article/pii/S2589750022000218.
- [23] Rhys Compton, Lily Zhang, Aahlad Puli, and Rajesh Ranganath. When more is less: Incorporating additional datasets can hurt performance by introducing spurious correlations. *arXiv* preprint arXiv:2308.04431, 2023.
- [24] Danish Contractor, Daniel McDuff, Julia Katherine Haines, Jenny Lee, Christopher Hines, Brent Hecht, Nicholas Vincent, and Hanlin Li. Behavioral use licensing for responsible ai. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, FAccT '22, page 778–788, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450393522. doi: 10.1145/3531146.3533143. URL https://doi.org/10.1145/3531146.3533143.
- [25] Arianna Dagliati, Alberto Malovini, Valentina Tibollo, and Riccardo Bellazzi. Health informatics and ehr to support clinical research in the covid-19 pandemic: an overview. *Briefings in bioinformatics*, 22(2):812–822, 2021.
- [26] Roxana Daneshjou, Mary P Smith, Mary D Sun, Veronica Rotemberg, and James Zou. Lack of transparency and potential bias in artificial intelligence data sets and algorithms: a scoping review. *JAMA dermatology*, 157(11):1362–1369, 2021.
- [27] Alex J DeGrave, Joseph D Janizek, and Su-In Lee. Ai for radiographic covid-19 detection selects shortcuts over signal. *Nature Machine Intelligence*, pages 1–10, 2021.
- [28] Emily Denton, Alex Hanna, Razvan Amironesei, Andrew Smart, and Hilary Nicole. On the genealogy of machine learning datasets: A critical history of ImageNet. *Big Data & Society*, 8 (2):20539517211035955, 2021.
- [29] Mark Díaz, Ian Kivlichan, Rachel Rosen, Dylan Baker, Razvan Amironesei, Vinodkumar Prabhakaran, and Emily Denton. Crowdworksheets: Accounting for individual and collective identities underlying crowdsourced dataset annotation. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 2342–2351, 2022.
- [30] European Organization For Nuclear Research and OpenAIRE. Zenodo, 2013. URL https://www.zenodo.org/.
- [31] Andrea Forte, Vanesa Larco, and Amy Bruckman. Decentralization in wikipedia governance. *Journal of Management Information Systems*, 26(1):49–72, 2009.
- [32] Erin D Foster and Ariel Deardorff. Open science framework (osf). *Journal of the Medical Library Association: JMLA*, 105(2):203, 2017.

- [33] Christian Garbin, Pranav Rajpurkar, Jeremy Irvin, Matthew P Lungren, and Oge Marques. Structured dataset documentation: a datasheet for chexpert. arXiv preprint arXiv:2105.03020, 2021.
- [34] Timnit Gebru, Jamie Morgenstern, Briana Vecchione, Jennifer Wortman Vaughan, Hanna Wallach, Hal Daumé Iii, and Kate Crawford. Datasheets for datasets. *Communications of the ACM*, 64(12):86–92, 2021.
- [35] Edd Gent. Public ai training datasets are rife with licensing errors, 2023. URL https://spectrum.ieee.org/data-ai.
- [36] Ary L Goldberger, Luis AN Amaral, Leon Glass, Jeffrey M Hausdorff, Plamen Ch Ivanov, Roger G Mark, Joseph E Mietus, George B Moody, Chung-Kang Peng, and H Eugene Stanley. Physiobank, physiotoolkit, and physionet: components of a new research resource for complex physiologic signals. *circulation*, 101(23):e215–e220, 2000.
- [37] Kalinda E Griffiths, Jessica Blain, Claire M Vajdic, and Louisa Jorm. Indigenous and tribal peoples data governance in health research: A systematic review. *International journal of environmental research and public health*, 18(19):10318, 2021.
- [38] Paul Groth, Helena Cousijn, Tim Clark, and Carole Goble. Fair data reuse—the path through data citation. *Data Intelligence*, 2(1-2):78–86, 2020.
- [39] S Holland, A Hosny, S Newman, J Joseph, and K Chmielinski. The dataset nutrition label: a framework to drive higher data quality standards. arxiv, arxiv: 180503677. 2018.
- [40] Sarah Holland, Ahmed Hosny, Sarah Newman, Joshua Joseph, and Kasia Chmielinski. The dataset nutrition label. *Data Protection and Privacy*, 12(12):1, 2020.
- [41] AD Hoover, Valentina Kouznetsova, and Michael Goldbaum. Locating blood vessels in retinal images by piecewise threshold probing of a matched filter response. *IEEE Transactions on Medical imaging*, 19(3):203–210, 2000.
- [42] Corey Horien, Stephanie Noble, Abigail S Greene, Kangjoo Lee, Daniel S Barron, Siyuan Gao, David O'Connor, Mehraveh Salehi, Javid Dadashkarimi, Xilin Shen, et al. A hitchhiker's guide to working with large, open-source neuroimaging datasets. *Nature human behaviour*, 5 (2):185–193, 2021.
- [43] HuggingFace. Huggingface datasets card creation guide. https://huggingface.co/docs/datasets/v1.12.0/dataset_card.html, 2024. Accessed: 2024-01-10.
- [44] Ben Hutchinson, Andrew Smart, Alex Hanna, Emily Denton, Christina Greer, Oddur Kjartansson, Parker Barnes, and Margaret Mitchell. Towards accountability for machine learning datasets: Practices from software engineering and infrastructure. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, pages 560–575, 2021.
- [45] Jeremy Irvin, Pranav Rajpurkar, Michael Ko, Yifan Yu, Silviana Ciurea-Ilcus, Chris Chute, Henrik Marklund, Behzad Haghgoo, Robyn Ball, Katie Shpanskaya, et al. Chexpert: A large chest radiograph dataset with uncertainty labels and expert comparison. In *AAAI Conference on Artificial Intelligence*, volume 33, pages 590–597, 2019.
- [46] ISIC. Isic archive. https://www.isic-archive.com/, 2024. Accessed: 2024-05-22.
- [47] Marijn Janssen, Paul Brous, Elsa Estevez, Luis S. Barbosa, and Tomasz Janowski. Data governance: Organizing data for trustworthy artificial intelligence. *Government Information Quarterly*, 37(3):101493, 2020. ISSN 0740-624X. doi: https://doi.org/10.1016/j.giq.2020.101493. URL https://www.sciencedirect.com/science/article/pii/S0740624X20302719.
- [48] Yacine Jernite, Huu Nguyen, Stella Biderman, Anna Rogers, Maraim Masoud, Valentin Danchev, Samson Tan, Alexandra Sasha Luccioni, Nishant Subramani, Isaac Johnson, et al. Data governance in the age of large-scale data-driven language technology. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 2206–2222, 2022.

- [49] Debesh Jha, Pia H Smedsrud, Michael A Riegler, Pål Halvorsen, Thomas de Lange, Dag Johansen, and Håvard D Johansen. Kvasir-seg: A segmented polyp dataset. In *MultiMedia Modeling: 26th International Conference, MMM 2020, Daejeon, South Korea, January 5–8, 2020, Proceedings, Part II 26*, pages 451–462. Springer, 2020.
- [50] Amelia Jiménez-Sánchez, Dovile Juodelyte, Bethany Chamberlain, and Veronika Cheplygina. Detecting shortcuts in medical images a case study in chest x-rays. In 2023 IEEE 20th International Symposium on Biomedical Imaging (ISBI), pages 1–5, 2023. doi: 10.1109/ISBI53787.2023.10230572.
- [51] Alistair EW Johnson, Tom J Pollard, Seth J Berkowitz, Nathaniel R Greenbaum, Matthew P Lungren, Chih-ying Deng, Roger G Mark, and Steven Horng. Mimic-cxr, a de-identified publicly available database of chest radiographs with free-text reports. *Scientific data*, 6(1): 317, 2019.
- [52] Kaggle. Kaggle datasets documentation. https://www.kaggle.com/docs/datasets, 2024. Accessed: 2024-01-10.
- [53] Florian Knoll, Jure Zbontar, Anuroop Sriram, Matthew J Muckley, Mary Bruno, Aaron Defazio, Marc Parente, Krzysztof J Geras, Joe Katsnelson, Hersh Chandarana, et al. fastmri: A publicly available raw k-space and dicom dataset of knee images for accelerated mr image reconstruction using machine learning. *Radiology: Artificial Intelligence*, 2(1):e190007, 2020.
- [54] Bernard Koch, Emily Denton, Alex Hanna, and Jacob G Foster. Reduced, reused and recycled: The life of a dataset in machine learning research. *arXiv preprint arXiv:2112.01716*, 2021.
- [55] Ranjay Krishna, Yuke Zhu, Oliver Groth, Justin Johnson, Kenji Hata, Joshua Kravitz, Stephanie Chen, Yannis Kalantidis, Li-Jia Li, David A Shamma, et al. Visual genome: Connecting language and vision using crowdsourced dense image annotations. *International journal of computer vision*, 123:32–73, 2017.
- [56] Alex Krizhevsky, Geoffrey Hinton, et al. Learning multiple layers of features from tiny images. 2009.
- [57] Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:453–466, 2019.
- [58] Samuli Laato, Teemu Birkstedt, Matti Mäantymäki, Matti Minkkinen, and Tommi Mikkonen. Ai governance in the system development life cycle: Insights on responsible machine learning engineering. In *Proceedings of the 1st International Conference on AI Engineering: Software Engineering for AI*, pages 113–123, 2022.
- [59] Agostina J Larrazabal, Nicolás Nieto, Victoria Peterson, Diego H Milone, and Enzo Ferrante. Gender imbalance in medical imaging datasets produces biased classifiers for computer-aided diagnosis. *Proceedings of the National Academy of Sciences*, 117(23):12592–12594, 2020.
- [60] Susan Leavy, Eugenia Siapera, and Barry O'Sullivan. Ethical data curation for ai: An approach based on feminist epistemology and critical theories of race. In *Proceedings of the 2021 AAAI/ACM Conference on AI, Ethics, and Society*, pages 695–703, 2021.
- [61] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- [62] Karim Lekadir, Aasa Feragen, Abdul Joseph Fofanah, Alejandro F Frangi, Alena Buyx, Anais Emelie, Andrea Lara, Antonio R Porras, An-Wen Chan, Arcadi Navarro, et al. Future-ai: International consensus guideline for trustworthy and deployable artificial intelligence in healthcare. arXiv preprint arXiv:2309.12325, 2023.
- [63] Johann Li, Guangming Zhu, Cong Hua, Mingtao Feng, Basheer Bennamoun, Ping Li, Xiaoyuan Lu, Juan Song, Peiyi Shen, Xu Xu, et al. A systematic collection of medical image datasets for deep learning. *ACM Computing Surveys*, 56(5):1–51, 2023.

- [64] Ziwei Liu, Ping Luo, Xiaogang Wang, and Xiaoou Tang. Deep learning face attributes in the wild. In Proceedings of International Conference on Computer Vision (ICCV), December 2015.
- [65] Shayne Longpre, Robert Mahari, Anthony Chen, Naana Obeng-Marnu, Damien Sileo, William Brannon, Niklas Muennighoff, Nathan Khazam, Jad Kabbara, Kartik Perisetla, et al. The data provenance initiative: A large scale audit of dataset licensing & attribution in ai. *arXiv preprint arXiv:2310.16787*, 2023.
- [66] Andrew L. Maas, Raymond E. Daly, Peter T. Pham, Dan Huang, Andrew Y. Ng, and Christopher Potts. Learning word vectors for sentiment analysis. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 142–150, Portland, Oregon, USA, June 2011. Association for Computational Linguistics. URL http://www.aclweb.org/anthology/P11-1015.
- [67] Suranna R Monah, Matthias W Wagner, Asthik Biswas, Farzad Khalvati, Lauren E Erdman, Afsaneh Amirabadi, Logi Vidarsson, Melissa D McCradden, and Birgit B Ertl-Wagner. Data governance functions to support responsible data stewardship in pediatric radiology research studies using artificial intelligence. *Pediatric Radiology*, 52(11):2111–2119, 2022.
- [68] Inês C. Moreira, Igor Amaral, Inês Domingues, António Cardoso, Maria João Cardoso, and Jaime S. Cardoso. INbreast. *Academic Radiology*, 19(2):236–248, feb 2012. doi: 10.1016/j.acra.2011.09.014. URL https://doi.org/10.1016%2Fj.acra.2011.09.014.
- [69] Yuval Netzer, Tao Wang, Adam Coates, Alessandro Bissacco, Bo Wu, and Andrew Y Ng. Reading digits in natural images with unsupervised feature learning. 2011.
- [70] Guiomar Niso, Rotem Botvinik-Nezer, Stefan Appelhoff, Alejandro De La Vega, Oscar Esteban, Joset A Etzel, Karolina Finc, Melanie Ganz, Remi Gau, Yaroslav O Halchenko, et al. Open and reproducible neuroimaging: from study inception to publication. *NeuroImage*, 263: 119623, 2022.
- [71] Lauren Oakden-Rayner. Exploring large scale public medical image datasets. *arXiv preprint arXiv:1907.12720*, 2019.
- [72] Lauren Oakden-Rayner, Jared Dunnmon, Gustavo Carneiro, and Christopher Ré. Hidden stratification causes clinically meaningful failures in machine learning for medical imaging. In *ACM Conference on Health, Inference, and Learning*, pages 151–159, 2020.
- [73] Elinor Ostrom. *Governing the commons: The evolution of institutions for collective action*. Cambridge university press, 1990.
- [74] Andre GC Pacheco, Gustavo R Lima, Amanda S Salomao, Breno Krohling, Igor P Biral, Gabriel G de Angelo, Fábio CR Alves Jr, José GM Esgario, Alana C Simora, Pedro BC Castro, et al. Pad-ufes-20: A skin lesion dataset composed of patient data and clinical images collected from smartphones. *Data in brief*, 32:106221, 2020.
- [75] Kenny Peng, Arunesh Mathur, and Arvind Narayanan. Mitigating dataset harms requires stewardship: Lessons from 1000 papers. *arXiv preprint arXiv:2108.02922*, 2021.
- [76] Esther Plomp, Nicolas Dintzner, Marta Teperek, and Alastair Dunning. Cultural obstacles to research data management and sharing at tu delft. *Insights*, 32(1), 2019.
- [77] Russell A Poldrack and Krzysztof J Gorgolewski. Making big data open: data sharing in neuroimaging. *Nature neuroscience*, 17(11):1510–1517, 2014.
- [78] Jean-Baptiste Poline, Janis L Breeze, Satrajit Ghosh, Krzysztof Gorgolewski, Yaroslav O Halchenko, Michael Hanke, Christian Haselgrove, Karl G Helmer, David B Keator, Daniel S Marcus, et al. Data sharing in neuroimaging research. Frontiers in neuroinformatics, 6:9, 2012
- [79] Nadya Purtova and Gijs van Maanen. Data as an economic good, data as a commons, and data governance. *Law, Innovation and Technology*, pages 1–42, 2023.

- [80] Mahima Pushkarna, Andrew Zaldivar, and Oddur Kjartansson. Data cards: Purposeful and transparent dataset documentation for responsible ai. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 1776–1826, 2022.
- [81] Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. Squad: 100,000+ questions for machine comprehension of text. arXiv preprint arXiv:1606.05250, 2016.
- [82] Pranav Rajpurkar, Emma Chen, Oishi Banerjee, and Eric J Topol. Ai in health and medicine. *Nature medicine*, 28(1):31–38, 2022.
- [83] Nicola Rieke, Jonny Hancox, Wenqi Li, Fausto Milletari, Holger R Roth, Shadi Albarqouni, Spyridon Bakas, Mathieu N Galtier, Bennett A Landman, Klaus Maier-Hein, et al. The future of digital health with federated learning. NPJ digital medicine, 3(1):1–7, 2020.
- [84] Anna Rogers, Timothy Baldwin, and Kobi Leins. 'Just What do You Think You're Doing, Dave?' A Checklist for Responsible Data Use in NLP. In *Findings of the Association* for Computational Linguistics: EMNLP 2021, pages 4821–4833, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/ 2021.findings-emnlp.414.
- [85] Anna Rogers, Marzena Karpinska, Jordan Boyd-Graber, and Naoaki Okazaki. Program Chairs' Report on Peer Review at ACL 2023. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages xl-lxxv, Toronto, Canada, July 2023. Association for Computational Linguistics. URL https://aclanthology.org/2023.acl-long.report.
- [86] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115:211–252, 2015.
- [87] Nithya Sambasivan, Shivani Kapania, Hannah Highfill, Diana Akrong, Praveen Kumar Paritosh, and Lora Mois Aroyo. "everyone wants to do the model work, not the data work": Data cascades in high-stakes ai. 2021.
- [88] Kenneth F Schulz, Douglas G Altman, and David Moher. Consort 2010 statement: updated guidelines for reporting parallel group randomised trials. *Journal of Pharmacology and pharmacotherapeutics*, 1(2):100–107, 2010.
- [89] Candice Schumann, Susanna Ricco, Utsav Prabhu, Vittorio Ferrari, and Caroline Pantofaru. A step toward more inclusive people annotations for fairness. In *Proceedings of the 2021 AAAI/ACM Conference on AI, Ethics, and Society*, pages 916–925, 2021.
- [90] Arnaud Arindra Adiyoso Setio, Alberto Traverso, Thomas De Bel, Moira SN Berens, Cas Van Den Bogaard, Piergiorgio Cerello, Hao Chen, Qi Dou, Maria Evelina Fantacci, Bram Geurts, et al. Validation, comparison, and combination of algorithms for automatic detection of pulmonary nodules in computed tomography images: the luna16 challenge. *Medical image analysis*, 42:1–13, 2017.
- [91] Laleh Seyyed-Kalantari, Guanxiong Liu, Matthew McDermott, Irene Y Chen, and Marzyeh Ghassemi. Chexclusion: Fairness gaps in deep chest x-ray classifiers. In *Pacific Symposium on Biocomputing*, pages 232–243. World Scientific, 2020.
- [92] Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D Manning, Andrew Y Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1631–1642, 2013.
- [93] Théo Sourget, Ahmet Akkoç, Stinna Winther, Christine Lyngbye Galsgaard, Amelia Jiménez-Sánchez, Dovile Juodelyte, Caroline Petitjean, and Veronika Cheplygina. [citation needed] data usage and citation practices in medical imaging conferences. In *Medical Imaging with Deep Learning*, 2024.

- [94] Joes Staal, Michael D Abràmoff, Meindert Niemeijer, Max A Viergever, and Bram Van Ginneken. Ridge-based vessel segmentation in color images of the retina. *IEEE transactions on medical imaging*, 23(4):501–509, 2004.
- [95] Alek Tarkowski, Paul Keller, Francesco Vogelezano, and Jan J. Zygmuntowski. Public data commons a public-interest framework for b2g data sharing in the data act, 2022. URL https://openfuture.eu/publication/public-data-commons/.
- [96] Rachel Thomas and David Uminsky. The problem with metrics is a fundamental problem for AI. *arXiv preprint arXiv:2002.08512*, 2020.
- [97] Philipp Tschandl, Cliff Rosendahl, and Harald Kittler. The ham10000 dataset, a large collection of multi-source dermatoscopic images of common pigmented skin lesions. *Scientific data*, 5 (1):1–9, 2018.
- [98] John Darrell Van Horn and Arthur W Toga. Human neuroimaging as a "big data" science. *Brain imaging and behavior*, 8:323–331, 2014.
- [99] Gaël Varoquaux and Veronika Cheplygina. Machine learning for medical imaging: methodological failures and recommendations for the future. *Nature Digital Medicine*, 5(1):1–8, 2022.
- [100] Catherine Wah, Steve Branson, Peter Welinder, Pietro Perona, and Serge Belongie. The caltech-ucsd birds-200-2011 dataset. 2011.
- [101] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv* preprint arXiv:1804.07461, 2018.
- [102] Xiaosong Wang, Yifan Peng, Le Lu, Zhiyong Lu, Mohammadhadi Bagheri, and Ronald M Summers. Chestx-ray8: Hospital-scale chest x-ray database and benchmarks on weakly-supervised classification and localization of common thorax diseases. In *Computer Vision and Pattern Recognition*, pages 2097–2106, 2017.
- [103] David Wen, Saad M Khan, Antonio Ji Xu, Hussein Ibrahim, Luke Smith, Jose Caballero, Luis Zepeda, Carlos de Blas Perez, Alastair K Denniston, Xiaoxuan Liu, et al. Characteristics of publicly available skin cancer image datasets: a systematic review. *The Lancet Digital Health*, 4(1):e64–e74, 2022.
- [104] Steven Euijong Whang, Yuji Roh, Hwanjun Song, and Jae-Gil Lee. Data collection and quality challenges in deep learning: A data-centric ai perspective. *The VLDB Journal*, 32(4):791–813, 2023.
- [105] Tonya White, Elisabet Blok, and Vince D Calhoun. Data sharing and privacy issues in neuroimaging research: Opportunities, obstacles, challenges, and monsters under the bed. *Human Brain Mapping*, 43(1):278–291, 2022.
- [106] Mark D Wilkinson, Michel Dumontier, IJsbrand Jan Aalbersberg, Gabrielle Appleton, Myles Axton, Arie Baak, Niklas Blomberg, Jan-Willem Boiten, Luiz Bonino da Silva Santos, Philip E Bourne, et al. The fair guiding principles for scientific data management and stewardship. *Scientific data*, 3(1):1–9, 2016.
- [107] Martin J Willemink, Wojciech A Koszek, Cailin Hardell, Jie Wu, Dominik Fleischmann, Hugh Harvey, Les R Folio, Ronald M Summers, Daniel L Rubin, and Matthew P Lungren. Preparing medical imaging data for machine learning. *Radiology*, page 192224, 2020.
- [108] Adina Williams, Nikita Nangia, and Samuel Bowman. A broad-coverage challenge corpus for sentence understanding through inference. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 1112–1122. Association for Computational Linguistics, 2018. URL http://aclweb.org/anthology/N18-1101.

- [109] Julia K Winkler, Christine Fink, Ferdinand Toberer, Alexander Enk, Teresa Deinlein, Rainer Hofmann-Wellenhof, Luc Thomas, Aimilios Lallas, Andreas Blum, Wilhelm Stolz, et al. Association between surgical skin markings in dermoscopic images and diagnostic performance of a deep learning convolutional neural network for melanoma recognition. *JAMA dermatology*, 155(10):1135–1141, 2019.
- [110] Han Xiao, Kashif Rasul, and Roland Vollgraf. Fashion-mnist: a novel image dataset for benchmarking machine learning algorithms. *arXiv preprint arXiv:1708.07747*, 2017.
- [111] Xinyu Yang, Weixin Liang, and James Zou. Navigating dataset documentations in ai: A large-scale analysis of dataset cards on hugging face. arXiv preprint arXiv:2401.13822, 2024.
- [112] Hubert Dariusz Zając, Natalia Rozalia Avlona, Finn Kensing, Tariq Osman Andersen, and Irina Shklovski. Ground truth or dare: Factors affecting the creation of medical datasets for training ai. In *Proceedings of the 2023 AAAI/ACM Conference on AI, Ethics, and Society*, pages 351–362, 2023.
- [113] Dora Zhao, Angelina Wang, and Olga Russakovsky. Understanding and evaluating racial biases in image captioning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 14830–14840, 2021.
- [114] Bolei Zhou, Agata Lapedriza, Jianxiong Xiao, Antonio Torralba, and Aude Oliva. Learning deep features for scene recognition using places database. *Advances in neural information processing systems*, 27, 2014.
- [115] S Kevin Zhou, Hayit Greenspan, Christos Davatzikos, James S Duncan, Bram van Ginneken, Anant Madabhushi, Jerry L Prince, Daniel Rueckert, and Ronald M Summers. A review of deep learning in medical imaging: Image traits, technology trends, case studies with progress highlights, and future promises. *arXiv preprint arXiv:2008.09104*, 2020.

Supplementary Material

Table 2 shows the extracted documentation parameters from Kaggle and HuggingFace, which we categorized according to Datasheets [34].

On **HuggingFace**, we find information about the annotation creators (*e.g.*, crowdsource, experts, ml-generated) or specific task categories (*e.g.*, image-classification, image-to-text, text-to-image). Such parameters can be used to filter results when searching on HuggingFace, potentially enabling systematic analysis of a specific task or tag.

On **Kaggle**, we notice that some important parameters shown in the dataset website such as *temporal and geospatial coverage*, *data collection methodology*, *provenance*, *DOI citation*, and *update frequency* cannot be automatically extracted with their API, so we manually included them.

Kaggle automatically computes a *usability score*, which is associated with the tag "well-documented", and used for ranking results when searching for a dataset. Kaggle's *usability score* is based on:

- Completeness: *subtitle*, *tag*, *description*, *cover image*.
- Credibility: provenance, public noteboook, update frequency.
- Compatibility: *license*, *file format*, *file description*, *column description*.

The parameters used to compute the *usability score* only cover 4 out of 7 aspects from Datasheets [34].

	Kaggle	HuggingFace
Motivation	username dataset name description	username dataset name description
Composition	temporal coverage geospatial coverage	size categories: $n < 1K$, $1K < n < 10k$, $1M < n < 10M$ language: en, es, hi, ar, ja, zh, dataset info: {image, class label: bird, cat, deer, frog,} data splits: training, validation region version
Collection	data collection method provenance	source dataset: wikipedia, annotation creators: crowdsourced, found, expert-generated, machine-generated,
Preprocessing cleaning / labeling		
Uses		task_categories: image-classification, image-to-text, question-answering task_ids: multi-class-image-classification, extractive-qa,
Distribution	license: cc, gpl, open data commons, DOI citation	license: apache-2.0, mit, openrail, cc,
Maintenance	update frequency: weekly, never, not specified,	
Other	keywords number of views number of downloads number of votes weaklify setting	tags number of likes number of downloads in the last month arXiv

Table 2: Documentation parameters extracted from Kaggle and HuggingFace categorized according to Datasheets [34], except the last rows (Other). We represent in italic the extracted parameter, and show examples values for them. We include *description* in Motivation, although we find that this parameter can contain any type of dataset information.