
Efficient Multimodal Learning from Data-centric Perspective

Muyang He^{1,2*} Yexin Liu^{1,3*} Boya Wu^{1*}
Jianhao Yuan⁴ Yueze Wang¹ Tiejun Huang^{1,2} Bo Zhao^{1†}

¹Beijing Academy of Artificial Intelligence

²Peking University ³HKUST(GZ) ⁴University of Oxford

*Equal Contribution †Corresponding to Bo Zhao <bozhaonanjing@gmail.com>

Abstract

Multimodal Large Language Models (MLLMs) have demonstrated notable capabilities in general visual understanding and reasoning tasks. However, their deployment is hindered by substantial computational costs in both training and inference, limiting accessibility to the broader research and user communities. A straightforward solution is to leverage smaller pre-trained vision and language models, which inevitably cause significant performance drops. In this paper, we demonstrate the possibility of training a smaller but better MLLM with high-quality training data. Specifically, we introduce *Bunny*, a family of lightweight MLLMs with flexible vision and language backbones for efficient multimodal learning from selected training data. Experiments show that our Bunny-4B/8B outperforms the state-of-the-art large MLLMs on multiple benchmarks. We expect that this work can provide the community with a clean and flexible open-source tool for further research and development. The code, models, and data can be found in <https://github.com/BAAI-DCAI/Bunny>.

1 Introduction

Recent advancements in Multimodal Large Language Models (MLLMs) have demonstrated exceptional visual understanding and reasoning performances across a range of tasks such as visual question answering [1, 2] and referring comprehension [3–5]. Benefiting from scalable Transformer-based architecture [6] and web-scale training data sources, these models have become foundational in the field of artificial intelligence, with their parameters increasing from billions to trillions [3, 7, 8].

However, the deployment of these models is often hindered by their substantial computational costs and memory consumption in both training and inference phases, which limits their popularization across the broader research and user communities. Several early attempts, such as LLaVA-Phi [9], Imp [10], and Vary-toy [11], leverage off-the-shelf lightweight LLM backbones (e.g., Phi [12, 13]) and small vision encoders (e.g., SigLIP [14]) to build lightweight MLLMs. Further works also explore optimizations in model architecture and training recipes for tailored lightweight MLLM designs [15, 16].

While these attempts to create lightweight versions of MLLMs achieve various levels of success, these models often fall short in terms of performance when compared to their larger counterparts, as reducing the size of these models often leads to a compromise in model capacity. An alternative direction to bridge the performance gap is data optimization. Many works have shown the importance of high-quality training data. For instance, Phi-2 [12] demonstrates that curated high-quality text data can bring the performances of small-scale LLMs close to that of large-scale models. SVIT [17] validates the importance of data sources in MLLMs. In this work, we focus on data optimization to compensate for the reduction in model size.

We introduce *Bunny*, a family of lightweight but powerful multimodal models with plug-and-play language/vision backbones and a multimodal projector. To compensate for the performance decrease caused by the model shrinking, we construct more informative training data by dataset condensation, i.e., curated data selection from a broader source. We demonstrate the possibility of training a smaller but better MLLM on more informative training data. Extensive experiments indicate that our Bunny-4B/8B model outperforms not only state-of-the-art small MLLMs with similar sizes but also even large ones on popular benchmarks.

2 Related Work

2.1 Large Language Model

Recent advancements in Large Language Model (LLM) such as GPT [18, 19, 3], LLaMA [20, 7] and PaLM [21, 8] have demonstrated remarkable capacity in various natural language processing tasks, for example, dialogue, creative writing, and problem-solving. Benefiting from scalable Transformer-based architecture [6] design and web-scale training data source, these models have become foundation models for general reasoning tasks. Among many research endeavors, one line of work focuses on miniaturizing LLM, for more efficient and low-cost training and inference. By leveraging high-quality pre-training and instruction tuning data, along with optimized lightweight architecture, lightweight LLMs with fewer than 3 billion parameters, such as Phi [12, 13], StableLM-2 [22], and TinyLLaMA [23], have demonstrated performance comparable to larger models with 7/13 billion parameters.

2.2 Multimodal Large Language Model

Following the success of LLM, one line of research recently shifted further toward the Multimodal Large Language Model (MLLM) [3, 1] for unified cross-modality understanding and reasoning. Building upon various pre-trained LLM backbones, various methods are proposed to perform cross-modality fusion. Flamingo [2] and BLIP-2 [24] propose different modality fusion techniques to fuse visual tokens to frozen large language models through gated attention or query transformers. Inspired by the success of instruction tuning, LLaVA [25, 26] and MiniGPT-4 [27, 28] use visual instruction tuning to align visual input to LLMs, demonstrating remarkable success. More recent work, such as Kosmos-2 [4] and Shikra [5], further empowers MLLM with grounded visual understanding capacity. While these models exhibit promising potential for general-purpose visual reasoning and planning tasks, they are, in general, extremely expensive and prohibitive to train and deploy.

2.3 Lightweight Multimodal Large Language Model

More related to our work are those efforts dedicated to miniaturizing MLLMs, thereby achieving low-cost and fast deployment. LLaVA-Phi [9], Imp [10] and Vary-toy [11] leverage off-the-shelf small language models and also achieve comparable performance on various benchmarks. Several works explore various ways to optimize the model architecture and training recipe to compensate for the decrease in model size. For instance, MobileVLM [15] focuses on the architecture design of lightweight LLMs and cross-modality projectors to enable training and inference on resource-limited mobile devices. Moreover, MiniCPM [16] and TinyGPT-V [29] explore Bayesian search on hyperparameters and complex multi-stage training strategy, respectively, to optimize training recipes. An alternative direction, yet under-explored, is training data optimization. A number of works have emphasized the critical role of training data in foundation models [15, 17]. In this work, without bells and whistles, we show that by optimizing the training data, small-scale models can readily outperform their large-scale counterparts.

3 Bunny: A Family of Lightweight Multimodal Models

This section introduces the flexible backbone combination of Bunny, the construction of informative training data, and the training procedure.

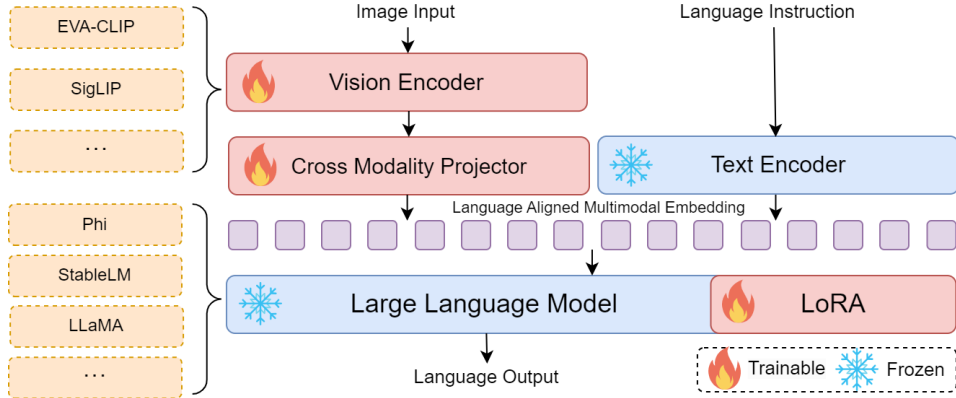


Figure 1: **Model Architecture.** Bunny offers a flexible choice of vision encoder and LLM backbone combination, which are aligned through the cross-modality projector.

3.1 Architecture and Backbone

Following the success of the MLLM paradigm of leveraging visual instruction tuning to align vision and language representations, our model contains three main modules: the LLM backbone, Vision Encoder, and Cross-modality Projector. As illustrated in Fig. 1, Bunny has a flexible combination of the three modules. We introduce some lightweight alternatives for each module as follows.

Large Language Model Backbone. We provide various options of state-of-the-art lightweight LLM: Phi-1.5 (1.3B) [12], Qwen1.5-1.8B [30], StableLM-2 (1.6B) [22], MiniCPM-2B [16], Phi-2 (2.7B) [13], Phi-3-Mini (3.8B) [31] and Llama-3-8B [32] as the language model backbone.

Vision Encoder. We provide two options for the lightweight vision encoder: SigLIP [14] and EVA-CLIP [33], which are both efficient language-aligned image encoders with 428M parameters.

Cross-modality Projector. Following LLaVA [26], we leverage a two-layer MLP with a GELU activation function as a cross-modality projector to align the vision encoder and LLM.

More choices of LLMs, vision encoders, and projectors will be provided in the future.

3.2 Training Data Construction

The quality and scale of training data play critical roles in advancing MLLM performance. We construct *Bunny-pretrain-LAION-2M* and *Bunny-695K* for pre-training and instruction tuning, respectively.

Pre-training Data. We construct a high-quality pre-training data from LAION-2B [34], i.e., we condense LAION-2B into a 2M coreset for data-efficient learning. Specifically, we design a three-step coreset selection scheme based on CLIP embedding. Firstly, motivated by SemDeDup [35], we cluster all 2B image embeddings by k-means, and then in each cluster, build an undirected graph that any two embeddings are connected if their cosine similarity is above a predetermined threshold. Only one sample is kept in each connected sub-graph whose Euclidean distance to the cluster centroid ranks at the median. By setting the threshold to 0.86, we obtain a subset of 952M. Secondly, we sort the remaining samples by the cosine similarity between their text embedding and image embedding and keep samples ranking 40% – 60%, subsequently resulting in a subset of 190M. In this way, the low-quality image-text pairs are removed. Thirdly, we sort the remaining samples by the cosine similarity between its image embedding and its cluster centroid and keep samples ranking 15% – 35%, resulting in a subset of 38M, capturing the essence and diversity of LAION-2B. We finally randomly sampled 2 million samples from the 38M coreset, resulting in *Bunny-pretrain-LAION-2M* for an appropriate training cost.

Fine-tuning Data. We collect a set of visual instruction tuning datasets – *DataOptim*¹, based on which we explore the better combination of fine-tuning datasets. Specifically, we leverage SVIT-mix-665K [17] and replace ShareGPT-40K [26] in it with WizardLM-evol-instruct-70K [36], resulting to Bunny-695K. We find that tuning MLLM on multimodal data may damage its cognition ability inherited from the pre-trained LLM. Probably, it is caused by the less informative and less diverse text in the multimodal training data. Keeping several high-quality pure text data in the fine-tuning dataset can relieve this problem. In experiments, we jointly use Bunny-695K and LLaVA-665K in the finetuning stage for better performance.

3.3 Training Procedure

We employ a two-stage training strategy. The first stage is the pre-training stage, where we align the visual embeddings from a pre-trained vision encoder with the text embeddings from the LLM. The second stage is the fine-tuning stage, where we apply visual instruction tuning to fully utilize the capabilities of the MLLM across various multimodal tasks. In both stages, we use the same cross-entropy loss for next-token prediction. During the pre-training stage, only the cross-modality projector is optimized for one epoch. In the fine-tuning stage, we use LoRA [37] to train the vision encoder, the cross-modality projector, and the LLM backbone for one epoch. For more training details, please refer to our GitHub repository. We observe that LoRA empirically leads to better performance compared to fully tuning all components of the model. This improvement is likely because smaller models are more prone to catastrophic forgetting, which LoRA tuning helps to mitigate.

4 Experiment

4.1 Settings

We evaluate Bunny on eleven popular benchmarks: MME perception [38], MME cognition [38], MMBench [39] test split, MMBench [39] dev split, SEED-Bench-1 [40], MMMU [41] validation split, MMMU [41] test split, VQA-v2 [42] test-dev split, GQA [43] test-dev-balanced split, ScienceQA-IMG [44] test split and POPE [45]: the averaged F1-score of three categories (random, popular and adversarial) on the validation set of MSCOCO, to throughout assess its multimodal capacity. We compare against state-of-the-art multimodal large language models (MLLMs), including BLIP-2 [24], InstructBLIP [46], Shikra-13/7B [5], SVIT-v1.5-3B [17], LVIS-INSTRUCT4V-13B [47], VILA1.5-13B/3B [48], Mini-Gemini-HD-13B [49], LLaVA-v1.5-13/7B [26], LLaVA-Next-13B [50], MiniGPT-v2 [28], mPLUG-Owl2 [51], SPHINX-Intern2 [52], Yi-VL-6B [53], DeepSeek-VL-7B [54], MM1-7B/3B-Chat [55], Idefics2[56], LLaVA-Next-Llama-3-8B [57], TinyGPT-V [29], MC-LLaVA [58], Moondream2 [59], MobileVLM-V2-3B [60], TinyLLaVA-share-Sig-Phi [61], Mipha-3B [62], MiniCPM-V-2 [16], Imp-v1.5-4B-Phi3 [10].

4.2 Comparison to the State of the Art

As shown in Tab. 1, Bunny-4B and Bunny-8B outperform MLLMs with similar sizes on most of the benchmarks, demonstrating exceptional multimodal understanding and reasoning capabilities. Remarkably, Bunny-8B achieves an 80.4 score on ScienceQA-IMG, which overwhelms the runner-up MM1-7B-Chat (72.6) by a large margin. Bunny-4B also shows superiority over MM1-3B-Chat on the challenging MMMU benchmark, namely 6.3% and 5.1% improvements on the validation and test splits respectively.

4.3 Ablation Study

LoRA vs. Fully Fine-tuning. As mentioned before, we find that LoRA empirically leads to better performance than fully tuning. The possible reason is that fully tuning on the small number of SFT data may lead to the catastrophic forgetting. We show the experimental results in Tab. 2.

Fine-tuning Data. Tab. 3 shows the ablation study on data strategy. Compared to the baselines – training on Bunny-695K for one and two epochs respectively, training on Bunny-695K + LLaVA-

¹<https://github.com/BAAI-DCAI/DataOptim>

Table 1: Comparison to state-of-the-art MLLMs on 11 benchmarks. Our model outperforms them in most of the settings. We evaluate these models on benchmarks: MME^P: MME perception [38], MME^C: MME cognition [38], MMB^T: MMBench [39] test split, MMB^D: MMBench [39] dev split, SEED: SEED-Bench-1 [40], MMMU^V: MMMU [41] validation split, MMMU^T: MMMU [41] test split, VQA-v2 [42] test-dev split, GQA [43] test-dev-balanced split, SQA¹: ScienceQA-IMG [44] test split and POPE [45]: the averaged F1-score of three categories (random, popular and adversarial) on the validation set of MSCOCO. [§]We evaluate the officially released checkpoint by ourselves.

Model	MME ^P	MME ^C	MMB ^T	MMB ^D	SEED(-I)	MMMU ^V	MMMU ^T	VQA ^{v2}	GQA	SQA ¹	POPE
<i>Size > 8B</i>											
GPT-4V-1106 [63]	1334.0	437.5	77.0	-	-/-	53.8	-	-	-	82.1	-
BLIP-2-Flan-T5-XXL [24]	1293.8	290.0	-	-	-/-	35.4	34.0	65.0	44.6	64.5	-
InstructBLIP-Flan-T5-XXL [46]	1212.8	291.8	-	-	-/-	35.7	33.8	-	47.9	70.6	-
BLIP-2-Vicuna-13B [24]	-	-	-	-	-/-	-	-	-	41.0	61.0	-
InstructBLIP-Vicuna-13B [46]	-	-	-	-	-/-	-	-	-	49.5	63.1	83.7
Shikra-13B [5]	-	-	-	-	-/-	-	-	77.4	-	-	-
SVIT-v1.5-13B [17]	1565.8	323.2	69.1	-	61.9/-	-	33.3	80.3	64.1	70.0	-
LVIS-INSTRUCT4V-13B [47]	1574.9	286.8	-	68.0	61.6/-	-	-	80.7	63.6	70.6	86.0
VILA1.5-13B [48]	1569.6	-	-	74.9	-/-	-	-	82.8	64.3	80.1	86.3
Mini-Gemini-HD-13B [49]	1597.0	320.0	-	68.6	-/-	37.3	35.1	-	-	-	-
LLaVA-v1.5-13B (LoRA) [26]	1541.7	300.4 [§]	68.4 [§]	68.5	61.3/-	40.0 [§]	33.2 [§]	80.0	63.3	71.2	86.7
LLaVA-NeXT-13B [50]	1575.0	326.0	-	70.0	-71.9	36.2	-	82.8	65.4	73.6	86.2
<i>4B < Size ≤ 8B</i>											
InstructBLIP-Vicuna-7B [46]	-	-	33.9	36.0	53.4/-	-	-	-	49.2	60.5	-
MiniGPT-v2 [28]	-	-	-	-	-/-	-	-	-	60.3	-	-
Shikra-7B [5]	-	-	60.2	58.8	-/-	-	-	-	-	-	-
mPLUG-Owl2 [51]	1450.2	313.2	66.0	66.5	57.8/-	32.7	32.1	79.4	56.1	68.7	85.8
SPHINX-Intern2 [52]	1260.4	294.6	-	57.9	-68.8	-	-	75.5	56.2	70.4	86.9
Yi-VL-6B [53]	-	-	68.4	68.6	-67.6	39.1	37.8	-	-	-	-
DeepSeek-VL-7B [54]	-	-	-	73.2	-70.4	36.6	-	-	-	-	88.1
LLaVA-v1.5-7B (LoRA) [26]	1476.9	267.9 [§]	66.1 [§]	66.1	60.1/-	34.4 [§]	31.7 [§]	79.1	63.0	68.4	86.4
LLaVA-NeXT-7B [50]	1519.0	<u>332.0</u>	-	67.4	-70.2	35.8	-	81.8	<u>64.2</u>	70.1	86.5
MM1-7B-Chat [55]	1529.3	328.9	-	72.3	64.0/69.9	37.0	35.6	82.8	-	<u>72.6</u>	86.6
Idefics2 [56]	-	-	76.7	-	-/-	<u>43.0</u>	<u>37.7</u>	81.2	-	-	-
LLaVA-NeXT-Llama-3-8B [57]	<u>1603.7</u>	367.8	-	72.1	-/-	41.7	-	-	-	-	-
Bunny-8B	1607.8	324.6	<u>76.5</u>	76.3	65.9/73.6	43.7	38.8	<u>82.3</u>	64.5	80.4	<u>87.4</u>
<i>Size ≤ 4B</i>											
TinyGPT-V [29]	-	-	-	-	-	-	-	-	33.6	-	-
MC-LLaVA [58]	-	-	-	-	-	-	-	64.2	49.6	-	80.6
Moondream2 [59]	-	-	-	-	-	-	-	79.4	63.1	-	-
MobileVLM-V2-3B [60]	1440.5	-	-	63.2	-	-	-	-	61.1	70.0	84.7
TinyLLaVA-share-Sig-Phi [61]	1464.9	-	-	66.9	-	-	-	79.9	62.0	69.1	86.4
VILA1.5-3B [48]	1442.4	-	-	63.4	-	-	-	80.4	61.5	69.0	85.9
Mipha-3B [62]	1488.9	295.0	-	69.7	-	-	-	81.3	63.9	70.9	86.7
MiniCPM-V-2 [16]	1411.4	396.8	-	69.6	-	<u>38.2</u>	-	-	-	-	-
Imp-v1.5-4B-Phi3 [10]	1507.7	-	-	73.3	-	-	-	81.5	<u>63.5</u>	78.0	86.9
MM1-3B-Chat [55]	1482.5	279.3	-	67.8	63.0/68.8	33.9	33.7	82.0	-	69.4	87.4
Bunny-4B	<u>1503.9</u>	<u>362.9</u>	74.1	74.1	64.6/71.7	40.2	38.8	<u>81.7</u>	63.4	<u>76.3</u>	<u>87.0</u>

Table 2: Comparisons between LoRA and fully fine-tuning. The experiments are conducted with SigLIP-SO [14] and Phi-2 [13].

	MME ^P	MME ^C	MMB ^T	MMB ^D	SEED	MMMU ^V	MMMU ^T	VQA ^{v2}	GQA	SQA ¹	POPE
Fully Tuning	1465.2	277.5	67.9	67.2	62.1	36.8	33.1	79.1	61.7	72.8	85.9
LoRA	1488.8	289.3	69.2	68.6	62.5	38.2	33.0	79.8	62.5	70.9	86.8

Table 3: Ablation study on fine-tuning data. The experiments are conducted with SigLIP-SO [14] and Phi-2 [13].

Fine-tuning Data	Epoch	MME ^P	MME ^C	MMB ^T	MMB ^D	SEED	MMMU ^V	MMMU ^T	VQA ^{v2}	GQA	SQA ¹	POPE
Bunny-695K	1	1488.8	289.3	69.2	68.6	62.5	38.2	33.0	79.8	62.5	70.9	86.8
Bunny-695K	2	1480.6	272.5	71.2	69.0	63.0	37.6	32.5	81.0	64.0	69.7	86.3
Bunny-695K + LLaVA-665K	1	1501.3	272.5	72.4	71.1	63.0	37.8	33.4	81.0	63.6	69.5	87.2

Table 4: Ablation study on tuning/freezing vision encoder in the fine-tuning stage. The experiments are conducted with SigLIP-SO [14] and Phi-2 [13].

Vision Encoder		MME ^P	MME ^C	MMB ^T	MMB ^D	SEED	MMMU ^V	MMMU ^T	VQA ^{v2}	GQA	SQA ^I	POPE
Bunny-695K + LLaVA-665K (LoRA)	Frozen	1501.3	272.5	72.4	71.1	63.0	37.8	33.4	81.0	63.6	69.5	87.2
Bunny-695K + LLaVA-665K (LoRA)	Trainable	1521.5	291.8	71.9	71.3	63.1	38.0	33.1	81.1	63.7	70.8	87.0

Table 5: Bunny with various language and vision backbones. The best performances are achieved by integrating SigLIP-SO [14] and Llama-3-8B [32].

Vision Encoder	LLM	MME ^P	MME ^C	MMB ^T	MMB ^D	SEED	MMMU ^V	MMMU ^T	VQA ^{v2}	GQA	SQA ^I	POPE
EVA02-CLIP-L (0.4B)	Phi-1.5 (1.3B)	1213.7	278.9	60.9	56.8	56.4	30.0	28.4	76.5	60.4	58.2	86.1
	StableLM-2 (1.6B)	1301.0	235.0	58.4	56.4	55.3	29.8	29.4	74.6	56.7	60.0	84.8
	Phi-2 (2.7B)	1421.0	285.4	68.6	67.4	62.2	35.9	32.6	78.9	62.3	69.1	87.1
SigLIP-SO (0.4B)	Phi-1.5 (1.3B)	1230.0	237.5	61.2	59.7	57.7	30.0	29.1	78.0	61.1	61.3	85.8
	StableLM-2 (1.6B)	1366.8	236.1	65.1	62.8	58.8	29.9	29.8	78.9	60.9	61.1	85.9
	Phi-2 (2.7B)	1488.8	289.3	69.2	68.6	62.5	38.2	33.0	79.8	62.5	70.9	86.8
	Phi-3-Mini (3.8B)	1503.9	362.9	74.1	74.1	71.7	40.2	38.8	81.7	63.4	76.3	87.0
	Llama-3-8B	1607.8	324.6	76.5	76.3	73.6	43.7	38.8	82.3	64.5	80.4	87.4

665K for one epoch can generally bring performance improvements on multiple benchmarks. The results indicate that increasing the data diversity can promote performance under the same training cost.

Trainable vs. Frozen Vision Encoder. As shown in Tab. 4, enabling the vision encoder trainable in the fine-tuning stage is better than freezing its pre-trained parameters.

Backbone Combination. We also investigate Bunny’s performance under different choices of vision encoder and language model. As shown in Tab. 5, all combinations show exceptional performance, with SigLIP-SO [14] and Phi-3 [13] delivering the best results. This indicates the customizability of the Bunny framework and the high quality of the constructed training data.

4.4 Qualitative Demonstrations

We also present several qualitative test cases for Bunny. As illustrated in Tab. 6, Bunny-8B with SigLIP-SO [14] and Llama-3-8B [32] demonstrates exceptional capabilities in visual understanding, common sense reasoning, external knowledge referring, optical character recognizing, and mathematical problem-solving. These results feature Bunny-8B as a powerful and versatile visual assistant. Additionally, Tab. 7 presents several test cases in Chinese using Bunny-8B. Although we do not intentionally include Chinese in the multimodal training data, Bunny still exhibits impressive Chinese instruction-following capabilities.

5 Conclusion

We present Bunny, a family of lightweight but powerful multimodal models. It offers multiple plug-and-play vision encoders, including EVA-CLIP and SigLIP, and language backbones, including Phi-1.5, Qwen1.5-1.8B, StableLM-2, MiniCPM-2B, Phi-2, Phi-3-Mini, and Llama-3-8B. To compensate for the decrease in model size, we construct more informative training data by condensing data from a broader source. Remarkably, our Bunny-4B/8B outperforms the state-of-the-art large MLLMs on multiple benchmarks.







	<ul style="list-style-type: none"> • Do you know who are they? They are members of the Beatles, one of the most famous rock bands in history. • Do you recognize where does this picture come from? Yes, this is a famous photo taken by Iain Macmillan on Abbey Road in London, England. It was used as the cover art for the Beatles' album "Abbey Road" released in 1969. • How do you know? The image has been widely recognized due to its iconic status and the distinctive white lines that cross the street, which are part of the pedestrian crossing at Abbey Road.
	<ul style="list-style-type: none"> • What kind of sport can I play here? Given the snowy environment, you could engage in winter sports such as skiing or snowboarding. • Is it safe for me to go skiing here? It appears to be a suitable location for skiing due to the presence of snow-covered slopes. However, it would be best to check with local authorities for any safety guidelines or restrictions before engaging in this activity.
	<ul style="list-style-type: none"> • What kind of art is this? This is a painting by Vincent van Gogh, specifically a still life featuring sunflowers in a vase. • Do you find the painting beautiful? As an AI, I don't have personal opinions or emotions. However, many people consider Van Gogh's paintings to be beautiful due to their vibrant colors and unique style.
	<ul style="list-style-type: none"> • What is the astronaut holding in his hand? The astronaut is holding a green bottle of beer in his hand. • Can this happen in real world? It's highly unlikely that an astronaut would be sitting on the moon with a beer bottle. This image seems to be a creative representation or a humorous depiction rather than a realistic scenario. • Why is that? Astronauts are trained for space missions and their primary focus is on scientific research and exploration. They follow strict protocols and guidelines to ensure safety and efficiency during their time in space. Drinking beer on the moon would not align with these objectives.
	<ul style="list-style-type: none"> • Why is the image funny? The image is funny because it features a cat sitting in front of a wall with yellow letters spelling out "Huh?" on it. This creates a humorous juxtaposition between the cat's expression and the question mark, suggesting that the cat might be confused or puzzled by something. • When should I use the meme? You can use this meme when you want to express confusion or puzzlement about something. It could also be used humorously to ask for clarification or to poke fun at someone who seems perplexed.
	<ul style="list-style-type: none"> • What is the height and base of the triangle? The height of the triangle is 8 meters and its base is 20 meters. • Can you calculate the area of triangle? Yes, I can calculate the area of the triangle. The formula for the area of a triangle is $(\text{base} * \text{height}) / 2$. In this case, it would be $(20\text{m} * 8\text{m}) / 2 = 80$ square meters. • Students of what grade should be able to solve this problem? This problem should be solvable by students in middle school or high school who have learned basic geometry concepts such as calculating the area of triangles using the formula $(\text{base} * \text{height}) / 2$.

Table 6: **Qualitative test cases of Bunny-8B:** The bold text represents user input, while the non-bold part is the model response. The results demonstrate Bunny's versatile capabilities in visual understanding, common sense reasoning, external knowledge referring, optical character recognizing, and mathematical problem solving.

	<ul style="list-style-type: none"> • 请用中文鉴赏一下图片？ <p>这是一幅奇幻的绘画，描绘了一位女性和一只红色的龙。女性的脸部被细腻地描绘，包括她的眼睛、鼻子、嘴巴和耳朵。她长着一头卷曲的发型，发色是粉红色的。同时，她的皮肤也呈现出一种粉红色的光泽。在女性面前飞舞着一只红色的龙，龙的身体部分可以看到它的翅膀和尾巴。龙的颜色非常鲜艳，体现了绘画中奇幻元素的特点。整体来说，这幅画充满了奇幻和梦幻的氛围，女性和龙之间的互动关系也很有趣。</p>
	<ul style="list-style-type: none"> • 请用中文详细描述这张图片 <p>这是一幅描绘了一个美丽的自然景观的画面。画面中，两个人在一艘小船上，正在穿过一片水面。这艘船位于画面的中心，人们似乎是在享受着这个宁静的湖泊的美景。水面上还有一些反射，可能是来自周围的山脉和树林的光芒。这些反射使得水面更加迷人，增添了一种神秘感。在画面背景中，有一座山脉，它们高耸入云，形成了一个壮丽的天际线。山脉的山峰部分被阳光照亮，反映在水面上，给整个画面带来了温暖的氛围。在山脉的脚下，是一片茂密的树林。这些树林的叶子呈现出不同的颜色，可能是由于季节的变化或日落的光芒。这些树林的反影也可以在水面上看到，这使得整个画面更加生动。总体来说，这幅画面展示了一个宁静、美丽的自然景观，两个人在其中度过了一段愉快的时光。</p>
	<ul style="list-style-type: none"> • 路牌上的医院名称是什么？ • 巴士的运营时间是几点？ • 这是哪座城市？ <p>路牌上的医院名称是“Kwong Wah Hospital”。 巴士的运营时间是从早上7点到晚上12点。 这是香港的市区。</p>
	<ul style="list-style-type: none"> • 请用中文回答为什么这张图片如此有趣？ <p>这张图片非常有趣，因为它展示了一个小狗的可爱和天真。小狗的双手抱着自己的头，表明它在思考或感到困惑。这场景让人联想到人类的行为，特别是孩子们经常这样做。同时，小狗的颜色和表情也很吸引人，让人无法不被其可爱所吸引。</p>
	<ul style="list-style-type: none"> • 这张图的创意体现在什么地方？ • 这张图片可能具有什么用途？ <p>这张图的创意体现在将一个船和一只鸟安置在一个蛋中，创造一个奇怪、有趣的场景。 这张图可能是用于表达创意或设计的概念，或者作为一种艺术作品展现。</p>

Table 7: **Qualitative test cases of Bunny-8B:** The results demonstrate Bunny’s Chinese instruction-following capabilities.

References

- [1] Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023. 1, 2
- [2] Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in Neural Information Processing Systems*, 35: 23716–23736, 2022. 1, 2
- [3] Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023. 1, 2
- [4] Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, Qixiang Ye, and Furu Wei. Grounding multimodal large language models to the world. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=1LmqxkfSIw>. 2
- [5] Keqin Chen, Zhao Zhang, Weili Zeng, Richong Zhang, Feng Zhu, and Rui Zhao. Shikra: Unleashing multimodal llm’s referential dialogue magic. *arXiv preprint arXiv:2306.15195*, 2023. 1, 2, 4, 5
- [6] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017. 1, 2
- [7] Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023. 1, 2
- [8] Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm: Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240): 1–113, 2023. 1, 2
- [9] Yichen Zhu, Minjie Zhu, Ning Liu, Zhicai Ou, Xiaofeng Mou, and Jian Tang. Llava-phi: Efficient multi-modal assistant with small language model. *arXiv preprint arXiv:2401.02330*, 2024. 1, 2
- [10] Zhenwei Shao, Zhou Yu, Jun Yu, Xuecheng Ouyang, Lihao Zheng, Zhenbiao Gai, Mingyang Wang, and Jiajun Ding. Imp: Highly capable large multimodal models for mobile devices. *arXiv preprint arXiv:2405.12107*, 2024. 1, 2, 4, 5
- [11] Haoran Wei, Lingyu Kong, Jinyue Chen, Liang Zhao, Zheng Ge, En Yu, Jianjian Sun, Chunrui Han, and Xiangyu Zhang. Small language model meets with reinforced vision vocabulary. *arXiv preprint arXiv:2401.12503*, 2024. 1, 2
- [12] Yuanzhi Li, Sébastien Bubeck, Ronen Eldan, Allie Del Giorno, Suriya Gunasekar, and Yin Tat Lee. Textbooks are all you need ii: phi-1.5 technical report. *arXiv preprint arXiv:2309.05463*, 2023. 1, 2, 3
- [13] Microsoft. Phi-2: The surprising power of small language models, 2023. URL <https://www.microsoft.com/en-us/research/blog/phi-2-the-surprising-power-of-small-language-models>. 1, 2, 3, 5, 6
- [14] Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 11975–11986, October 2023. 1, 3, 5, 6
- [15] Xiangxiang Chu, Limeng Qiao, Xinyang Lin, Shuang Xu, Yang Yang, Yiming Hu, Fei Wei, Xinyu Zhang, Bo Zhang, Xiaolin Wei, et al. Mobilevlm: A fast, reproducible and strong vision language assistant for mobile devices. *arXiv preprint arXiv:2312.16886*, 2023. 1, 2

- [16] Minicpm: Unveiling the potential of end-side large language models, 2024. [1](#), [2](#), [3](#), [4](#), [5](#)
- [17] Bo Zhao, Boya Wu, Muyang He, and Tiejun Huang. Svit: Scaling up visual instruction tuning. *arXiv preprint arXiv:2307.04087*, 2023. [1](#), [2](#), [4](#), [5](#)
- [18] Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019. [2](#)
- [19] Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020. [2](#)
- [20] Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023. [2](#)
- [21] Rohan Anil, Andrew M Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos, Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, et al. Palm 2 technical report. *arXiv preprint arXiv:2305.10403*, 2023. [2](#)
- [22] Stability AI. Introducing stable lm 2, 2024. URL <https://stability.ai/news/introducing-stable-lm-2>. [2](#), [3](#)
- [23] Peiyuan Zhang, Guangtao Zeng, Tianduo Wang, and Wei Lu. Tinyllama: An open-source small language model. *arXiv preprint arXiv:2401.02385*, 2024. [2](#)
- [24] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. BLIP-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett, editors, *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pages 19730–19742. PMLR, 23–29 Jul 2023. URL <https://proceedings.mlr.press/v202/li23q.html>. [2](#), [4](#), [5](#)
- [25] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=w0H2xGH1kw>. [2](#)
- [26] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023. [2](#), [3](#), [4](#), [5](#)
- [27] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. MiniGPT-4: Enhancing vision-language understanding with advanced large language models. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=1tZbq88f27>. [2](#)
- [28] Jun Chen, Deyao Zhu, Xiaoqian Shen, Xiang Li, Zechu Liu, Pengchuan Zhang, Raghuraman Krishnamoorthi, Vikas Chandra, Yunyang Xiong, and Mohamed Elhoseiny. Minigpt-v2: large language model as a unified interface for vision-language multi-task learning. *arXiv preprint arXiv:2310.09478*, 2023. [2](#), [4](#), [5](#)
- [29] Zhengqing Yuan, Zhaoxu Li, and Lichao Sun. Tinygpt-v: Efficient multimodal large language model via small backbones. *arXiv preprint arXiv:2312.16862*, 2023. [2](#), [4](#), [5](#)
- [30] Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge, Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu, Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. Qwen technical report. *arXiv preprint arXiv:2309.16609*, 2023. [3](#)

- [31] Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*, 2024. 3
- [32] AI@Meta. Llama 3 model card. 2024. URL https://github.com/meta-llama/llama3/blob/main/MODEL_CARD.md. 3, 6
- [33] Quan Sun, Yuxin Fang, Ledell Wu, Xinlong Wang, and Yue Cao. Eva-clip: Improved training techniques for clip at scale. *arXiv preprint arXiv:2303.15389*, 2023. 3
- [34] Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade W Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, Patrick Schramowski, Srivatsa R Kundurthy, Katherine Crowson, Ludwig Schmidt, Robert Kaczmarczyk, and Jenia Jitsev. LAION-5b: An open large-scale dataset for training next generation image-text models. In *Thirty-sixth Conference on Neural Information Processing Systems Datasets and Benchmarks Track*, 2022. URL <https://openreview.net/forum?id=M3Y74vmsMcY>. 3
- [35] Amro Abbas, Kushal Tirumala, Dániel Simig, Surya Ganguli, and Ari S Morcos. Semd-edup: Data-efficient learning at web-scale through semantic deduplication. *arXiv preprint arXiv:2303.09540*, 2023. 3
- [36] Can Xu, Qingfeng Sun, Kai Zheng, Xiubo Geng, Pu Zhao, Jiazhan Feng, Chongyang Tao, Qingwei Lin, and Daxin Jiang. WizardLM: Empowering large pre-trained language models to follow complex instructions. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=CfXh93NDgH>. 4
- [37] Edward J Hu, yelong shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>. 4
- [38] Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, and Rongrong Ji. Mme: A comprehensive evaluation benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023. 4, 5
- [39] Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. Mmbench: Is your multi-modal model an all-around player? *arXiv:2307.06281*, 2023. 4, 5
- [40] Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*, 2023. 4, 5
- [41] Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhui Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. *arXiv preprint arXiv:2311.16502*, 2023. 4, 5
- [42] Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6904–6913, 2017. 4, 5
- [43] Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6700–6709, 2019. 4, 5

- [44] Pan Lu, Swaroop Mishra, Tony Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. In *The 36th Conference on Neural Information Processing Systems (NeurIPS)*, 2022. 4, 5
- [45] Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In Houda Bouamor, Juan Pino, and Kalika Bali, editors, *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pages 292–305, Singapore, December 2023. Association for Computational Linguistics. 4, 5
- [46] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. InstructBLIP: Towards general-purpose vision-language models with instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=vvoWPYqZJA>. 4, 5
- [47] Junke Wang, Lingchen Meng, Zejia Weng, Bo He, Zuxuan Wu, and Yu-Gang Jiang. To see is to believe: Prompting gpt-4v for better visual instruction tuning. *arXiv preprint arXiv:2311.07574*, 2023. 4, 5
- [48] Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models, 2023. 4, 5
- [49] Yanwei Li, Yuechen Zhang, Chengyao Wang, Zhisheng Zhong, Yixin Chen, Ruihang Chu, Shaoteng Liu, and Jiaya Jia. Mini-gemini: Mining the potential of multi-modality vision language models. *arXiv:2403.18814*, 2023. 4, 5
- [50] Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024. URL <https://llava-vl.github.io/blog/2024-01-30-llava-next/>. 4, 5
- [51] Qinghao Ye, Haiyang Xu, Jiabo Ye, Ming Yan, Haowei Liu, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. mplug-owl2: Revolutionizing multi-modal large language model with modality collaboration. *arXiv preprint arXiv:2311.04257*, 2023. 4, 5
- [52] Peng Gao, Renrui Zhang, Chris Liu, Longtian Qiu, Siyuan Huang, Weifeng Lin, Shitian Zhao, Shijie Geng, Ziyi Lin, Peng Jin, et al. Sphinx-x: Scaling data and parameters for a family of multi-modal large language models. *arXiv preprint arXiv:2402.05935*, 2024. 4, 5
- [53] 01. AI, :, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024. 4, 5
- [54] Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Hao Yang, Yaofeng Sun, Chengqi Deng, Hanwei Xu, Zhenda Xie, and Chong Ruan. Deepseek-vl: Towards real-world vision-language understanding, 2024. 4, 5
- [55] Brandon McKinzie, Zhe Gan, Jean-Philippe Fauconnier, Sam Dodge, Bowen Zhang, Philipp Dufter, Dhruvi Shah, Xianzhi Du, Futang Peng, Floris Weers, et al. Mm1: Methods, analysis & insights from multimodal llm pre-training. *arXiv preprint arXiv:2403.09611*, 2024. 4, 5
- [56] Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building vision-language models? *arXiv preprint arXiv:2405.02246*, 2024. 4, 5
- [57] Bo Li, Kaichen Zhang, Hao Zhang, Dong Guo, Renrui Zhang, Feng Li, Yuanhan Zhang, Ziwei Liu, and Chunyuan Li. Llava-next: Stronger llms supercharge multi-modal capabilities in the wild, May 2024. URL <https://llava-vl.github.io/blog/2024-05-10-llava-next-stronger-llms/>. 4, 5
- [58] Multi-crop llava-3b, 2023. URL <https://huggingface.co/visheratin/MC-LLaVA-3b>. 4, 5

- [59] moondream2, 2024. URL <https://huggingface.co/vikhyatk/moondream2>. 4, 5
- [60] Xiangxiang Chu, Limeng Qiao, Xinyu Zhang, Shuang Xu, Fei Wei, Yang Yang, Xiaofei Sun, Yiming Hu, Xinyang Lin, Bo Zhang, et al. Mobilevlm v2: Faster and stronger baseline for vision language model. *arXiv preprint arXiv:2402.03766*, 2024. 4, 5
- [61] Baichuan Zhou, Ying Hu, Xi Weng, Junlong Jia, Jie Luo, Xien Liu, Ji Wu, and Lei Huang. Tinyllava: A framework of small-scale large multimodal models, 2024. 4, 5
- [62] Minjie Zhu, Yichen Zhu, Xin Liu, Ning Liu, Zhiyuan Xu, Chaomin Shen, Yaxin Peng, Zhicai Ou, Feifei Feng, and Jian Tang. A comprehensive overhaul of multimodal assistant with small language models. *arXiv preprint arXiv:2403.06199*, 2024. 4, 5
- [63] OpenAI. Gpt-4 technical report, 2023. 5