

# CORRELATED PROXIES: A NEW DEFINITION AND IMPROVED MITIGATION FOR REWARD HACKING

Cassidy Laidlaw, Shivam Singhal, and Anca Dragan

Department of Electrical Engineering and Computer Science

University of California, Berkeley

Berkeley, CA 94709, USA

{cassidy\_laidlaw, shivamsinghal, anca}@berkeley.edu

## ABSTRACT


Because it is difficult to precisely specify complex objectives, reinforcement learning policies are often optimized using flawed proxy rewards that seem to capture the true objective. However, optimizing proxy rewards frequently leads to *reward hacking*: the optimized reward function ceases to be a good proxy, and the resulting policy performs poorly with respect to the unspecified true reward. Principled solutions to reward hacking have been impeded by the lack of a good definition for the problem. To address this, we introduce a definition of reward hacking based on **the correlation between proxy and true rewards** for states and actions seen by a “base policy” that breaks down under optimization. We show that this definition captures reward hacking behavior across several realistic settings, including in reinforcement learning from human feedback (RLHF). We then show theoretically that regularization to the base policy can effectively prevent reward hacking. While current RLHF approaches apply a KL penalty between the action distributions of policies, our theory suggests that it is more effective to regularize using the  $\chi^2$  divergence between the policies’ occupancy measures. We intuitively show why this type of regularization is superior and demonstrate that it better mitigates reward hacking in practice across four realistic domains, including RLHF for LLMs. Our code is available at <https://github.com/cassidylaidlaw/orpo>.

## 1 INTRODUCTION

A major challenge for the designers of goal-oriented AI systems is specifying a reward function that robustly captures their goals and values. Manually designing reward functions is difficult due to the ambiguities and complexity underlying real-world scenarios (Ibarz et al., 2018). An alternative is to learn reward functions from human data (Sadigh et al., 2017; Jeon et al., 2020), but these often fail to generalize outside the distribution of behavior seen during training (McKinney et al., 2023; Tien et al., 2023). Thus, a learned or hand-specified reward function is often just a *proxy* for the true reward underlying the system designer’s intent. Misalignment between the two objectives can lead to *reward hacking*: a learned policy performs well according to the proxy reward function, but not according to the true reward function (Russell et al., 2010; Amodei et al., 2016; Pan et al., 2022; Skalse et al., 2022). A reward hacking policy’s behavior is often undesirable and can be especially catastrophic when deployed in safety-critical scenarios, such as autonomous driving (Krakovna et al., 2019; Turner et al., 2019; Knox et al., 2022). Unfortunately, reward hacking is a common phenomenon (Krakovna, 2018) and has harmful effects in the real world (Lum & Isaac, 2016; Corbett-Davies et al., 2017; Obermeyer et al., 2019; Milli et al., 2021; Franchi et al., 2023; Kleinberg et al., 2023).

The ideal solution to prevent reward hacking would be to perfectly align the specified proxy and unknown true reward; however, in many domains, this is impossible to achieve. For example, imagine trying to design a reward function for a self-driving car. It would have to capture the speed at which the car reached the destination, comfort of the passenger, all applicable laws, and other factors, many of which are difficult to robustly measure; furthermore, these factors would have to be carefully weighted against each other (Knox et al., 2022). In practice, reward hacking can occur even with significant reward engineering efforts. For example, hand-designed reward functions for recommender systems have led to adverse outcomes in terms of user experience (Stray et al., 2022).

Figure 1: We present a new characterization of reward hacking and a method for preventing it. We define a proxy reward function as one that correlates with an unknown true reward function for state-action pairs sampled from some base policy. However, optimizing the proxy alone can lead to a breakdown in the correlation and worse true reward than the base policy. We show theoretically and empirically that optimizing the proxy with  $\chi^2$  occupancy measure regularization to the base policy can allow outperforming the base policy under the unknown true reward.

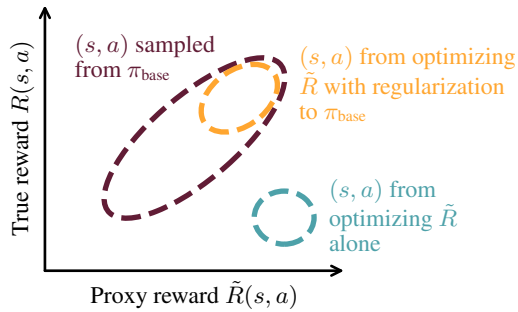

Reinforcement learning from human feedback (RLHF), where a learned reward function is used to align a large-language model (LLM) based assistant to human preferences, provides another example. Without regularization, RLHF leads to the overoptimization of the learned reward function, a case of reward hacking (Gao et al., 2022).

Since proxy reward functions for complex tasks are nearly always misspecified in practice, what can be done to avoid reward hacking? There is a lack of principled solutions for preventing reward hacking, stemming from a more fundamental problem: *defining* reward hacking in a formal sense that captures realistic cases. In particular, it is difficult to characterize what makes a proxy reward function “good”. For example, Skalse et al. (2022) define a notion of “unhackability” for proxy reward functions but find that it can only hold if the proxy is a multiple of the true reward, which is obviously unrealistic.

We argue that proxies are chosen because they seem to capture the true objective under some base distribution of behavior. To formalize this, we define a proxy reward as one that *correlates* with the true reward function under the distribution of states and actions visited by a *base policy*. For example, if we use a human-like policy as the base policy for self-driving cars, then a proxy reward would have to correlate with the true reward for states and actions seen during typical human driving. In the case of RLHF, where the reward function is learned from human preference feedback over different model responses, a natural base policy is the supervised fine-tuning (SFT) model used to generate those responses. If the reward learning process is effective, then the learned reward should correlate well with the true human-judged reward on the distribution of responses it was trained on, making it a good proxy.

We thus formally define reward hacking as occurring when optimizing a proxy reward induces a decrease in true reward compared to the base policy (Figure 1). We show that this definition and our definition of a proxy reward function capture a number of intuitive cases of reward hacking in realistic environments, including traffic control, blood glucose regulation, and RLHF (Figure 2).

Furthermore, we show that our definition allows us to derive a method for avoiding reward hacking during policy optimization by regularizing the optimized policy to be similar to the base policy. Specifically, we find that optimizing the proxy reward minus a regularization term provides a *provable* lower bound on improvement in the true reward. The amount of regularization needed depends on how strong the correlation is between the proxy and true rewards; as the correlation becomes stronger, it is possible to use less regularization.

Regularizing policy optimization to a base policy is already used in practice during RLHF via a KL divergence penalty (Stiennon et al., 2020; Bai et al., 2022), and Proposition 5.1 provides some theoretical justification for why this works. However, while the regularization in RLHF penalizes the KL divergence between the optimized and base policies’ *action distributions*, our result suggests that it is better to penalize the chi-squared ( $\chi^2$ ) divergence between the policies’ *occupancy measures*. A policy’s occupancy measure (OM) is the distribution of states or state-action pairs seen by the policy when it interacts with its environment. Unlike action distribution (AD)-based metrics, occupancy measures take into account the states that the agent reaches, not just the actions it takes. While algorithms based on occupancy measures have been widely used for imitation learning (Ho & Ermon, 2016), offline RL (Lee et al., 2022), and efficient exploration (Hazan et al., 2019), using OM divergences to prevent reward hacking remains unexplored. We compare OM vs. AD regularization and  $\chi^2$  vs. KL divergence, presenting intuitive reasons why  $\chi^2$  OM divergence may be a better regularization target in Figures 3 and 4.

Based on our theoretical results, we empirically investigate using the benefits of using occupancy measure regularization to prevent reward hacking. We implement OM-based regularization in practice using a discriminator network that approximates the OM divergence between policies. We then optimize policies with misaligned proxy reward functions in multiple reward hacking benchmark environments (Pan et al., 2022) using OM and AD regularization. The results of our experiments demonstrate that training with occupancy measure regularization leads to better performance under the unseen true reward function in all of the environments, validating our theoretical results. In contrast, we find that it is difficult to tune AD regularization in some environments to both prevent reward hacking and allow meaningful improvement over the base policy. Furthermore, we compare regularizing with  $\chi^2$  divergence, which our theoretical results suggest using, to KL divergence, the prior standard in settings like RLHF. We find that regularization with chi-squared divergence leads to more stable results across regularization coefficients and often achieves higher true reward.

Our main contributions can be summarized as follows:

1. We provide a new formal definition of reward hacking and show that it captures a number of realistic case studies.
2. Using our definition, we establish that optimizing a proxy reward with  $\chi^2$  occupancy measure regularization leads to a provable improvement in the unknown true reward function.
3. We implement  $\chi^2$  OM regularization in practice and demonstrate that it is superior to the current standard for preventing reward hacking via regularization.

## 2 RELATED WORK

While there have been separate lines of work investigating reward hacking and exploring the use of occupancy measure divergences for other applications, to the best of our knowledge, we are the first to specifically study applying occupancy measure regularization to the problem of reward hacking.

**Reward hacking.** Some prior works establish theoretical models of reward hacking as a special case of Goodhart’s Law (Goodhart, 1984; Leike et al., 2018; Manheim & Garrabrant, 2019; Krakovna, 2019; Skalse et al., 2022; Ngo et al., 2023). Krakovna (2018) provide a list of many examples of reward hacking. Pan et al. (2022) categorize types of reward misspecification and relate optimization power to reward hacking.

**Safe reinforcement learning.** Regularizing policies to be similar to an offline policy based on their action distribution KL divergence was proposed by Stiennon et al. (2020) and has since been widely employed in the context of optimizing LLMs using RLHF (Ouyang et al., 2022; Bai et al., 2022; Glaese et al., 2022). KL regularization for RLHF has been further studied by Vieillard et al. (2021), Gao et al. (2022), and Korbak et al. (2022). Some alternative approaches to avoid reward hacking include quantizers (Taylor, 2016), “mild” optimization (Taylor et al., 2020), and impact regularization (Turner et al., 2020). While constrained RL can prevent the misbehavior of agents that optimize flawed reward functions (Dalal et al., 2018; Chow et al., 2019; Zhang et al., 2020; Roy et al., 2022), it simply shifts the difficulty of designing a reward function to specifying a set of constraints and weights. Robust RL usually considers a misspecified transition model, but some work has explored misspecified reward functions (Derman et al., 2021; Gadot et al., 2024). Other proposals to address the reward specification problem attempt to infer the true reward function based on the given proxy reward function, environment context, and/or feedback from humans (Hadfield-Menell et al., 2017; Reddy et al., 2020; Lee et al., 2021).

**Applications of occupancy measure regularization.** Occupancy measure regularization and optimization have been used for a variety of purposes. GAIL (Ho & Ermon, 2016) is an algorithm for robust imitation learning that aims to match the imitator’s occupancy measure to that of the demonstrator. Kang et al. (2018) combines GAIL with a reward function to efficiently explore using human data. Another line of work aims to find a policy with the highest-entropy occupancy measure for the purpose of exploring the state space (Hazan et al., 2019; Lee et al., 2020; Nedergaard & Cook, 2023). Various types of distributional regularization are used in model-based RL since learned models may not generalize out-of-distribution (Yang et al., 2022).

**Offline reinforcement learning.** Prior work in offline RL may appear to be particularly related to our work. Many offline RL algorithms use occupancy measure or action distribution-based regularization to ensure that the learned policy remains within the training data distribution (Lee

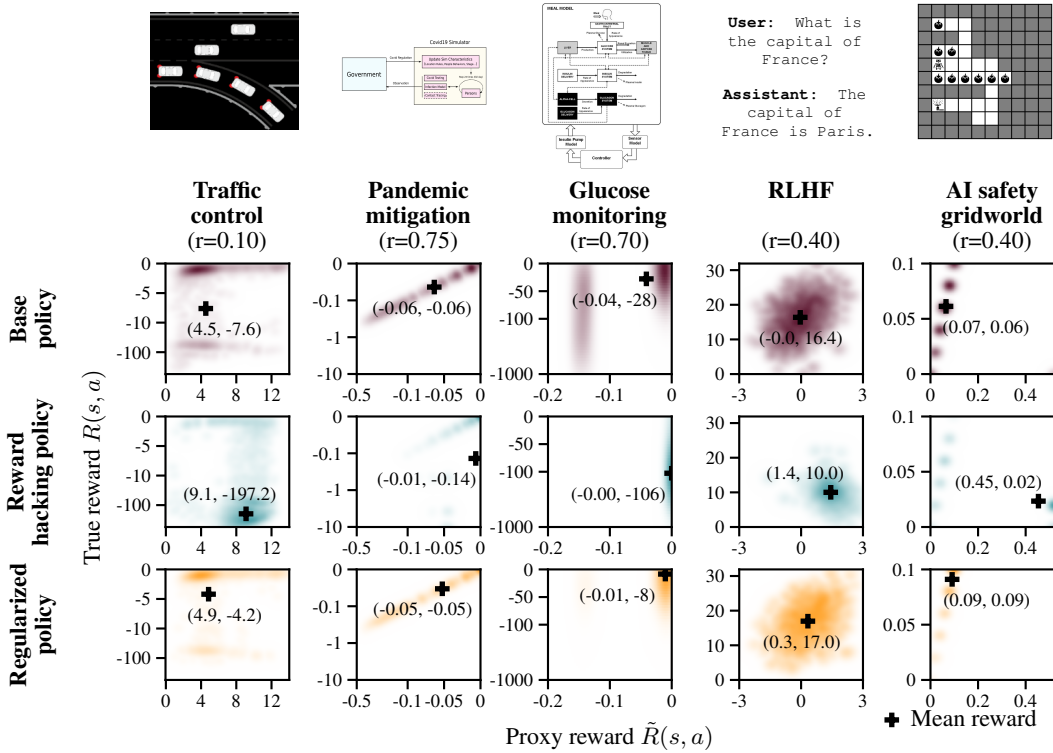


Figure 2: We show that reward hacking in four realistic environments and an illustrative gridworld is captured by our definition. The top row shows the distribution of proxy and true reward values for state-action pairs sampled from a natural base policy for each environment; in all environments, the proxy and true rewards are correlated. However, if the proxy is optimized via reinforcement learning, the correlation breaks down and the true reward is lower than the base policy, which we define as reward hacking (middle row). Our theoretical results show that RL with occupancy measure regularization to the base policy can prevent reward hacking and enable an increase in true reward (bottom row).

et al., 2022; Mandal et al., 2023; He, 2023; Cheng et al., 2022; Rashidinejad et al., 2023; Xie et al., 2023). However, the settings are fundamentally different: while offline RL is limited by a lack of coverage in the training data, the difficulty in our setting is that the reward function is misspecified. While it might be possible to avoid reward hacking by using offline RL algorithms, we leave this to future work and focus on regularization-based approaches in the online RL setting.

### 3 PRELIMINARIES

To study reward hacking, we consider the setting of an infinite-horizon Markov decision process (MDP). An agent takes actions  $a \in \mathcal{A}$  to transition between states  $s \in \mathcal{S}$  over a series of timesteps  $t = 0, 1, 2, \dots$ . We assume that  $\mathcal{S}$  and  $\mathcal{A}$  are finite for simplicity but our results can easily generalize to infinite state or action spaces. The first state  $s_0$  is sampled from an initial distribution  $\mu_0(s)$ , and when an agent takes action  $a_t$  in  $s_t$  at time  $t$ , the next state  $s_{t+1}$  is reached at timestep  $t + 1$  with transition probability  $p(s_{t+1} | s_t, a_t)$ . The agent aims to optimize a reward function  $R : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ , and rewards are accumulated over time with discount factor  $\gamma \in [0, 1)$ . A policy  $\pi$  maps each state  $s$  to a distribution over actions to take at that state  $\pi(a | s)$ . We define the (normalized) *return* of a policy  $\pi$  under a reward function  $R$  as

$$J(\pi, R) = (1 - \gamma) \mathbb{E}_\pi \left[ \sum_{t=0}^{\infty} \gamma^t R(s_t, a_t) \right] \quad (1)$$

where  $\mathbb{E}_\pi$  refers to the expectation under the distribution of states and actions induced by running the policy  $\pi$  in the environment.

We define the *state-action occupancy measure*  $\mu_\pi$  of a policy  $\pi$  as the expected discounted number of times the agent will be in a particular state and take a specific action:

$$\mu_\pi(s, a) = (1 - \gamma) \mathbb{E}_\pi \left[ \sum_{t=0}^{\infty} \gamma^t \mathbb{1}\{s_t = s \wedge a_t = a\} \right]. \quad (2)$$

Intuitively, the occupancy measure represents the distribution of states and actions visited by the policy over time. Furthermore, combining (1) and (2), it is easy to show that the return of a policy can be re-written as the expected reward for states and actions sampled from the occupancy measure:

$$J(\pi, R) = \sum_{s,a \in \mathcal{S} \times \mathcal{A}} \mu_\pi(s, a) R(s, a) = \mathbb{E}_{\mu_\pi}[R(s, a)]. \quad (3)$$

The standard approach to solving an MDP is to find a policy  $\pi$  that maximizes its return  $J(\pi, R)$ . However, as we discussed in the introduction, an AI system designer might optimize  $\pi$  using a learned or hand-specified *proxy* reward function  $\tilde{R}$  which is misaligned with the *true* reward function  $R$ . In order to better understand and mitigate reward hacking, it would be helpful to have a good definition of the problem. Intuitively, reward hacking is when optimizing the proxy reward  $J(\pi, \tilde{R})$  of a policy  $\pi$  ultimately leads to low true reward  $J(\pi, R)$ . However, this intuition is more difficult to formalize than it might seem.

**Desiderata for a definition of reward hacking.** To understand why defining reward hacking is difficult, consider the case study of RLHF. In this case, optimizing a learned reward function over LLM outputs eventually leads to the LLM producing nonsensical responses. This clearly satisfies our informal definition of “optimizing the proxy makes the true reward go down.” However, what if we were to optimize  $\tilde{R}(s, a) = -R(s, a)$ ? In this case, optimizing  $\tilde{R}$  also makes the true reward go down, but arguably this is not reward hacking because  $\tilde{R}$  was not a good “proxy” in the first place. Thus, a good definition of reward hacking should distinguish between “reasonable” proxies and reward functions that are clearly unrelated (or opposite) to the true reward function.

In the RLHF example, optimizing until the LLM produces nonsensical outputs seems like bad enough behavior that we would say the proxy has been “hacked.” However, what if optimizing the proxy produced mediocre but not obviously bad outputs? Even if optimizing the proxy does not lead to near-optimal true reward, we would not always say that reward hacking has occurred. Thus, a good definition of reward hacking should also choose a threshold for true reward: below the threshold, reward hacking is occurring, and above the threshold it is not.

**Prior definitions of reward hacking.** Because of these difficulties, prior work has struggled to define reward hacking. With regard to our first desideratum, defining reasonable proxies, Skalse et al. (2022) introduce a notion of an “unhackable” proxy reward but find that a proxy is only unhackable if it is equivalent to the true reward up to scaling; this is clearly too restrictive of a definition. The robust MDP literature has considered proxy rewards that differ from the true reward by at most some constant, e.g.,  $|R(s, a) - \tilde{R}(s, a)| \leq c$  for all  $s, a$  (Derman et al., 2021). However, we find that in many realistic cases of reward hacking, there may be some states where a proxy differs from the true reward by an arbitrarily large amount, and so these definitions are generally not applicable. With regard to the second desideratum, defining a threshold of true reward, there is little existing literature.

## 4 DEFINING REWARD HACKING

Despite the difficulties in formalizing reward hacking, we argue that both of our desiderata for a definition can be met by defining reward hacking with respect to a *base policy*. We show how this allows for both a precise definition of proxy rewards and a natural threshold for when reward hacking is occurring.

**Characterizing proxy rewards.** To find a realistic definition of a good proxy reward, consider the process by which system designers create proxies. If they are hand-specified, we argue that designers usually imagine a distribution of behavior and design a reward that captures the objective under that distribution. For example, we study a traffic control simulator (Lopez et al., 2018; Vinitzky et al., 2018; Wu et al., 2022; Pan et al., 2022) where a small number of autonomous cars help to regulate traffic among a larger population of human drivers. In this case, a designer might choose the average speed of all vehicles as a proxy for improving traffic flow; this is a reasonable proxy because under the distribution of typical human driving behavior, higher speeds are associated with better traffic.

We can formalize this intuition by requiring that the proxy and true rewards be *correlated* over states and actions sampled from a *base policy*:

**Definition 4.1** (Correlated proxy reward). An  $r$ -correlated proxy reward  $\tilde{R}$  with respect to a base policy  $\pi_{\text{base}}$  is one that has a correlation of  $r > 0$  with the true reward for state-action pairs sampled

from the base policy:

$$\mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \left( \frac{\tilde{R}(s, a) - J(\pi_{\text{base}}, \tilde{R})}{\sigma_{\tilde{R}}} \right) \left( \frac{R(s, a) - J(\pi_{\text{base}}, R)}{\sigma_R} \right) \right] = r,$$

where  $\sigma_{\tilde{R}} = \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ (\tilde{R}(s, a) - J(\pi_{\text{base}}, \tilde{R}))^2 \right]$  and  $\sigma_R = \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ (R(s, a) - J(\pi_{\text{base}}, R))^2 \right]$  are the standard deviations of proxy and true rewards under the base policy.

This definition intuitively captures cases like the traffic environment, where we define the true reward function as the negative total commute time for all vehicles. Letting  $\pi_{\text{base}}$  be an autonomous vehicle policy based on a common model of human driving behavior, we plot the distribution of true and proxy rewards in the top-left corner of Figure 2 and find that they are correlated: higher average speed tends to occur with lower commute times, and vice versa. This validates that average speed is a correlated proxy reward according to Definition 4.1.

Definition 4.1 also avoids too strongly constraining proxy rewards, unlike past formalisms. The proxy and true reward functions can diverge arbitrarily at some state-action pairs, as long as those state-action pairs have low or zero occupancy measure under the base policy.

Finally, Definition 4.1 captures *learned* proxy rewards in addition to hand-specified ones. Reward learning begins with collecting annotations—for example, preference comparisons (as in RLHF) or scalar feedback—for states and actions collected from a rollout policy—for example, the SFT model in RLHF. Then, a reward function is estimated via supervised learning over this dataset with an appropriate loss function. If the estimated reward function generalizes well in-distribution, then we should expect the true and learned rewards to be well correlated under states and actions sampled from the rollout policy, satisfying Definition 4.1.

**Choosing a threshold for reward hacking.** As discussed in Section 3, the other difficulty in defining reward hacking is specifying a threshold of true reward below which performance is poor enough to be considered hacking. If we are already characterizing proxy rewards with respect to a base policy, then it makes sense to also use this base policy as a baseline for evaluating a policy that optimizes the proxy. If optimizing the proxy leads to worse true reward than the base policy achieves, then the system designer may as well simply use the base policy. On the other hand, if optimizing the proxy reward improves true reward over the base policy, then we can argue that optimizing the proxy succeeded.

**Definition 4.2** (Reward hacking). Suppose a  $\tilde{R}$  is an  $r$ -correlated proxy with respect to  $\pi_{\text{base}}$  (Definition 4.1). Then we say *reward hacking* occurs when an optimal policy for  $\tilde{R}$  has lower true reward than the base policy  $\pi_{\text{base}}$ :


$$J(\pi, R) < J(\pi_{\text{base}}, R) \quad \text{for some} \quad \pi \in \arg \max_{\pi} J(\pi, \tilde{R}).$$

For example, in the traffic control environment, optimizing for the proxy of average speed leads to the autonomous vehicles blocking a highway on-ramp. This decreases the speed of the cars on the ramp to zero, but allows cars on the highway to move at high speeds, overall increasing the proxy reward. However, the true reward becomes extremely low, since commute times for the cars on the on-ramp are arbitrarily long. This constitutes reward hacking under Definition 4.2 since the true reward of the proxy-optimized policy is lower than that achieved by typical human driving.

**Verifying our definition experimentally.** To test whether Definition 4.2 accurately captures intuitive cases of reward hacking, we consider four realistic environments and an illustrative gridworld. We consider the aforementioned traffic simulator and two other environments originally studied by Pan et al. (2022) as examples of reward hacking. SimGlucose (Man et al., 2014) is based on an FDA-approved simulator of Type 1 Diabetes patients in which a policy monitors glucose levels and administers insulin; the true reward captures patient health while the proxy reward prioritizes reducing the monetary cost of insulin. PandemicSimulator (Kompella et al., 2020) uses the SEIR model (Mwalili et al., 2020) to simulate the COVID-19 pandemic among a population; the policy controls the level of lockdown restrictions placed on the population by observing the results of testing. The proxy reward omits the political cost of certain decisions.

We also study RLHF, in which LLMs are optimized based on a reward function learned from human preferences. Following Gao et al. (2022) and Coste et al. (2024), we use a large (more robust)

Figure 3: Unlike RLHF, which regularizes *action distribution* (AD) divergence to prevent reward hacking, our results suggest regularizing using *occupancy measure* (OM) divergence. These plots of the glucose monitoring environment show the typical ADs and OMs of two policies.  $\pi$  is close to  $\pi_{\text{base}}$  in AD; it is more likely to give slightly less insulin because the proxy reward penalizes monetary cost. However, this leads to a vastly different OM, with typical glucose levels for  $\pi$  far outside the healthy range (dotted lines). Thus, regularizing ADs to be close to  $\pi_{\text{base}}$  is not enough to prevent reward hacking; instead, divergence between the OMs better captures the reward hacking behavior.

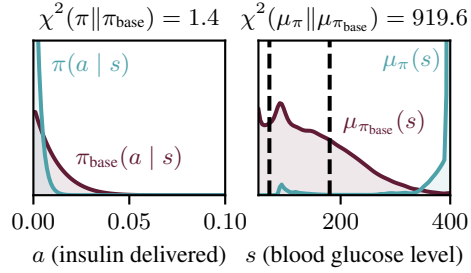

reward model as the true reward function and a smaller (less robust) one as the proxy. Finally, as an interpretable and illustrative example, we include the tomato-watering gridworld from Leike et al. (2017). In this environment, a robot that waters tomatoes receives true reward depending on how many plants are watered; however, the proxy additionally rewards the robot for standing in a sprinkler where it appears all the tomatoes are watered. Besides the gridworld, all of our environments reflect complex, realistic tasks with large or infinite state state spaces. To test our definition of reward hacking, for each of the five environments we construct a natural base policy. See Appendix C for more details about the environments and base policies.

The top row of Figure 2 shows the distribution of true and proxy reward values for state-action pairs sampled from these base policies in each environment. We find that in all cases, the proxy rewards correlate with the true reward, satisfying our definition of a correlated proxy. The middle row of Figure 2 shows the result of optimizing for the proxies: for each environment, we plot the distribution of true and proxy reward values for state-action pairs reached by a policy optimized on the proxy reward via RL. In all cases, we see that the true reward drops significantly compared to the base policy. Thus, these intuitive cases of reward hacking are captured by Definition 4.2.

## 5 MITIGATING REWARD HACKING WITH OCCUPANCY MEASURE REGULARIZATION

We now discuss how our new definition of reward hacking can lead to better methods for preventing it. Ideally, we would like to be able to optimize a proxy reward function and have it translate into an improvement in true reward over the base policy. To understand how this might be possible, consider again the traffic environment. The reward hacking policy exhibits behavior which is very unlikely under the base policy: human drivers hardly ever stop on on-ramps and refuse to move. That is, optimizing the proxy reward leads to *out-of-distribution states and actions* where the correlation that made the proxy good in the first place breaks down. Visually, this can be seen in the second row of Figure 2: the reward hacking policy usually finds state-action pairs with high proxy reward and low true reward that were very unlikely to be reached by the base policy.

Thus, to prevent reward hacking, one solution could be to optimize the proxy reward while avoiding states that are unlikely under the base policy. The following theorem formalizes this idea.

**Theorem 5.1.** *Suppose that  $\tilde{R}$  is an  $r$ -correlated-proxy for the true reward function  $R$ , and let  $\sigma_{\tilde{R}}$  and  $\sigma_R$  be defined as in Definition 4.1. Then for any policy  $\pi$  such that  $\mu_\pi \ll \mu_{\pi_{\text{base}}}$  (i.e.,  $\mu_{\pi_{\text{base}}}(s, a) = 0 \Rightarrow \mu_\pi(s, a) = 0$ ), we have*

$$\frac{J(\pi, R) - J(\pi_{\text{base}}, R)}{\sigma_R} \geq \frac{1}{r} \left( \frac{J(\pi, \tilde{R}) - J(\pi_{\text{base}}, \tilde{R})}{\sigma_{\tilde{R}}} - \sqrt{(1 - r^2)\chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}})} \right), \quad (4)$$

where  $\chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}}) = \mathbb{E}_{\mu_\pi} \left[ \frac{\mu_\pi(s, a)}{\mu_{\pi_{\text{base}}}(s, a)} - 1 \right]$  is the  $\chi^2$  divergence between  $\mu_\pi$  and  $\mu_{\pi_{\text{base}}}$ .

See Appendix A for the proof. Equation (4) gives a lower bound on how much the policy  $\pi$  improves over the base policy  $\pi_{\text{base}}$  on the true reward, normalized by the standard deviation of the true reward under the base policy. This is exactly we would like to maximize, but we can't optimize the unknown true reward directly, so it makes sense to instead optimize the right hand side of (4). The RHS consists of two terms. The first is the improvement of the policy  $\pi$  over the base policy under the proxy

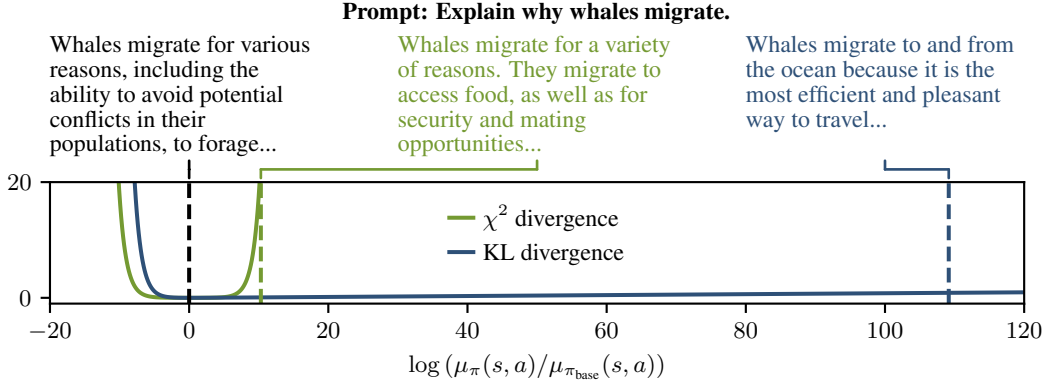


Figure 4: Our theory also suggests preventing reward hacking by regularizing with  $\chi^2$  divergence instead of *KL divergence* like prior work. This plot illustrates how  $\chi^2$  regularization is more effective at preventing reward hacking in RLHF. Both divergences can be written as the expectation of a function  $g(\log(\mu_\pi(s, a)/\mu_{\pi_{\text{base}}}(s, a)))$  which penalizes state-action pairs more the further the log-ratio is from zero. The  $g(\cdot)$  associated with KL divergence only increases slowly for large log-ratios, so policies trained with KL divergence may produce *nonsensical text*. In contrast, the  $g(\cdot)$  for  $\chi^2$  divergence increases exponentially, better constraining the LLM to produce *text similar to the SFT policy*.

reward, again normalized; optimizing this term alone often leads to reward hacking. However, the second term penalizes the divergence of  $\pi$ 's occupancy measure from that of  $\pi_{\text{base}}$ . By incentivizing  $\pi$  to achieve high proxy reward but also stay close to the base policy,  $\pi$  can achieve high true reward.

Scaling the RHS of (4) and removing terms that are constant in  $\pi$  suggests using the following regularized policy optimization objective to avoid reward hacking:

$$\text{maximize } J(\pi, \tilde{R}) - \lambda \sqrt{\chi^2(\mu_\pi \| \mu_{\pi_{\text{base}}})} \quad \text{where } \lambda = \sigma_{\tilde{R}} \sqrt{1 - r^2}. \quad (5)$$

The amount of regularization needed to improve on the base policy depends on the strength of correlation  $r$ . The higher the correlation, the lower the regularization strength  $\sqrt{1 - r^2}$ . Given the prefactor of  $\frac{1}{r}$  on the RHS of (4), it may appear that a lower correlation leads to a larger gain in true reward. However, Lemma A.1 shows that in fact, the lower bound decreases as a function of  $r$ .

**Comparison to KL regularization in RLHF.** Regularization to a base policy is already widely used to prevent reward hacking in RLHF (Stiennon et al., 2020; Bai et al., 2022). Specifically, a KL penalty is applied between the distributions of responses generated by the optimized policy and the SFT policy. In our setting, we can write this as

$$\text{maximize } J(\pi, \tilde{R}) - \lambda(1 - \gamma) \mathbb{E}_\pi \left[ \sum_{t=0}^{\infty} \gamma^t D_{\text{KL}}(\pi(\cdot | s_t) \| \mu_{\pi_{\text{base}}}(\cdot | s_t)) \right]. \quad (6)$$

That is, in RLHF, the expected KL divergence between the action distributions of  $\pi$  and  $\pi_{\text{base}}$  is penalized. Action distribution divergence is easy to calculate and optimize, and training LLMs with (6) seems to work well in practice. However, unlike our objective in (5), (6) lacks theoretical guarantees, and it is unclear if it works in other environments.

Our regularized objective in (5) differs in two main ways from the KL regularization used in RLHF. First, our results suggest optimizing the *occupancy measure* (OM) divergence between policies, whereas RLHF uses the *action distribution* (AD) divergence. Second, Theorem 5.1 applies to  $\chi^2$  divergence, while RLHF uses KL divergence. In the remainder of this section, we explore intuitively why OM divergence is preferable to AD divergence, and why  $\chi^2$  divergence is superior to KL divergence. Then, in Section 6, we empirically explore applying different types of regularization to prevent reward hacking in five environments.

**Occupancy measure vs. action distribution regularization.** While AD regularization works well for RLHF, this may be because RLHF is essentially a contextual bandit problem, meaning that  $\gamma = 0$ ; in this case, OM and AD divergence are equivalent (see Appendix A.3). However, in other cases, AD divergence may not suffice to prevent reward hacking behavior. This is because, in longer-horizon environments, a small change in action distribution at a single state can lead to a much higher probability of reaching undesirable states. Figure 3 shows an example of this in the glucose monitoring environment: policies that are close in action distribution regularization produce vastly different patient glucose levels. Occupancy measure regularization avoids this issue by directly



Method	Environment				
	Traffic control ( $\times 10^3$ )	Pandemic mitigation	Glucose monitoring ( $\times 10^3$ )	RLHF	AI safety gridworld
Action dist. $\chi^2$	-1.29 $\pm$ 0.10	-12.29 $\pm$ 0.05	-74.8 $\pm$ 11.8	<b>16.94</b> $\pm$ 0.07	6.24 $\pm$ 0.09
State occupancy $\chi^2$	-2.18 $\pm$ 0.38	-10.68 $\pm$ 0.15	-54.7 $\pm$ 1.0	—	9.07 $\pm$ 0.06
State-action occupancy $\chi^2$	<b>-1.15</b> $\pm$ 0.05	-11.17 $\pm$ 0.17	<b>-47.6</b> $\pm$ 0.6	—	<b>9.17</b> $\pm$ 0.11
Action dist. KL	-1.33 $\pm$ 0.05	-12.20 $\pm$ 0.06	-73.4 $\pm$ 8.3	16.81 $\pm$ 0.27	6.33 $\pm$ 0.11
State occupancy KL	-1.34 $\pm$ 22.6	<b>-10.24</b> $\pm$ 0.54	-58.4 $\pm$ 3.4	—	7.07 $\pm$ 0.11
State-action occupancy KL	-1.25 $\pm$ 0.06	-11.73 $\pm$ 0.19	-48.9 $\pm$ 0.5	—	6.86 $\pm$ 0.17
$\pi_{\text{base}}$	-2.28 $\pm$ 0.00	-12.26 $\pm$ 0.00	-72.6 $\pm$ 0.0	16.37 $\pm$ 0.00	5.86 $\pm$ 0.00
No regularization	-57.38 $\pm$ 3.53	-29.57 $\pm$ 6.86	-599.0 $\pm$ 1.6	9.16 $\pm$ 0.80	2.35 $\pm$ 0.14
Training with true reward	-0.93 $\pm$ 0.11	-2.65 $\pm$ 0.83	-43.4 $\pm$ 0.8	—	8.54 $\pm$ 0.12

Table 1: We compare using various types of regularization to prevent reward hacking in the five environments from Figure 2. The median true reward and standard deviation across 5 random seeds is shown for the best regularization coefficient for each type of regularization. The bottom rows show results for the baselines: the base policy  $\pi_{\text{base}}$ , a policy trained on the proxy reward without regularization (exhibiting reward hacking), and a policy trained on the true reward function (impossible in practice, but included as an upper bound on performance). We find that occupancy measure regularization consistently improves on action distribution regularization, and that  $\chi^2$  divergence is often superior to KL divergence.

preventing the distribution of glucose levels from differing too much from the base policy.

**$\chi^2$  vs. KL divergence.** Compared to KL divergence,  $\chi^2$  divergence may be superior for preventing reward hacking because it more strongly penalizes out-of-distribution state-action pairs. To illustrate this, we can write both divergences as expectations over functions of the log-ratio of the occupancy measures, which we denote  $d(s, a)$ :

$$D_{\text{KL}}(\mu_\pi \parallel \mu_{\pi_{\text{base}}}) = \mathbb{E}_{\mu_\pi} [d(s, a) + e^{-d(s, a)}] \quad \chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}}) = \mathbb{E}_{\mu_\pi} [e^{d(s, a)} + e^{-d(s, a)}]$$

where  $d(s, a) = \log(\mu_\pi(s, a) / \mu_{\pi_{\text{base}}}(s, a))$ . (7)

As  $d(s, a)$  increases, the optimized policy is visiting state-action pairs that are less likely under the base policy. However, KL divergence only penalizes increases in  $d(s, a)$  linearly, while  $\chi^2$  penalizes them exponentially, resulting in stronger regularization even with a lower coefficient. Figure 4 plots the functions in (7) and shows how in practice  $\chi^2$  divergence better prevents reward hacking in RLHF.

## 6 EXPERIMENTS

We now show that our theoretical results—which suggest  $\chi^2$  occupancy measure regularization can prevent reward hacking—lead to empirical success in realistic environments.

**Practical occupancy measure regularization.** Occupancy measure regularization is more difficult to implement in practice compared to action distribution regularization. While AD regularization can be added as a loss term to deep RL algorithms like proximal policy optimization (PPO), OM divergences cannot be calculated in closed form. Instead, we follow several previous works (e.g., Ho & Ermon 2016; Kang et al. 2018) and use a discriminator network to approximate OM divergences. Specifically, in Appendix B, we show the objective in (5) can be optimized via policy gradient with an adjusted reward function that depends on a discriminator  $\hat{d}_\phi$ :

$$R'(s, a) = \tilde{R}(s, a) - \frac{\lambda}{\sqrt{\chi^2}} e^{\hat{d}_\phi(s, a)} \quad \text{where} \quad \widehat{\chi^2} = \mathbb{E}_{\mu_\pi} [e^{\hat{d}_\phi(s_t, a_t)} - 1]$$

and  $\phi = \arg \min_{\phi} \mathbb{E}_{\mu_\pi} [\log(1 + e^{-\hat{d}_\phi(s, a)})] + \mathbb{E}_{\mu_{\pi_{\text{base}}}} [\log(1 + e^{\hat{d}_\phi(s, a)})]$ . (8)

That is, optimizing a discriminator network  $\hat{d}_\phi$  to minimize the given loss can be used to estimate and optimize  $\chi^2$  OM divergence. We alternately train  $\hat{d}_\phi$  via gradient descent on (8) and the policy  $\pi$  via PPO based on the adjusted reward. We call this algorithm Occupancy-Regularized Policy Optimization (ORPO). See Appendix B for a full derivation of the approximations used in ORPO and Algorithm 1 for a formal description. We use a similar strategy for regularizing based on OM KL divergence; see the appendix for details.

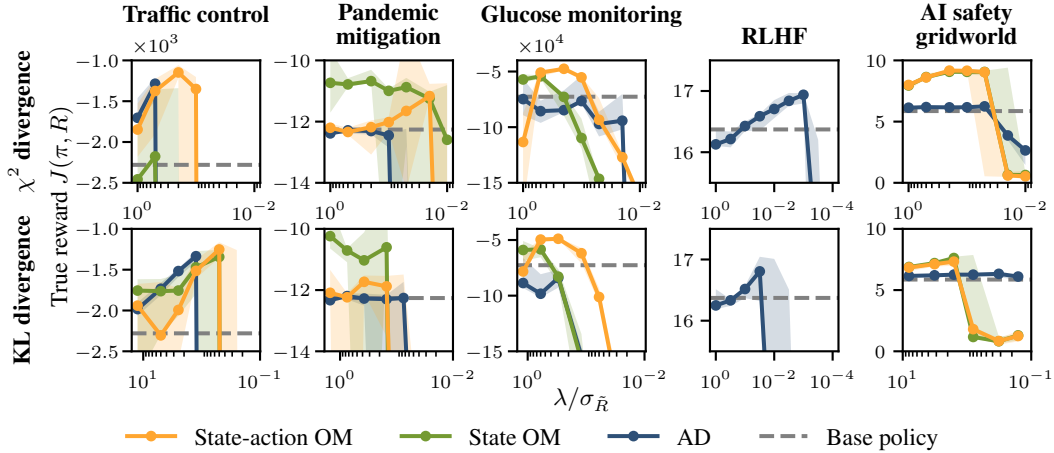


Figure 5: The true reward achieved by policies regularized with varying amounts of action distribution or occupancy measure regularization using  $\chi^2$  and KL divergence. The x-axis is the regularization coefficient  $\lambda$  normalized by the standard deviation of proxy rewards under the base policy. Dots indicate the median reward and the shaded area is the range over random seeds. For RLHF, AD and OM regularization are equivalent, which is why OM regularization results are not shown for that column.

**Experimental setup.** In each of the five environments shown in Figure 2, we train policies with four types of regularization towards the base policy: AD KL, AD  $\chi^2$ , OM KL, and OM  $\chi^2$ . In Appendix A.4, we show that Theorem 5.1 also holds for state-only occupancy measures if the environment’s reward function does not depend on the action; thus, we experiment with regularizing based on both state-action and state-only OM divergence. For each environment and type of regularization, we test a number of regularization coefficients  $\lambda$ . Theorem 5.1 suggests setting  $\lambda = \sigma_{\bar{R}}\sqrt{1-r^2}$  for an  $r$ -correlated proxy, so for  $\chi^2$  regularization we test a range of values  $\lambda = c\sigma_{\bar{R}}$  from  $c = 1$  to  $10^{-2}$  ( $10^{-4}$  for RLHF). Since it is less clear theoretically how to set the coefficient  $\lambda$  for KL regularization, we experiment with a wider range of values.

We train each combination of  $\{\chi^2 \text{ divergence, KL divergence}\} \times \{\text{AD, state OM, state-action OM}\} \times \{\lambda_1, \lambda_2, \dots\}$  with five random seeds and measure the resulting policies’ expected returns under the true reward. As a baseline, we train a policy without any regularization, which leads to reward hacking in all environments. We also train a policy directly on the true reward function as an upper limit for performance. In RLHF, we only consider AD regularization since it is equivalent to OM regularization for LLM chatbots (see Appendix A.3). We do not train a policy on the true reward for RLHF as we found it could be hacked with enough optimization pressure. See Appendix D for all hyperparameter and experiment details.

**Results.** The results of our experiments are shown in Table 1 and Figure 5. Table 1 shows the median true reward with the best coefficient for each type of regularization. We find that OM regularization consistently outperforms AD regularization across the four non-RLHF environments. In two environments (glucose monitoring and pandemic mitigation), AD regularization fails to improve on the base policy’s true reward at all. Furthermore,  $\chi^2$  regularization tends to perform similarly to or better than KL regularization across all environments. In RLHF in particular,  $\chi^2$  regularization leads to a larger improvement over the base policy compared to the industry-standard KL penalty, and is more stable across seeds as well.

However, comparing the types of regularization based only on the best coefficient is unrealistic, since in practice designers must choose a coefficient  $\lambda$  without access to the true reward. In Figure 5, we show the true reward achieved when training with each type of regularization across a range of  $\lambda$  values. In addition to performing best with an optimal coefficient,  $\chi^2$  and OM regularization seem to also perform well over a larger range of coefficients compared to AD regularization.

In Appendix E, we present the full results of our experiments as well as ablations of ORPO.

## 7 CONCLUSION

We have introduced a new definition for reward hacking based on correlation between a proxy reward function and the unknown true reward that breaks down when optimizing the proxy. Furthermore, we leveraged this definition to show theoretically and empirically that  $\chi^2$  occupancy measure regularization can effectively prevent reward hacking. Our results have implications for settings, like RLHF, where RL is used to optimize complex, hard-to-specify objectives. We suggest that the heuristic KL penalty used currently should be replaced by a more principled form of regularization. While OM and AD regularization are equivalent for today’s formulation of RLHF as a contextual bandit, they will no longer remain so as LLM-based agents are optimized over multi-turn conversations or with tool use (Wang et al., 2023; Abdulhai et al., 2023; Shani et al., 2024). Thus, our results provide a principled path to continuing to ensure the safety of increasingly powerful AI systems.

### ACKNOWLEDGMENTS

We would like to thank Sam Toyer, Micah Carroll, Katie Kang, Dibya Ghosh, and Cam Allen for helpful discussions and feedback on drafts.

This work was supported by the Semiconductor Research Corporation (SRC)’s Center for the Co-Design of Cognitive Systems (COCOSYS) as well as the NSF’s Human Centered Computing (HCC) program. Cassidy Laidlaw is supported by an Open Philanthropy AI Fellowship and a National Defense Science and Engineering Graduate (NDSEG) Fellowship.

### REFERENCES

- Marwa Abdulhai, Isadora White, Charlie Snell, Charles Sun, Joey Hong, Yuexiang Zhai, Kelvin Xu, and Sergey Levine. LMRL Gym: Benchmarks for Multi-Turn Reinforcement Learning with Language Models, November 2023. URL <http://arxiv.org/abs/2311.18232>. arXiv:2311.18232 [cs].
- Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. Concrete Problems in AI Safety, July 2016. URL <http://arxiv.org/abs/1606.06565>. arXiv:1606.06565 [cs].
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, Nicholas Joseph, Saurav Kadavath, Jackson Kernion, Tom Conerly, Sheer El-Showk, Nelson Elhage, Zac Hatfield-Dodds, Danny Hernandez, Tristan Hume, Scott Johnston, Shauna Kravec, Liane Lovitt, Neel Nanda, Catherine Olsson, Dario Amodei, Tom Brown, Jack Clark, Sam McCandlish, Chris Olah, Ben Mann, and Jared Kaplan. Training a Helpful and Harmless Assistant with Reinforcement Learning from Human Feedback, April 2022. URL <http://arxiv.org/abs/2204.05862>. arXiv:2204.05862 [cs].
- Stella Biderman, Hailey Schoelkopf, Quentin Gregory Anthony, Herbie Bradley, Kyle O’Brien, Eric Hallahan, Mohammad Aflah Khan, Shivanshu Purohit, Usvsn Sai Prashanth, Edward Raff, Aviya Skowron, Lintang Sutawika, and Oskar Van Der Wal. Pythia: A Suite for Analyzing Large Language Models Across Training and Scaling. In *Proceedings of the 40th International Conference on Machine Learning*, pp. 2397–2430. PMLR, July 2023. URL <https://proceedings.mlr.press/v202/biderman23a.html>. ISSN: 2640-3498.
- Ching-An Cheng, Tengyang Xie, Nan Jiang, and Alekh Agarwal. Adversarially Trained Actor Critic for Offline Reinforcement Learning, July 2022. URL <http://arxiv.org/abs/2202.02446>. arXiv:2202.02446 [cs].
- Yinlam Chow, Ofir Nachum, Aleksandra Faust, Edgar Duenez-Guzman, and Mohammad Ghavamzadeh. Lyapunov-based Safe Policy Optimization for Continuous Control, February 2019. URL <http://arxiv.org/abs/1901.10031>. arXiv:1901.10031 [cs, stat].
- Sam Corbett-Davies, Emma Pierson, Avi Feller, Sharad Goel, and Aziz Huq. Algorithmic decision making and the cost of fairness, June 2017. URL <http://arxiv.org/abs/1701.08230>. arXiv:1701.08230 [cs, stat].

- Thomas Coste, Usman Anwar, Robert Kirk, and David Krueger. Reward Model Ensembles Help Mitigate Overoptimization, March 2024. URL <http://arxiv.org/abs/2310.02743>. arXiv:2310.02743 [cs].
- Gal Dalal, Krishnamurthy Dvijotham, Matej Vecerik, Todd Hester, Cosmin Paduraru, and Yuval Tassa. Safe Exploration in Continuous Action Spaces, January 2018. URL <http://arxiv.org/abs/1801.08757>. arXiv:1801.08757 [cs].
- Esther Derman, Matthieu Geist, and Shie Mannor. Twice regularized MDPs and the equivalence between robustness and regularization, October 2021. URL <http://arxiv.org/abs/2110.06267>. arXiv:2110.06267 [cs, math].
- Yann Dubois, Chen Xuechen Li, Rohan Taori, Tianyi Zhang, Ishaan Gulrajani, Jimmy Ba, Carlos Guestrin, Percy S. Liang, and Tatsunori B. Hashimoto. AlpacaFarm: A Simulation Framework for Methods that Learn from Human Feedback. *Advances in Neural Information Processing Systems*, 36:30039–30069, December 2023. URL [https://proceedings.neurips.cc/paper\\_files/paper/2023/hash/5fc47800ee5b30b8777fdd30abcaaf3b-Abstract-Conference.html](https://proceedings.neurips.cc/paper_files/paper/2023/hash/5fc47800ee5b30b8777fdd30abcaaf3b-Abstract-Conference.html).
- Ian Fox, Joyce Lee, Rodica Pop-Busui, and Jenna Wiens. Deep Reinforcement Learning for Closed-Loop Blood Glucose Control, September 2020. URL <http://arxiv.org/abs/2009.09051>. arXiv:2009.09051 [cs, stat].
- Matt Franchi, J. D. Zamfirescu-Pereira, Wendy Ju, and Emma Pierson. Detecting disparities in police deployments using dashcam data. In *2023 ACM Conference on Fairness, Accountability, and Transparency*, pp. 534–544, June 2023. doi: 10.1145/3593013.3594020. URL <http://arxiv.org/abs/2305.15210>. arXiv:2305.15210 [cs].
- Uri Gadot, Esther Derman, Navdeep Kumar, Maxence Mohamed Elfathi, Kfir Levy, and Shie Mannor. Solving Non-Rectangular Reward-Robust MDPs via Frequency Regularization, February 2024. URL <http://arxiv.org/abs/2309.01107>. arXiv:2309.01107 [cs].
- Leo Gao, John Schulman, and Jacob Hilton. Scaling Laws for Reward Model Overoptimization, October 2022. URL <http://arxiv.org/abs/2210.10760>. arXiv:2210.10760 [cs, stat].
- Amelia Glaese, Nat McAleese, Maja Trebacz, John Aslanides, Vlad Firoiu, Timo Ewalds, Maribeth Rauh, Laura Weidinger, Martin Chadwick, Phoebe Thacker, Lucy Campbell-Gillingham, Jonathan Uesato, Po-Sen Huang, Ramona Comanescu, Fan Yang, Abigail See, Sumanth Dathathri, Rory Greig, Charlie Chen, Doug Fritz, Jaume Sanchez Elias, Richard Green, Sona Mokra, Nicholas Fernando, Boxi Wu, Rachel Foley, Susannah Young, Iason Gabriel, William Isaac, John Mellor, Demis Hassabis, Koray Kavukcuoglu, Lisa Anne Hendricks, and Geoffrey Irving. Improving alignment of dialogue agents via targeted human judgements, September 2022. URL <http://arxiv.org/abs/2209.14375>. arXiv:2209.14375 [cs].
- C. A. E. Goodhart. Problems of Monetary Management: The UK Experience. In C. A. E. Goodhart (ed.), *Monetary Theory and Practice: The UK Experience*, pp. 91–121. Macmillan Education UK, London, 1984. ISBN 978-1-349-17295-5. doi: 10.1007/978-1-349-17295-5\_4. URL [https://doi.org/10.1007/978-1-349-17295-5\\_4](https://doi.org/10.1007/978-1-349-17295-5_4).
- Dylan Hadfield-Menell, Smitha Milli, Pieter Abbeel, Stuart Russell, and Anca Dragan. Inverse Reward Design, 2017. URL <http://arxiv.org/abs/1711.02827>. arXiv:1711.02827 [cs].
- Alexander Havrilla, Maksym Zhuravinskiy, Duy Phung, Aman Tiwari, Jonathan Tow, Stella Biderman, Quentin Anthony, and Louis Castricato. trIX: A Framework for Large Scale Reinforcement Learning from Human Feedback. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 8578–8595, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.530. URL <https://aclanthology.org/2023.emnlp-main.530>.
- Elad Hazan, Sham M. Kakade, Karan Singh, and Abby Van Soest. Provably Efficient Maximum Entropy Exploration, January 2019. URL <http://arxiv.org/abs/1812.02690>. arXiv:1812.02690 [cs, stat].

- Haoyang He. A Survey on Offline Model-Based Reinforcement Learning, May 2023. URL <http://arxiv.org/abs/2305.03360>. arXiv:2305.03360 [cs, eess].
- Jonathan Ho and Stefano Ermon. Generative Adversarial Imitation Learning. In *Advances in Neural Information Processing Systems*, volume 29. Curran Associates, Inc., 2016. URL [https://papers.nips.cc/paper\\_files/paper/2016/hash/cc7e2b878868cbae992d1fb743995d8f-Abstract.html](https://papers.nips.cc/paper_files/paper/2016/hash/cc7e2b878868cbae992d1fb743995d8f-Abstract.html).
- Borja Ibarz, Jan Leike, Tobias Pohlen, Geoffrey Irving, Shane Legg, and Dario Amodei. Reward learning from human preferences and demonstrations in Atari. 2018. doi: 10.48550/ARXIV.1811.06521. URL <https://arxiv.org/abs/1811.06521>. Publisher: arXiv Version Number: 1.
- Hamish Ivison, Yizhong Wang, Jiacheng Liu, Zeqiu Wu, Valentina Pyatkin, Nathan Lambert, Noah A. Smith, Yejin Choi, and Hannaneh Hajishirzi. Unpacking DPO and PPO: Disentangling Best Practices for Learning from Preference Feedback. 2024. doi: 10.48550/ARXIV.2406.09279. URL <https://arxiv.org/abs/2406.09279>. Publisher: arXiv Version Number: 1.
- Hong Jun Jeon, Smitha Milli, and Anca D. Dragan. Reward-rational (implicit) choice: A unifying formalism for reward learning, December 2020. URL <http://arxiv.org/abs/2002.04833>. arXiv:2002.04833 [cs].
- Bingyi Kang, Zequn Jie, and Jiashi Feng. Policy Optimization with Demonstrations. In *Proceedings of the 35th International Conference on Machine Learning*, pp. 2469–2478. PMLR, July 2018. URL <https://proceedings.mlr.press/v80/kang18a.html>. ISSN: 2640-3498.
- Jon Kleinberg, Sendhil Mullainathan, and Manish Raghavan. The Challenge of Understanding What Users Want: Inconsistent Preferences and Engagement Optimization, October 2023. URL <http://arxiv.org/abs/2202.11776>. arXiv:2202.11776 [cs].
- W. Bradley Knox, Alessandro Allievi, Holger Banzhaf, Felix Schmitt, and Peter Stone. Reward (Mis)design for Autonomous Driving, March 2022. URL <http://arxiv.org/abs/2104.13906>. arXiv:2104.13906 [cs].
- Varun Kompella, Roberto Capobianco, Stacy Jong, Jonathan Browne, Spencer Fox, Lauren Meyers, Peter Wurman, and Peter Stone. Reinforcement Learning for Optimization of COVID-19 Mitigation policies, October 2020. URL <http://arxiv.org/abs/2010.10560>. arXiv:2010.10560 [cs].
- Tomasz Korbak, Ethan Perez, and Christopher L. Buckley. RL with KL penalties is better viewed as Bayesian inference, October 2022. URL <http://arxiv.org/abs/2205.11275>. arXiv:2205.11275 [cs, stat].
- Victoria Krakovna. Specification gaming examples in AI, April 2018. URL <https://vkrakovna.wordpress.com/2018/04/02/specification-gaming-examples-in-ai/>.
- Victoria Krakovna. Classifying specification problems as variants of Goodhart’s Law, August 2019. URL <https://vkrakovna.wordpress.com/2019/08/19/classifying-specification-problems-as-variants-of-goodharts-law/>.
- Victoria Krakovna, Laurent Orseau, Ramana Kumar, Miljan Martic, and Shane Legg. Penalizing side effects using stepwise relative reachability, March 2019. URL <http://arxiv.org/abs/1806.01186>. arXiv:1806.01186 [cs, stat].
- Cassidy Laidlaw, Stuart Russell, and Anca Dragan. Bridging RL Theory and Practice with the Effective Horizon, April 2023. URL <http://arxiv.org/abs/2304.09853>. arXiv:2304.09853 [cs, stat].
- Jongmin Lee, Cosmin Paduraru, Daniel J. Mankowitz, Nicolas Heess, Doina Precup, Kee-Eung Kim, and Arthur Guez. COptIDICE: Offline Constrained Reinforcement Learning via Stationary Distribution Correction Estimation, April 2022. URL <http://arxiv.org/abs/2204.08957>. arXiv:2204.08957 [cs].

- Kimin Lee, Laura Smith, and Pieter Abbeel. PEBBLE: Feedback-Efficient Interactive Reinforcement Learning via Relabeling Experience and Unsupervised Pre-training, June 2021. URL <http://arxiv.org/abs/2106.05091>. arXiv:2106.05091 [cs].
- Lisa Lee, Benjamin Eysenbach, Emilio Parisotto, Eric Xing, Sergey Levine, and Ruslan Salakhutdinov. Efficient Exploration via State Marginal Matching, February 2020. URL <http://arxiv.org/abs/1906.05274>. arXiv:1906.05274 [cs, stat].
- Jan Leike, Miljan Martic, Victoria Krakovna, Pedro A. Ortega, Tom Everitt, Andrew Lefrancq, Laurent Orseau, and Shane Legg. AI Safety Gridworlds, November 2017. URL <http://arxiv.org/abs/1711.09883>. arXiv:1711.09883 [cs].
- Jan Leike, David Krueger, Tom Everitt, Miljan Martic, Vishal Maini, and Shane Legg. Scalable agent alignment via reward modeling: a research direction, November 2018. URL <http://arxiv.org/abs/1811.07871>. arXiv:1811.07871 [cs, stat].
- Eric Liang, Richard Liaw, Philipp Moritz, Robert Nishihara, Roy Fox, Ken Goldberg, Joseph E. Gonzalez, Michael I. Jordan, and Ion Stoica. RLlib: Abstractions for Distributed Reinforcement Learning, June 2018. URL <http://arxiv.org/abs/1712.09381>. arXiv:1712.09381 [cs].
- Pablo Alvarez Lopez, Michael Behrisch, Laura Bieker-Walz, Jakob Erdmann, Yun-Pang Flötteröd, Robert Hilbrich, Leonhard Lücken, Johannes Rummel, Peter Wagner, and Evamarie Wiessner. Microscopic Traffic Simulation using SUMO. In *2018 21st International Conference on Intelligent Transportation Systems (ITSC)*, pp. 2575–2582, November 2018. doi: 10.1109/ITSC.2018.8569938. URL <https://ieeexplore.ieee.org/document/8569938>. ISSN: 2153-0017.
- Kristian Lum and William Isaac. To Predict and Serve? *Significance*, 13(5):14–19, October 2016. ISSN 1740-9705. doi: 10.1111/j.1740-9713.2016.00960.x. URL <https://doi.org/10.1111/j.1740-9713.2016.00960.x>. eprint: [https://academic.oup.com/jrssig/article-pdf/13/5/14/49106469/sign\\_13\\_5\\_14.pdf](https://academic.oup.com/jrssig/article-pdf/13/5/14/49106469/sign_13_5_14.pdf).
- Chiara Dalla Man, Francesco Micheletto, Dayu Lv, Marc Breton, Boris Kovatchev, and Claudio Cobelli. The UVA/PADOVA Type 1 Diabetes Simulator. *Journal of Diabetes Science and Technology*, 8(1):26–34, January 2014. ISSN 1932-2968. doi: 10.1177/1932296813514502. URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC4454102/>.
- Debmalya Mandal, Stelios Triantafyllou, and Goran Radanovic. Performative Reinforcement Learning, February 2023. URL <http://arxiv.org/abs/2207.00046>. arXiv:2207.00046 [cs].
- David Manheim and Scott Garrabrant. Categorizing Variants of Goodhart’s Law, February 2019. URL <http://arxiv.org/abs/1803.04585>. arXiv:1803.04585 [cs, q-fin, stat].
- Lev McKinney, Yawen Duan, David Krueger, and Adam Gleave. On The Fragility of Learned Reward Functions, January 2023. URL <http://arxiv.org/abs/2301.03652>. arXiv:2301.03652 [cs].
- Smitha Milli, Luca Belli, and Moritz Hardt. From Optimizing Engagement to Measuring Value. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, pp. 714–722, March 2021. doi: 10.1145/3442188.3445933. URL <http://arxiv.org/abs/2008.12623>. arXiv:2008.12623 [cs, stat].
- Samuel Mwalili, Mark Kimathi, Viona Ojiambo, Duncan Gathungu, and Rachel Mbogo. SEIR model for COVID-19 dynamics incorporating the environment and social distancing. *BMC Research Notes*, 13:352, July 2020. ISSN 1756-0500. doi: 10.1186/s13104-020-05192-1. URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC7376536/>.
- Alexander Nedergaard and Matthew Cook. k-Means Maximum Entropy Exploration, November 2023. URL <http://arxiv.org/abs/2205.15623>. arXiv:2205.15623 [cs].
- Richard Ngo, Lawrence Chan, and Sören Mindermann. The alignment problem from a deep learning perspective, September 2023. URL <http://arxiv.org/abs/2209.00626>. arXiv:2209.00626 [cs].

- Ziad Obermeyer, Brian Powers, Christine Vogeli, and Sendhil Mullainathan. Dissecting racial bias in an algorithm used to manage the health of populations. *Science*, 366(6464):447–453, October 2019. ISSN 0036-8075, 1095-9203. doi: 10.1126/science.aax2342. URL <https://www.science.org/doi/10.1126/science.aax2342>.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback. 2022. doi: 10.48550/ARXIV.2203.02155. URL <https://arxiv.org/abs/2203.02155>.
- Alexander Pan, Kush Bhatia, and Jacob Steinhardt. The Effects of Reward Misspecification: Mapping and Mitigating Misaligned Models, February 2022. URL <http://arxiv.org/abs/2201.03544>. arXiv:2201.03544 [cs, stat].
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Köpf, Edward Yang, Zach DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. PyTorch: An Imperative Style, High-Performance Deep Learning Library, December 2019. URL <http://arxiv.org/abs/1912.01703>. arXiv:1912.01703 [cs, stat].
- Paria Rashidinejad, Banghua Zhu, Cong Ma, Jiantao Jiao, and Stuart Russell. Bridging Offline Reinforcement Learning and Imitation Learning: A Tale of Pessimism, July 2023. URL <http://arxiv.org/abs/2103.12021>. arXiv:2103.12021 [cs, math, stat].
- Siddharth Reddy, Anca Dragan, Sergey Levine, Shane Legg, and Jan Leike. Learning Human Objectives by Evaluating Hypothetical Behavior. In *Proceedings of the 37th International Conference on Machine Learning*, pp. 8020–8029. PMLR, November 2020. URL <https://proceedings.mlr.press/v119/reddy20a.html>. ISSN: 2640-3498.
- Julien Roy, Roger Girgis, Joshua Romoff, Pierre-Luc Bacon, and Christopher Pal. Direct Behavior Specification via Constrained Reinforcement Learning, June 2022. URL <http://arxiv.org/abs/2112.12228>. arXiv:2112.12228 [cs].
- Stuart J. Russell, Peter Norvig, and Ernest Davis. *Artificial intelligence: a modern approach*. Prentice Hall series in artificial intelligence. Prentice Hall, Upper Saddle River, 3rd ed edition, 2010. ISBN 978-0-13-604259-4.
- Dorsa Sadigh, Anca Dragan, Shankar Sastry, and Sanjit Seshia. Active Preference-Based Learning of Reward Functions. In *Robotics: Science and Systems XIII*. Robotics: Science and Systems Foundation, July 2017. ISBN 978-0-9923747-3-0. doi: 10.15607/RSS.2017.XIII.053. URL <http://www.roboticsproceedings.org/rss13/p53.pdf>.
- John Schulman. Approximating KL Divergence, March 2020. URL <http://joschu.net/blog/kl-approx.html>.
- Lior Shani, Aviv Rosenberg, Asaf Cassel, Oran Lang, Daniele Calandriello, Avital Zipori, Hila Noga, Orgad Keller, Bilal Piot, and Idan Szpektor. Multi-turn Reinforcement Learning from Preference Human Feedback. *arXiv preprint arXiv:2405.14655*, 2024. URL <https://arxiv.org/abs/2405.14655>.
- Joar Skalse, Nikolaus H. R. Howe, Dmitrii Krasheninnikov, and David Krueger. Defining and Characterizing Reward Hacking, September 2022. URL <http://arxiv.org/abs/2209.13085>. arXiv:2209.13085 [cs, stat].
- Garry M. Steil. Algorithms for a Closed-Loop Artificial Pancreas: The Case for Proportional-Integral-Derivative Control. *Journal of Diabetes Science and Technology*, 7(6):1621–1631, November 2013. ISSN 1932-2968. URL <https://www.ncbi.nlm.nih.gov/pmc/articles/PMC3876341/>.
- Nisan Stiennon, Long Ouyang, Jeff Wu, Daniel M. Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford, Dario Amodei, and Paul Christiano. Learning to summarize from human feedback, September 2020. URL <http://arxiv.org/abs/2009.01325>. arXiv:2009.01325 [cs].

- Jonathan Stray, Alon Halevy, Parisa Assar, Dylan Hadfield-Menell, Craig Boutilier, Amar Ashar, Lex Beattie, Michael Ekstrand, Claire Leibowicz, Connie Moon Sehat, Sara Johansen, Lianne Kerlin, David Vickrey, Spandana Singh, Sanne Vrijenhoek, Amy Zhang, McKane Andrus, Natali Helberger, Polina Proutskova, Tanushree Mitra, and Nina Vasan. Building Human Values into Recommender Systems: An Interdisciplinary Synthesis, July 2022. URL <http://arxiv.org/abs/2207.10192>. arXiv:2207.10192 [cs].
- Jessica Taylor. Quantilizers: A Safer Alternative to Maximizers for Limited Optimization. March 2016. URL <https://www.semanticscholar.org/paper/Quantilizers%3A-A-Safer-Alternative-to-Maximizers-for-Taylor/4e8ff3b4069a12a00196d62925bab8add7389742>.
- Jessica Taylor, Eliezer Yudkowsky, Patrick LaVictoire, and Andrew Critch. Alignment for Advanced Machine Learning Systems. In *Ethics of Artificial Intelligence*. Oxford University Press, August 2020. ISBN 978-0-19-090505-7. Google-Books-ID: 1yT3DwAAQBAJ.
- Jeremy Tien, Jerry Zhi-Yang He, Zackory Erickson, Anca D. Dragan, and Daniel S. Brown. Causal Confusion and Reward Misidentification in Preference-Based Reward Learning, March 2023. URL <http://arxiv.org/abs/2204.06601>. arXiv:2204.06601 [cs].
- Martin Treiber, Ansgar Hennecke, and Dirk Helbing. Congested Traffic States in Empirical Observations and Microscopic Simulations. *Physical Review E*, 62(2):1805–1824, August 2000. ISSN 1063-651X, 1095-3787. doi: 10.1103/PhysRevE.62.1805. URL <http://arxiv.org/abs/cond-mat/0002177>. arXiv:cond-mat/0002177.
- A. M. Turner, Logan Smith, Rohin Shah, Andrew Critch, and Prasad Tadepalli. Optimal Policies Tend To Seek Power. December 2019. URL <https://www.semanticscholar.org/paper/Optimal-Policies-Tend-To-Seek-Power-Turner-Smith/46d4452eb041e33f1e58eab64ec8cf5af534b6fff>.
- Alexander Matt Turner, Neale Ratzlaff, and Prasad Tadepalli. Avoiding Side Effects in Complex Environments, October 2020. URL <http://arxiv.org/abs/2006.06547>. arXiv:2006.06547 [cs].
- Ikechukwu Uchendu, Ted Xiao, Yao Lu, Banghua Zhu, Mengyuan Yan, Joséphine Simon, Matthew Bennis, Chuyuan Fu, Cong Ma, Jiantao Jiao, Sergey Levine, and Karol Hausman. Jump-Start Reinforcement Learning, July 2023. URL <http://arxiv.org/abs/2204.02372>. arXiv:2204.02372 [cs].
- Nino Vieillard, Tadashi Kozuno, Bruno Scherrer, Olivier Pietquin, Rémi Munos, and Matthieu Geist. Leverage the Average: an Analysis of KL Regularization in RL, January 2021. URL <http://arxiv.org/abs/2003.14089>. arXiv:2003.14089 [cs, stat].
- Eugene Vinitzky, Aboudy Kreidieh, Luc Le Flem, Nishant Khetarpal, Kathy Jang, Cathy Wu, Fangyu Wu, Richard Liaw, Eric Liang, and Alexandre M. Bayen. Benchmarks for reinforcement learning in mixed-autonomy traffic. In *Proceedings of The 2nd Conference on Robot Learning*, pp. 399–409. PMLR, October 2018. URL <https://proceedings.mlr.press/v87/vinitzky18a.html>. ISSN: 2640-3498.
- Xingyao Wang, Zihan Wang, Jiateng Liu, Yangyi Chen, Lifan Yuan, Hao Peng, and Heng Ji. Mint: Evaluating llms in multi-turn interaction with tools and language feedback. *arXiv preprint arXiv:2309.10691*, 2023. URL <https://arxiv.org/abs/2309.10691>.
- Cathy Wu, Aboudy Kreidieh, Kanaad Parvate, Eugene Vinitzky, and Alexandre M. Bayen. Flow: A Modular Learning Framework for Mixed Autonomy Traffic. *IEEE Transactions on Robotics*, 38(2):1270–1286, April 2022. ISSN 1552-3098, 1941-0468. doi: 10.1109/TRO.2021.3087314. URL <http://arxiv.org/abs/1710.05465>. arXiv:1710.05465 [cs].
- Tengyang Xie, Ching-An Cheng, Nan Jiang, Paul Mineiro, and Alekh Agarwal. Bellman-consistent Pessimism for Offline Reinforcement Learning, October 2023. URL <http://arxiv.org/abs/2106.06926>. arXiv:2106.06926 [cs, stat].



Shentao Yang, Yihao Feng, Shujian Zhang, and Mingyuan Zhou. Regularizing a Model-based Policy Stationary Distribution to Stabilize Offline Reinforcement Learning, June 2022. URL <http://arxiv.org/abs/2206.07166>. arXiv:2206.07166 [cs].

Yiming Zhang, Quan Vuong, and Keith W. Ross. First Order Constrained Optimization in Policy Space, October 2020. URL <http://arxiv.org/abs/2002.06506>. arXiv:2002.06506 [cs, stat].

# Appendix

## A PROOFS

### A.1 PROOF OF THEOREM 5.1

**Theorem 5.1.** *Suppose that  $\tilde{R}$  is an  $r$ -correlated-proxy for the true reward function  $R$ , and let  $\sigma_{\tilde{R}}$  and  $\sigma_R$  be defined as in Definition 4.1. Then for any policy  $\pi$  such that  $\mu_\pi \ll \mu_{\pi_{\text{base}}}$  (i.e.,  $\mu_{\pi_{\text{base}}}(s, a) = 0 \Rightarrow \mu_\pi(s, a) = 0$ ), we have*

$$\frac{J(\pi, R) - J(\pi_{\text{base}}, R)}{\sigma_R} \geq \frac{1}{r} \left( \frac{J(\pi, \tilde{R}) - J(\pi_{\text{base}}, \tilde{R})}{\sigma_{\tilde{R}}} - \sqrt{(1-r^2)\chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}})} \right), \quad (4)$$

where  $\chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}}) = \mathbb{E}_{\mu_\pi} \left[ \frac{\mu_\pi(s, a)}{\mu_{\pi_{\text{base}}}(s, a)} - 1 \right]$  is the  $\chi^2$  divergence between  $\mu_\pi$  and  $\mu_{\pi_{\text{base}}}$ .

*Proof.* For simplicity of exposition, define

$$Z(s, a) = \frac{R(s, a) - J(\pi_{\text{base}}, R)}{\sigma_R} \quad \text{and} \quad \tilde{Z}(s, a) = \frac{\tilde{R}(s, a) - J(\pi_{\text{base}}, \tilde{R})}{\sigma_{\tilde{R}}}.$$

Using (3), we can rewrite (4) as

$$\mathbb{E}_{\mu_\pi} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] \leq \sqrt{(1-r^2)\chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}})}.$$

Then, the left hand side can be rewritten as

$$\begin{aligned} & \mathbb{E}_{\mu_\pi} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] \\ &= \mathbb{E}_{\mu_\pi} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] - \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] + \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] \\ &= \mathbb{E}_{\mu_\pi} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] - \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \tilde{Z}(s, a) - r Z(s, a) \right], \end{aligned}$$

since by definition  $\mathbb{E}_{\mu_{\pi_{\text{base}}}} [\tilde{Z}(s, a)] = \mathbb{E}_{\mu_{\pi_{\text{base}}}} [Z(s, a)] = 0$ . Applying the Cauchy-Schwartz inequality to this difference gives

$$\begin{aligned} & \mathbb{E}_{\mu_\pi} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] - \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] \\ &= \sum_{(s, a) \in \mathcal{S} \times \mathcal{A}} \left[ \tilde{Z}(s, a) - r Z(s, a) \right] \left[ \mu_\pi(s, a) - \mu_{\pi_{\text{base}}}(s, a) \right] \\ &= \sum_{(s, a) \in \mathcal{S} \times \mathcal{A}} \left[ \sqrt{\mu_{\pi_{\text{base}}}(s, a)} \left( \tilde{Z}(s, a) - r Z(s, a) \right) \right] \left[ \frac{\mu_\pi(s, a) - \mu_{\pi_{\text{base}}}(s, a)}{\sqrt{\mu_{\pi_{\text{base}}}(s, a)}} \right] \\ &\leq \sqrt{\left( \sum_{(s, a) \in \mathcal{S} \times \mathcal{A}} \mu_{\pi_{\text{base}}}(s, a) \left[ \tilde{Z}(s, a) - r Z(s, a) \right]^2 \right) \left( \sum_{(s, a) \in \mathcal{S} \times \mathcal{A}} \frac{(\mu_\pi(s, a) - \mu_{\pi_{\text{base}}}(s, a))^2}{\mu_{\pi_{\text{base}}}(s, a)} \right)} \\ &= \sqrt{\mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \left( \tilde{Z}(s, a) - r Z(s, a) \right)^2 \right] \chi^2(\mu_\pi \parallel \mu_{\pi_{\text{base}}})}. \end{aligned} \quad (9)$$

The expectation can be calculated as

$$\begin{aligned}
& \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \left( \tilde{Z}(s, a) - r Z(s, a) \right)^2 \right] \\
&= \text{Var}_{\mu_{\pi_{\text{base}}}} \left( \tilde{Z}(s, a) - r Z(s, a) \right) \\
&= \text{Var}_{\mu_{\pi_{\text{base}}}} \left( \tilde{Z}(s, a) \right) + r^2 \text{Var}_{\mu_{\pi_{\text{base}}}} \left( Z(s, a) \right) - 2r \text{Cov}_{\mu_{\pi_{\text{base}}}} \left( \tilde{Z}(s, a), Z(s, a) \right) \\
&= 1 - r^2,
\end{aligned}$$

using the fact that both reward functions have unit variance under the base policy and that their correlation is  $r$ . Plugging this into (9) gives the desired result.  $\square$

## A.2 UNDERSTANDING THE LOWER BOUND IN THEOREM 5.1

Denote by

$$L(\pi) = \frac{1}{r} \left( \frac{J(\pi, \tilde{R}) - J(\pi_{\text{base}}, \tilde{R})}{\sigma_{\tilde{R}}} - \sqrt{(1-r^2)\chi^2(\mu_{\pi} \parallel \mu_{\pi_{\text{base}}})} \right)$$

the lower bound on increase in the true reward which is the RHS of (4). One surprising observation is that this lower bound seems to be *increasing* as the proxy becomes *less* correlated with the true reward. This would suggest that a less correlated proxy leads to better optimization of the true reward. However, as the following lemma shows,  $L(\pi)$  is actually decreasing in  $r$ .

**Lemma A.1.** *Under the same conditions as Theorem 5.1, the lower bound  $L(\pi)$  satisfies*

$$L(\pi) \leq \frac{1 - \sqrt{1-r^2}}{r} \sqrt{\chi^2(\mu_{\pi} \parallel \mu_{\pi_{\text{base}}})}. \quad (10)$$

This shows that the lower bound can be at most a factor of  $\frac{1-\sqrt{1-r^2}}{r}$  times the divergence between the learned and base policies' occupancy measures. This factor is increasing in  $r$  and asymptotes to  $r/2$  as  $r \rightarrow 0$ .

*Proof.* Using the same notation as the proof of Theorem 5.1, we can rewrite the lower bound as

$$L(\pi) = \frac{1}{r} \left( \mathbb{E}_{\pi} \left[ \tilde{Z}(s, a) \right] - \sqrt{(1-r^2)\chi^2(\mu_{\pi} \parallel \mu_{\pi_{\text{base}}})} \right).$$

Following a similar argument to that in the proof of Theorem 5.1, we can write

$$\begin{aligned}
\mathbb{E}_{\pi} \left[ \tilde{Z}(s, a) \right] &= \mathbb{E}_{\pi} \left[ \tilde{Z}(s, a) \right] - \mathbb{E}_{\pi_{\text{base}}} \left[ \tilde{Z}(s, a) \right] \\
&= \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} \left[ \sqrt{\mu_{\pi_{\text{base}}}(s, a)} \tilde{Z}(s, a) \right] \left[ \frac{\mu_{\pi}(s, a) - \mu_{\pi_{\text{base}}}(s, a)}{\sqrt{\mu_{\pi_{\text{base}}}(s, a)}} \right] \\
&\leq \sqrt{\left( \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} \mu_{\pi_{\text{base}}}(s, a) \tilde{Z}(s, a)^2 \right) \left( \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} \frac{(\mu_{\pi}(s, a) - \mu_{\pi_{\text{base}}}(s, a))^2}{\mu_{\pi_{\text{base}}}(s, a)} \right)} \\
&= \sqrt{\mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \tilde{Z}(s, a)^2 \right] \chi^2(\mu_{\pi} \parallel \mu_{\pi_{\text{base}}})} \\
&= \sqrt{\chi^2(\mu_{\pi} \parallel \mu_{\pi_{\text{base}}})}.
\end{aligned}$$

Combining this with the definition of  $L(\pi)$  gives

$$\begin{aligned} L(\pi) &\leq \frac{1}{r} \left( \sqrt{\chi^2(\mu_\pi \| \mu_{\pi_{\text{base}}})} - \sqrt{(1-r^2)\chi^2(\mu_\pi \| \mu_{\pi_{\text{base}}})} \right) \\ &= \frac{1 - \sqrt{1-r^2}}{r} \sqrt{\chi^2(\mu_\pi \| \mu_{\pi_{\text{base}}})}, \end{aligned}$$

which completes the proof.  $\square$

### A.3 ACTION DISTRIBUTION AND OCCUPANCY MEASURE DIVERGENCES IN CONTEXTUAL BANDITS

In our setting, a *contextual bandit* can be defined as an MDP with  $\gamma = 0$ ; then, the return of the policy  $\pi$  under a reward function  $R$  is given by

$$J(\pi, R) = \mathbb{E}_{s \sim \mu_0(\cdot), a \sim \pi(\cdot|s)} [R(s, a)].$$

That is, a single state is sampled from the initial state distribution  $\mu_0$ , and then a single action is sampled from the policy  $\pi$  conditioned on that state. For example, RLHF for LLMs generally follows this setting: a prompt is sampled from a dataset, the LLM generates a response, and the reward is calculated based on the prompt and response.

In this setting, it is simple to show that the action distribution and occupancy measure divergences are equivalent.

**Lemma A.2.** *Let  $D_f(P \| Q) = \mathbb{E}_{x \sim Q} [f(P(x)/Q(x))]$  be the  $f$ -divergence between two distributions  $P$  and  $Q$ . Then, for any two policies  $\pi, \pi'$  in a contextual bandit, we have*

$$D_f(\mu_\pi \| \mu_{\pi'}) = \mathbb{E}_{s \sim \mu_0(\cdot)} [D_f(\pi \| \pi')].$$

Lemma A.2 applies to any  $f$ -divergence, including the KL and  $\chi^2$  divergences we study in this paper.

*Proof.* We have

$$\begin{aligned} D_f(\mu_\pi \| \mu_{\pi'}) &= \mathbb{E}_{s \sim \mu_0(\cdot), a \sim \pi'(\cdot|s)} \left[ f \left( \frac{\mu_\pi(s, a)}{\mu_{\pi'}(a | s)} \right) \right] \\ &= \mathbb{E}_{s \sim \mu_0(\cdot)} \left[ \mathbb{E}_{a \sim \pi'(\cdot|s)} \left[ f \left( \frac{\mu_0(s)\pi(a | s)}{\mu_0(s)\pi'(a | s)} \right) \right] \right] \\ &= \mathbb{E}_{s \sim \mu_0(\cdot)} [D_f(\pi \| \pi')], \end{aligned}$$

which completes the proof.  $\square$

### A.4 STATE-ONLY OCCUPANCY MEASURES

We can also consider state-only occupancy measures, defined as

$$\mu_\pi(s) = (1 - \gamma) \mathbb{E}_\pi \left[ \sum_{t=0}^{\infty} \gamma^t \mathbb{1}\{s_t = s\} \right].$$

In many environments, the reward functions only depend on the state, i.e.,  $R(s, a) = R(s)$  and  $\tilde{R}(s, a) = \tilde{R}(s)$ . In this case, Theorem 5.1 holds for state-only occupancy measures as well. The proof is identical to the proof of Theorem 5.1, but replacing expectations and sums over state-action pairs with expectations over states.

## B DERIVATION OF OCCUPANCY-REGULARIZED POLICY OPTIMIZATION

In this appendix section, we show how to derive the approximations used for Occupancy-Regularized Policy Optimization (ORPO). As a reminder, we would like to optimize

$$J(\pi_\theta, \tilde{R}) - \lambda \sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}.$$

We can rewrite its gradient as

$$\begin{aligned} & \nabla_\theta \left( J(\pi_\theta, \tilde{R}) - \lambda \sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})} \right) \\ &= \nabla_\theta J(\pi_\theta, \tilde{R}) - \frac{\lambda \nabla_\theta \chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}{2\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \\ &= \nabla_\theta \left( \sum_{s,a} \mu_{\pi_\theta}(s,a) \tilde{R}(s,a) \right) - \frac{\lambda}{2\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \nabla_\theta \left( \sum_{s,a} \frac{\mu_{\pi_\theta}(s,a)^2}{\mu_{\pi_{\text{base}}}(s,a)} - 1 \right) \\ &= \sum_{s,a} \left[ \nabla_\theta \mu_{\pi_\theta}(s,a) \tilde{R}(s,a) - \frac{\lambda}{2\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \nabla_\theta \left( \frac{\mu_{\pi_\theta}(s,a)^2}{\mu_{\pi_{\text{base}}}(s,a)} - 1 \right) \right] \\ &= \sum_{s,a} \left[ \nabla_\theta \mu_{\pi_\theta}(s,a) \tilde{R}(s,a) - \frac{\lambda}{2\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \frac{2\mu_{\pi_\theta}(s,a)}{\mu_{\pi_{\text{base}}}(s,a)} \nabla_\theta \mu_{\pi_\theta}(s,a) \right] \\ &= \sum_{s,a} \left( \nabla_\theta \mu_{\pi_\theta}(s,a) \right) \left( \tilde{R}(s,a) - \frac{\lambda}{\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \frac{\mu_{\pi_\theta}(s,a)}{\mu_{\pi_{\text{base}}}(s,a)} \right). \end{aligned}$$

As described in the main text, policy gradient algorithms can approximate this type of gradient by using an augmented reward function

$$R'(s,a) = \tilde{R}(s,a) - \frac{\lambda}{\sqrt{\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}})}} \frac{\mu_{\pi_\theta}(s,a)}{\mu_{\pi_{\text{base}}}(s,a)}. \quad (11)$$

However, two terms in (11) cannot be computed directly: the current  $\chi^2$  divergence between occupancy measures, and the ratio of the occupancy measures  $\mu_{\pi_\theta}(s,a)/\mu_{\pi_{\text{base}}}(s,a)$ . We first show how to approximate the latter using a discriminator network  $\hat{d}^\phi(s,a)$ , trained to optimize

$$\phi = \arg \min_{\phi} \mathbb{E}_{\mu_{\pi_\theta}} \left[ \log(1 + e^{-\hat{d}^\phi(s,a)}) \right] + \mathbb{E}_{\mu_{\pi_{\text{base}}}} \left[ \log(1 + e^{\hat{d}^\phi(s,a)}) \right]. \quad (12)$$

It is well-known that exactly optimizing the loss function in (12) gives

$$\hat{d}^\phi(s,a) = \log \frac{\mu_{\pi_\theta}(s,a)}{\mu_{\pi_{\text{base}}}(s,a)}. \quad (13)$$

Furthermore, the OM  $\chi^2$  divergence is given by

$$\chi^2(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}}) = \mathbb{E}_{\mu_{\pi_\theta}} \left[ \frac{\mu_{\pi_\theta}(s,a)}{\mu_{\pi_{\text{base}}}(s,a)} - 1 \right] = \mathbb{E}_{\mu_{\pi_\theta}} \left[ e^{\hat{d}^\phi(s,a)} - 1 \right] =: \widehat{\chi^2}. \quad (14)$$

Combining (13) and (14) shows that the augmented reward in (11) can be rewritten as

$$R'(s,a) = \tilde{R}(s,a) - \frac{\lambda}{\widehat{\chi^2}} e^{\hat{d}^\phi(s,a)}.$$

Putting all the steps together, the following algorithm formalizes ORPO:

---

**Algorithm 1** Occupancy-Regularized Policy Optimization (ORPO).

---

- 1: **for** iteration  $i = 1, \dots, I$  **do**
- 2:   Collect a set of  $n$  trajectories  $\mathcal{D}_\pi$  from  $\pi_\theta$ .
- 3:   Collect a set of  $n$  trajectories  $\mathcal{D}_{\pi_{\text{base}}}$  from  $\pi_{\text{base}}$ .
- 4:   Optimize  $\phi$  via SGD to minimize

$$\mathbb{E}_{\mathcal{D}_\pi} \left[ \log(1 + e^{-\hat{d}_\phi(s,a)}) \right] + \mathbb{E}_{\mathcal{D}_{\pi_{\text{base}}}} \left[ \log(1 + e^{\hat{d}_\phi(s,a)}) \right]$$

- 5:   Calculate  $\widehat{\chi}^2 = \mathbb{E}_{\mathcal{D}_\pi} \left[ e^{\hat{d}_\phi(s,a)} - 1 \right]$ .
  - 6:   Transform  $\mathcal{D}_\pi$  to  $\mathcal{D}'_\pi$  by replacing the rewards with  $R'(s, a) = \tilde{R}(s, a) - \frac{\lambda}{\sqrt{\widehat{\chi}^2}} \left( e^{\hat{d}_\phi(s,a)} - 1 \right)$ .
  - 7:   Optimize  $\theta$  via SGD to minimize the proximal policy optimization (PPO) loss  $L_{\text{PPO}}(\mathcal{D}'_\pi)$ .
  - 8: **end for**
- 

A similar approach can also be used to optimize the proxy reward regularized by KL divergence

$$J(\pi_\theta, \tilde{R}) - \lambda D_{\text{KL}}(\mu_{\pi_\theta} \parallel \mu_{\pi_{\text{base}}}),$$

by changing the augmented reward in Line 6 of Algorithm 1 to

$$R'(s, a) = \tilde{R}(s, a) - \lambda \hat{d}_\phi(s, a).$$


## C ENVIRONMENT DETAILS

Here, we discuss the details of the five reward-hacking environments we study.

### C.1 TRAFFIC CONTROL

The traffic control environment, based on the Flow simulator (Wu et al., 2022), simulates a group of human-controlled and RL-controlled vehicles on an on-ramp attempting to merge into traffic on a highway. The true reward prioritizes a small mean commute time, while the proxy reward is the average velocity of all cars. When reward hacking, the RL controlled vehicle on the on-ramp stops indefinitely and lets cars continue forward at high speeds on the highway, which maximizes the proxy reward but increases the commute times of cars on the on-ramp infinitely. As the base policy for the traffic environment we used the Intelligent Driver Model (IDM), a standard approximation of human driving behavior (Treiber et al., 2000). In practice, base policies are often learned via imitation learning, so to simulate this we generate data from the IDM controller and train a behavioral cloning (BC) policy using the generated data.


Here, the green cars are controlled by the human driver model IDM controller, and the blue cars are controlled by RL:

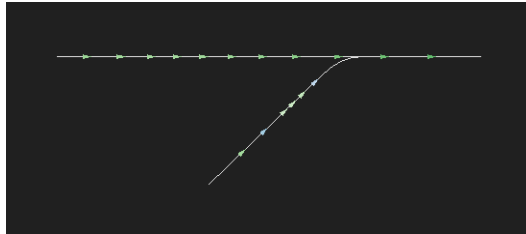

This particular frame showcases reward hacking behavior. The blue RL-controlled vehicle has stopped completely on the on-ramp, blocking cars behind it. This increases the average velocity of all vehicles in the simulation, as the cars on the straightway are able to continue speeding along the road without having to wait for merging cars. However, the true reward (negative average commute time) decreases endlessly as the cars on the on-ramp wait.

## C.2 GLUCOSE MONITORING


The SimGlucose blood glucose monitoring environment is an extension of the FDA-approved glucose monitoring simulator proposed by [Man et al. \(2014\)](#) for Type 1 Diabetes patients ([Fox et al., 2020](#)):

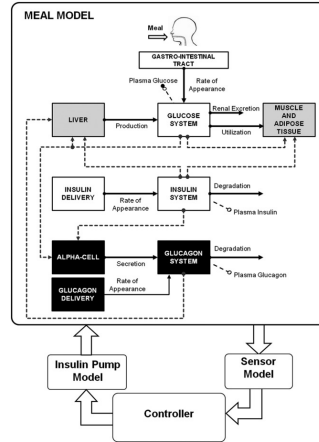

The RL agent (bottom) controls the insulin administered to a simulated patient in order to maintain healthy glucose levels. The true reward is a standard measure of health risk for the patient, but the proxy reward is misaligned and prioritizes the monetary cost of insulin. As the safe baseline policy, we train a BC policy based on data generated by a PID controller with parameters tuned by the original designers of the simulator ([Steil, 2013](#)).

## C.3 PANDEMIC MITIGATION

PandemicSimulator simulates a population’s infection dynamics using the SEIR model ([Mwalili et al., 2020](#); [Kompella et al., 2020](#)):

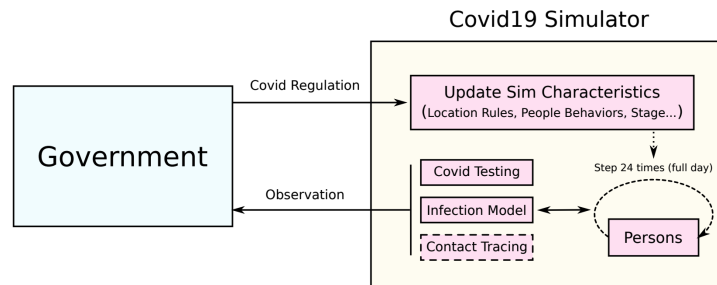

The RL agent chooses the level of lockdown restrictions placed on the population by observing the results of testing. The proxy reward function omits the political cost associated with certain decisions. Our base policy is trained via BC on a combination of hand-specified and real-world strategies employed by governments during the pandemic, which were also used by [Kompella et al. \(2020\)](#) as baselines.


## C.4 RLHF

We base our RLHF environment on the work of [Coste et al. \(2024\)](#), who study overoptimization of LLM-based reward models. The proxy reward model we use is fine-tuned from Pythia-70M ([Biderman et al., 2023](#)) on the AlpacaFarm ([Dubois et al., 2023](#)) preference dataset. As a true reward model, we use the Llama 3 Tulu V2 8B RM from AI2 ([Iverson et al., 2024](#)). As a base policy, we use Coste et al.’s SFT policy, which was fine-tuned from Python-1.4B on the AlpacaFarm SFT data. We evaluate policies’ true and proxy rewards on responses sampled for a held out set of prompts.

## C.5 TOMATO-WATERING GRIDWORLD

The tomato environment contains a sprinkler state where the agent perceives all tomatoes as being watered and thus receives high proxy reward but no true reward. We train a base policy using the true reward function, and then add a 10% chance of taking a random action to ensure there is room to improve upon it.

The gray squares in the environment represent walls, and the white squares represent open spaces where the agent can travel:

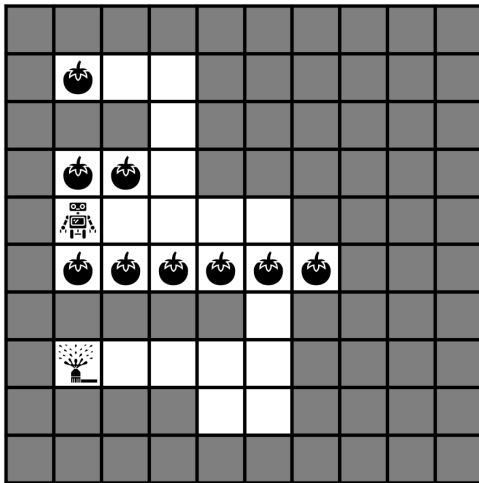

The sprinkler state is down a narrow hallway, and on the other end a tomato is down another narrow hallway.

## D EXPERIMENT DETAILS

### D.1 NON-LLM EXPERIMENTS

We implement ORPO using RLLib (Liang et al., 2018) and PyTorch (Paszke et al., 2019).

**Network architectures** For the pandemic, traffic, and tomato-watering environments, we use policy networks based on fully-connected networks with 2 layers of 128 units, 4 layers of 512 units, and 4 units of 512 units, respectively. The policy model for the glucose environment is a basic LSTM network with 3 layers of 64 units each. We made this choice since the observation of the environment contains continuous historical information about the patient’s blood glucose levels and previously administered insulin.

The discriminator model for all four non-LLM environments is a fully connected network with 2 layers of 256 units each. We found that the discriminator architecture did not need to be tuned to each environment.

**Policy initialization** Initializing using an imitation learning policy has been shown to effectively speed up the learning process (Laidlaw et al., 2023; Uchendu et al., 2023) and is used in practice for RLHF (Stiennon et al., 2020), so we initialize our policies using the specified  $\pi_{\text{base}}$  for the more realistic traffic, glucose, and pandemic environments.

**Hyperparameters** Some hyperparameters for the traffic environment were tuned by Pan et al. (2022). We primarily tuned the hyperparameters listed below in order to ensure that the proxy reward would be properly optimized and reward hacking would occur without regularization. This enables to see if the various regularization methods actually succeed at preventing reward hacking.



Hyperparameter	Tomato	Traffic	Glucose	Pandemic
Training iterations	500	250	500	260
Batch size	3000	40000	100000	3860
SGD minibatch size	128	16384	1024	64
SGD epochs per iteration	8	5	4	5
Optimizer	Adam	Adam	Adam	Adam
Learning rate	1e-3	5e-5	1e-4	0.0003
Gradient clipping	0.1	None	10	10
Discount rate ( $\gamma$ )	0.99	0.99	0.99	0.99
GAE coefficient ( $\lambda$ )	0.98	0.97	0.98	0.95
Entropy coefficient (start)	0.01	0.01	0.01	0.1
Entropy coefficient (end)	0.01	0.01	0.01	0.01
Entropy schedule horizon	0	0	0	500000
KL target	0.001	0.02	1e-3	0.01
Value function loss clipping	10	10,000	100	20
Value function loss coefficient	0.1	0.5	0.0001	0.5
Share value function layers	F	T	T	T

Table 2: PPO/ORPO hyperparameters.

Hyperparameter	Tomato	Traffic	Glucose	Pandemic
Discriminator reward clipping	1000	10	1e10	0.1
Regularization coefficient ( $\lambda$ )	Varied	Varied	Varied	Varied
$\sigma_{\bar{R}}$	0.05	0.0002	0.05	0.08

Table 3: ORPO-specific hyperparameters.

**ORPO details** We found that a couple of tricks were useful to ensure that ORPO remained stable. First, we clip the discriminator term added to the reward functions to a range  $[-\delta, \delta]$ , since sometimes it can blow up and cause numerical issues. Second, when estimating  $\widehat{\chi^2}$ , we use a trimmed mean (trimmed by 1% in each tail) to reduce the effect that outliers have on the estimate. These are both particularly important for  $\chi^2$  divergence, where the output of the discriminator is exponentiated for both the reward discriminator term and for estimating  $\widehat{\chi^2}$ .

## D.2 RLHF EXPERIMENTS

We train LLMs via the RLHF implementation used by Coste et al. (2024), which is based on OpenAssistant and trIX (Havrilla et al., 2023). To implement  $\chi^2$  or KL regularization, we directly add a loss term to the PPO loss:

$$\begin{aligned} \chi^2 \text{ divergence:} & \quad \lambda \left( \frac{\pi_{\theta}(a | s)}{\pi_{\text{base}}(a | s)} + \frac{\pi_{\text{base}}(a | s)}{\pi_{\theta}(a | s)} - 2 \right) \\ \text{KL divergence:} & \quad \lambda \left( \log \frac{\pi_{\theta}(a | s)}{\pi_{\text{base}}(a | s)} + \frac{\pi_{\text{base}}(a | s)}{\pi_{\theta}(a | s)} - 1 \right) \end{aligned}$$

where  $s$  is the prompt and  $a$  is the sampled response. Intuitively, both loss terms have a unique minimum when  $\pi_{\theta}(a | s) = \pi_{\text{base}}(a | s)$  and in expectation are equivalent to the correct divergence. Schulman (2020) suggests that these are particularly low-variance estimates, and we find that they work well in practice.

## E ADDITIONAL EXPERIMENTS AND RESULTS

In this appendix, we the full results from our main experiments as well as ablations of ORPO.

## E.1 RESULTS FOR ALL REGULARIZATION COEFFICIENTS

Here, we present the results of training with AD and OM regularization using  $\chi^2$  and KL divergence across all regularization coefficients. Each table shows the median and the standard deviation of the true rewards achieved by the learned policy across 5 random seeds.

$\chi^2$ divergence			
<b>Coefficient</b>	<b>AD</b>	<b>State OM</b>	<b>State-action OM</b>
0.000002	-60.79 $\pm$ 8.40	-61.04 $\pm$ 2.20	-59.11 $\pm$ 4.53
0.000004	-62.01 $\pm$ 8.58	-61.85 $\pm$ 2.22	-58.21 $\pm$ 5.52
0.00001	-60.43 $\pm$ 6.61	-59.82 $\pm$ 2.85	-54.35 $\pm$ 2.81
0.00002	-62.01 $\pm$ 4.54	-56.53 $\pm$ 10.66	-1.35 $\pm$ 30.28
0.00004	-50.84 $\pm$ 6.28	-42.24 $\pm$ 22.01	-1.15 $\pm$ 0.06
0.0001	-1.29 $\pm$ 0.12	-2.18 $\pm$ 0.42	-1.38 $\pm$ 0.29
0.0002	-1.70 $\pm$ 0.12	-2.46 $\pm$ 0.65	-1.85 $\pm$ 0.29

KL divergence			
<b>Coefficient</b>	<b>AD</b>	<b>State OM</b>	<b>State-action OM</b>
0.000001	-56.20 $\pm$ 4.02	-61.59 $\pm$ 2.72	-61.18 $\pm$ 2.87
0.0000025	-59.58 $\pm$ 4.84	-54.59 $\pm$ 3.16	-59.59 $\pm$ 2.36
0.000005	-57.24 $\pm$ 2.62	-59.03 $\pm$ 5.41	-61.24 $\pm$ 2.01
0.00001	-54.84 $\pm$ 3.15	-57.62 $\pm$ 3.13	-58.85 $\pm$ 2.73
0.000025	-55.10 $\pm$ 2.64	-59.32 $\pm$ 1.37	-56.86 $\pm$ 5.48
0.00005	-49.99 $\pm$ 4.04	-59.96 $\pm$ 1.65	-53.39 $\pm$ 23.77
0.0001	-45.72 $\pm$ 9.02	-1.34 $\pm$ 25.30	-1.25 $\pm$ 0.07
0.00025	-1.33 $\pm$ 0.05	-1.47 $\pm$ 0.20	-1.51 $\pm$ 0.10
0.0005	-1.52 $\pm$ 0.04	-1.76 $\pm$ 0.22	-1.99 $\pm$ 0.35
0.001	-1.73 $\pm$ 0.07	-1.76 $\pm$ 0.26	-2.30 $\pm$ 1.14
0.0025	-1.98 $\pm$ 0.07	-1.76 $\pm$ 0.51	-1.94 $\pm$ 0.30
0.005	-2.15 $\pm$ 0.05	-1.90 $\pm$ 0.83	-2.08 $\pm$ 0.61
0.01	-2.11 $\pm$ 0.05	-2.12 $\pm$ 1.00	-2.14 $\pm$ 0.56

Table 4: All traffic control results ( $\times 10^3$ ).

$\chi^2$ divergence			
<b>Coefficient</b>	<b>AD</b>	<b>State OM</b>	<b>State-action OM</b>
0.0008	-17.60 $\pm$ 1.78	-12.59 $\pm$ 1.63	-27.16 $\pm$ 12.83
0.0016	-36.16 $\pm$ 3.25	-11.25 $\pm$ 10.08	-11.17 $\pm$ 0.19
0.004	-34.16 $\pm$ 12.90	-10.88 $\pm$ 0.91	-11.65 $\pm$ 2.12
0.008	-12.45 $\pm$ 0.25	-10.99 $\pm$ 3.13	-12.02 $\pm$ 0.18
0.016	-12.31 $\pm$ 0.08	-10.68 $\pm$ 0.17	-12.18 $\pm$ 0.46
0.04	-12.29 $\pm$ 0.05	-10.78 $\pm$ 0.12	-12.34 $\pm$ 0.10
0.08	-12.39 $\pm$ 0.04	-10.73 $\pm$ 0.84	-12.20 $\pm$ 0.11

KL divergence			
<b>Coefficient</b>	<b>AD</b>	<b>State OM</b>	<b>State-action OM</b>
0.00006	-21.23 $\pm$ 9.74	-33.59 $\pm$ 9.89	-30.96 $\pm$ 22.42
0.00012	-30.39 $\pm$ 22.16	-41.96 $\pm$ 12.70	-19.67 $\pm$ 6.43
0.0003	-23.10 $\pm$ 5.63	-35.29 $\pm$ 10.32	-27.56 $\pm$ 7.50
0.0006	-21.85 $\pm$ 19.03	-34.56 $\pm$ 11.97	-22.40 $\pm$ 9.84
0.0012	-25.17 $\pm$ 10.24	-31.28 $\pm$ 7.83	-31.77 $\pm$ 6.01
0.003	-23.51 $\pm$ 6.91	-35.76 $\pm$ 10.53	-23.90 $\pm$ 12.81
0.006	-12.26 $\pm$ 11.82	-58.08 $\pm$ 46.98	-29.42 $\pm$ 25.37
0.012	-12.30 $\pm$ 9.27	-10.60 $\pm$ 0.87	-11.88 $\pm$ 0.81
0.03	-12.28 $\pm$ 0.14	-11.03 $\pm$ 6.86	-11.73 $\pm$ 0.21
0.06	-12.20 $\pm$ 0.07	-10.71 $\pm$ 0.18	-12.23 $\pm$ 14.25
0.12	-12.33 $\pm$ 0.04	-10.24 $\pm$ 0.61	-12.09 $\pm$ 0.38
0.3	-12.35 $\pm$ 0.04	-11.02 $\pm$ 0.57	-12.11 $\pm$ 0.25
0.6	-12.40 $\pm$ 0.04	-10.61 $\pm$ 0.36	-12.11 $\pm$ 0.28
1.2	-12.33 $\pm$ 0.03	-10.50 $\pm$ 0.26	-12.02 $\pm$ 0.28

Table 5: All pandemic mitigation results.

$\chi^2$ divergence			
Coefficient	AD	State OM	State-action OM
0.0005	-580.7 $\pm$ 73.8	-484.2 $\pm$ 56.6	-164.0 $\pm$ 3.5
0.001	-94.2 $\pm$ 14.0	-263.9 $\pm$ 19.2	-127.0 $\pm$ 5.9
0.0025	-97.1 $\pm$ 8.2	-146.4 $\pm$ 18.1	-93.3 $\pm$ 9.3
0.005	-76.6 $\pm$ 10.5	-109.7 $\pm$ 10.3	-55.2 $\pm$ 0.7
0.01	-84.7 $\pm$ 8.5	-72.8 $\pm$ 8.8	-47.5 $\pm$ 0.6
0.025	-85.6 $\pm$ 7.9	-54.3 $\pm$ 1.3	-50.9 $\pm$ 2.3
0.05	-74.8 $\pm$ 13.1	-57.1 $\pm$ 3.5	-113.3 $\pm$ 32.8

KL divergence			
Coefficient	AD	State OM	State-action OM
0.00003	-598.4 $\pm$ 39.7	-604.1 $\pm$ 10.7	-583.8 $\pm$ 61.2
0.00006	-600.6 $\pm$ 12.4	-589.0 $\pm$ 260.9	-594.7 $\pm$ 3.3
0.00015	-592.3 $\pm$ 51.3	-607.9 $\pm$ 11.1	-577.1 $\pm$ 11.2
0.0003	-593.6 $\pm$ 6.0	-592.0 $\pm$ 29.3	-497.9 $\pm$ 11.2
0.0006	-590.0 $\pm$ 7.5	-593.1 $\pm$ 5.4	-364.3 $\pm$ 5.8
0.0015	-459.9 $\pm$ 114.1	-511.1 $\pm$ 21.1	-181.6 $\pm$ 7.5
0.003	-270.0 $\pm$ 39.7	-332.3 $\pm$ 41.0	-101.2 $\pm$ 5.0
0.006	-154.5 $\pm$ 5.5	-158.7 $\pm$ 28.8	-61.9 $\pm$ 5.2
0.015	-84.1 $\pm$ 6.8	-82.9 $\pm$ 5.6	-48.9 $\pm$ 0.5
0.03	-98.3 $\pm$ 8.4	-58.4 $\pm$ 3.8	-49.6 $\pm$ 1.2
0.06	-88.6 $\pm$ 12.8	-59.0 $\pm$ 7.2	-78.3 $\pm$ 10.2
0.15	-82.1 $\pm$ 11.6	-75.9 $\pm$ 4.6	-106.6 $\pm$ 19.6
0.3	-73.4 $\pm$ 9.2	-98.1 $\pm$ 16.1	-127.3 $\pm$ 24.7
0.6	-88.6 $\pm$ 5.6	-112.5 $\pm$ 16.6	-118.5 $\pm$ 10.7

Table 6: All glucose monitoring results ( $\times 10^3$ ).

Coefficient	AD $\chi^2$	AD KL
0.00008	9.20 $\pm$ 0.68	8.80 $\pm$ 2.24
0.00025	14.05 $\pm$ 3.27	9.48 $\pm$ 1.02
0.0008	16.94 $\pm$ 0.07	8.84 $\pm$ 0.42
0.0025	16.84 $\pm$ 0.08	14.22 $\pm$ 2.81
0.008	16.71 $\pm$ 0.11	12.73 $\pm$ 2.75
0.025	16.59 $\pm$ 0.11	16.81 $\pm$ 0.27
0.08	16.43 $\pm$ 0.07	16.52 $\pm$ 0.08
0.25	16.22 $\pm$ 0.10	16.33 $\pm$ 0.04
0.8	16.13 $\pm$ 0.10	16.25 $\pm$ 0.13

Table 7: All results for RLHF.

$\chi^2$ divergence			
Coefficient	AD	State OM	State-action OM
0.0005	$2.65 \pm 0.67$	$0.64 \pm 0.19$	$0.53 \pm 0.29$
0.001	$3.87 \pm 0.25$	$0.65 \pm 4.63$	$0.60 \pm 0.16$
0.0025	$6.24 \pm 0.10$	$9.06 \pm 0.17$	$9.04 \pm 4.71$
0.005	$6.17 \pm 0.03$	$9.06 \pm 0.11$	$9.16 \pm 0.09$
0.01	$6.16 \pm 0.04$	$9.07 \pm 0.07$	$9.17 \pm 0.12$
0.025	$6.19 \pm 0.04$	$8.64 \pm 0.12$	$8.61 \pm 0.18$
0.05	$6.14 \pm 0.00$	$7.95 \pm 0.05$	$7.99 \pm 0.22$

KL divergence			
Coefficient	AD	State OM	State-action OM
0.0008	$2.52 \pm 0.18$	$2.32 \pm 0.86$	$2.31 \pm 0.08$
0.0016	$2.98 \pm 0.33$	$2.31 \pm 0.07$	$1.11 \pm 0.89$
0.004	$4.59 \pm 0.19$	$2.23 \pm 0.06$	$2.01 \pm 0.23$
0.008	$6.10 \pm 0.15$	$1.30 \pm 0.19$	$1.25 \pm 0.32$
0.016	$6.33 \pm 0.13$	$0.82 \pm 0.22$	$0.84 \pm 0.21$
0.04	$6.26 \pm 0.05$	$1.17 \pm 2.92$	$1.81 \pm 0.31$
0.08	$6.26 \pm 0.04$	$7.62 \pm 0.06$	$7.32 \pm 0.28$
0.16	$6.21 \pm 0.05$	$7.20 \pm 0.12$	$7.12 \pm 0.11$
0.4	$6.16 \pm 0.03$	$6.89 \pm 0.14$	$6.84 \pm 0.19$
0.8	$6.19 \pm 0.03$	$7.07 \pm 0.12$	$6.86 \pm 0.19$
1.6	$6.14 \pm 0.04$	$6.90 \pm 0.13$	$6.61 \pm 0.31$
4	$6.13 \pm 0.03$	$6.80 \pm 0.16$	$6.79 \pm 0.12$
8	$6.13 \pm 0.01$	$6.81 \pm 0.28$	$6.80 \pm 0.06$
16	$6.13 \pm 0.00$	$6.94 \pm 0.10$	$6.83 \pm 0.25$

Table 8: All results for the tomato-watering gridworld.

## E.2 ABLATIONS

Here, we present the results of two ablations of ORPO. For each of the non-RLHF environments, we fix the optimal coefficient for state-action OM  $\chi^2$  regularization and modify other hyperparameters. We do not ablate the RLHF experiments because RLHF is a contextual bandit (Appendix A.3) and so it isn't actually necessary to run ORPO for RLHF. The results are shown in Table 9 below.

**Order of training policy and discriminator networks.** First, we experiment with modifying ORPO to train the discriminator *after* the policy. In Algorithm 1, the discriminator  $\hat{d}_\phi$  is optimized, then the rewards are updated with the discriminator outputs, and then the policy is trained with the updated rewards. An alternative is to wait to train the discriminator until after the policy has been updated, i.e., put Line 4 after Line 7. We experimented with this and found that in in most environments there is not too much difference between the two orders, although training the discriminator first gives slightly better results. However, in the pandemic mitigation environment, we found that training the discriminator second gave results with much higher variance. This suggests that it is best to train the discriminator before augmenting the rewards to train the policy.

**Discriminator reward clipping.** Second, we experiment with modifying the discriminator reward clipping parameter  $\delta$  of ORPO. We found that removing the clipping parameter entirely led to NaN errors and training could not complete, so we do not report those results. However, to test sensitivity to this parameter, we tried training with a clipping parameter  $10\times$  larger and  $10\times$  smaller in each environment. We found that the results did not vary by much across different clipping parameters. This suggests that ORPO is relatively robust to the hyperparameter, so it does not need to be tuned precisely.

Method	Environment			
	Traffic control ( $\times 10^3$ )	Pandemic mitigation	Glucose monitoring ( $\times 10^3$ )	AI safety gridworld
Default parameters	$-1.15 \pm 0.06$	$-12.18 \pm 0.46$	$-47.5 \pm 0.6$	$9.17 \pm 0.12$
Train policy before discriminator	$-1.24 \pm 0.07$	$-12.23 \pm 2.71$	$-48.2 \pm 0.7$	$8.97 \pm 0.13$
Discriminator reward clipping $\times 0.1$	$-1.18 \pm 0.14$	$-12.22 \pm 0.21$	$-47.7 \pm 0.8$	$9.21 \pm 0.18$
Discriminator reward clipping $\times 10$	$-1.24 \pm 0.03$	$-12.11 \pm 0.29$	$-47.9 \pm 0.7$	$9.20 \pm 0.14$

Table 9: Results of our ablations of ORPO. We report the median and standard deviation of the true reward across five random seeds for the four non-RLHF environments. The top row shows the results of state-action occupancy measure regularization with the optimal coefficient for  $\chi^2$  divergence. The other rows show ablations with the same coefficient. We find that ORPO is mostly robust to different hyperparameters but that it is probably best to train the discriminator network before the policy network.