

ON A NOVEL UCP RESULT AND ITS APPLICATION TO INVERSE CONDUCTIVE SCATTERING

HUAIAN DIAO, XIAOXU FEI, AND HONGYU LIU

ABSTRACT. In this paper, we derive a novel Unique Continuation Principle (UCP) for a system of second-order elliptic PDEs system and apply it to investigate inverse problems in conductive scattering. The UCP relaxes the typical assumptions imposed on the domain or boundary with certain interior transmission conditions. This is motivated by the study of the associated inverse scattering problem and enables us to establish several novel unique identifiability results for the determination of generalized conductive scatterers using a single far-field pattern, significantly extending the results in [15, 21]. A key technical advancement in our work is the combination of Complex Geometric Optics (CGO) techniques from [15, 21] with the Fourier expansion method to microlocally analyze corner singularities and their implications for inverse problems. We believe that the methods developed can have broader applications in other contexts.

Keywords: Unique Continuation Principle, conductive medium scattering, inverse problem, uniqueness, single far-field measurement, polygonal-nest and polygonal-cell structures

2020 Mathematics Subject Classification: 35Q60, 78A46 (primary); 35P25, 78A05, 81U40 (secondary).

1. INTRODUCTION

1.1. The main results. This paper addresses a novel type of the unique continuation principle (UCP) for a system of partial differential equations (PDEs) and applies this principle to investigate inverse problems in conductive medium scattering. In this subsection, we outline the main results of our study, deferring detailed proofs to subsequent sections. Initially, we introduce the geometric setup and notations for our study.

Let (r, ϑ) denote the polar coordinates in \mathbb{R}^2 , where $\mathbf{x} = (x_1, x_2) = (r \cos \vartheta, r \sin \vartheta) \in \mathbb{R}^2$. For a given point \mathbf{x}_0 , we denote $B_{r_0}(\mathbf{x}_0)$ as the open disk centered at \mathbf{x}_0 with radius $r_0 \in \mathbb{R}_+$, and we simply denote B_{r_0} as $B_{r_0}(\mathbf{0})$. Let a sector \mathcal{S} be defined as follows:

$$\mathcal{S} = \{\mathbf{x} \in \mathbb{R}^2 \mid \vartheta_m < \arg(x_1 + ix_2) < \vartheta_M\}, \quad (1.1)$$

where $-\pi \leq \vartheta_m < \vartheta_M < \pi$, $\vartheta_M - \vartheta_m \in (0, \pi)$, and $i = \sqrt{-1}$. Additionally, the two boundary lines of \mathcal{S} are given by

$$\Gamma^+ = \{\mathbf{x} \in \mathbb{R}^2 \mid \mathbf{x} = (r \cos \vartheta_M, r \sin \vartheta_M)^\top, r > 0\},$$

$$\Gamma^- = \{\mathbf{x} \in \mathbb{R}^2 \mid \mathbf{x} = (r \cos \vartheta_m, r \sin \vartheta_m)^\top, r > 0\}.$$

Furthermore, define

$$\mathcal{S}_{r_0} = \mathcal{S} \cap B_{r_0}, \quad \Gamma_{r_0}^\pm = \Gamma^\pm \cap B_{r_0}, \quad \Lambda_{r_0} = \mathcal{S} \cap \partial B_{r_0}. \quad (1.2)$$

The opening angle of \mathcal{S}_{r_0} is $\vartheta_M - \vartheta_m$. If $\frac{\vartheta_M - \vartheta_m}{\pi}$ is a *rational number*, \mathcal{S}_{r_0} is termed a *rational corner*; otherwise, it is an *irrational corner*.

Theorem 1.1 shows a novel type of UCP result associated with a PDE system described by (1.3). The detailed proof of Theorem 1.1 is given in Section 2.

Theorem 1.1. *Let D and Ω be two bounded Lipschitz domains in \mathbb{R}^2 with connected complements $\mathbb{R}^2 \setminus \bar{D}$ and $\mathbb{R}^2 \setminus \bar{\Omega}$ respectively, where $\Omega \subset D$. Assume $\gamma_1 \in \mathbb{R}_+$ and*

$\gamma_2 \in L^\infty(D) \cap H^2(\Omega)$ with $\text{supp}(\gamma_2 - \gamma_1) \subset \Omega$ are given. Suppose that $\Omega \cap B_{r_0} = \mathcal{S}_{r_0}$, where \mathcal{S}_{r_0} is defined by (1.2), $r_0 \in \mathbb{R}_+$ is sufficiently small and $\mathbf{0} \in \partial\Omega$. The line segments $\Gamma_{r_0}^\pm$ are defined in (1.2). Consider $\mathbf{u} = (v, w)^\top \in H^1(D) \times H^1(D)$ solving the PDE system:

$$\begin{cases} \mathcal{P}\mathbf{u} = 0 & \text{in } D, \\ \mathcal{B}\mathbf{u} = 0 & \text{on } \Gamma_{r_0}^\pm, \end{cases} \quad (1.3)$$

where

$$\mathcal{P} = \begin{pmatrix} \Delta + \gamma_1 & 0 \\ 0 & \Delta + \gamma_2 \end{pmatrix}, \quad \mathcal{B} = \begin{pmatrix} 1 & -1 \\ \partial_\nu + \eta & -\partial_\nu \end{pmatrix}. \quad (1.4)$$

Here the constant $\eta \in \mathbb{C}$ is defined on $\Gamma_{r_0}^\pm$ and $\partial_\nu v$ is the exterior normal derivative of v with ν being the exterior normal of $\partial\Omega$. If \mathcal{S}_{r_0} forms an irrational corner and $\eta \neq 0$, then $\mathbf{u} = \mathbf{0}$ in D .

Remark 1.1. UCP is a fundamental concept in the theory of elliptic partial differential equations (PDEs). For instance, UCP can be applied to investigate the solvability and stability of partial differential equations [3,47,48]. In Theorem 1.1, we establish a novel UCP for the PDE system (1.3). Specifically, if a solution $\mathbf{u} = (v, w)^\top$ to (1.3) exists and satisfies certain boundary conditions described by (1.3) on two intersecting line segments within D , forming an irrational convex corner, then \mathbf{u} must be identically zero in D . Furthermore, the boundary conditions of \mathbf{u} on two intersecting line segments describes certain transmission properties of v and w across these segments. This type of transmission boundary condition is particularly relevant for studying the conductive scattering problem, which will be discussed in detail in subsection 1.2. To the best of our knowledge, this type of UCP is particularly intriguing compared to existing literature on UCP for elliptic systems. It has important applications in the study of the inverse conductive medium scattering problem (1.9), which will be further elaborated in the subsequent subsection.

The PDE system described by (1.3) in Theorem 1.1 originates from the invisibility phenomena associated with the time-harmonic conductive medium scattering problem (1.7), which will be further elaborated upon in subsection 1.2. The direct scattering problem (1.7) involves solving for the scattered wave u^s given the incident wave u^i and the conductive medium scatterer (Ω, q, η) , where Ω is a bounded Lipschitz domain in \mathbb{R}^2 with a connected complement such that $\Omega \Subset B_R$ ($R \in \mathbb{R}_+$) and u^i can be either a plane wave of the form

$$u^i(\mathbf{x}) = e^{i\mathbf{k}\mathbf{x}\cdot\mathbf{d}} \quad (1.5)$$

or a point source of the form

$$u^i(\mathbf{x}; \mathbf{z}_0) = H_0^1(k|\mathbf{x} - \mathbf{z}_0|) \quad (1.6)$$

associated with a wave number $k \in \mathbb{R}_+$. Here, $\mathbf{d} \in \mathbb{S}^1$ is the incident direction of the plane wave, H_0^1 denotes the zeroth-order Hankel function of the first kind, and \mathbf{z}_0 signifies the location of the point source with $\mathbf{z}_0 \in \mathbb{R}^2 \setminus \overline{B_R}$ with $\Omega \Subset B_R$ and $R \in \mathbb{R}_+$. The function $q \in L^\infty(\Omega)$ characterizes the refractive index of the medium scatterer Ω with $\text{supp}(q) \subset \Omega$, and the constant conductive parameter η defined on $\partial\Omega$ signifies the conductive property of Ω . On the other hand, the inverse problem corresponding to (1.7) aims to determine the shape of the underlying conductive medium scatterer (Ω, q, η) and its physical configuration (q, η) through the measurement of the scattered wave. The novel UCP derived in Theorem 1.1 has several applications in the conductive medium scattering problem (1.7). Specifically, in Theorem 1.2, utilizing the UCP for (1.3), it can be shown that the conductive medium scatterer in (1.7) containing a convex irrational corner cannot be invisible. The detailed proof of Theorem 1.2 is postponed to Section 2.

Theorem 1.2. *Consider the conductive medium scattering problem modeled by (1.7), associated with a given incident wave u^i with the wave number k , as defined by (1.5) or (1.6). Let the bounded Lipschitz domain $\Omega \subset \mathbb{R}^2$ with a connected complement in (1.7) describe the corresponding conductive medium scatterer (Ω, q, η) , where $\text{supp}(q) \subset \Omega$, $q \in L^\infty(\Omega)$ and η is a nonzero constant. If Ω has a convex irrational corner \mathbf{x}_0 with $q \in L^\infty(\Omega) \cap H^2(\Omega \cap B_{r_0}(\mathbf{x}_0))$, where $r_0 \in \mathbb{R}_+$ is sufficiently small, then Ω cannot be invisible for any wave number $k \in \mathbb{R}_+$.*

Using the unique continuation property (UCP) for (1.3) as established in Theorem 1.1, we can address the unique identifiability for the inverse problem of the conductive medium scattering problem (1.7). Specifically, in Theorem 1.3, we present both local and global unique determination of a conductive medium scatterer based on a single measurement of the scattered wave, where the single measurement refers to that taken under a fixed incident wave. The unique identifiability by a single measurement is challenging and has a long and colorful history in inverse scattering problems, often referred to as Schiffer problem in the literature; see [18, 19] and the references therein for more details. The detailed statement of Theorem 1.3 is provided in Theorem 2.1, along with the corresponding proof.

Theorem 1.3. *Considering the conductive medium scattering problem (1.7), if the measurements of the two scattered wave corresponding to two conductive medium scatterers under a fixed incident wave are identical, then the difference between these two scatterers cannot contain a convex irrational corner. Furthermore, if two convex irrational polygonal conductive medium scatterers, Ω_1 and Ω_2 , produce the same scattered wave measurements for a fixed incident wave, then Ω_1 and Ω_2 must be identical.*

When the conductive medium scatterer associated with (1.7) has a polygonal-cell or polygonal-nest structure (see Definitions 3.2 and 3.3 for rigorous explanations), we can uniquely identify the polygonal-nest structure based on a single measurement of the scattered wave, given some a-priori knowledge of the scatterer (see the detailed a-priori information in Definition 3.5). This identification leverages the novel UCP for (1.3). The detailed statements of these uniqueness results can be found in Theorems 3.1 and 3.3.

In addition to determining the shape of the conductive medium scatterer using the newly derived UCP in Theorem 1.1, we also establish uniqueness results for identifying the piecewise-linear-polynomial refractive index and constant conductive parameter within the conductive polygonal-cell or polygonal-nest medium scatterer. This is achieved under some a priori information based on a single measurement of the scattered wave. These results are detailed in Theorems 3.2 and 3.3.

1.2. The conductive medium scattering and invisibility. The conductive medium scattering problem has important and practical applications, such as the modelling of an electromagnetic object coated with a thin layer of a highly conductive material and magnetotellurics in geophysics [5]. Indeed, this kind of the conductive medium scattering problem can be derived by TM (transverse magnetic) polarisation from the corresponding Maxwell scattering system; see more details in [11, 15].

Let Ω be a conductive medium scatterer suited in a homogenous isotropic background medium \mathbb{R}^2 with the medium configurations q and η , which is a bounded Lipschitz domain with a connected complement $\mathbb{R}^2 \setminus \bar{\Omega}$. The medium parameter $q \in L^\infty(\Omega)$ characterises the refractive index of the medium Ω with $\text{supp}(q - 1) \subset \Omega$ and the constant η defined on $\partial\Omega$ signifies the conductive property of Ω . In what follows, we write $(\Omega; q, \eta)$ to describe the conductive medium scatterer Ω with the physical configurations q and η .

For a given incident wave u^i impinging on Ω , it generates a scattered wave u^s . The total wave u is given by $u = u^i + u^s$. The incident wave u^i can be either a plane wave of the form (1.5) or a point source of the form (1.6). The conductive medium scattering problem in \mathbb{R}^2

can be modeled as:

$$\begin{cases} \Delta u^- + k^2 q u^- = 0 & \text{in } \Omega, \\ \Delta u^+ + k^2 u^+ = 0 & \text{in } \mathbb{R}^2 \setminus \overline{\Omega}, \\ u^+ = u^-, \quad \partial_\nu u^- = \partial_\nu u^+ + \eta u^+ & \text{on } \partial\Omega, \\ u^+ = u^i + u^s & \text{in } \mathbb{R}^2 \setminus \overline{\Omega}, \\ \lim_{r \rightarrow \infty} r^{1/2} (\partial_r u^s - i k u^s) = 0, & r = |\mathbf{x}|, \end{cases} \quad (1.7)$$

where $k \in \mathbb{R}_+$ is the wave number, and $\nu \in \mathbb{S}^1$ is the exterior unit normal vector to $\partial\Omega$. The third equation in (1.7) describes the conductive transmission property of the total wave u across $\partial\Omega$. The final equation refers to the Sommerfeld radiation condition, characterizing the outgoing nature of the scattered wave u^s . Moreover, u^\pm and $\partial_\nu^\pm u$ denote the limits of u and $\partial_\nu u$ from the exterior and interior of Ω , respectively.

The direct problem (1.7) aims to solve the scattered wave u^s given the conductive medium scatterer $(\Omega; q, \eta)$ and the incident wave u^i . For the well-posedness of the direct problem (1.7) it was proved that there exists a unique solution $u \in H_{loc}^1(\mathbb{R}^2)$ to (1.7) (cf. [9, 11]). Moreover, the scattered field u^s possesses the following asymptotic behavior

$$u^s(\hat{\mathbf{x}}) = \frac{e^{ik|\mathbf{x}|}}{|\mathbf{x}|^{\frac{1}{2}}} \left(u^\infty(\hat{\mathbf{x}}) + \mathcal{O}(|\mathbf{x}|^{-\frac{1}{2}}) \right), \quad |\mathbf{x}| \rightarrow \infty, \quad (1.8)$$

where $\hat{\mathbf{x}} = \frac{\mathbf{x}}{|\mathbf{x}|}$ and u^∞ is the far-field pattern of u^s associated with u^i . Here it can be checked that the far-field pattern u^∞ , which is a real analytic function defined in \mathbb{S}^1 , corresponds one-to-one to u^s and encodes the information of the scatterer $(\Omega; q, \eta)$. From (1.8) we define the forward operator by

$$\mathcal{F}((\Omega; q, \eta); u^i) \rightarrow u^\infty(\hat{\mathbf{x}}). \quad (1.9)$$

The inverse problem associated with (1.9) can be formulated as

$$u^\infty(\hat{\mathbf{x}}; u^i) \rightarrow (\Omega; q, \eta), \quad (1.10)$$

which intends to identify Ω and its physical configurations q and η . This type of inverse problem has practical applications in non-destructive testing and radar [18], etc. In this paper we will mainly focus on the uniquely determination of (Ω, q, η) by a single far-field measurement, namely that the far-field pattern $u^\infty(\hat{\mathbf{x}}; u^i)$ is generated by a fixed incident wave u^i and a fixed wave number k , otherwise we say that it refers to many far-field measurements.

When $u^\infty \equiv 0$, no scattering pattern can be observed outside Ω , and hence the scatterer (Ω, q, η) is invisible/transparent with respect to the exterior observation under the wave interrogation by u^i . Then by Rellich's theorem, which indicates that $u^+ = u^i$ in $\mathbb{R}^2 \setminus \overline{\Omega}$, one has $(w, v) = (u^-|_\Omega, u^i|_\Omega)$ satisfies the following transmission eigenvalue problem:

$$\begin{cases} \Delta w + k^2(1 + V)w = 0 & \text{in } \Omega, \\ \Delta v + k^2 v = 0 & \text{in } \Omega, \\ w = v, \quad \partial_\nu w = \partial_\nu v + \eta v & \text{on } \Gamma, \end{cases} \quad (1.11)$$

where $V = q - 1$ and $\Gamma = \partial\Omega$.

On the other hand, given the bounded Lipschitz domain Ω , $V \in L^\infty(\Omega)$ and the boundary parameter $\eta \in L^\infty(\partial\Omega)$, consider the PDE system (1.11). If there exists a nontrivial pair of solutions (w, v) to (1.11) associated with k , then k is referred to as a transmission eigenvalue and (w, v) is the corresponding pair of transmission eigenfunctions of (1.11). Here, we would like to emphasise that throughout the article, η can be taken to be identically zero,

which reduces to the case with a normal scattering inhomogeneity of refractive index q , and all the results still hold equally. Hence, $(\Omega; q, \eta)$ is actually a generalized conductive medium scatterer and the transmission eigenvalue problem (1.11) is generalized transmission eigenvalue problem in our study, but we shall not distinguish it.

In the following, we shall investigate the connection between the PDE system (1.3) in Theorem 1.1 and the conductive medium scattering (1.7) when the invisibility of the conductive medium scatterer $(\Omega; q, \eta)$ occurs. Recall that the incident wave u^i is given by (1.5) or (1.6). Since Ω is bounded and has a connected complement, let $D := B_R$ such that $\Omega \Subset B_R$, where B_R is a disk centered at the origin with radius R . As discussed earlier, when $(\Omega; q, \eta)$ is invisible/transparent, we have $u^\infty \equiv 0$, and by Rellich's theorem, it follows that $u^s \equiv 0$ in $D \setminus \overline{\Omega}$, which implies that $u^+ \equiv u^i$ in $D \setminus \overline{\Omega}$. According to (1.7), we can readily derive:

$$\begin{cases} \mathcal{P}\mathbf{u} = 0 & \text{in } D, \\ \mathcal{B}\mathbf{u} = 0 & \text{on } \partial\Omega, \end{cases} \quad (1.12)$$

where $\mathbf{u} = (u^i, u^- \chi_\Omega + u^i \chi_{D \setminus \overline{\Omega}}) \in H^1(D) \times H^1(D)$, \mathcal{P} and \mathcal{B} are defined in (1.4) with $\gamma_1 = k^2$ and $\gamma_2 = k^2 q \chi_\Omega + k^2 \chi_{D \setminus \overline{\Omega}}$. When Ω has a convex corner, meaning there are two intersecting line segments lying on $\partial\Omega$ where the intersection point belongs to $\partial\Omega$, we can directly obtain (1.3) from (1.12).

1.3. Connections to existing results and main contributions. The UCP is a fundamental theory with various applications in solvability, controllability, optimal stability, and inverse problems for elliptic partial differential equations (cf. [18, 31, 32]). Several forms of UCP exist for second-order elliptic partial differential equations, including the weak UCP, strong UCP, UCP for Cauchy data, and UCP across a hypersurface [4, 26, 38, 48]. There are multiple approaches to establishing UCP for elliptic equations, such as doubling inequalities, Carleman inequalities, and three spheres inequalities. For further discussions on this topic, we refer to [16, 25, 26, 31–34, 42, 46] and references therein for a historical overview. Recently, the UCP result for the (fractional) Laplacian equation in Euclidian space or a Riemannian manifold can be found in [27, 37]. For elliptic PDE systems, [44] proved that the zero set of least energy solutions for Lane-Emden systems with Neumann boundary conditions has zero measure. The weak UCP for a general second-order elliptic system was established in [30] under certain assumptions. Moreover, [47] derived UCP results for elliptic PDE systems, including strong UCP, weak UCP, and UCP for local Cauchy data.

As discussed in the previous subsection, the invisibility or transparency in inverse scattering problems implies that the scatterer cannot be detected by external measurements, as the probing incident wave remains unperturbed and the corresponding scattered field is identically zero. However, when the scatterer exhibits geometrical singularities, such as corners or points of high curvature, as shown in [6, 8, 12, 24, 41] for time-harmonic acoustic scattering, invisibility or transparency cannot occur for any frequency associated with an incident plane wave. Recently, new methods based on free boundary problems have been introduced to investigate invisibility or transparency in isotropic and anisotropic acoustic medium scattering [13, 14, 35, 45].

The quest to determine the geometrical and physical properties of scatterers through a single far-field measurement boasts a rich and extensive history in the realm of inverse scattering [2, 7, 18, 19, 39, 43]. This pursuit, often referred to as the Schiffer problem [19], aims to uniquely identify the location and shape of scatterers based on a single far-field measurement. When a scatterer is impenetrable, it is termed an obstacle; otherwise, it is considered a medium. In the inverse obstacle scattering, Lax and Phillips [36] demonstrated that the shape of a sound-soft obstacle can be uniquely identified through infinite far-field

measurements. However, achieving uniqueness with just a single far-field measurement has thus far required additional a-priori knowledge of the geometry, such as the size or shape of the scatterer (cf. [17, 20, 39]).

In the context of conductive medium scattering described by (1.7), uniqueness results for determining Ω based on the far-field patterns of all incident plane waves at a fixed frequency, namely infinitely many far-field measurements, have been obtained in [10, 11, 29]. The unique identifiability based on a single far-field measurement for recovering a convex polygon Ω and the constant boundary parameter η has been established in [21] under the generic non-vanishing assumption on the corresponding total wave field, which can be fulfilled under certain physical scenarios. When the refractive index q and the conductive boundary parameter η are piecewise constants, characterized by polygonal-nest or polygonal-cell structures, the corresponding unique determination for q and η by a single far-field pattern under the generic condition has been derived in [15], whereas for the case $\eta \equiv 0$, the single far-field measurement uniquely identifiability for recovering q appeared in [7].

The main contributions of this paper can be summarized in several key points:

- a) We derive a novel type of UCP result for an elliptic second order PDEs system (1.3), where the components v and w of the solution \mathbf{u} to (1.3) satisfy a transmission condition across two intersecting line segments within the underlying domain. These two intersecting line segments form an irrational corner.
- b) We reveal that when the conductive medium scatterer (Ω, q, η) has a convex irrational corner \mathbf{x}_0 and the physical parameter q satisfies H^2 regularity near \mathbf{x}_0 , then Ω radiates any wave number. Furthermore, we demonstrate that an admissible complex irrational polygonal scatterer can be uniquely determined using only a single far-field measurement, independent of its medium content.
- c) We demonstrate that both the shape and medium parameters of a conductive scatterer within the polygonal-nest or polygonal-cell structure can be uniquely determined through a single far-field measurement.

For the main contribution a), in contrast to the existing weak, strong, or Cauchy-type UCPs for elliptic systems in the literature, we consider the UCP for the case where the components of the solution to (1.3) fulfill a transmission boundary condition on two intersecting line segments within the domain, forming an irrational corner. This transmission boundary condition arises from the invisibility or transparency phenomena in conductive medium scattering, which holds both practical and physical significance. We will discuss this aspect in more detail in Section 2. To the best of our knowledge, this represents a novel type of UCP for second-order elliptic PDE systems, playing a crucial role in investigating invisibility and uniqueness results in inverse conductive medium scattering problems.

For the main contribution b), we can substitute the technical condition on the a-priori information in [21], which requires the non-vanishing of the total wave at the corner points, with an irrationality condition related to the interior angles of the conductive polygonal medium Ω . Although ensuring the non-vanishing nature of the total wave at the corner point is feasible in generic physical scenarios, the a-priori information on the irrationality of the interior angles of the underlying scatterer is less restrictive, making the new global unique identifiability more applicable in practice. We establish this uniqueness result by using the novel UCP result described in Theorem 1.1. Furthermore, using the novel UCP established in Theorem 1.1, we can show that if a conductive medium scatterer Ω has a convex irrational corner on the boundary, where the refractive index q has H^2 regularity near the corner, then Ω radiates any incident wave u^i defined by (1.5) or (1.6).

For the main contribution c), we can uniquely determine the refractive index in linear polynomial form and the constant conductive boundary parameter of the medium scatterer, whereas in [15] both the refractive index and the conductive parameter are constants. Moreover, we can relax the admissibility conditions in [15], which requires the non-vanishing of the total wave field at the corner points, to requiring the non-vanishing of either the total wave field or the gradient of the total wave field. In fact, the complexity inherent in the conductive polygonal-nest and polygonal-cell medium scatterer necessitates a detailed study of the singular behavior of the solution to a coupled conductive transmission PDE problem near a corner; see Lemma 3.2. Specifically, given that the refractive index is assumed to be a linear polynomial, it becomes crucial to demonstrate the Hölder regularity of the gradient of the total wave as derived from the direct problem (1.7), particularly near corners; see Lemma 3.1. With this regularity established, we propose another admissible condition, which describes the non-vanishing property of the gradient of the total wave field at the corner point. This admissible condition is generic, which can be fulfilled in more general physical scenarios; see more detailed discussions in Remarks 3.1 and 3.2. Under this generic admissible condition, we can then proceed recursively to determine the interior polygonal-nest structure.

The remainder of the paper is organized as follows. In Section 2, we present the proofs of Theorems 1.1-1.3. In Section 3, we present our main results regarding the uniqueness of recovering the conductive polygonal-nest and polygonal-cell medium scatterers, including the scatterers shape, the partition of their interior polygonal-nest and polygonal-cell structure and the material parameters. Section 4 is devoted to the proofs of the main theorems of Section 3.

2. THE PROOFS OF THEOREMS 1.1-1.3

In this section, we aim to provide the proofs of Theorems 1.1-1.3. Specifically, we present a novel UCP result for an elliptic second-order PDE system and establish both local and global uniqueness results for the shape of an admissible complex conductive polygonal medium scatterer Ω , utilizing only a single far-field measurement. To prove Theorem 1.1, we first introduce some auxiliary lemmas. Drawing upon the results in [12, 41], we present the following lemma, which constructs a complex geometrical optics (CGO) solution.

Lemma 2.1. [12, 41] *Let $\tilde{q} \in H^{1,1+\varepsilon_0}(\mathbb{R}^2)$, where $\varepsilon_0 \in (0, 1)$. Suppose $\mathbf{d} \in \mathbb{S}^1$ and $\mathbf{d}^\perp \in \mathbb{S}^1$ satisfy that $\mathbf{d} \cdot \mathbf{d}^\perp = 0$. Define $\rho = -\tau(\mathbf{d} + i\mathbf{d}^\perp)$, where $\tau \in \mathbb{R}_+$. If τ is sufficiently large, then there exists a complex geometrical optics (CGO) solution u_0 of the form*

$$u_0(\mathbf{x}) = (1 + \psi(\mathbf{x}))e^{\rho \cdot \mathbf{x}}, \quad (2.1)$$

which satisfies

$$(\Delta + k^2\tilde{q})u_0 = 0 \text{ in } \mathbb{R}^2. \quad (2.2)$$

Furthermore, it holds that

$$\|\psi(\mathbf{x})\|_{H^{1,s}(\mathbb{R}^2)} = \mathcal{O}(\tau^{-\frac{2}{3}}).$$

Proposition 2.1. [22] *For a given $\zeta \in (0, e)$ and $s > 0$, it yields that*

$$\begin{aligned} \left| \int_{\zeta}^{\infty} r^s e^{-\mu r} dr \right| &\leq \frac{2}{\Re \mu} e^{-\frac{\zeta}{2} \Re \mu}, \\ \int_0^{\zeta} r^s e^{-\mu r} dr &= \frac{\Gamma(s+1)}{\mu^{s+1}} + \mathcal{O}\left(\frac{2}{\Re \mu} e^{-\frac{\zeta}{2} \Re \mu}\right), \end{aligned} \quad (2.3)$$

as $\Re \mu \rightarrow \infty$, where $\Gamma(s)$ stands for the Gamma function.

Moreover, let u_0 be the CGO solution with the parameter τ defined in (2.1). Suppose the corner \mathcal{S}_{r_0} is defined as in (1.2). Then, there exists a vector $\mathbf{d} \in \mathbb{S}^1$ such that

$$0 < \varsigma < \mathbf{d} \cdot \hat{\mathbf{x}} \leq 1, \quad \forall \mathbf{x} \in \mathcal{S}_{r_0} \setminus \{\mathbf{0}\}, \quad \hat{\mathbf{x}} = \mathbf{x}/|\mathbf{x}|, \quad (2.4)$$

where ς is a positive constant depending on \mathcal{S}_{r_0} and \mathbf{d} . For sufficiently large τ , one has

$$\begin{aligned} \int_{\mathcal{S}_{r_0}} |\mathbf{x}|^s |u_0| d\mathbf{x} &\lesssim \tau^{-(s+\frac{29}{12})} + \tau^{-(s+2)} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}), \\ \|u_0(\mathbf{x})\|_{H^1(\Lambda_{r_0})} &\lesssim (1+\tau)(1+\tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau}, \\ \left| \int_{\Gamma_{r_0}^\pm} |\mathbf{x}|^s \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\sigma \right| &\lesssim \tau^{-(s+\frac{7}{6})} + \mathcal{O}(\tau^{-\frac{7}{6}} e^{-\frac{1}{2}\varsigma r_0 \tau}), \end{aligned} \quad (2.5)$$

where $e^{\rho \cdot \mathbf{x}}$ and $\psi(\mathbf{x})$ are defined in (2.1). Throughout the rest of this paper, “ \lesssim ” means that we only perform the leading asymptotic analysis by neglecting a generic positive constant C with respect to $\tau \rightarrow \infty$, where C is not a function of τ . This convention is similar for “ \gtrsim ”.

Lemma 2.2. [18, Section 3.4] Suppose that v is a solution to Helmholtz equation $\Delta + \gamma_1 v = 0$ in \mathcal{S}_{r_0} , where $\gamma_1 \in \mathbb{R}_+$ and \mathcal{S}_{r_0} is defined in (1.2). If v is analytic in \mathcal{S}_{r_0} , then v has the following spherical wave expansion in polar coordinates around the origin:

$$v = \sum_{n=0}^{\infty} (a_n e^{in\vartheta} + b_n e^{-in\vartheta}) J_n(\sqrt{\gamma_1} r), \quad r = |\mathbf{x}|, \quad (2.6)$$

where $\mathbf{x} = (x_1, x_2) = r(\cos \vartheta, \sin \vartheta) \in \mathbb{R}^2$, a_n and b_n are constants and

$$J_n(t) = \sum_{p=0}^{\infty} \frac{(-1)^p}{2^{n+2p} p! (n+p)!} t^{n+2p}$$

is the Bessel functions of order n .

We are in the position to give the proof of Theorem 1.1.

The proof of Theorem 1.1. According to the statement of Theorem 1.1, we know that the solution (v, w) to (1.3) satisfy the following system:

$$\begin{cases} \Delta w + \gamma_2 w = 0 & \text{in } \mathcal{S}_{r_0}, \\ \Delta v + \gamma_1 v = 0 & \text{in } \mathcal{S}_{r_0}, \\ w = v, \quad \partial_\nu w = \partial_\nu v + \eta v & \text{on } \Gamma_{r_0}^\pm. \end{cases} \quad (2.7)$$

By the interior regularity of the elliptic equation, we know that v is analytic in B_{r_0} . When v is analytic, it was proven in [22, Theorem 3.2] that $v(\mathbf{0}) = 0$. Using (2.6), one has

$$a_0 + b_0 = 0,$$

which indicates that

$$\begin{aligned} v &= \sum_{n=1}^{\infty} (a_n e^{in\vartheta} + b_n e^{-in\vartheta}) J_n(\sqrt{\gamma_1} r) \\ &= \frac{k}{2} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) r + \mathfrak{J}_1 + \mathfrak{J}_2. \end{aligned} \quad (2.8)$$

Here

$$\mathfrak{J}_1 = \sum_{p=1}^{\infty} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) \frac{(-1)^p (\sqrt{\gamma_1} r)^{2p+1}}{2^{2p+1} p! (p+1)!}, \quad \mathfrak{J}_2 = \sum_{n=2}^{\infty} \sum_{p=0}^{\infty} (a_n e^{in\vartheta} + b_n e^{-i\vartheta}) \frac{(-1)^p (\sqrt{\gamma_1} r)^{n+2p}}{2^{n+2p} p! (n+p)!}.$$

In what follows, we shall prove this theorem by using mathematical induction. Namely, we shall prove that $a_\ell = b_\ell = 0$ for $\ell \in \mathbb{N}$. Since $\gamma_2 \in H^2(\mathcal{S}_{r_0})$, let $\tilde{\gamma}_2$ be the Sobolev extension of γ_2 in \mathbb{R}^2 . According to Lemma 2.1, there exists the CGO solution u_0 given by (2.1), which satisfies

$$(\Delta + \tilde{\gamma}_2)u_0 = 0 \text{ in } \mathbb{R}^2.$$

Hence, it yields that

$$(\Delta + \gamma_2)u_0 = 0 \text{ in } \mathcal{S}_{r_0}. \quad (2.9)$$

Denoting $u = w - v$ and using (2.7), one has

$$\begin{cases} \Delta u + \gamma_2 u = (\gamma_1 - \gamma_2)v, & \text{in } \mathcal{S}_{r_0}, \\ u = 0, \partial_\nu u = \eta v, & \text{on } \Gamma_{r_0}^\pm. \end{cases} \quad (2.10)$$

Combing (2.10) with (2.9), utilizing Green's formula, we derive the following integral equation

$$\begin{aligned} \eta \int_{\Gamma_{r_0}^\pm} v e^{\rho \cdot \mathbf{x}} d\sigma &= -\eta \int_{\Gamma_{r_0}^\pm} v \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\sigma + \int_{\mathcal{S}_{r_0}} (\gamma_1 - \gamma_2) v u_0 d\mathbf{x} \\ &\quad + \int_{\Lambda_{r_0}} \partial_\nu u_0 u - \partial_\nu u u_0 d\sigma. \end{aligned} \quad (2.11)$$

Substituting (2.8) into (2.11), we have

$$\frac{\sqrt{\gamma_1} \eta}{2} \int_{\Gamma_{r_0}^\pm} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) r e^{\rho \cdot \mathbf{x}} d\sigma = \sum_{i=1}^5 \mathcal{G}_i, \quad (2.12)$$

where

$$\begin{aligned} \mathcal{G}_1 &= -\eta \int_{\Gamma_{r_0}^\pm} v \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\sigma, \quad \mathcal{G}_2 = \int_{\mathcal{S}_{r_0}} (\gamma_1 - \gamma_2) v u_0 d\mathbf{x}, \quad \mathcal{G}_3 = \int_{\Lambda_{r_0}} \partial_\nu u_0 u - \partial_\nu u u_0 d\sigma, \\ \mathcal{G}_4 &= -\eta \sum_{p=1}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{2p+1}}{2^{2p+1} p! (p+1)!} \int_{\Gamma_{r_0}^\pm} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) r^{2p+1} e^{\rho \cdot \mathbf{x}} d\sigma, \\ \mathcal{G}_5 &= -\eta \sum_{n=2}^{\infty} \sum_{p=0}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{n+2p}}{2^{n+2p} p! (n+p)!} \int_{\Gamma_{r_0}^\pm} (a_n e^{in\vartheta} + b_n e^{-in\vartheta}) r^{n+2p} e^{\rho \cdot \mathbf{x}} d\sigma. \end{aligned}$$

For a given sector \mathcal{S}_{r_0} , let $\mathbf{d} = (\cos \varphi, \sin \varphi)^\top$ be the unit vector satisfying (2.4). Once \mathbf{d} is fixed, then there are two choices of \mathbf{d}^\perp as follows,

$$\mathbf{d}^\perp = (-\sin \varphi, \cos \varphi)^\top, \quad (2.13)$$

and

$$\mathbf{d}^\perp = (\sin \varphi, -\cos \varphi)^\top. \quad (2.14)$$

Taking \mathbf{d}^\perp in the form of (2.13), we can directly observe that the left-hand side of (2.12) satisfies:

$$\begin{aligned} \int_{\Gamma_{r_0}^\pm} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) r e^{\rho \cdot \mathbf{x}} d\sigma &= (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) \int_0^{r_0} r e^{-\tau e^{i(\vartheta_m - \varphi)} r} dr \\ &\quad + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) \int_0^{r_0} r e^{-\tau e^{i(\vartheta_M - \varphi)} r} dr \\ &= (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) \frac{\Gamma(2)}{\tau^2 e^{2i(\vartheta_m - \varphi)}} + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) \frac{\Gamma(2)}{\tau^2 e^{2i(\vartheta_M - \varphi)}} \\ &\quad + \mathcal{O} \left(\frac{1}{\tau \cos(\vartheta_m - \varphi)} e^{-\frac{r_0}{2} \tau \cos(\vartheta_m - \varphi)} + \frac{1}{\tau \cos(\vartheta_M - \varphi)} e^{-\frac{r_0}{2} \tau \cos(\vartheta_M - \varphi)} \right). \end{aligned} \quad (2.15)$$

Without loss of generality, we assume that $\cos(\vartheta_m - \varphi) \leq \cos(\vartheta_M - \varphi)$. Hence

$$\begin{aligned} & \frac{1}{\tau \cos(\vartheta_m - \varphi)} e^{-\frac{r_0}{2}\tau \cos(\vartheta_m - \varphi)} + \frac{1}{\tau \cos(\vartheta_M - \varphi)} e^{-\frac{r_0}{2}\tau \cos(\vartheta_M - \varphi)} \\ &= \frac{1}{\tau \cos(\vartheta_m - \varphi)} e^{-\frac{r_0}{2}\lambda\tau} \left(1 + \frac{\cos(\vartheta_m - \varphi)}{\cos(\vartheta_M - \varphi)} e^{-\frac{r_0}{2}\tau(\cos(\vartheta_M - \varphi) - \cos(\vartheta_m - \varphi))} \right), \end{aligned}$$

where and in what follows, $\lambda = \cos(\vartheta_m - \varphi) \in \mathbb{R}_+$. For convenience, we denote the last term in (2.15) as $\mathcal{O}(\frac{1}{\tau}e^{-\frac{r_0}{2}\lambda\tau})$ in the rest of the paper .

Similarly, it can be shown directly that the left-hand side of (2.12) with \mathbf{d}^\perp defined in (2.14) fulfills the following estimates

$$\begin{aligned} & \int_{\Gamma_{r_0}^\pm} (a_1 e^{i\vartheta} + b_1 e^{-i\vartheta}) r e^{\rho \cdot \mathbf{x}} d\sigma = (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) \int_0^{r_0} r e^{-\tau e^{i(\varphi - \vartheta_m)} r} dr \\ & \quad + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) \int_0^{r_0} r e^{-\tau e^{i(\varphi - \vartheta_M)} r} dr \\ &= (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) \frac{\Gamma(2)}{\tau^2 e^{2i(\varphi - \vartheta_m)}} + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) \frac{\Gamma(2)}{\tau^2 e^{2i(\varphi - \vartheta_M)}} \\ & \quad + \mathcal{O}\left(\frac{1}{\tau} e^{-\frac{r_0}{2}\lambda\tau}\right). \end{aligned}$$

Next we estimate each term \mathcal{G}_i ($i = 1, \dots, 5$) on the right-hand side of (2.12) with respect to τ as $\tau \rightarrow \infty$. Using Proposition 2.1, we have

$$\begin{aligned} |\mathcal{G}_1| &\leq \left| \int_{\Gamma_{r_0}^\pm} v \psi e^{\rho \cdot \mathbf{x}} d\sigma \right| \\ &\leq |\eta| \sum_{n=1}^{\infty} \sum_{p=0}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{n+2p} (|a_n| + |b_n|)}{2^{n+2p} p! (n+p)!} \int_{\Gamma_{r_0}^\pm} r^{n+2p} |\psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}}| d\sigma \\ &\lesssim |\eta| \sum_{n=1}^{\infty} \sum_{p=0}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{n+2p} (|a_n| + |b_n|)}{2^{n+2p} p! (n+p)!} \left(\tau^{-(n+2p+\frac{7}{6})} + \mathcal{O}(\tau^{-\frac{7}{6}} e^{-\frac{1}{2}\varsigma r_0 \tau}) \right) \\ &\lesssim \tau^{-\frac{13}{6}} + \mathcal{O}(\tau^{-\frac{7}{6}} e^{-\frac{1}{2}\varsigma r_0 \tau}), \end{aligned}$$

and

$$\begin{aligned} |\mathcal{G}_2| &\leq |\gamma_1 - \gamma_2| \int_{\mathcal{S}_{r_0}} |v u_0| d\mathbf{x} \\ &\leq |\gamma_1 - \gamma_2| \sum_{n=1}^{\infty} \sum_{p=0}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{n+2p} (|a_n| + |b_n|)}{2^{n+2p} p! (n+p)!} \int_{\mathcal{S}_{r_0}} r^{n+2p} |u_0| d\mathbf{x} \\ &\lesssim \tau^{-\frac{41}{12}} + \tau^{-3} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}). \end{aligned}$$

Moreover, there holds that

$$\begin{aligned} |\mathcal{G}_3| &\leq \|\partial_\nu u_0\|_{L^2(\Lambda_{r_0})} \|u\|_{L^2(\Lambda_{r_0})} + \|u_0\|_{H^{\frac{1}{2}}(\Lambda_{r_0})} \|\partial_\nu u\|_{H^{-\frac{1}{2}}(\Lambda_{r_0})} \\ &\leq C(\|\partial_\nu u_0\|_{L^2(\Lambda_{r_0})} + \|u_0\|_{H^1(\Lambda_{r_0})}) \|u\|_{H^1(\Lambda_{r_0})} \\ &\lesssim \|u_0\|_{H^1(\Lambda_{r_0})} + \|\nabla u_0\|_{L^2(\Lambda_{r_0})} \lesssim (1 + \tau)(1 + \tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau}. \end{aligned}$$

As for the last two terms of \mathcal{G}_4 and \mathcal{G}_5 , similarly we can deduce that

$$|\mathcal{G}_4 + \mathcal{G}_5| \lesssim \tau^{-3} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}). \quad (2.16)$$

Combining (2.15)–(2.16) with (2.12) and letting $\tau \rightarrow \infty$, this shows that

$$\begin{cases} (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) e^{2i(\varphi - \vartheta_m)} + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) e^{2i(\varphi - \vartheta_M)} = 0, \\ (a_1 e^{i\vartheta_m} + b_1 e^{-i\vartheta_m}) e^{2i(\vartheta_m - \varphi)} + (a_1 e^{i\vartheta_M} + b_1 e^{-i\vartheta_M}) e^{2i(\vartheta_M - \varphi)} = 0. \end{cases}$$

By multiplying $e^{-2i\varphi}$ on both two sides of the first identity above and $e^{2i\varphi}$ on the second, we get that

$$A \begin{pmatrix} a_1 \\ b_1 \end{pmatrix} = \mathbf{0},$$

where

$$A = \begin{pmatrix} e^{-i\vartheta_m} + e^{-i\vartheta_M} & e^{-3i\vartheta_m} + e^{-3i\vartheta_M} \\ e^{3i\vartheta_m} + e^{-3i\vartheta_M} & e^{i\vartheta_m} + e^{i\vartheta_M} \end{pmatrix}$$

Since $\vartheta_M - \vartheta_m \neq \frac{\pi}{2}$ by noting \mathcal{S}_{r_0} is irrational, after some calculations, it shows that

$$\det(A) = 2(\cos(\vartheta_M - \vartheta_m) - \cos(3(\vartheta_M - \vartheta_m))) \neq 0,$$

which implies that $a_1 = b_1 = 0$.

Suppose that

$$a_j = b_j = 0, \quad j = 1, \dots, \ell, \quad \ell \geq 1, \quad (2.17)$$

then we shall verify that $a_{\ell+1} = b_{\ell+1} = 0$. Under the assumption (2.17), using (2.6), we have

$$\begin{aligned} v &= \sum_{n=\ell+1}^{\infty} (a_n e^{in\vartheta} + b_n e^{-in\vartheta}) J_n(\sqrt{\gamma_1} r) = \frac{(\sqrt{\gamma_1})^{\ell+1} (a_{\ell+1} e^{i(\ell+1)\vartheta} + b_{\ell+1} e^{-i(\ell+1)\vartheta})}{2^{\ell+1} (\ell+1)!} r^{\ell+1} \\ &+ \sum_{p=1}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{2p+\ell+1} (a_{\ell+1} e^{i(\ell+1)\vartheta} + b_{\ell+1} e^{-i(\ell+1)\vartheta})}{2^{n+2p} p! (\ell+1+p)!} r^{2p+\ell+1} \\ &+ \sum_{n=\ell+2}^{\infty} \sum_{p=0}^{\infty} \frac{(-1)^p (\sqrt{\gamma_1})^{2p+n} (a_n e^{in\vartheta} + b_n e^{-in\vartheta})}{2^{n+2p} p! (n+p)!} r^{2p+n}. \end{aligned}$$

From this, we can then derive the following integral equation

$$\begin{aligned} &\frac{\eta(\sqrt{\gamma_1})^{\ell+1}}{2^{\ell+1} (\ell+1)!} \int_{\Gamma_{r_0}^{\pm}} (a_{\ell+1} e^{i(\ell+1)\vartheta} + b_{\ell+1} e^{-i(\ell+1)\vartheta}) r^{\ell+1} e^{\rho \cdot \mathbf{x}} d\sigma \\ &= -\eta \int_{\Gamma_{r_0}^{\pm}} v \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\sigma + \int_{\mathcal{S}_{r_0}} (\gamma_1 - \gamma_2) v u_0 d\mathbf{x} + \int_{\Lambda_{r_0}} \partial_\nu v u_0 - \partial_\nu u u_0 d\sigma \\ &- \sum_{p=1}^{\infty} \frac{\eta (-1)^p (\sqrt{\gamma_1})^{2p+\ell+1}}{2^{\ell+1+2p} p! (\ell+1+p)!} \int_{\Gamma_{r_0}^{\pm}} (a_{\ell+1} e^{i(\ell+1)\vartheta} + b_{\ell+1} e^{-i(\ell+1)\vartheta}) r^{2p+\ell+1} e^{\rho \cdot \mathbf{x}} d\sigma \\ &- \sum_{n=\ell+2}^{\infty} \sum_{p=0}^{\infty} \frac{\eta (-1)^p (\sqrt{\gamma_1})^{2p+n}}{2^{n+2p} p! (n+p)!} \int_{\Gamma_{r_0}^{\pm}} (a_n e^{in\vartheta} + b_n e^{-in\vartheta}) r^{2p+n} e^{\rho \cdot \mathbf{x}} d\sigma. \end{aligned}$$

Then, by an asymptotic analysis similar to that used to prove $a_1 = b_1 = 0$, we can conclude that

$$\begin{cases} (a_{\ell+1} e^{i(\ell+1)\vartheta_m} + b_{\ell+1} e^{-i(\ell+1)\vartheta_m}) e^{-i(\ell+2)(\vartheta_m - \varphi)} \\ \quad + (a_{\ell+1} e^{i(\ell+1)\vartheta_M} + b_{\ell+1} e^{-i(\ell+1)\vartheta_M}) e^{-i(\ell+2)(\vartheta_M - \varphi)} = 0, \\ (a_{\ell+1} e^{i(\ell+1)\vartheta_m} + b_{\ell+1} e^{-i(\ell+1)\vartheta_m}) e^{-i(\ell+2)(\varphi - \vartheta_m)} \\ \quad + (a_{\ell+1} e^{i(\ell+1)\vartheta_M} + b_{\ell+1} e^{-i(\ell+1)\vartheta_M}) e^{-i(\ell+2)(\varphi - \vartheta_M)} = 0, \end{cases}$$

which further induces that

$$B \begin{pmatrix} a_{\ell+1} \\ b_{\ell+1} \end{pmatrix} = \mathbf{0},$$

where the coefficient matrix B is

$$B = \begin{pmatrix} e^{-i\vartheta_m} + e^{-i\vartheta_M} & e^{-(2\ell+3)i\vartheta_m} + e^{-(2\ell+3)i\vartheta_M} \\ e^{(2\ell+3)i\vartheta_m} + e^{(2\ell+3)i\vartheta_M} & e^{i\vartheta_m} + e^{i\vartheta_M} \end{pmatrix}.$$

Using \mathcal{S}_{r_0} is irrational, we know that $\vartheta_M - \vartheta_m \neq \frac{\alpha}{\ell+1}\pi$, where $\alpha = 1, 2, \dots, \ell$, and $\vartheta_M - \vartheta_m \neq \frac{\sigma}{\ell+2}\pi$, where $\sigma = 1, 2, \dots, \ell + 1$. Then the determinant of B satisfies

$$\det(B) = 2(\cos(\vartheta_M - \vartheta_m) - \cos((2\ell + 3)(\vartheta_M - \vartheta_m))) \neq 0,$$

which implies that $a_{\ell+1} = b_{\ell+1} = 0$. By mathematical induction, we deduce that $v \equiv 0$ in B_{r_0} . By unique continuation principle for elliptic PDE, we know that $v \equiv 0$ in D . Due to the boundary conditions in (2.7), one has $w = \partial_\nu w = 0$ on Γ_{r_0} , which implies that $w \equiv 0$ in D by using unique continuation principle for elliptic equation.

The proof is complete. \square

In the following we will prove Theorem 1.2.

The proof of Theorem 1.2. We prove this theorem using a contradiction argument. Assume that Ω has an irrational convex corner and is invisible. Since the Laplacian Δ is invariant under rigid motion, this corner of Ω can be described by \mathcal{S}_{r_0} as given by (1.2). Since $u^\infty \equiv 0$, by Rellich's theorem, one has the PDE system (1.3), where $v = u^i$, $w = u^- \chi_\Omega + u^i \chi_{D \setminus \bar{\Omega}}$, $\gamma_1 = k^2$ and $\gamma_2 = k^2 q \chi_\Omega + k^2 \chi_{D \setminus \bar{\Omega}}$. Here $D := B_R$ is chosen such that $\Omega \Subset D$. By applying Theorem 1.1, we conclude that $u^i \equiv 0$ in D , leading to a contradiction by unique continuation principle. \square

To address the inverse problem (1.10), it is essential to define the admissible class of scatterers. Definition 2.1 introduces the concept of an irrational polygon, which will be used in Definition 2.2.

Definition 2.1. Suppose $\Omega \subset \mathbb{R}^2$ is a polygon. Let $\omega = \lambda \cdot \pi$, where $\lambda \in (0, 2)$, be an interior angle of Ω . An angle ω is considered *irrational* if λ is an irrational number; otherwise, it is considered *rational*. Furthermore, if $\lambda \in (0, 1)$ is an irrational number, then the angle ω is considered convex irrational. The polygon Ω is termed an *irrational polygon* if each of its interior angles is an irrational angle; otherwise, it is considered rational.

Definition 2.2. We define Ω as an *admissible complex scatterer* if it comprises finitely many disjointed scatterers, denoted as follows:

$$(\Omega; q, \eta) = \bigcup_{\ell=1}^N (\Omega_\ell; q_\ell, \eta_\ell), \quad \Omega_\ell \cap \Omega_m = \emptyset \text{ for } \ell \neq m,$$

where $N \in \mathbb{N}$, and each Ω_ℓ is a bounded Lipschitz domain. Here, $q = \sum_{\ell=1}^N q_\ell \chi_{\Omega_\ell}$ with $\text{supp}(q_\ell) \subset \Omega_\ell$ and $q_\ell \in H^2(\Omega_\ell)$. Additionally, $\eta = \sum_{\ell=1}^N \eta_\ell \chi_{\partial\Omega_\ell}$ and η_ℓ is a constant for $\ell = 1, \dots, N$.

Moreover, if each Ω_ℓ is an irrational polygon, then Ω is considered to be an *admissible complex irrational polygonal scatterer*. Similarly, if each Ω_ℓ is a convex irrational polygon, then Ω is considered to be an *admissible complex convex irrational polygonal scatterer*.

The following theorem provides a local uniqueness result for determining the shape of a scatterer through a single far-field measurement, offering a more rigorous version of Theorem 1.3. It asserts that the difference set between two admissible complex polygonal scatterers cannot contain a convex irrational corner if the far-field measurements associated with

these two scatterers, for a fixed incident wave, are identical. Furthermore, we establish the global unique identification of the shape of admissible complex convex irrational polygonal scatterers using only a single far-field measurement.

Theorem 2.1. *Consider the conductive medium scattering described by (1.7) with the given incident wave u^i . Let $u_\ell^s \in H_{\text{loc}}^1(\mathbb{R}^2)$ represent the scattered wave associated with u^i and an admissible complex polygonal scatterer $(\Omega_\ell; q_\ell, \eta_\ell)$ be defined in Definition 2.2, where*

$$(\Omega_\ell; q_\ell, \eta_\ell) = \bigcup_{i=1}^{N_\ell} (\Omega_{i,\ell}; q_{i,\ell}, \eta_{i,\ell}), \quad N_\ell \in \mathbb{N}+, \quad \ell = 1, 2.$$

Let u_ℓ^∞ ($\ell = 1, 2$), defined in (1.8), be the far-field pattern corresponding to u_ℓ^s , respectively.

If

$$u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i), \quad (2.18)$$

for all $\hat{\mathbf{x}} \in \mathbb{S}^1$ and a fixed incident wave u^i , then $\Omega_1 \Delta \Omega_2 = (\Omega_1 \setminus \Omega_2) \cup (\Omega_2 \setminus \Omega_1)$ cannot contain a convex irrational corner.

Moreover, if (2.18) is satisfied and Ω_ℓ is an admissible complex convex irrational polygonal scatterer ($\ell = 1, 2$), then $\Omega_1 = \Omega_2$. In other words, $N_1 = N_2$ and $\Omega_{i,1} = \Omega_{i,2}$ for $i = 1, \dots, N_1$.

Proof. We prove the first conclusion of this theorem by contradiction. When (2.18) holds, assume that $\Omega_1 \Delta \Omega_2$ contains an irrational corner. Underlying the fact that Δ is variant under the rigid motion and by the definition of an admissible complex irrational polygonal scatterer, we also assume that there exists an irrational corner \mathcal{S}_{r_0} such that $\mathcal{S}_{r_0} \subseteq \Omega_1 \setminus \Omega_2$, where $r_0 \in \mathbb{R}_+$ is sufficiently small. Let B_{r_0} be a disk with $r_0 \in \mathbb{R}_+$ be chosen such that $B_{r_0} \subseteq \Omega_1 \setminus \overline{\Omega_2}$ and $\mathcal{S}_{r_0} \subset B_{r_0}$.

Let $u_1(\mathbf{x})$ and $u_2(\mathbf{x})$ be total wave fields associated $(\Omega_1; q_1, \eta_1)$ and $(\Omega_2; q_2, \eta_2)$, respectively. Then using (2.18), by Rellich lemma, we have $u_1 = u_2$ in $\mathbb{R}^2 \setminus \overline{\Omega_1 \cup \Omega_2}$. By virtue of the trace theorem, we have

$$u_1^- = u_1^+ = u_2^\pm \text{ on } \Gamma_{r_0}^\pm. \quad (2.19)$$

Utilizing the conductive boundary conditions of (1.7) and (2.19), since u_1 and u_2 satisfy (1.7), we can therefore obtain that

$$\begin{cases} \Delta u_1^- + k^2(q_1 \chi_{\mathcal{S}_{r_0}} + \chi_{B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}}) u_1^- = 0, & \text{in } B_{r_0}, \\ \Delta u_2^+ + k^2 u_2^+ = 0, & \text{in } B_{r_0}, \\ u_1^- = u_2^+, \quad \partial_\nu u_1^- = \partial_\nu u_2^+ + \eta u_2^+, & \text{on } \Gamma_{r_0}^\pm. \end{cases}$$

It is clear that u_2 is analytic in \mathcal{S}_{r_0} . By applying Theorem 1.1, we have

$$u_2 \equiv 0 \text{ in } \mathcal{S}_{r_0}.$$

Using the unique continuation principle and noting $u_2 = u^i + u_2^s$, due to the fact that the scattered wave u_2^s fulfills the Sommerfeld radiation condition, we get the contradiction.

The second conclusion can be directly obtained by using the definition of an admissible complex convex irrational polygonal scatterer. \square

3. UNIQUE RECOVERY RESULTS FOR THE CONDUCTIVE POLYGONAL-NEST AND POLYGONAL-CELL MEDIUM SCATTERERS

In this section, we introduce the concepts of conductive polygonal-nest and polygonal-cell medium scatterers. We then formulate the corresponding inverse problems according to (1.10) when the scatterer in the direct scattering problem (1.7) exhibits a polygonal-nest or polygonal-cell structure. To establish the uniqueness result for determining the shape

of the scatterer and its polygonal-nest or polygonal-cell structure using a single far-field measurement, we introduce the concept of the admissible class and prove that the gradient of the total wave field has Hölder regularity near the corners. Additionally, we demonstrate that the reflective index, represented by a linear polynomial, and the constant conductive boundary parameter can be uniquely identified through a single far-field measurement once the shape is determined.

Definition 3.1. Let Ω be a bounded, simply connected Lipschitz domain with a connected complement $\mathbb{R}^2 \setminus \overline{\Omega}$. We say that Ω has a polygonal-nest structure if there exist open, convex, simply connected polygons Σ_i , for $i = 1, \dots, N \in \mathbb{N}$, such that


$$\Sigma_N \Subset \Sigma_{N-1} \Subset \dots \Subset \Sigma_2 \Subset \Sigma_1 = \Omega.$$

A schematic illustration of a simply connected Lipschitz domain with a polygonal-nest structure is displayed in Figure 1a.

Definition 3.2. Let Ω be a bounded, simply connected Lipschitz domain with a connected complement $\mathbb{R}^2 \setminus \overline{\Omega}$. We say that Ω has a polygonal-cell structure if there exist open, convex, simply connected polygons Σ_i , for $i = 1, \dots, N \in \mathbb{N}$, satisfying the following conditions:

- (a) $\Sigma_i \subset \Omega$ and $\Sigma_i \cap \Sigma_j = \emptyset$ for $i \neq j$,
- (b) $\bigcup_{i=1}^N \overline{\Sigma_i} = \overline{\Omega}$,
- (c) For each Σ_i , there exists at least one vertex $\mathbf{x}_{p,i}$ such that the two edges of $\partial\Sigma_i$ associated with $\mathbf{x}_{p,i}$ are denoted by $\Gamma_i^\pm \subset \partial\Omega$.

A schematic illustration of a simply connected Lipschitz domain with a polygonal-cell structure is displayed in Figure 1b.

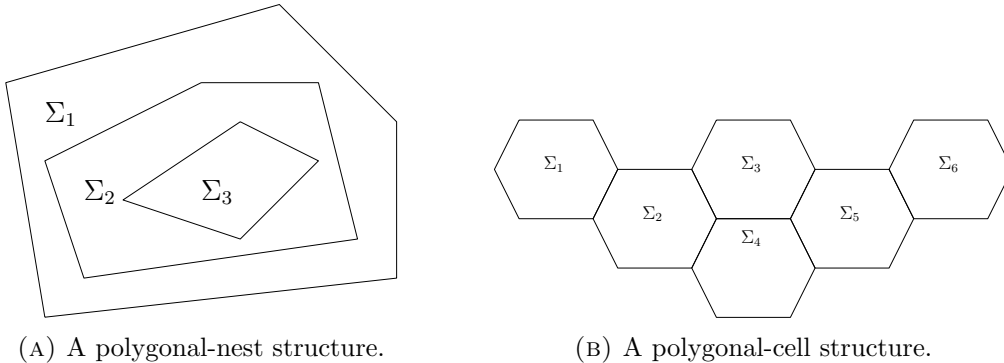

(A) A polygonal-nest structure.

(B) A polygonal-cell structure.

FIGURE 1. The schematic illustrations of the polygonal-nest and the polygonal-cell structures.

Definition 3.3. Let $(\Omega; q, \eta)$ be a conductive medium scatterer, if it satisfies the following conditions:

- (a) Ω has a polygonal-nest structure defined in Definition 3.1;
- (b) each Σ_i is a medium scatterer such that $\mathcal{D}_i := \Sigma_i \setminus \overline{\Sigma_{i+1}}$ with physical configurations q_i and η_i (on $\partial\Sigma_i$), which is denoted as $(\mathcal{D}_i; q_i, \eta_i)$ with $\Sigma_{N+1} = \emptyset$, where q_i is a polynomial of order 1 with the form given by

$$q_i = q_i^{(0)} + q_i^{(1)}x_1 + q_i^{(2)}x_2, \quad q_i^{(j)} \in \mathbb{C}, \quad (j = 0, 1, 2) \quad (3.1)$$

in \mathcal{D}_i , and η_i is a constant on $\partial\Sigma_i$ for $i = 1, \dots, N$,

then we say that $(\Omega; q, \eta)$ possesses a polygonal-nest structure.

Throughout of the rest paper, we rewrite a conductive polygonal-nest medium $(\Omega; q, \eta)$ given by Definition 3.3 as

$$(\Omega; q, \eta) = \bigcup_{i=1}^N (\mathcal{D}_i; q_i, \eta_i) \quad (3.2)$$

and $\Omega = \bigcup_{i=1}^N \mathcal{D}_i$, $q = \sum_{i=1}^N q_i \chi_{\mathcal{D}_i}$, $\eta = \sum_{i=1}^N \eta_i \chi_{\partial \Sigma_i}$.

Considering the direct scattering problem (1.7) associated with a conductive polygonal-nest medium scatterer $(\Omega; q, \eta)$ described by (3.2), let $u \in H_{loc}^1(\mathbb{R}^2)$ be the corresponding total wave field. In view of the polygonal-nest structure of $(\Omega; q, \eta)$, the conductive transmission boundary conditions of the total wave u across $\partial \Sigma_{i+1}$ are given by

$$u_i|_{\partial \Sigma_{i+1}} = u_{i+1}|_{\partial \Sigma_{i+1}}, \quad (\partial_\nu u_i + \eta_{i+1} u_i)|_{\partial \Sigma_{i+1}} = \partial_\nu u_{i+1}|_{\partial \Sigma_{i+1}}, \quad (3.3)$$

where $u_i = u|_{\mathcal{D}_i}$, $i = 0, 1, \dots, N-1$ and $\Sigma_0 = \mathbb{R}^2 \setminus \overline{\Sigma_1}$. Indeed, the well-posedness of the direct scattering problem can be obtained by using a similar variational argument in [11], where the detailed proof is omitted. In this paper, our main focus is the corresponding inverse problems associated with a conductive polygonal-nest medium scatterer $(\Omega; q, \eta)$, which aims to determine the polygonal-nest structure of Ω and the physical configurations q_ℓ and η_ℓ from the knowledge of the far-field pattern $u^\infty(\hat{\mathbf{x}}; u^i)$ with a fixed incident wave u^i . Here, $u^\infty(\hat{\mathbf{x}}; u^i)$ is the far-field pattern of u given by (1.8). The above inverse problems can be formulated by

$$u^\infty(\hat{\mathbf{x}}; u^i) \rightarrow \bigcup_{\ell=1}^N (\mathcal{D}_\ell; q_\ell, \eta_\ell), \quad \forall \hat{\mathbf{x}} \in \mathbb{S}^1. \quad (3.4)$$

Similarly, we can define a conductive polygonal-cell medium scatterer Ω as follows.

Definition 3.4. Let $(\Omega; q, \eta)$ be a conductive medium scatterer, if the following conditions are fulfilled:

- (a) Ω has a polygonal-cell structure defined in Definition 3.2;
- (b) each Σ_i is a medium scatterer with physical configurations q_i and $\tilde{\eta}$ and is denoted as $(\Sigma_i; q_i, \tilde{\eta})$, q_i is a polynomial of order 1 in the form of (3.1) in Σ_i and $\tilde{\eta}$ is a constant on $\partial \Sigma_i$ for $i = 1, \dots, N$,

then $(\Omega; q, \eta)$ is said to have a polygonal-cell structure.

We write a conductive polygonal-cell medium scatterer $(\Omega; q, \eta)$ as

$$(\Omega; q, \eta) = \bigcup_{i=1}^N (\Sigma_i; q_i, \tilde{\eta}), \quad (3.5)$$

where $\Omega = \bigcup_{i=1}^N \Sigma_i$, $q = \sum_{i=1}^N q_i \chi_{\Sigma_i}$, $\eta = \sum_{i=1}^N \tilde{\eta} \chi_{\partial \Sigma_i}$. The inverse problems for a conductive polygonal-cell medium scatterer by a single far-field measurement can be described in a similar way as for the case with a conductive polygonal-nest medium scatterer. Namely, one aims to determine the shape of Ω and physical configurations q_i and $\tilde{\eta}$ through the measurement $u^\infty(\hat{\mathbf{x}}; u^i)$ associated with a fixed incident wave u^i , which can be formulated as follows:

$$u^\infty(\hat{\mathbf{x}}; u^i) \rightarrow \bigcup_{i=1}^N (\Sigma_i; q_i, \tilde{\eta}), \quad \forall \hat{\mathbf{x}} \in \mathbb{S}^1. \quad (3.6)$$

Here, $u^\infty(\hat{\mathbf{x}}; u^i)$ is the far-field pattern given by (1.8), associated with the total wave u , where u is the solution of (1.7) corresponding to the conductive polygonal-cell medium scatterer $\bigcup_{i=1}^N (\Sigma_i; q_i, \tilde{\eta})$.

In order to introduce the admissible class for studying the inverse problems, we need to study the Hölder-regularity of the total wave field u which is associated with the scattering problem (1.7) near the corner \mathcal{S}_{r_0} . Then we have the following lemma, which shows that there holds that $u^- \in C^{1,\alpha}(\overline{\mathcal{S}_{r_0}})$, where $\alpha \in (0, 1)$.

Lemma 3.1. *Let the corner $\mathcal{S}_{2r_0} = \mathcal{S} \cap B_{2r_0}$, where \mathcal{S} is given by (1.1) and B_{2r_0} is a disk centered at the origin with the radius $2r_0$ ($r_0 \in \mathbb{R}_+$). Denote $\Gamma_{2r_0}^\pm = \Gamma^\pm \cap B_{2r_0}$, where Γ^\pm is the boundary line of \mathcal{S} . Suppose that $u \in H^1(B_{2r_0})$ with $u^+ = u|_{B_{2r_0} \setminus \overline{\mathcal{S}_{2r_0}}}$, $u^- = u|_{\mathcal{S}_{2r_0}}$ satisfies that*

$$\begin{cases} (\Delta + k^2q)u^- = 0, & \text{in } \mathcal{S}_{2r_0}, \\ (\Delta + k^2)u^+ = 0, & \text{in } B_{2r_0} \setminus \overline{\mathcal{S}_{2r_0}}, \\ u^+ = u^-, \partial_\nu u^- = \partial_\nu u^+ + \eta u^+, & \text{on } \Gamma_{2r_0}^\pm, \end{cases} \quad (3.7)$$

where k is a positive constant and q is in the form of (3.1). Assume that u^- and u^+ are real analytic in \mathcal{S}_{2r_0} and $B_{2r_0} \setminus \overline{\mathcal{S}_{2r_0}}$, respectively. Then there exist $\alpha \in (0, 1)$ such that $u^- \in C^{1,\alpha}(\overline{\mathcal{S}_{r_0}})$.

Before proving Lemma 3.1, we first introduce a triangle V_{2r_0} described below, which will be used in a subsequent argument. Let us pick up the points \mathbf{y}_+ and \mathbf{y}_- on $\Gamma_{2r_0}^+$ and $\Gamma_{2r_0}^-$, respectively, where $|\mathbf{y}_\pm| \in (r_0, 2r_0)$. Denote $\Lambda'_{2r_0} = \mathbf{y}_+ - \mathbf{y}_-$. Then the triangle domain V_{2r_0} is formed by three vectors \mathbf{y}_+ , \mathbf{y}_- and Λ'_{2r_0} . It is clear that $\overline{\mathcal{S}_{r_0}} \subset \overline{V_{2r_0}} \subset \overline{\mathcal{S}_{2r_0}}$. We can refer to Fig. 2 for a geometric illustration of V_{2r_0} .




FIGURE 2. A schematic illustration of \mathcal{S}_{2r_0} , V_{2r_0} and \mathcal{S}_{r_0} .

The proof of Lemma 3.1. Denote \bar{u} by the analytic extension of $u^+|_{B_{2r_0} \setminus \overline{\mathcal{S}_{2r_0}}}$ in B_{2r_0} since it is real analytic in $B_{2r_0} \setminus \overline{\mathcal{S}_{2r_0}}$. By virtue of the boundary condition of (3.7), one has $\bar{u} = u^- = u^+$ on $\Gamma_{2r_0}^\pm$.

Let $w = u^- - \bar{u}$, then from (3.7) it can be directly calculated that

$$\begin{cases} \Delta w = f, & \text{in } V_{2r_0}, \\ w = \varphi, & \text{on } \Lambda'_{2r_0}, \\ w = 0, & \text{on } \Gamma_{2r_0}^\pm, \end{cases}$$

where $f = k^2\bar{u} - k^2qu_- \in H^1(V_{2r_0})$. According to [1, Theorem 2.8], we know that $f \in W^{1,p}(V_{2r_0})$, $1 < p < 2$. Since u^- and \bar{u} are real analytic in \mathcal{S}_{2r_0} , one has $\varphi = w|_{\Lambda'_{2r_0}} \in W^{\frac{5}{2},p}(\Lambda'_{2r_0})$. By virtue of [40, Theorem 2.1], we have the decomposition of w as follows,

$$w(\mathbf{x}) = w_{\text{reg}}(\mathbf{x}) + \sum_{0 < \lambda_\ell < 3 - \frac{2}{p}} \zeta^\ell r^{\lambda_\ell} \sin(\lambda_\ell \vartheta), \quad w_{\text{reg}} \in W^{3,p}(V_{2r_0}), \quad \mathbf{x} = r(\cos \vartheta, \sin \vartheta),$$

where ζ is a constant depending only on f and φ , and $\lambda_\ell = \frac{\ell\pi}{\vartheta_M - \vartheta_m}$, $\ell \in \mathbb{N}$. If $\vartheta_M - \vartheta_m \in (0, \pi/2]$, then we know that $w(\mathbf{x}) = w_{\text{reg}}(\mathbf{x})$. If $\vartheta_M - \vartheta_m \in (\pi/2, \pi)$, it can be verified that

$\frac{2}{3 - \frac{\pi}{\vartheta_M - \vartheta_m}} \in (1, 2)$. Hence we can choose $p \in (1, \frac{2}{3 - \frac{\pi}{\vartheta_M - \vartheta_m}})$. This indicates that $\lambda_\ell > 3 - \frac{2}{p}$ for any $\ell \in \mathbb{N}$. Therefore, $w = w_{\text{reg}} \in W^{3,p}(V_{2r_0})$. By virtue of the Sobolev embedding theorem (cf. [28, Theorem 7.26]), we have that $w = w_{\text{reg}} \in C^{1,\alpha}(\overline{V_{2r_0}})$ for $\alpha \in (0, 1)$.

The proof is complete. \square

In the following, we will introduce the admissible class for studying the inverse problems (3.4) and (3.6), which will be used to establish recovery uniqueness results in the subsequent theorems.

Definition 3.5. Suppose $(\Omega; q, \eta)$ represents a conductive polygonal-nest or polygonal-cell medium scatterer as defined in Definitions 3.1 or 3.2. Let u denote the total wave field of (1.7) associated with $(\Omega; q, \eta)$.

- Polygonal-Nest Admissibility:

- (1) For a conductive polygonal-nest medium scatterer $(\Omega; q, \eta)$, it is considered admissible if it satisfies one of the following conditions:

(I)

$$u(\mathbf{x}_p) \neq 0, \quad (3.8)$$

(II)

$$\nabla u(\mathbf{x}_p) \neq 0, \quad u(\mathbf{x}_p) = 0, \quad (3.9)$$

where $\mathbf{x}_p \in \mathcal{V}(\Sigma_i)$ and $\mathcal{V}(\Sigma_i) = \{\mathbf{x}_{p,i}\}_{p=1}^{\ell_i}$ ($3 \leq \ell_i \in \mathbb{Z}_+$) is the vertex set of the convex polygon Σ_i . Here, $\{\Sigma_i\}_{i=1}^N$ is the polygonal-nest structure of Ω described by Definition 3.1.

- (2) If the condition (3.9) is satisfied, it is additionally required that $\angle(\Gamma_p^-, \Gamma_p^+) \in (\frac{\pi}{3}, \frac{2\pi}{3}) \setminus \{\frac{\pi}{2}\}$, where Γ_p^\pm represent two edges of Σ_i , and $\Gamma_p^- \cap \Gamma_p^+ = \mathbf{x}_p$ with $\angle(\Gamma_p^-, \Gamma_p^+)$ being the intersection angle between Γ_p^- and Γ_p^+ .

- Polygonal-Cell Admissibility:

- (1) For a conductive polygonal-cell medium scatterer $(\Omega; q, \eta)$, it is considered admissible if it satisfies condition (3.8) or (3.9), where $\mathbf{x}_p \in \mathcal{V}(\Omega)$. Here, $\mathcal{V}(\Omega)$ represents the vertex set of the polygon Ω .
- (2) Similarly, if the condition (3.9) is satisfied, it is additionally required that $\angle(\Gamma_p^-, \Gamma_p^+) \in (\frac{\pi}{3}, \frac{2\pi}{3}) \setminus \{\frac{\pi}{2}\}$, where Γ_p^\pm represent two edges of Ω , and $\Gamma_p^- \cap \Gamma_p^+ = \mathbf{x}_p$ with $\angle(\Gamma_p^-, \Gamma_p^+)$ being the intersection angle between Γ_p^- and Γ_p^+ .

Remark 3.1. The non-void assumptions (3.8) and (3.9) in Definition 3.5 represent generic physical conditions. Indeed, the generic assumptions (3.8) and (3.9) can be fulfilled in certain physical scenarios. For example, when

$$k \cdot \text{diam}(\Omega) \ll 1, \quad (3.10)$$

from a physical perspective, the scattered wave u^s can be neglected. In fact, as rigorously justified in [11], it holds that

$$\|u^s\|_{H^1(B_R)} \leq C(\|\eta u^i\|_{H^{-\frac{1}{2}}(\partial\Omega)} + k^2 \|qu^i\|_{L^2(\Omega)}), \quad \Omega \subset B_R,$$

where C is a positive number and B_R is a ball centered at the origin with radius R . Hence, if (3.10) is satisfied and the conductive boundary parameter η is sufficiently small, the plane incident wave u^i dominates the total wave $u = u^i + u^s$. It is evident that u^i fulfills (3.8) (or (3.9)), which implies that the total wave u generically satisfies (3.8) or (3.9). On the other hand, from a physical standpoint, in conductive medium scattering, if the total wave does not satisfy (3.8) at a corner point, it implies that the scattered wave and the incident wave cancel each other at those points. Similarly, if the admissible condition (3.9) is violated, it indicates that either the scattered wave and the incident wave cancel each other, or the

gradient of the scattered wave and the incident wave cancel each other at those points. Such cancellation phenomena, as described above, are rare in typical scattering scenarios. However, we will not delve deeply into this matter in this paper.

Remark 3.2. In previous works such as [15, 21], the admissible condition (3.8) plays a crucial role in deriving corresponding uniqueness results. However, in this paper, when (3.8) is violated, we propose another admissible condition, denoted as (3.9). There are three distinct cases for (3.9), characterized as follows:

- a) $\partial_1 u(\mathbf{x}_p) \neq 0, u(\mathbf{x}_p) = \partial_2 u(\mathbf{x}_p) = 0,$
- b) $\partial_2 u(\mathbf{x}_p) \neq 0, u(\mathbf{x}_p) = \partial_1 u(\mathbf{x}_p) = 0,$
- c) $\partial_1 u(\mathbf{x}_p) \neq 0, \partial_2 u(\mathbf{x}_p) \neq 0, u(\mathbf{x}_p) = 0.$

Since (3.9) encompasses more cases compared to (3.8), it is more likely to be satisfied in practical scenarios. This increased applicability of (3.9) enhances the practical relevance of our uniqueness results.

In Theorem 3.1, a local uniqueness result for determining the shape of an admissible conductive polygonal-nest or polygonal-cell medium scatterer by a single far-field measurement is established. Furthermore, when the admissible scatterer has a polygonal-nest structure, a global shape identifiability by a single far-field measurement is obtained.

Theorem 3.1. *Let $(\Omega_\ell; q_\ell, \eta_\ell), \ell = 1, 2$ be two admissible conductive polygonal-nest or polygonal-cell medium scatterer satisfying (1.7), $u_\ell^\infty(\hat{\mathbf{x}}; u^i)$ be the far-field pattern associated with the scatterer $(\Omega_\ell; q_\ell, \eta_\ell)$ and the incident field u^i . If*

$$u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i)$$

is fulfilled for all $\hat{\mathbf{x}} \in \mathbb{S}^1$ and a fixed incident wave u^i , then $\Omega_1 \Delta \Omega_2$ cannot have a convex corner. Moreover, if Ω_1 and Ω_2 are two admissible conductive polygonal-nest medium scatterers, one holds that

$$\partial\Omega_1 = \partial\Omega_2.$$

Proof. We only present the proof for the polygonal-nest case, since the polygonal-cell case can be proven in a similar manner. We proceed to prove this theorem by contradiction. Let us assume that there exists a corner in $\Omega_1 \Delta \Omega_2$. According to (3.2), we can express the admissible conductive polygonal-nest medium scatterers as $(\Omega_\ell; q_\ell, \eta_\ell)$ ($\ell = 1, 2$) as follows

$$(\Omega_\ell; q_\ell, \eta_\ell) = \bigcup_{i=1}^{N_\ell} (\mathcal{D}_{i,\ell}; q_{i,\ell}, \eta_{i,\ell}),$$

and

$$\Omega_\ell = \bigcup_{i=1}^{N_\ell} \mathcal{D}_{i,\ell}, \quad q_j = \sum_{i=1}^{N_\ell} q_{i,\ell} \chi_{\mathcal{D}_{i,\ell}}, \quad \eta_\ell = \sum_{i=1}^{N_\ell} \eta_{i,\ell} \chi_{\partial\Sigma_{i,\ell}}. \quad (3.11)$$

Since $-\Delta$ is invariant under rigid motion, without loss of generality, let us assume that $\mathbf{0}$ is the vertex of the corner $\Omega_1 \cap \mathcal{S}$ such that $\mathbf{0} \in \partial\Omega_1$ but $\mathbf{0} \notin \partial\overline{\Omega_2}$, where $\mathbf{0}$ represents the origin. Moreover, we assume that the corner $\Omega_1 \cap \mathcal{S} = \mathcal{S}_{r_0} \in \Sigma_{1,1}$, where $\Sigma_{1,1}$ is defined in Definition 3.1 and (3.11).

Let $u_1(\mathbf{x})$ and $u_2(\mathbf{x})$ be the total wave fields associated with Ω_1 and Ω_2 , respectively. Given $u_1^\infty = u_2^\infty$ for all $\hat{\mathbf{x}} \in \mathbb{S}^1$ and by Rellich lemma, we conclude that $u_1^s = u_2^s$ in $\mathbb{R}^2 \setminus (\overline{\Omega_1 \cup \Omega_2})$. This implies that $u_1(\mathbf{x}) = u_2(\mathbf{x})$ for all $\hat{\mathbf{x}} \in \mathbb{R}^2 \setminus (\overline{\Omega_1 \cup \Omega_2})$. Then u_1^- and

u_2^+ satisfy the following PDE system,

$$\begin{cases} \Delta u_1^- + k^2 q_1 u_1^- = 0, & \text{in } \mathcal{S}_{r_0}, \\ \Delta u_2^+ + k^2 u_2^+ = 0, & \text{in } \mathcal{S}_{r_0}, \\ u_1^- = u_2^+, \quad \partial_\nu u_1^- = \partial_\nu u_2^+ + \eta_1 u_2^+, & \text{on } \Gamma_{r_0}^\pm. \end{cases}$$

Let $\bar{u} = u_1^- - u_2^+$. Then it yields that

$$\begin{cases} \Delta \bar{u} + k^2 q_1 \bar{u} = k^2(1 - q_1)u_2^+, & \text{in } \mathcal{S}_{r_0}, \\ \bar{u} = 0, \quad \partial_\nu \bar{u} = \eta_1 u_2^+, & \text{on } \Gamma_{r_0}^\pm. \end{cases}$$

Since $q_1 \in H^2(\mathcal{S}_{r_0})$, let \tilde{q}_1 be the Sobolev extension of q_1 in \mathbb{R}^2 . According to Lemma 2.1, there exists the CGO solution u_0 given by (2.1), which satisfies (2.2). Hence it yields that

$$(\Delta + k^2 q_1)u_0 = 0 \text{ in } \mathcal{S}_{r_0}.$$

By virtue of the CGO solution defined in (2.1), using Green's formula, one has

$$\eta_1 \int_{\Gamma_{r_0}^\pm} u_2^+ u_0 d\mathbf{x} = k^2 \int_{\mathcal{S}_{r_0}} (1 - q_1)u_2^+ u_0 d\mathbf{x} + \int_{\Lambda_{r_0}} \partial_\nu u_0 \bar{u} - \partial_\nu \bar{u} u_0 d\sigma. \quad (3.12)$$

According to Lemma 3.1, we know that $u_2^+ \in C^{1,\alpha}(\overline{\mathcal{S}_{r_0}})$, $\alpha \in (0, 1)$, which implies the following expansion

$$u_2^+ = u_2^+(\mathbf{0}) + \partial_1 u_2^+(\mathbf{0})x_1 + \partial_2 u_2^+(\mathbf{0})x_2 + \delta u_2^+, \quad |\delta u_2^+| \leq |\mathbf{x}|^{1+\alpha} \|u_2^+\|_{C^{1,\alpha}}. \quad (3.13)$$

According to the admissibility conditions in Definition 3.5, we will divide the proof into four cases, as follows.

Case (a): $u_2^+(\mathbf{0}) \neq 0$. Combing (3.13) with (3.12), we can deduce that

$$\eta_1 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} e^{\rho \cdot \mathbf{x}} d\mathbf{x} = \sum_{i=1}^4 I_i, \quad (3.14)$$

where

$$\begin{aligned} I_1 &= -\eta_1 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\sigma, \quad I_2 = k^2 \int_{\mathcal{S}_{r_0}} (1 - q_1)u_2^+ u_0 d\mathbf{x} \\ I_3 &= -\eta_1 \int_{\Gamma_{r_0}^\pm} (\partial_1 u_2^+(\mathbf{0})x_1 + \partial_2 u_2^+(\mathbf{0})x_2 + \delta u_2^+) u_0 d\sigma, \\ I_4 &= \int_{\Lambda_{r_0}} \partial_\nu u_0 \bar{u} - \partial_\nu \bar{u} u_0 d\sigma. \end{aligned} \quad (3.15)$$

By (2.5), we have

$$\begin{aligned} |I_1| &\lesssim \tau^{-\frac{7}{6}} + \mathcal{O}(\tau^{-\frac{7}{6}} e^{-\frac{1}{2} \varsigma r_0 \tau}), \quad |I_2| \lesssim \tau^{-2} + \tau^{-\frac{29}{12}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2} \varsigma \tau}), \\ |I_3| &\lesssim \tau^{-2} + \tau^{-(2+\alpha)} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2} \varsigma r_0 \tau}), \quad |I_4| \lesssim (1 + \tau)(1 + \tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau}. \end{aligned} \quad (3.16)$$

Let \mathbf{d} be given in the form of (2.14). We can then directly derive that

$$|\eta_1 u_2^+(\mathbf{0})| \left| \int_{\Gamma_{r_0}^\pm} e^{\rho \cdot \mathbf{x}} d\sigma \right| \gtrsim \frac{\Gamma(1) |\eta_1 u_2^+(\mathbf{0})| |e^{i\vartheta_m} + e^{i\vartheta_M}|}{|\tau e^{i\varphi}|} - \mathcal{O}(\tau^{-1} e^{-\frac{1}{2} \lambda r_0 \tau}), \quad (3.17)$$

here and in what follows, the term $\mathcal{O}(\tau^{-1} e^{-\frac{1}{2} \lambda r_0 \tau})$ is defined in (2.15). Recall that \mathcal{S}_{r_0} is defined by (1.2), where the polar angle of $\Gamma_{r_0}^-$ is ϑ_m and the polar angle of $\Gamma_{r_0}^+$ is ϑ_M . Combining (3.15)- (3.17) with (3.14), then multiplying τ and letting $\tau \rightarrow \infty$, we see that

$$|\eta_1 u_2^+(\mathbf{0})| |e^{i\vartheta_m} + e^{i\vartheta_M}| = 0.$$

Since

$$|e^{i\vartheta_m} + e^{i\vartheta_M}| = (2(\cos(\vartheta_M - \vartheta_m) + 1))^{1/2} \neq 0 \quad \text{for } \vartheta_M - \vartheta_m \in (0, \pi),$$

it follows that

$$|\eta_1 u_2^+(\mathbf{0})| = 0.$$

However, this contradicts to the admissible condition $u_2^+(\mathbf{0}) \neq 0$ due to $\eta_1 \neq 0$.

Case (b): $\partial_1 u_2^+(\mathbf{0}) \neq 0$, $u_2^+(\mathbf{0}) = \partial_2 u_2^+(\mathbf{0}) = 0$. Similar to (3.14), we have the following integral equality:

$$\begin{aligned} \eta_1 \partial_1 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} e^{\rho \cdot \mathbf{x}} x_1 d\sigma &= -\eta_1 \partial_1 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} x_1 d\sigma \\ &+ \int_{\mathcal{S}_{r_0}} (1 - q_1) u_2^+ u_0 d\mathbf{x} - \eta_1 \int_{\Gamma_{r_0}^\pm} \delta u_2^+ u_0 d\sigma + I_4. \end{aligned} \quad (3.18)$$

By direct calculations we know that the right-hand side of (3.18) satisfies

$$|RHS| \lesssim \tau^{-\frac{13}{6}} + \tau^{-(2+\alpha)} + (1 + \tau)(1 + \tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}). \quad (3.19)$$

Furthermore, we have the following inequality about the left-hand side of (3.18)

$$|LHS| \gtrsim \frac{\Gamma(2) |\eta_1 \partial_1 u_2^+(\mathbf{0})|}{\tau^2} \left| \frac{\cos \vartheta_M}{((\mathbf{d} + \mathbf{id}) \cdot \hat{\mathbf{x}}_1)^2} + \frac{\cos \vartheta_m}{((\mathbf{d} + \mathbf{id}) \cdot \hat{\mathbf{x}}_2)^2} \right| - \mathcal{O}(\tau^{-1} e^{-\lambda r_0 \tau}), \quad (3.20)$$

where $\hat{\mathbf{x}}_1 \in \Gamma_{r_0}^+$ and $\hat{\mathbf{x}}_2 \in \Gamma_{r_0}^-$. Let \mathbf{d}^\perp be in the form of (2.14), then we have

$$\left| \frac{\cos \vartheta_M}{((\mathbf{d} + \mathbf{id}) \cdot \hat{\mathbf{x}}_1)^2} + \frac{\cos \vartheta_m}{((\mathbf{d} + \mathbf{id}) \cdot \hat{\mathbf{x}}_2)^2} \right| = |\cos \vartheta_M e^{-2i\vartheta_m} + \cos \vartheta_m e^{-2i\vartheta_M}| \neq 0$$

for $-\pi < \vartheta_m < \vartheta_M < \pi$, $\vartheta_M - \vartheta_m \in (0, \pi)$. Substituting (3.19) and (3.20) into (3.18), then multiplying τ^2 on both sides and taking $\tau \rightarrow \infty$, we get

$$|\eta_1 \partial_1 u_2^+(\mathbf{0})| = 0,$$

which implies that $\partial_1 u_2^+(\mathbf{0}) = 0$ by noting $\eta_1 \neq 0$. Hence, we obtain a contradiction.

Case (c): $\partial_2 u_2^+(\mathbf{0}) \neq 0$, $u_2^+(\mathbf{0}) = \partial_1 u_2^+(\mathbf{0}) = 0$. Similar to (3.14), it holds that

$$\begin{aligned} \eta_1 \partial_2 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} e^{\rho \cdot \mathbf{x}} x_2 d\sigma &= -\eta_1 \partial_2 u_2^+(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} x_2 d\sigma \\ &+ \int_{\mathcal{S}_{r_0}} (1 - q_1) u_2^+ u_0 d\mathbf{x} - \eta_1 \int_{\Gamma_{r_0}^\pm} \delta u_2^+ u_0 d\sigma + I_4. \end{aligned} \quad (3.21)$$

Similar to (3.18), for the right-hand and left-hand sides of (3.21), we have

$$|RHS| \lesssim \tau^{-\frac{13}{6}} + \tau^{-(2+\alpha)} + (1 + \tau)(1 + \tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau})$$

and

$$|LHS| \gtrsim \frac{\Gamma(2) |\eta_1 \partial_2 u_2^+(\mathbf{0})|}{\tau^2} \left| \frac{\sin \vartheta_M}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_1)^2} + \frac{\sin \vartheta_m}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_2)^2} \right| - \mathcal{O}(\tau^{-1} e^{-\lambda r_0 \tau}) \quad (3.22)$$

where $\hat{\mathbf{x}}_1 \in \Gamma_{r_0}^+$, $\hat{\mathbf{x}}_2 \in \Gamma_{r_0}^-$. Let \mathbf{d}^\perp be defined as in (2.14), then it follows that:

$$\left| \frac{\sin \vartheta_M}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_1)^2} + \frac{\sin \vartheta_m}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_2)^2} \right| = |\sin \vartheta_M e^{-2i\vartheta_m} + \sin \vartheta_m e^{-2i\vartheta_M}| \neq 0,$$

for $-\pi < \vartheta_m < \vartheta_M < \pi$, $\vartheta_M - \vartheta_m \in (0, \pi)$ and $\vartheta_M - \vartheta_m \neq \frac{\pi}{2}$. Combining (3.21)-(3.22) and taking $\tau \rightarrow \infty$, one has

$$|\eta_1 \partial_2 u_2^+(\mathbf{0})| = 0,$$

Hence, it yields that $\partial_2 u_2^+(\mathbf{0}) = 0$ since $\eta_1 \neq 0$, which contradicts to $\partial_2 u_2^+(\mathbf{0}) \neq 0$.

Case (d): $\partial_1 u_2^+(\mathbf{0}) \neq 0, \partial_2 u_2^+(\mathbf{0}) \neq 0, u_2^+(\mathbf{0}) = 0$. Similar to (3.14), we have

$$\begin{aligned} \eta_1 \int_{\Gamma_{r_0}^\pm} (\partial_1 u_2^+(\mathbf{0})x_1 + \partial_2 u_2^+(\mathbf{0})x_2) e^{\rho \cdot \mathbf{x}} d\sigma &= \int_{\mathcal{S}_{r_0}} (1 - q_1) u_2^+ u_0 d\sigma - \eta_1 \int_{\Gamma_{r_0}^\pm} \delta u_2^+ u_0 d\sigma \\ &- \eta_1 \int_{\Gamma_{r_0}^\pm} (\partial_1 u_2^+(\mathbf{0})x_1 + \partial_2 u_2^+(\mathbf{0})x_2) e^{\rho \cdot \mathbf{x}} \psi(\mathbf{x}) d\sigma + I_4. \end{aligned} \quad (3.23)$$

By careful calculations, for the right-hand and left-hand sides of (3.23), it is evident that

$$|RHS| \lesssim \tau^{-\frac{13}{6}} + \tau^{-(\alpha+2)} + (1 + \tau)(1 + \tau^{-\frac{2}{3}}) e^{-\varsigma r_0 \tau} + \mathcal{O}(\tau^{-\frac{7}{6}} e^{-\frac{1}{2} \varsigma r_0 \tau}),$$

and

$$|LHS| \gtrsim \frac{\Gamma(2) |\eta_1| |\mathcal{N}|}{\tau^2 |(\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_1|^2 |(\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_2|^2} - \mathcal{O}(\tau^{-1} e^{-\lambda r_0 \tau}).$$

Similarly, it yields that

$$|\mathcal{N}| = 0$$

as $\tau \rightarrow \infty$. When \mathbf{d}^\perp is given in the form of (2.13), we have

$$\begin{aligned} \mathcal{N} &= (\partial_1 u_2^+(\mathbf{0}) \cos \vartheta_M + \partial_2 u_2^+(\mathbf{0}) \sin \vartheta_M) e^{2i\vartheta_m} \\ &+ (\partial_1 u_2^+(\mathbf{0}) \cos \vartheta_m + \partial_2 u_2^+(\mathbf{0}) \sin \vartheta_m) e^{2i\vartheta_M}, \end{aligned} \quad (3.24)$$

And when \mathbf{d}^\perp is given by (2.14), one has

$$\begin{aligned} \mathcal{N} &= (\partial_1 u_2^+(\mathbf{0}) \cos \vartheta_M + \partial_2 u_2^+(\mathbf{0}) \sin \vartheta_M) e^{-2i\vartheta_m} \\ &+ (\partial_1 u_2^+(\mathbf{0}) \cos \vartheta_m + \partial_2 u_2^+(\mathbf{0}) \sin \vartheta_m) e^{-2i\vartheta_M}. \end{aligned} \quad (3.25)$$

Let us consider the real and imaginary parts of $\partial_1 u_2^+(\mathbf{0})$ and $\partial_2 u_2^+(\mathbf{0})$, separately. Denote $\partial_1 u_2^+(\mathbf{0}) = a_1 + b_1 i$ and $\partial_2 u_2^+(\mathbf{0}) = a_2 + b_2 i$, where $a_i, b_i \in \mathbb{R}$ ($i = 1, 2$). For (3.24), it follows that

$$\begin{aligned} \Re(\mathcal{N}) &= a_1 (\cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M) - b_1 (\cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M) \\ &+ a_2 (\sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M) - b_2 (\sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M), \end{aligned} \quad (3.26)$$

$$\begin{aligned} \Im(\mathcal{N}) &= a_1 (\cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M) + b_1 (\cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M) \\ &+ a_2 (\sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M) + b_2 (\sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M). \end{aligned}$$

Similarly, for (3.25), one has

$$\begin{aligned} \Re(\mathcal{N}) &= a_1 (\cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M) + b_1 (\cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M) \\ &+ a_2 (\sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M) + b_2 (\sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M), \\ \Im(\mathcal{N}) &= -a_1 (\cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M) + b_1 (\cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M) \\ &- a_2 (\sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M) + b_2 (\sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M). \end{aligned} \quad (3.27)$$

Combining (3.26)-(3.27) with the fact that $|\mathcal{N}| = 0$, we can derive that

$$\mathcal{M}_1 \begin{pmatrix} a_1 \\ a_2 \end{pmatrix} = 0, \quad \mathcal{M}_2 \begin{pmatrix} b_1 \\ b_2 \end{pmatrix} = 0, \quad (3.28)$$

where

$$\mathcal{M}_1 = \begin{pmatrix} \cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M & \sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M \\ \cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M & \sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M \end{pmatrix}$$

and

$$\mathcal{M}_2 = \begin{pmatrix} \cos \vartheta_M \sin 2\vartheta_m + \cos \vartheta_m \sin 2\vartheta_M & \sin \vartheta_M \sin 2\vartheta_m + \sin \vartheta_m \sin 2\vartheta_M \\ \cos \vartheta_M \cos 2\vartheta_m + \cos \vartheta_m \cos 2\vartheta_M & \sin \vartheta_M \cos 2\vartheta_m + \sin \vartheta_m \cos 2\vartheta_M \end{pmatrix}.$$

According to the admissible condition, we know that $\vartheta_M - \vartheta_m \in (0, \pi)$ and $\vartheta_M - \vartheta_m \neq \frac{\pi}{2}$. After tedious calculations, we have

$$\det(\mathcal{M}_1) = -\det(\mathcal{M}_2) = -2 \sin^2(\vartheta_M - \vartheta_m) \cos(\vartheta_M - \vartheta_m) \neq 0.$$

Therefore, by (3.28), we have $a_i = b_i = 0$ for $i = 1, 2$, which indicates that $\partial_1 u_2^+(\mathbf{0}) = \partial_2 u_2^+(\mathbf{0}) = 0$. This leads to a contradiction.

The proof is complete. \square

Remark 3.3. From the proof of Theorem 3.1, we can see that when the conductive boundary parameter η is a Hölder continuous function on the boundary and η does not vanish at the vertex of the scatterer, we can also establish the local unique result for determining the shape of an admissible conductive polygonal-nest or polygonal-cell medium scatterer by a single far-field pattern. The corresponding proof can be modified slightly from the proof of Theorem 3.1. Similarly, a global unique result for identifying the shape of an admissible conductive polygonal-nest medium scatterer by a single far-field pattern can be obtained for a Hölder continuous conductive boundary parameter with the non-vanishing property at the vertex.

Considering an admissible conductive polygonal-cell medium scatterer, the following theorem states the unique identifiability for the refractive index and conductive boundary parameter by a single far-field measurement, where we require a-priori knowledge of the shape and structure of the admissible conductive polygonal-cell medium scatterer.

Theorem 3.2. *Suppose that $(\Omega; q_\ell, \eta_\ell)$, $\ell = 1, 2$ are two admissible conductive polygon-cell medium scatterers associated with the scattering problem (1.7). Suppose that the refractive index q_ℓ and conductive boundary parameter η_ℓ have a common polygonal-cell structure $\cup_{i=1}^N \Sigma_i$ described by Definition 3.2. Let q_ℓ and η_ℓ be defined as follows:*

$$q_\ell = \sum_{i=1}^N q_{i,\ell} \chi_{\Sigma_i}, \quad \eta_\ell = \sum_{i=1}^N \tilde{\eta}_\ell \chi_{\Sigma_i}.$$

The coefficients of $q_{i,\ell}$ are real, where $q_{i,\ell}$ follows the form specified in (3.1), while $\tilde{\eta}_\ell$ is a real constant. Let $u_\ell^\infty(\hat{\mathbf{x}}; u^i)$ be the far-field pattern associated with the incident wave u^i corresponding to $(\Omega; q_\ell, \eta_\ell)$. Assume that

$$u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i)$$

for all $\hat{\mathbf{x}} \in \mathbb{S}^1$ and a fixed incident wave u^i . Then we have $q_1 = q_2$ and $\eta_1 = \eta_2$.

Considering an admissible conductive polygonal-nest medium scatterer, we have shown that the shape of the underlying medium scatterer can be uniquely determined by a single far-field measurement in Theorem 3.1. In the following theorem, we will further prove that the polygonal-nest structure of the underlying scatterer, the corresponding reflective indexes and the conductive boundary parameter can be uniquely determined by a single far-field pattern.

Theorem 3.3. *Suppose $(\Omega_\ell; q_\ell, \eta_\ell)$, $\ell = 1, 2$ are two admissible polygonal-nest medium scatterers associated with the scattering problem (1.7), where $\Omega_1 = \cup_{i=1}^{N_1} \mathcal{D}_{i,1}$ and $\Omega_2 = \cup_{i=1}^{N_2} \mathcal{D}_{i,2}$ with $\mathcal{D}_{i,\ell} = \Sigma_{i,\ell} \setminus \overline{\Sigma_{i,\ell}}$, $i = 1, \dots, N_\ell$. For each ℓ , let q_ℓ and η_ℓ be defined as follows:*

$$q_\ell = \sum_{i=1}^{N_\ell} q_{i,\ell} \chi_{\mathcal{D}_{i,\ell}}, \quad \eta_\ell = \sum_{i=1}^{N_\ell} \eta_{i,\ell} \chi_{\partial \Sigma_{i,\ell}}.$$

The coefficients of $q_{i,\ell}$ are real, where $q_{i,\ell}$ follows the form specified in (3.1), while $\eta_{i,\ell}$ is a real constant. Let $u_\ell^\infty(\hat{\mathbf{x}}; u^i)$ be the far-field pattern associated with the incident wave u^i corresponding to $(\Omega_\ell; q_\ell, \eta_\ell)$. Assume that

$$u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i)$$

for all $\hat{\mathbf{x}} \in \mathbb{S}^1$ and a fixed incident wave u^i . Then we have $N_1 = N_2 = N$, $\partial\Sigma_{i,1} = \partial\Sigma_{i,2}$, $q_{i,1} = q_{i,2}$ and $\eta_{i,1} = \eta_{i,2}$ for $i = 1, \dots, N$,

Remark 3.4. In Theorems 3.2 and 3.3, it is assumed that the coefficients of the reflective index follow the form specified in (3.1) and are real, while the conductive boundary parameter is a real constant. This assumption is also crucial in Lemma 3.2, as the proof of Theorems 3.2 and 3.3 relies on Lemma 3.2. Remark 3.5 suggests that the conclusion of Lemma 3.2 may hold in a more general scenario where the coefficients of the reflective index and the conductive boundary parameter are complex numbers. Hence, it is speculated that the linear polynomial reflective index with complex coefficients can be uniquely determined through a single far-field measurement.

Consider an admissible conductive polygonal-nest or polygonal-cell medium scatterer $(\Omega; q, \eta)$ as defined in Definition 3.5, where $\Omega \in \mathbb{R}^2$ possesses a polygonal-nest or polygonal-cell structure. Each vertex \mathbf{x}_c of Ω corresponds to a corner with an associated opening angle $\theta \in (0, \pi)$. Utilizing the translation transformation $\mathbf{y} = \mathbf{x} - \mathbf{x}_c$, we observe that the underlying corner can be represented by (1.2), where $\Gamma_{r_0}^\pm$ denote two line segment boundaries of \mathcal{S}_{r_0} . Recall that ϑ_m and ϑ_M are the polar angles of $\Gamma_{r_0}^-$ and $\Gamma_{r_0}^+$, respectively, such that $\theta = \vartheta_M - \vartheta_m$.

Furthermore, we introduce the rotation transformation $\tilde{\mathbf{x}} = M(\vartheta_m)\mathbf{y}$, employing the rotation matrix $M(\vartheta_m)$ given by:

$$M(\vartheta_m) = \begin{bmatrix} \cos(\vartheta_m) & \sin(\vartheta_m) \\ -\sin(\vartheta_m) & \cos(\vartheta_m) \end{bmatrix}. \quad (3.29)$$

In this new coordinate system \mathcal{C}_N , we set $\mathbf{x}_c = \mathbf{0}$ and $\vartheta_m = 0$. Proposition 3.1 demonstrates that if two linear polynomials coincide in the new coordinate system \mathcal{C}_N , they are identical in the original coordinate system. This result is crucial for proving the unique determination of a linear polynomial refractive index for $(\Omega; q, \eta)$. Similarly, Proposition 3.2 investigates the corresponding admissible conditions in the new coordinate system \mathcal{C}_N for the admissible conditions (3.8) and (3.9), originally formulated in the old coordinate system. The proofs of Proposition 3.1 and 3.2 are omitted.

Proposition 3.1. *In a fixed coordinate system \mathcal{C} , consider two linear polynomials with the form given by*

$$\alpha(\mathbf{x}) = a_0 + \mathbf{a}^\top \mathbf{x}, \text{ and } \gamma(\mathbf{x}) = b_0 + \mathbf{b}^\top \mathbf{x},$$

where $\mathbf{a} = (a_1, a_2)^\top$, $\mathbf{b} = (b_1, b_2)^\top$ and $\mathbf{x} = (x_1, x_2)^\top$. Pick up any fixed point \mathbf{x}_c in the coordinate system \mathcal{C} and a fixed rotation matrix $M(\vartheta_m)$ given by (3.29). Here $\vartheta_m \in [-\pi, \pi)$ is a fixed angle in the coordinate system \mathcal{C} . Let

$$\tilde{\mathbf{x}} = M(\vartheta_m)(\mathbf{x} - \mathbf{x}_c),$$

and

$$p(\tilde{\mathbf{x}}) = \alpha(M(\vartheta_m)^\top \tilde{\mathbf{x}} + \mathbf{x}_c), \quad g(\tilde{\mathbf{x}}) = \gamma(M(\vartheta_m)^\top \tilde{\mathbf{x}} + \mathbf{x}_c).$$

If $p(\tilde{\mathbf{x}}) \equiv g(\tilde{\mathbf{x}})$, then $\alpha(\mathbf{x}) = \gamma(\mathbf{x})$.

Proposition 3.2. *Consider a fixed coordinate system \mathcal{C} and an admissible conductive polygonal-nest or polygonal-cell medium scatterer $(\Omega; q, \eta)$ in \mathcal{C} as defined in Definition 3.5, where Ω possesses a polygonal-nest or polygonal-cell structure. Each vertex \mathbf{x}_c of*

Ω corresponds to a corner with an associated opening angle $\theta \in (0, \pi)$. Let u represent the total wave field of the direct scattering problem (1.7) associated with $(\Omega; q, \eta)$. Define $U(\tilde{\mathbf{x}}) = u(M(\vartheta_m)^\top \tilde{\mathbf{x}} + \mathbf{x}_c)$, where $\vartheta_m \in [-\pi, \pi)$ is a fixed angle in the coordinate system \mathcal{C} . Then, we have the following relations:

1. If $u(\mathbf{x}_c) = 0$, then $U(\mathbf{0}) = 0$.
2. If $\nabla u(\mathbf{x}_c) \neq 0$ and $u(\mathbf{x}_c) = 0$, then $\nabla U(\mathbf{0}) \neq 0$ and $U(\mathbf{0}) = 0$.

The proofs of Theorems 3.2 and 3.3 are deferred to Section 4. Prior to that, we require the following lemma, which establishes local uniqueness results for identifying the refractive index and conductive boundary parameter of a coupled PDE system near a corner.

Lemma 3.2. *Recall that $\mathcal{S}_{r_0}, \Gamma_{r_0}^\pm$ and B_{r_0} are defined in (1.2). Suppose that $u_1 = u_1^- \chi_{\mathcal{S}_{r_0}} + u_1^+ \chi_{B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}} \in H^1(B_{r_0})$ and $u_2 = u_2^- \chi_{\mathcal{S}_{r_0}} + u_2^+ \chi_{B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}} \in H^1(B_{r_0})$ satisfy the following PDE system:*

$$\begin{cases} (\Delta + k^2 q_1) u_1^- = 0, & \text{in } \mathcal{S}_{r_0}, \\ (\Delta + k^2 q_2) u_2^- = 0, & \text{in } \mathcal{S}_{r_0}, \\ (\Delta + k^2 q_3) u_1^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}, \\ (\Delta + k^2 q_3) u_2^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}, \\ u_1^+ = u_1^-, \partial_\nu u_1^- = \partial_\nu u_1^+ + \eta_1 u_1^+, & \text{on } \Gamma_{r_0}^\pm, \\ u_2^+ = u_2^-, \partial_\nu u_2^- = \partial_\nu u_2^+ + \eta_2 u_2^+, & \text{on } \Gamma_{r_0}^\pm, \end{cases} \quad (3.30)$$

where η_1 and η_2 are real constants and q_1, q_2, q_3 with forms

$$q_j = q_j^{(0)} + q_j^{(1)} x_1 + q_j^{(2)} x_2, \quad j = 1, 2, 3,$$

where $q_j^{(0)}, q_j^{(1)}$ and $q_j^{(2)}$ are real constants, $j = 1, 2, 3$.

Assume that for $i = 1$ or 2 , either

$$|u_i(\mathbf{0})| \neq 0, \quad (3.31)$$

or

$$\nabla u_i(\mathbf{0}) \neq 0, \quad u_i(\mathbf{0}) = 0 \quad (3.32)$$

is fulfilled. Additionally, if (3.32) holds, it is further required that $\vartheta_M - \vartheta_m \in (\frac{\pi}{3}, \frac{2\pi}{3}) \setminus \{\frac{\pi}{2}\}$, where $\vartheta_M - \vartheta_m$ is the opening angle of \mathcal{S}_{r_0} .

If

$$u_1^+ = u_2^+ \text{ in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}},$$

then one has $\eta_1 = \eta_2, q_1 = q_2$. Moreover, it holds that $u_1^- = u_2^-$ in \mathcal{S}_{r_0} .

Proof. Since $u_1^+ = u_2^+$ in $B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}$, we have that $u_1^+ = u_2^+$ on $\Gamma_{r_0}^\pm$ by the trace theorem, which indicates that $u_1^- = u_1^+ = u_2^+ = u_2^-$ on $\Gamma_{r_0}^\pm$ according to the transmission boundary condition. Without loss of generality, we assume that u_2^- fulfills (3.31) or (3.32). Denote $\tilde{u} := u_1^- - u_2^-$, then it can be shown directly that

$$\begin{cases} \Delta \tilde{u} + k^2 q_1 \tilde{u} = k^2 (q_2 - q_1) u_2^-, & \text{in } \mathcal{S}_{r_0}, \\ \tilde{u} = 0, \quad \partial_\nu \tilde{u} = (\eta_1 - \eta_2) u_2^-, & \text{on } \Gamma_{r_0}^\pm. \end{cases}$$

Similar to the proof of Theorem 3.1, we know that there exists the CGO solution u_0 given by (2.1), which satisfies (2.2) and

$$(\Delta + k^2 q_1) u_0 = 0 \text{ in } \mathcal{S}_{r_0}.$$

Using Green's formula, we have the following integral identity

$$\int_{\mathcal{S}_{r_0}} k^2 (q_2 - q_1) u_2^- u_0 d\mathbf{x} = (\eta_1 - \eta_2) \int_{\Gamma_{r_0}^\pm} u_2^- u_0 d\sigma + \int_{\Lambda_{r_0}} u_0 \partial_\nu \tilde{u} - \tilde{u} \partial_\nu u_0 d\sigma. \quad (3.33)$$

According to Lemma 3.1, we have $u_2^- \in C^{1,\alpha}(\overline{\mathcal{S}_{r_0}})$. Therefore, it follows that

$$u_2^- = u_2^-(\mathbf{0}) + \partial_1 u_2^-(\mathbf{0})x_1 + \partial_2 u_2^-(\mathbf{0})x_2 + \delta u_2^-, \quad |\delta u_2^-| \leq |\mathbf{x}|^{1+\alpha} \|u_2^-\|_{C^{1,\alpha}}. \quad (3.34)$$

For convenience, we denote $\tilde{\delta} u_2^- = \partial_1 u_2^-(\mathbf{0})x_1 + \partial_2 u_2^-(\mathbf{0})x_2 + \delta u_2^-$.

First, we are going to prove $\eta_1 = \eta_2$ and $q_1 = q_2$. According to the admissible conditions (3.8) and (3.9), in the rest of this proof, we will consider two distinct cases.

Case (I): $u_2^-(\mathbf{0}) \neq 0$. Using (3.33) and (3.34), we can directly see that

$$(\eta_2 - \eta_1)u_2^-(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} e^{\rho \cdot \mathbf{x}} d\sigma = \sum_{i=1}^4 I_i \quad (3.35)$$

where

$$\begin{aligned} I_1 &= (\eta_1 - \eta_2)u_2^-(\mathbf{0}) \int_{\Gamma_{r_0}^\pm} \psi(\mathbf{x})e^{\rho \cdot \mathbf{x}} d\sigma, I_2 = \int_{\mathcal{S}_{r_0}} k^2(q_1 - q_2)u_2^- u_0 d\mathbf{x}, \\ I_3 &= (\eta_1 - \eta_2) \int_{\Gamma_{r_0}^\pm} \tilde{\delta} u_2^- u_0(\mathbf{x}) d\sigma, I_4 = \int_{\Lambda_{r_0}} u_0 \partial_\nu \tilde{u} - \tilde{u} \partial_\nu u_0 d\sigma. \end{aligned}$$

By virtue of (3.15) and (3.16), we can derive that the right-hand side of (3.35) satisfies

$$|RHS| \lesssim \tau^{-\frac{7}{6}} + \tau^{-(2+\alpha)} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}\varsigma r_0 \tau}) + (1 + \tau)(1 + \tau^{-\frac{2}{3}})e^{-\varsigma r_0 \tau}.$$

By (2.14) and (3.17), one has the left-hand side of (3.35) satisfying

$$|LHS| \gtrsim |(\eta_2 - \eta_1)u_2^-(\mathbf{0})| \frac{|\Gamma(1)|e^{i\vartheta_m} + e^{i\vartheta_M}}{|\tau e^{i\varphi}|} - \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}\lambda r_0 \tau}). \quad (3.36)$$

Similar to the proof of **Case(a)** in Theorem 3.1, we have

$$|(\eta_1 - \eta_2)u_2^-(\mathbf{0})| = 0, \quad \text{for } \vartheta_M - \vartheta_m \in (0, \pi),$$

which indicates that $\eta_1 = \eta_2$ since $u_2^-(\mathbf{0}) \neq 0$.

Next, using $\eta_1 = \eta_2$, the integral identity (3.35) can be rewritten as

$$k^2(q_2^{(0)} - q_1^{(0)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} e^{\rho \cdot \mathbf{x}} d\mathbf{x} = \sum_{i=1}^4 \mathcal{P}_i + I_4, \quad (3.37)$$

where

$$\begin{aligned} \mathcal{P}_1 &= k^2(q_1^{(0)} - q_2^{(0)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} \psi(\mathbf{x})e^{\rho \cdot \mathbf{x}} d\mathbf{x}, \quad \mathcal{P}_2 = k^2(q_1^{(0)} - q_2^{(0)}) \int_{\mathcal{S}_{r_0}} \tilde{\delta} u_2^- u_0 d\mathbf{x}, \\ \mathcal{P}_3 &= k^2(q_1^{(1)} - q_2^{(1)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_1 u_0 d\mathbf{x} + k^2(q_1^{(2)} - q_2^{(2)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_2 u_0 d\mathbf{x}, \\ \mathcal{P}_4 &= k^2(q_1^{(1)} - q_2^{(1)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_1 \tilde{\delta} u_2^- u_0 d\mathbf{x} + k^2(q_1^{(2)} - q_2^{(2)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_2 \tilde{\delta} u_2^- u_0 d\mathbf{x}, \end{aligned}$$

and I_4 is defined in (3.35). Then by Proposition 2.1, it is directly shown that

$$\begin{aligned} |\mathcal{P}_1| &\lesssim \tau^{-29/12} + \mathcal{O}(\tau^{-1}e^{-1/2\varsigma r_0 \tau}), \quad |\mathcal{P}_2| \lesssim \tau^{-3} + \tau^{-(\alpha+3)} + \mathcal{O}(\tau^{-1}e^{-1/2\varsigma r_0 \tau}), \\ |\mathcal{P}_3| &\lesssim \int_{\mathcal{S}_{r_0}} |x| |u_0| d\mathbf{x} \lesssim \tau^{-3} + \mathcal{O}(\tau^{-1}e^{-1/2\varsigma r_0 \tau}), \\ |\mathcal{P}_4| &\lesssim \int_{\mathcal{S}_{r_0}} |x| |\tilde{\delta} u_2^- u_0| d\mathbf{x} \lesssim \tau^{-4} + \tau^{-(\alpha+4)} + \mathcal{O}(\tau^{-1}e^{-1/2\varsigma r_0 \tau}). \end{aligned} \quad (3.38)$$

Let \mathbf{d}^\perp be in the form of (2.14), we find that the left-hand side of (3.37) satisfies

$$LHS = k^2(q_0^{(2)} - q_0^{(1)})u_2^-(\mathbf{0}) \frac{\Gamma(2)(e^{2i\vartheta_M} - e^{2i\vartheta_m})}{\tau^2 e^{2i\varphi}} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}\lambda r_0\tau}). \quad (3.39)$$

Similarly, by combining (3.37)-(3.39), as $\tau \rightarrow \infty$, we can obtain

$$|k^2(q_0^{(2)} - q_0^{(1)})u_2^-(\mathbf{0})| = 0,$$

since $|e^{2i\vartheta_M} - e^{2i\vartheta_m}| \neq 0$ when $\vartheta_M - \vartheta_m \in (0, \pi)$. Therefore, $q_0^{(2)} = q_0^{(1)}$ holds due to $u_2^-(\mathbf{0}) \neq 0$.

Using $q_1^{(0)} = q_2^{(0)}$, from (3.37), we have the following integral identity

$$k^2(q_2^{(1)} - q_1^{(1)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_1 e^{\rho \cdot \mathbf{x}} d\mathbf{x} + k^2(q_2^{(2)} - q_1^{(2)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_2 e^{\rho \cdot \mathbf{x}} d\mathbf{x} = \sum_{i=1}^2 \mathcal{E}_i + I_4, \quad (3.40)$$

where

$$\begin{aligned} \mathcal{E}_1 &= k^2(q_1^{(1)} - q_2^{(1)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_1 \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\mathbf{x} + k^2(q_1^{(2)} - q_2^{(2)})u_2^-(\mathbf{0}) \int_{\mathcal{S}_{r_0}} x_2 \psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}} d\mathbf{x}, \\ \mathcal{E}_2 &= k^2(q_1^{(1)} - q_2^{(1)}) \int_{\mathcal{S}_{r_0}} x_1 \tilde{\delta} u_2^- u_0 d\mathbf{x} + k^2(q_1^{(2)} - q_2^{(2)}) \int_{\mathcal{S}_{r_0}} x_2 \tilde{\delta} u_2^- u_0 d\mathbf{x}. \end{aligned}$$

Utilizing Proposition 2.1, it can be calculated estimates about \mathcal{E}_1 and \mathcal{E}_2 as follows,

$$\begin{aligned} |\mathcal{E}_1| &\lesssim \int_{\mathcal{S}_{r_0}} |\mathbf{x}| |\psi(\mathbf{x}) e^{\rho \cdot \mathbf{x}}| d\mathbf{x} \lesssim \tau^{-\frac{41}{12}} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}sr_0\tau}), \\ |\mathcal{E}_2| &\lesssim \int_{\mathcal{S}_{r_0}} |\mathbf{x}| |\tilde{\delta} u_2^-| |u_0| d\mathbf{x} \lesssim \tau^{-(3+\alpha)} + \tau^{-(\frac{53}{12}+\alpha)} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}sr_0\tau}). \end{aligned} \quad (3.41)$$

Then we can write the left-hand side of (3.40) as

$$\bar{q}_1 \int_{\vartheta_m}^{\vartheta_M} d\vartheta \int_0^{r_0} r^2 \cos \vartheta e^{-\tau e^{i(\vartheta-\varphi)r}} dr + \bar{q}_2 \int_{\vartheta_m}^{\vartheta_M} d\vartheta \int_0^{r_0} r^2 \sin \vartheta e^{-\tau e^{i(\vartheta-\varphi)r}} dr, \quad (3.42)$$

when \mathbf{d}^\perp is selected in the form described in (2.13), and

$$\bar{q}_1 \int_{\vartheta_m}^{\vartheta_M} d\vartheta \int_0^{r_0} r^2 \cos \vartheta e^{-\tau e^{i(\varphi-\vartheta)r}} dr + \bar{q}_2 \int_{\vartheta_m}^{\vartheta_M} d\vartheta \int_0^{r_0} r^2 \sin \vartheta e^{-\tau e^{i(\varphi-\vartheta)r}} dr, \quad (3.43)$$

when \mathbf{d}^\perp is selected in the form of (2.14), where $\bar{q}_i := k^2(q_2^{(i)} - q_1^{(i)})u_2^-(\mathbf{0})$, $i = 1, 2$.

Utilizing (2.3), the first term of (3.42) can be expressed as:

$$\begin{aligned} &\frac{\Gamma(3)\bar{q}_1 e^{3i\varphi}}{\tau^3} \int_{\vartheta_m}^{\vartheta_M} \cos \vartheta e^{-3i\vartheta} d\vartheta + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}sr_0\tau}) \\ &= \frac{\Gamma(3)e^{3i\varphi}}{\tau^3} \cdot \frac{1}{8} \left\{ (-\sin \vartheta + 3i \cos \vartheta) e^{-3i\vartheta} \right\} \Big|_{\vartheta_m}^{\vartheta_M} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}\lambda r_0\tau}). \end{aligned} \quad (3.44)$$

The second term can be simplified as:

$$\begin{aligned} &\frac{\Gamma(3)\bar{q}_2 e^{3i\varphi}}{\tau^3} \int_{\vartheta_m}^{\vartheta_M} \sin \vartheta e^{-3i\vartheta} d\vartheta + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}sr_0\tau}) \\ &= \frac{\Gamma(3)e^{3i\varphi}}{\tau^3} \cdot \frac{1}{8} \left\{ (\cos \vartheta + 3i \sin \vartheta) e^{-3i\vartheta} \right\} \Big|_{\vartheta_m}^{\vartheta_M} + \mathcal{O}(\tau^{-1}e^{-\frac{1}{2}\lambda r_0\tau}). \end{aligned} \quad (3.45)$$

Similarly, the first term of (3.43) can be expressed as:

$$\begin{aligned} & \frac{\Gamma(3)\bar{q}_1 e^{-3i\varphi}}{\tau^3} \int_{\vartheta_m}^{\vartheta_M} \cos \vartheta e^{3i\vartheta} d\vartheta + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}) \\ &= \frac{\Gamma(3)e^{-3i\varphi}}{\tau^3} \cdot \frac{1}{8} \left\{ -(\sin \vartheta + 3i \cos \vartheta) e^{3i\vartheta} \right\} \Big|_{\vartheta_m}^{\vartheta_M} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau}). \end{aligned} \quad (3.46)$$

The second term of (3.43) can be written as:

$$\begin{aligned} & \frac{\Gamma(3)\bar{q}_2 e^{-3i\varphi}}{\tau^3} \int_{\vartheta_m}^{\vartheta_M} \sin \vartheta e^{3i\vartheta} d\vartheta + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}) \\ &= \frac{\Gamma(3)e^{-3i\varphi}}{\tau^3} \cdot \frac{1}{8} \left\{ (\cos \vartheta - 3i \sin \vartheta) e^{3i\vartheta} \right\} \Big|_{\vartheta_m}^{\vartheta_M} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau}). \end{aligned} \quad (3.47)$$

Combining (3.41)-(3.47) with (3.40), one has

$$\begin{aligned} & \left| \frac{\Gamma(3)e^{3i\varphi}}{8\tau^3} \left\{ \bar{q}_1 \left((-\sin \vartheta + 3i \cos \vartheta) e^{3i\vartheta} \right) + \bar{q}_2 \left((\cos \vartheta + 3i \sin \vartheta) e^{-3i\vartheta} \right) \right\} \right|_{\vartheta_m}^{\vartheta_M} \\ & \leq \tau^{-\frac{41}{12}} + \tau^{-(3+\alpha)} + (1+\tau)(1+\tau^{2/3})e^{-\varsigma r_0 \tau} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}) + \mathcal{O}(\tau^{-1} e^{-\lambda r_0 \tau}) \end{aligned} \quad (3.48)$$

and

$$\begin{aligned} & \left| \frac{\Gamma(3)e^{-3i\varphi}}{8\tau^3} \left\{ \bar{q}_1 \left(-(\sin \vartheta + 3i \cos \vartheta) e^{3i\vartheta} \right) + \bar{q}_2 \left((\cos \vartheta - 3i \sin \vartheta) e^{3i\vartheta} \right) \right\} \right|_{\vartheta_m}^{\vartheta_M} \\ & \leq \tau^{-\frac{41}{12}} + \tau^{-(3+\alpha)} + (1+\tau)(1+\tau^{2/3})e^{-\varsigma r_0 \tau} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\varsigma r_0 \tau}) + \mathcal{O}(\tau^{-1} e^{-\lambda r_0 \tau}). \end{aligned} \quad (3.49)$$

By multiplying both sides of (3.48) by $\frac{8\tau^3}{\Gamma(3)e^{3i\varphi}}$, (3.49) by $\frac{8\tau^3 e^{3i\varphi}}{\Gamma(3)}$, and letting $\tau \rightarrow \infty$, we obtain

$$B \begin{pmatrix} \bar{q}_1 \\ \bar{q}_2 \end{pmatrix} = \mathbf{0},$$

where

$$B = \begin{pmatrix} (-\sin \vartheta + 3i \cos \vartheta) e^{-3i\vartheta} \Big|_{\vartheta_m}^{\vartheta_M} & (\cos \vartheta + 3i \sin \vartheta) e^{-3i\vartheta} \Big|_{\vartheta_m}^{\vartheta_M} \\ -(\sin \vartheta + 3i \cos \vartheta) e^{3i\vartheta} \Big|_{\vartheta_m}^{\vartheta_M} & (\cos \vartheta - 3i \sin \vartheta) e^{3i\vartheta} \Big|_{\vartheta_m}^{\vartheta_M} \end{pmatrix}.$$

Furthermore, it can be calculated that

$$\begin{aligned} \det(B) &= (20 \sin(3\beta) \sin \beta + 12 \cos(3\beta) \cos \beta - 12) i \\ &= -4(\cos(2\beta) - 1)^2 i \neq 0, \quad \beta = \vartheta_M - \vartheta_m \in (0, \pi). \end{aligned}$$

Hence we get that $\bar{q}_1 = 0$ and $\bar{q}_2 = 0$, which implies that $q_1^{(1)} = q_2^{(1)}$ and $q_1^{(2)} = q_2^{(2)}$ by using $u_2^-(\mathbf{0}) \neq 0$.

Case (II): $|\nabla u_2^-(\mathbf{0})| \neq 0$ and $u(\mathbf{0}) = 0$. In this scenario, we utilize the rotation transformation $\tilde{\mathbf{x}} = M(\vartheta_m)^\top \mathbf{x}$, where $M(\vartheta_m)$ is defined by (3.29). Consequently, in the new coordinate system, we denote the linear segment boundary of the corner \mathcal{S}_{r_0} by $\tilde{\Gamma}_{r_0}^\pm$, and the new corner is represented as \mathcal{S}'_{r_0} . The boundary part Λ_{r_0} of \mathcal{S}'_{r_0} is denoted by Λ'_{r_0} . The polar angle of $\tilde{\Gamma}_{r_0}^-$ is 0, and the polar angle of $\tilde{\Gamma}_{r_0}^+$ is $\tilde{\vartheta} = \vartheta_M - \vartheta_m$.

Denote

$$\tilde{q}_i(\tilde{\mathbf{x}}) = q_i(M(\vartheta_m)^\top \tilde{\mathbf{x}}), \quad \tilde{q}_i = \tilde{q}_0^{(i)} + \tilde{q}_1^{(i)} \tilde{x}_1 + \tilde{q}_2^{(i)} \tilde{x}_2, \quad i = 1, 2, 3,$$

and

$$U_j^\pm(\tilde{\mathbf{x}}) = u_j^\pm(M(\vartheta_m)^\top \tilde{\mathbf{x}}), \quad j = 1, 2.$$

Then we can rewrite (3.30) as follows:

$$\begin{cases} (\Delta + k^2 \tilde{q}_1)U_1^- = 0, & \text{in } \mathcal{S}'_{r_0}, \\ (\Delta + k^2 \tilde{q}_2)U_2^- = 0, & \text{in } \mathcal{S}'_{r_0}, \\ (\Delta + k^2 \tilde{q}_3)U_1^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}'_{r_0}}, \\ (\Delta + k^2 \tilde{q}_3)U_2^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}'_{r_0}}, \\ U_1^+ = U_1^-, \partial_\nu U_1^- = \partial_\nu U_1^+ + \eta_1 U_1^+, & \text{on } \tilde{\Gamma}_{r_0}^\pm, \\ U_2^+ = U_2^-, \partial_\nu U_2^- = \partial_\nu U_2^+ + \eta_2 U_2^+, & \text{on } \tilde{\Gamma}_{r_0}^\pm. \end{cases} \quad (3.50)$$

Denote $\tilde{U} = U_1^- - U_2^-$, then one has

$$\begin{cases} \Delta \tilde{U} + k^2 \tilde{q}_1 \tilde{U} = k^2 (\tilde{q}_2 - \tilde{q}_1) U_2^-, & \text{in } \mathcal{S}'_{r_0}, \\ \tilde{U} = 0, \partial_\nu \tilde{U} = (\eta_1 - \eta_2) U_2^-, & \text{on } \tilde{\Gamma}_{r_0}^\pm. \end{cases} \quad (3.51)$$

By Lemma 2.1, we know that there exists a CGO solution \tilde{u}_0 of the form

$$\tilde{u}_0(\tilde{\mathbf{x}}) = (1 + \psi(\tilde{\mathbf{x}}))e^{\rho \cdot \tilde{\mathbf{x}}}$$

satisfying that

$$(\Delta + k^2 \tilde{q}_1)\tilde{u}_0(\tilde{\mathbf{x}}) = 0, \text{ in } \mathcal{S}'_{r_0}.$$

Recall that

$$\begin{aligned} u_2^- &= u_2^-(\mathbf{0}) + \partial_1 u_2^-(\mathbf{0})x_1 + \partial_2 u_2^-(\mathbf{0})x_2 + \delta u_2^- \\ &= u_2^-(\mathbf{0}) + \mathbf{x}^\top \nabla_{\mathbf{x}} u_2^-(\mathbf{0}) + \delta u_2^-. \end{aligned}$$

Due to $\mathbf{x} = M(\vartheta_m)^\top \tilde{\mathbf{x}}$ and $\nabla_{\mathbf{x}} u_2^-(\mathbf{0}) = M(\vartheta_m)^\top \nabla_{\tilde{\mathbf{x}}} U_2^-(\mathbf{0})$, then we have

$$U_2^-(\tilde{\mathbf{x}}) = U_2^-(\mathbf{0}) + \partial_1 U_2^-(\mathbf{0})\tilde{x}_1 + \partial_2 U_2^-(\mathbf{0})\tilde{x}_2 + \delta U_2^-, |\delta U_2^-| \leq C \|U_2^-\|_{C^{1,\alpha}}. \quad (3.52)$$

According to Proposition 3.2, using the condition $|\nabla u_2^-(\mathbf{0})| \neq 0$ and $u(\mathbf{0}) = 0$, we have $\nabla U_2^-(\mathbf{0}) \neq 0$ and $U_2^-(\mathbf{0}) = 0$. In the following, we further divide the rest proof into the following three distinct cases.

Case (i): $\partial_1 U_2^-(\mathbf{0}) \neq 0$, $\partial_2 U_2^-(\mathbf{0}) \neq 0$, $U_2^-(\mathbf{0}) = 0$. Recall that $U_2^- = \partial_1 U_2^-(\mathbf{0})\tilde{x}_1 + \partial_2 U_2^-(\mathbf{0})\tilde{x}_2 + \delta U_2^-$, then we have

$$\begin{aligned} \bar{\eta} \int_{\tilde{\Gamma}_{r_0}^\pm} (\partial_1 U_2^-(\mathbf{0})\tilde{x}_1 + \partial_2 U_2^-(\mathbf{0})\tilde{x}_2) e^{\rho \cdot \tilde{\mathbf{x}}} d\sigma &= \int_{\mathcal{S}'_{r_0}} k^2 (q_1 - q_2) \tilde{u}_0 U_2^- d\tilde{\mathbf{x}} \\ &- \bar{\eta} \int_{\tilde{\Gamma}_{r_0}^\pm} (\partial_1 U_2^-(\mathbf{0})\tilde{x}_1 + \partial_2 U_2^-(\mathbf{0})\tilde{x}_2) \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\sigma - \bar{\eta} \int_{\tilde{\Gamma}_{r_0}^\pm} \delta U_2^- \tilde{u}_0 d\sigma + \mathcal{I}, \end{aligned} \quad (3.53)$$

where $\bar{\eta} = \eta_2 - \eta_1$. Comparing (3.53) with (3.23), then we see that the right-hand and left-hand sides of (3.53) satisfy

$$|RHS| \lesssim \tau^{-(2+\alpha)} + \tau^{-\frac{13}{6}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}sr_0\tau}) + (1 + \tau)(1 + \tau^{-sr_0\tau})$$

and

$$LHS = \frac{\Gamma(2)(\eta_2 - \eta_1)\mathcal{Q}}{\tau^2((\mathbf{d} + \mathbf{id}^\perp) \cdot \tilde{\mathbf{x}}_1)^2((\mathbf{d} + \mathbf{id}^\perp) \cdot \tilde{\mathbf{x}}_2)^2} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau}),$$

where

$$\begin{aligned} \mathcal{Q} &= (\partial_1 U_2^-(\mathbf{0}) \cos \tilde{\vartheta} + \partial_2 U_2^-(\mathbf{0}) \sin \tilde{\vartheta}) + \partial_1 U_2^-(\mathbf{0}) e^{-2i\tilde{\vartheta}} \\ &= (\partial_1 U_2^-(\mathbf{0}) \cos \tilde{\vartheta} + \partial_2 U_2^-(\mathbf{0}) \sin \tilde{\vartheta} + \partial_1 U_2^-(\mathbf{0}) \cos 2\tilde{\vartheta}) - i\partial_1 U_2^-(\mathbf{0}) \sin 2\tilde{\vartheta}. \end{aligned}$$

Since $\partial_1 U_2^-(\mathbf{0}) \neq 0$, it follows that $\Im(\mathcal{Q}) \neq 0$ when $\tilde{\vartheta} \neq \frac{\pi}{2}$. By employing a similar manner as in **Case (b)** of the proof of Theorem 3.1, it can be demonstrated that $\eta_1 = \eta_2$ since $\tilde{\vartheta} = \vartheta_M - \vartheta_m \neq \frac{\pi}{2}$.

Next, we will prove that $\tilde{q}_1^{(0)} = \tilde{q}_2^{(0)}$. Using $\eta_1 = \eta_2$, the integral identity (3.53) can be rewritten as

$$\begin{aligned}
& \tilde{\sigma}_0 \left(\partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + \partial_2 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_2 e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \right) \\
&= -\tilde{\sigma}_0 \left(\partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + \partial_2 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_2 \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \right) \\
&- \tilde{\sigma}_0 \int_{S'_{r_0}} \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + k^2 (\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \int_{S'_{r_0}} \tilde{x}_1 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\
&+ k^2 (\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \int_{S'_{r_0}} \tilde{x}_2 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}
\end{aligned} \tag{3.54}$$

where $\tilde{\sigma}_0 = k^2 (\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)})$. Initially, according to Proposition 2.1, for the right-hand side of (3.54), it follows that

$$|RHS| \lesssim \tau^{-(3+\alpha)} + \tau^{-\frac{41}{12}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}sr_0\tau}) + (1+\tau)(1+\tau^{-\frac{2}{3}})e^{-sr_0\tau}.$$

Concerning the left-hand side of (3.54) and letting \mathbf{d}^\perp be in the form of (2.14), it follows that

$$\begin{aligned}
LHS &= \frac{\Gamma(3)\tilde{\sigma}_0}{\tau^3 e^{3i\varphi}} \left(\partial_1 U_2^-(\mathbf{0}) \int_0^{\tilde{\vartheta}} e^{3i\vartheta} \cos \vartheta d\vartheta + \partial_2 U_2^-(\mathbf{0}) \int_0^{\tilde{\vartheta}} e^{3i\vartheta} \sin \vartheta d\vartheta \right) \\
&+ \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau}).
\end{aligned}$$

Denote

$$\Psi := \partial_1 U_2^-(\mathbf{0}) \int_0^{\tilde{\vartheta}} e^{3i\vartheta} \cos \vartheta d\vartheta + \partial_2 U_2^-(\mathbf{0}) \int_0^{\tilde{\vartheta}} e^{3i\vartheta} \sin \vartheta d\vartheta.$$

Multiplying both sides of (3.54) by τ^3 and taking the limit as τ tends to infinity yields $\tilde{\sigma}_0 \Psi = 0$. Direct calculations show that

$$\begin{aligned}
\Re(\Psi) &= -\partial_1 U_2^-(\mathbf{0}) (\sin \tilde{\vartheta} \cos 3\tilde{\vartheta} - 3 \sin 3\tilde{\vartheta} \cos \tilde{\vartheta}) \\
&+ \partial_2 U_2^-(\mathbf{0}) (\cos \tilde{\vartheta} \cos 3\tilde{\vartheta} + 3 \sin \tilde{\vartheta} \sin 3\tilde{\vartheta} - 1), \\
\Im(\Psi) &= -\partial U_2^-(\mathbf{0}) (\sin \tilde{\vartheta} \sin 3\tilde{\vartheta} + 3 \cos \tilde{\vartheta} \cos 3\tilde{\vartheta} - 3) \\
&+ \partial_2 U_2^-(\mathbf{0}) (\cos \tilde{\vartheta} \sin 3\tilde{\vartheta} - 3 \sin \tilde{\vartheta} \cos 3\tilde{\vartheta}).
\end{aligned}$$

Next, we will show that $\Psi \neq 0$. By contradiction, suppose that $\Re(\Psi) = \Im(\Psi) = 0$, then we have

$$M \begin{pmatrix} \partial_1 U_2^-(\mathbf{0}) \\ \partial_2 U_2^-(\mathbf{0}) \end{pmatrix} = \mathbf{0},$$

where

$$M = \begin{pmatrix} 3 \sin 3\tilde{\vartheta} \cos \tilde{\vartheta} - \sin \tilde{\vartheta} \cos 3\tilde{\vartheta} & \cos \tilde{\vartheta} \cos 3\tilde{\vartheta} + 3 \sin \tilde{\vartheta} \sin 3\tilde{\vartheta} - 1 \\ \sin \tilde{\vartheta} \sin 3\tilde{\vartheta} + 3 \cos \tilde{\vartheta} \cos 3\tilde{\vartheta} - 3 & \cos \tilde{\vartheta} \sin 3\tilde{\vartheta} - 3 \sin \tilde{\vartheta} \cos 3\tilde{\vartheta} \end{pmatrix}.$$

It can be deduced that

$$\det(M) = 16 \sin^4 \tilde{\vartheta} \neq 0 \text{ for } \tilde{\vartheta} \in (0, \pi),$$

where we get a contradiction. Hence, the proof of $\tilde{q}_2^{(0)} = \tilde{q}_1^{(0)}$ is complete.

Substituting $\tilde{q}_2^{(0)} = \tilde{q}_1^{(0)}$ into (3.54), we obtain

$$\begin{aligned} & \tilde{\sigma}_1 \int_{S'_{r_0}} (\partial_1 U_2^-(\mathbf{0}) \tilde{x}_1^2 + \partial_2 U_2^-(\mathbf{0}) \tilde{x}_1 \tilde{x}_2) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + \tilde{\sigma}_2 \int_{S'_{r_0}} (\partial_1 U_2^-(\mathbf{0}) \tilde{x}_1 \tilde{x}_2 + \partial_2 U_2^-(\mathbf{0}) \tilde{x}_2^2) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &= -\tilde{\sigma}_1 \int_{S'_{r_0}} (\partial_1 U_2^-(\mathbf{0}) \tilde{x}_1^2 + \partial_2 U_2^-(\mathbf{0}) \tilde{x}_1 \tilde{x}_2) \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} - \tilde{\sigma}_1 \int_{S'_{r_0}} \tilde{x}_1 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\ & \quad - \tilde{\sigma}_2 \int_{S'_{r_0}} (\partial_1 U_2^-(\mathbf{0}) \tilde{x}_1 \tilde{x}_2 + \partial_2 U_2^-(\mathbf{0}) \tilde{x}_2^2) \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} - \tilde{\sigma}_2 \int_{S'_{r_0}} \tilde{x}_2 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}, \end{aligned}$$

here $\tilde{\sigma}_i = k^2(\tilde{q}_2^{(i)} - \tilde{q}_1^{(i)})$, $i = 1, 2$. Following a similar argument as in **Case (I)**, we obtain a linear equation:

$$Q \begin{pmatrix} \tilde{q}_2^{(1)} - \tilde{q}_1^{(1)} \\ \tilde{q}_2^{(2)} - \tilde{q}_1^{(2)} \end{pmatrix} = \mathbf{0}, \quad (3.55)$$

where

$$\begin{aligned} Q_{11} &= \left(\partial_1 U_2^-(\mathbf{0}) \left(-\frac{1}{2i} + \frac{1}{3}(2i \cos 2\vartheta - \sin 2\vartheta) \right) + \frac{1}{3} \partial_2 U_2^-(\mathbf{0}) (2i \sin 2\vartheta + \cos 2\vartheta) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ Q_{12} &= \left(\frac{1}{3} \partial_1 U_2^-(\mathbf{0}) (2i \sin 2\vartheta + \cos 2\vartheta) + \partial_2 U_2^-(\mathbf{0}) \left(-\frac{1}{2i} - \frac{1}{3}(2i \cos 2\vartheta - \sin 2\vartheta) \right) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ Q_{21} &= \left(\partial_1 U_2^-(\mathbf{0}) \left(\frac{1}{2i} - \frac{1}{3}(\sin 2\vartheta + 2i \cos 2\vartheta) \right) + \frac{1}{3} \partial_2 U_2^-(\mathbf{0}) (\cos 2\vartheta - 2i \sin \vartheta) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ Q_{22} &= \left(\frac{1}{3} \partial_1 U_2^-(\mathbf{0}) (\cos 2\vartheta - 2i \sin 2\vartheta) + \partial_2 U_2^-(\mathbf{0}) \left(\frac{1}{2i} + \frac{1}{3}(\sin 2\vartheta + 2i \cos 2\vartheta) \right) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}}. \end{aligned}$$

After tedious calculations, it is revealed that

$$\det(Q) = \frac{i}{9} (\partial_1 U_2^-(\mathbf{0}) \partial_2 U_2^-(\mathbf{0})) \mathcal{A} \begin{pmatrix} \partial_1 U_2^-(\mathbf{0}) \\ \partial_2 U_2^-(\mathbf{0}) \end{pmatrix},$$

where

$$\mathcal{A}(:, 1) = \begin{pmatrix} -3 \cos 4\tilde{\vartheta} - 8 \cos 2\tilde{\vartheta} - 5 \sin 4\tilde{\vartheta} \sin 2\tilde{\vartheta} + 11 \\ 6 \sin 2\tilde{\vartheta} - 6 \sin 4\tilde{\vartheta} + 3 \sin 4\tilde{\vartheta} \cos 2\tilde{\vartheta} \end{pmatrix}$$

and

$$\mathcal{A}(:, 2) = \begin{pmatrix} 6 \sin 2\tilde{\vartheta} - 6 \sin 4\tilde{\vartheta} + 3 \sin 4\tilde{\vartheta} \cos 2\tilde{\vartheta} \\ 3 \cos 4\tilde{\vartheta} - 8 \cos 2\tilde{\vartheta} + \sin 4\tilde{\vartheta} \sin 2\tilde{\vartheta} + 5 \end{pmatrix}.$$

In the following, we will show that \mathcal{A} is positive definite. In fact, we have the first order leading principle minors of \mathcal{A} fulfills that

$$D_1(\mathcal{A}) = 2(5 \cos 2\tilde{\vartheta} + 7)(\cos 2\tilde{\vartheta} - 1)^2 > 0, \text{ for } \tilde{\vartheta} \in (0, \pi).$$

When $\tilde{\vartheta} \in (\frac{\pi}{3}, \frac{2\pi}{3})$, we can show that the second order leading principle minors of \mathcal{A} satisfies that

$$D_2(\mathcal{A}) = 8(2 \cos 2\tilde{\vartheta} + 1)(\cos 2\tilde{\vartheta} - 1)^5 > 0.$$

Given that the conductive boundary parameter is a real constant and the refractive index is a linear polynomial with real coefficients, we can treat the PDE system (3.30) separately by considering its real and imaginary parts. This allows us to assume that the solutions u_1 and u_2 of (3.30) are real-valued by separating the real and imaginary parts of u_1 and u_2 . Consequently, $(\partial_1 u_2^-(\mathbf{0}) \partial_2 u_2^-(\mathbf{0}))^\top$ becomes a nonzero real vector. Leveraging the positivity of \mathcal{A} , we deduce that Q is nonsingular, which can be used to prove that $\tilde{q}_1^{(1)} = \tilde{q}_2^{(1)}$ and $\tilde{q}_1^{(2)} = \tilde{q}_2^{(2)}$.

By Proposition 3.1, we ascertain that $q_1 = q_2$ and $\eta_1 = \eta_2$.

Case (ii): $\partial_1 U_2^-(\mathbf{0}) \neq 0$, $\partial_2 U_2^-(\mathbf{0}) = U_2^-(\mathbf{0}) = 0$. In view of (3.51), we observe that

$$(\eta_2 - \eta_1)\partial_1 U_2^-(\mathbf{0}) \int_{\tilde{\Gamma}_{r_0}^\pm} \tilde{x}_1 e^{\rho \tilde{\mathbf{x}}} d\sigma = \sum_{i=1}^3 \mathcal{F}_i + \mathcal{I}, \quad (3.56)$$

where

$$\begin{aligned} \mathcal{F}_1 &= (\eta_1 - \eta_2)\partial_1 U_2^-(\mathbf{0}) \int_{\tilde{\Gamma}_{r_0}^\pm} \tilde{x}_1 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\sigma, \quad \mathcal{F}_2 = (\eta_1 - \eta_2) \int_{\tilde{\Gamma}_{r_0}^\pm} \delta U_2^- \tilde{u}_0 d\sigma \\ \mathcal{F}_3 &= \int_{S'_{r_0}} k^2(\tilde{q}_1 - \tilde{q}_2) U_2^- \tilde{u}_0 d\tilde{\mathbf{x}}, \quad \mathcal{I} = \int_{\Lambda'_{r_0}} \partial_\nu \tilde{u}_0 \tilde{U} - \partial_\nu \tilde{U} \tilde{u}_0 d\sigma. \end{aligned}$$

Similar to the proof of **Case(b)** in Theorem 3.1, using Proposition 2.1, it yields that the right-hand side of (3.56) satisfies

$$|RHS| \lesssim \tau^{-\frac{13}{6}} + \tau^{-(2+\alpha)} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}sr_0\tau}) + (1+\tau)(1+\tau^{-\frac{2}{3}})e^{-sr_0\tau} \quad (3.57)$$

and the left-hand side of (3.56) fulfills that

$$\bar{\eta} \int_{\tilde{\Gamma}_{r_0}^\pm} \tilde{x}_1 e^{\rho \tilde{\mathbf{x}}} d\sigma = \frac{\Gamma(2)\bar{\eta}}{\tau^2} \left(\frac{\cos \tilde{\vartheta}}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_1)^2} + \frac{1}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_2)^2} \right) + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau})$$

where $\bar{\eta} = (\eta_2 - \eta_1)\partial_1 U_2^-(\mathbf{0})$ and $\hat{\mathbf{x}}_1 \in \tilde{\Gamma}_{r_0}^+$, $\hat{\mathbf{x}}_2 \in \tilde{\Gamma}_{r_0}^-$. Let \mathbf{d} and \mathbf{d}^\perp be defined in (2.14), then one has

$$\left| \frac{\cos \tilde{\vartheta}}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_1)^2} + \frac{1}{((\mathbf{d} + \mathbf{id}^\perp) \cdot \hat{\mathbf{x}}_2)^2} \right| \neq 0, \quad \tilde{\vartheta} \in (0, \pi). \quad (3.58)$$

By virtue of (3.56)-(3.58), one can directly derive:

$$|\Gamma(2)\bar{\eta}| = 0,$$

as $\tau \rightarrow \infty$. Consequently, $\eta_1 = \eta_2$ follows from $\partial_1 U_2^-(\mathbf{0}) \neq 0$.

Next, from (3.56), we have the following identity due to $\eta_1 = \eta_2$:

$$\begin{aligned} k^2(\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)})\partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} &= k^2(\tilde{q}_1^{(0)} - \tilde{q}_2^{(0)})\partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &+ k^2(\tilde{q}_1^{(0)} - \tilde{q}_2^{(0)}) \int_{S'_{r_0}} \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + k^2(\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \int_{S'_{r_0}} \tilde{x}_1 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\ &+ k^2(\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \int_{S'_{r_0}} \tilde{x}_2 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}, \end{aligned} \quad (3.59)$$

where \mathcal{I} is given by (3.56). By (2.14) and direct computations, we can derive that the term on the left-hand side of (3.59) fulfils that

$$LHS = -\frac{\Gamma(3)((\sin \tilde{\vartheta} + 3i \cos \tilde{\vartheta})e^{3i\tilde{\vartheta}} - 3i)}{8\tau^3 e^{3i\varphi}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau}), \quad (3.60)$$

and the right-hand side of (3.59) satisfies

$$|RHS| \lesssim \tau^{-\frac{41}{12}} + \tau^{-(\alpha+3)} + (1+\tau)(1+\tau^{-\frac{2}{3}})e^{-sr_0\tau} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}sr_0\tau}) \quad (3.61)$$

for a sufficient large τ . Additionally, since $\tilde{\vartheta} \in (0, \pi)$, we can deduce

$$(\sin \tilde{\vartheta} + 3i \cos \tilde{\vartheta})e^{3i\tilde{\vartheta}} - 3i = -2 \sin 2\tilde{\vartheta}(\cos 2\tilde{\vartheta} + 1) + 2(\cos 2\tilde{\vartheta})(\cos 2\tilde{\vartheta} - 1)i \neq 0. \quad (3.62)$$

Subsequently, by combining (3.59) - (3.62), and multiplying both sides by τ^3 before letting $\tau \rightarrow \infty$, we obtain

$$k^2 |(\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)}) \partial_1 U_2^-(\mathbf{0})| = 0,$$

which indicates that $\tilde{q}_1^{(0)} = \tilde{q}_2^{(0)}$ since $|\partial_1 U_2^-(\mathbf{0})| \neq 0$.

Substituting $\tilde{q}_1^{(0)} = \tilde{q}_2^{(0)}$ into (3.59), we have

$$\begin{aligned} & k^2 (\tilde{q}_2^{(1)} - \tilde{q}_1^{(1)}) \partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1^2 e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + k^2 (\tilde{q}_2^{(2)} - \tilde{q}_1^{(2)}) \partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 \tilde{x}_2 e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &= k^2 (\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1^2 \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + k^2 (\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \int_{S'_{r_0}} \tilde{x}_1 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\ &+ k^2 (\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \partial_1 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_1 \tilde{x}_2 \psi(\tilde{\mathbf{x}}) e^{\rho \cdot \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &+ k^2 (\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \int_{S'_{r_0}} \tilde{x}_2 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}. \end{aligned} \quad (3.63)$$

By Proposition 2.1, we know that the right-hand side of (3.63) satisfies

$$|RHS| \lesssim \tau^{-\frac{53}{12}} + \tau^{-(4+\alpha)} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}sr_0\tau}) + (1+\tau)(1+\tau^{\frac{2}{3}})e^{-sr_0\tau}, \quad (3.64)$$

when τ is sufficient large. Moreover, we can deduce that the left-hand side of (3.63) is equal to

$$\begin{aligned} & \sigma_1 \frac{\Gamma(4)e^{4i\varphi}}{\tau^4} \frac{1}{4} \left(-\frac{1}{2i} + \frac{1}{3}(2i \cos 2\vartheta - \sin 2\vartheta) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ &+ \sigma_2 \frac{\Gamma(4)e^{4i\varphi}}{\tau^4} \frac{1}{12} (2i \sin 2\vartheta + \cos 2\vartheta) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau}), \end{aligned} \quad (3.65)$$

when \mathbf{d}^\perp is defined in (2.13) and

$$\begin{aligned} & \sigma_1 \frac{\Gamma(4)e^{-4i\varphi}}{\tau^4} \frac{1}{4} \left(\frac{1}{2i} - \frac{1}{3}(\sin 2\vartheta + 2i \cos 3\vartheta) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ &+ \sigma_2 \frac{\Gamma(4)e^{-4i\varphi}}{\tau^4} \frac{1}{12} (\cos 2\vartheta - 2i \sin 2\vartheta) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0\tau}), \end{aligned} \quad (3.66)$$

when \mathbf{d}^\perp is defined in (2.14), where $\sigma_i = k^2 (\tilde{q}_2^{(i)} - \tilde{q}_1^{(i)}) \partial_1 U_2^-(\mathbf{0})$, $i = 1, 2$. Combing (3.63)-(3.66) and following a similar argument for the **Case (I)**, we derive that

$$D \begin{pmatrix} \sigma_1 \\ \sigma_2 \end{pmatrix} = \mathbf{0},$$

where

$$D = \begin{pmatrix} \frac{1}{4} \left(-\frac{1}{2i} + \frac{1}{3}(2i \cos 2\vartheta - \sin 2\vartheta) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} & \frac{1}{12} (2i \sin 2\vartheta + \cos 2\vartheta) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ \frac{1}{4} \left(\frac{1}{2i} - \frac{1}{3}(\sin 2\vartheta + 2i \cos 2\vartheta) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} & \frac{1}{12} (\cos 2\vartheta - 2i \sin 2\vartheta) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} \end{pmatrix}.$$

After careful and tedious calculations, we have

$$\det(D) = \frac{i}{72} (5 \cos^3 2\tilde{\vartheta} - 3 \cos^2 \tilde{\vartheta} - 9 \cos 2\tilde{\vartheta} + 7) \neq 0, \text{ for } \tilde{\vartheta} \in (0, \pi).$$

Therefore, it yields that $\sigma_1 = \sigma_2$, which implies that $\tilde{q}_1^{(1)} = \tilde{q}_2^{(1)}$ and $\tilde{q}_1^{(2)} = \tilde{q}_2^{(2)}$.

The proof of **Case (ii)** is complete.

Case (iii): $\partial_2 U_2^-(\mathbf{0}) \neq 0$, $\partial_1 U_2^-(\mathbf{0}) = U_2^-(\mathbf{0}) = 0$. Direct calculations yield

$$\begin{aligned} (\eta_2 - \eta_1) \partial_2 U_2^-(\mathbf{0}) \int_{\tilde{\Gamma}_{r_0}^\pm} \tilde{x}_2 e^{\rho \tilde{\mathbf{x}}} d\sigma &= (\eta_1 - \eta_2) \partial_2 U_2^-(\mathbf{0}) \int_{\tilde{\Gamma}_{r_0}^\pm} x_2 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\sigma \\ &+ \int_{S'_{r_0}} k^2 (\tilde{q}_1 - \tilde{q}_2) (\partial_2 U_2^-(\mathbf{0}) \tilde{x}_2 + \delta U_2^-) \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}. \end{aligned} \quad (3.67)$$

Comparing (3.67) with (3.56), then we observe that the the right-hand side of (3.67) can be estimated by (3.57).

Furthermore, by utilizing Proposition 2.1 again, we can deduce that the left-hand side of (3.67) satisfies

$$LHS = (\eta_2 - \eta_1) \frac{\Gamma(2) \partial_2 U_2^-(\mathbf{0})}{\tau^2} \left\{ \frac{\sin \tilde{\vartheta}}{((\mathbf{d} + i\mathbf{d}^\perp) \cdot \hat{\tilde{\mathbf{x}}})^2} \right\} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau}), \quad (3.68)$$

where $\hat{\tilde{\mathbf{x}}} \in \tilde{\Gamma}_{r_0}^+$. Therefore, we can directly derive that $\eta_1 = \eta_2$ since $\partial_2 U_2^-(\mathbf{0}) \neq 0$ and $\sin \tilde{\vartheta} \neq 0$, $\tilde{\vartheta} \in (0, \pi)$.

Consequently, we obtain

$$\begin{aligned} k^2 (\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)}) \partial_2 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_2 e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} &= k^2 (\tilde{q}_1^{(0)} - \tilde{q}_2^{(0)}) \partial_2 U_2^-(\mathbf{0}) \int_{S'_{r_0}} \tilde{x}_2 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &+ k^2 (\tilde{q}_1^{(0)} - \tilde{q}_2^{(0)}) \int_{S'_{r_0}} \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + k^2 (\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \int_{S'_{r_0}} \tilde{x}_1 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\ &+ k^2 (\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \int_{S'_{r_0}} \tilde{x}_2 U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}. \end{aligned} \quad (3.69)$$

Through meticulous calculation, we ascertain that the left-hand side of (3.69) equals

$$LHS = k^2 (\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)}) \partial_2 U_2^-(\mathbf{0}) \frac{\Gamma(3) ((\cos \tilde{\vartheta} - 3i \sin \tilde{\vartheta}) e^{3i\tilde{\vartheta}} - 1)}{\tau^3 e^{3i\varphi}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau})$$

and the right-hand side of (3.69) fulfills that (3.61). Given that

$$(\cos \tilde{\vartheta} - 3i \sin \tilde{\vartheta}) e^{3i\tilde{\vartheta}} - 1 = -2 \cos 2\tilde{\vartheta} (\cos 2\tilde{\vartheta} - 1) + 2 \sin 2\tilde{\vartheta} (1 - \cos 2\tilde{\vartheta}) i \neq 0$$

for $\tilde{\vartheta} \in (0, \pi)$ and $\partial_2 U_2^-(\mathbf{0}) \neq 0$, we can derive that

$$\tilde{q}_2^{(0)} - \tilde{q}_1^{(0)} = 0.$$

The proof that $\tilde{q}_2^{(0)} = \tilde{q}_1^{(0)}$ is complete.

Now we are going to prove $\tilde{q}_1^{(1)} = \tilde{q}_2^{(1)}$ and $\tilde{q}_1^{(2)} = \tilde{q}_2^{(2)}$. It is easy to get

$$\begin{aligned} \tilde{\sigma}_1 \int_{S'_{r_0}} \tilde{x}_1 \tilde{x}_2 e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + \tilde{\sigma}_2 \int_{S'_{r_0}} \tilde{x}_2^2 e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} &= -\tilde{\sigma}_1 \int_{S'_{r_0}} \tilde{x}_1 \tilde{x}_2 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} \\ &- \tilde{\sigma}_2 \int_{S'_{r_0}} \tilde{x}_2^2 \psi(\tilde{\mathbf{x}}) e^{\rho \tilde{\mathbf{x}}} d\tilde{\mathbf{x}} + k^2 (\tilde{q}_1^{(1)} - \tilde{q}_2^{(1)}) \int_{S'_{r_0}} \tilde{x}_1 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} \\ &+ k^2 (\tilde{q}_1^{(2)} - \tilde{q}_2^{(2)}) \int_{S'_{r_0}} \tilde{x}_2 \delta U_2^- \tilde{u}_0 d\tilde{\mathbf{x}} + \mathcal{I}, \end{aligned} \quad (3.70)$$

here, $\tilde{\sigma}_i = k^2 (\tilde{q}_2^{(i)} - \tilde{q}_1^{(i)}) \partial_2 U_2^-(\mathbf{0})$, $i = 1, 2$. It is clear that the right-hand side term of (3.70) satisfies (3.64).

Moreover, the left-hand side term of (3.70) fulfills that

$$\begin{aligned} LHS &= \tilde{\sigma}_1 \frac{\Gamma(4)e^{4i\varphi}}{\tau^4} \frac{1}{12} (2i \sin 2\vartheta + \cos 2\vartheta) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ &\quad + \tilde{\sigma}_2 \frac{\Gamma(4)e^{4i\varphi}}{\tau^4} \frac{1}{4} \left(-\frac{1}{2i} - \frac{1}{6} (2i \cos 2\vartheta - \sin 2\vartheta) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau}) \end{aligned}$$

when $\mathbf{d}^\perp = (-\sin \varphi, \cos \varphi)^\top$ and

$$\begin{aligned} LHS &= \tilde{\sigma}_1 \frac{\Gamma(4)e^{-4i\varphi}}{\tau^4} \frac{1}{12} (\cos \vartheta - \cos 2i \sin \vartheta) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ &\quad + \tilde{\sigma}_2 \frac{\Gamma(4)e^{-4i\varphi}}{\tau^4} \frac{1}{4} \left(\frac{1}{2i} + \frac{1}{6} (2i \cos 2\vartheta + \sin 2\vartheta) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} + \mathcal{O}(\tau^{-1} e^{-\frac{1}{2}\lambda r_0 \tau}) \end{aligned}$$

when $\mathbf{d}^\perp = (\sin \varphi, -\cos \varphi)^\top$. For a sufficiently large τ , it holds that

$$E \begin{pmatrix} \tilde{\sigma}_1 \\ \tilde{\sigma}_2 \end{pmatrix} = \mathbf{0},$$

where

$$E = \begin{pmatrix} \frac{1}{12} (2i \sin 2\vartheta + \cos 2\vartheta) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} & \frac{1}{4} \left(-\frac{1}{2i} - \frac{1}{6} (2i \cos 2\vartheta - \sin 2\vartheta) \right) e^{-4i\vartheta} \Big|_0^{\tilde{\vartheta}} \\ \frac{1}{12} (\cos 2\vartheta - 2i \sin \vartheta) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} & \frac{1}{4} \left(\frac{1}{2i} + \frac{1}{6} (2i \cos 2\vartheta + \sin 2\vartheta) \right) e^{4i\vartheta} \Big|_0^{\tilde{\vartheta}} \end{pmatrix}.$$

Following meticulous calculations, it yields that

$$\det(E) = \frac{-i}{144} (\cos \tilde{\vartheta} - 1)^3 \neq 0, \quad \tilde{\vartheta} \in (0, \pi)$$

which indicates that $\tilde{\sigma}_1 = \tilde{\sigma}_2 = 0$, implying $\tilde{q}_1^{(i)} = \tilde{q}_2^{(i)}$ for $i = 1, 2$ due to $\partial_2 U_2^-(\mathbf{0}) \neq 0$. Thus, the proof for **Case (ii)** is complete.

Finally, we shall prove $u_1^- = u_2^-$ in \mathcal{S}_{r_0} . By the fact that $\eta_1 = \eta_2$ and $q_1 = q_2$ and the boundary condition, then we have

$$\begin{cases} \Delta w + k^2 q w = 0 & \text{in } \mathcal{S}_{r_0}, \\ w = \partial_\nu w = 0 & \text{on } \Gamma_{r_0}^\pm, \end{cases}$$

where $w = u_2^- - u_1^-$. Using Holmgren's principle (cf. [18]), we have $w = 0$ in \mathcal{S}_{r_0} .

The proof is complete. \square

Remark 3.5. In the proof of Lemma 3.2, the assumption that the constant conductive boundary parameter is real and coefficients of the linear polynomial refractive index are real is only necessary for **Case (i)** of **Case (I)**. However, if the conductive boundary parameter is a complex constant and the refractive index is a linear polynomial with complex coefficients, we speculate that the conclusion of Lemma 3.2 still holds in a generic scenario. In fact, in the final step of proving **Case (iii)**, we demonstrated that the determinant of the coefficient matrix in (3.55) is quadratic, with the matrix \mathcal{A} being positive. To address this scenario, let us consider a complex nonzero vector $(\partial_1 U_2^-(\mathbf{0}), \partial_2 U_2^-(\mathbf{0}))^\top$ and define

$$\mathbf{a} = \Re \left(\begin{pmatrix} \partial_1 U_2^-(\mathbf{0}) \\ \partial_2 U_2^-(\mathbf{0}) \end{pmatrix} \right), \quad \mathbf{b} = \Im \left(\begin{pmatrix} \partial_1 U_2^-(\mathbf{0}) \\ \partial_2 U_2^-(\mathbf{0}) \end{pmatrix} \right).$$

Then $\det(Q) = 0$ is equivalent to

$$\mathbf{a}^\top \mathcal{A} \mathbf{a} = \mathbf{b}^\top \mathcal{A} \mathbf{b}, \quad \mathbf{a}^\top \mathcal{A} \mathbf{b} = 0. \quad (3.71)$$

By defining the \mathcal{A} -inner product as $(\mathbf{a}, \mathbf{b})_{\mathcal{A}} = \mathbf{a}^{\top} \mathcal{A} \mathbf{b}$ and the \mathcal{A} -norm as $\|\mathbf{a}\|_{\mathcal{A}} = \sqrt{\mathbf{a}^{\top} \mathcal{A} \mathbf{a}}$, (3.71) can be equivalently expressed as

$$\|\mathbf{a}\|_{\mathcal{A}} = \|\mathbf{b}\|_{\mathcal{A}} \text{ and } (\mathbf{a}, \mathbf{b})_{\mathcal{A}} = 0. \quad (3.72)$$

The entries of \mathcal{A} depend solely on the opening angle of \mathcal{S}_{r_0} . It is important to note that \mathbf{a} and \mathbf{b} represent the real and imaginary parts of $(\partial_1 U_2^-(\mathbf{0}) \ \partial_2 U_2^-(\mathbf{0}))^{\top}$, respectively, where $u_2^-(\mathbf{x}) = U_2^-(M(\vartheta_m)\mathbf{x})$ is a solution of (3.30). When applying Lemma 3.2 to prove Theorems 3.2 and 3.3, $u_2^-(\mathbf{x}) = U_2^-(M(\vartheta_m)\mathbf{x})$ represents the total wave in (1.7). From a physical perspective, (3.72) is rarely encountered, as it necessitates a peculiar algebraic relationship between the gradient of the total wave and \mathcal{A} . Consequently, Q is generically nonsingular, enabling the unique determination of the linear polynomial reflective index with complex coefficients through a single far-field measurement, as demonstrated in Theorems 3.2 and 3.3. However, a rigorous proof of this speculation is fraught with significant difficulties and hence we defer it to our future study. Nevertheless, we would like to emphasize that the case with q and η being real-valued in the current article are physically unobjectionable.

4. THE PROOFS OF THEOREMS 3.2 AND 3.3

Proof of Theorem 3.2. In accordance with Theorem 3.2, the shape of the conductive medium scatterer Ω and the corresponding polygonal-cell structures $\Sigma_i, i = 1, \dots, N$, are known in advance. We establish uniqueness results for determining the physical parameters of the refractive index and the conductive boundary parameter through a proof by contradiction. Assume that $\tilde{\eta}_1 \neq \tilde{\eta}_2$ or there is an index i_0 such that $q_{i_0,1} \neq q_{i_0,2}$. From Definition 3.2, we know that there exists a vertex $\mathbf{x}_{p_0} \in \Sigma_{i_0}$ intersected by two adjacent edges Γ^{\pm} of Ω . Since $-\Delta$ is invariant under rigid motion, without loss of generality, we assume that \mathbf{x}_{p_0} coincides with the origin. Let $r_0 \in \mathbb{R}_+$ be sufficiently small such that $\mathcal{S}_{r_0} = \Omega \cap B_{r_0}(\mathbf{0})$ and $\Gamma_{r_0}^{\pm} = \partial\Omega \cap B_{r_0}(\mathbf{0})$. Denote $W = \mathbb{R}^2 \setminus \overline{\Omega}$, then we have $\Gamma_{r_0}^{\pm} \subset \partial W$, see Figure 3 for a schematic illustration.

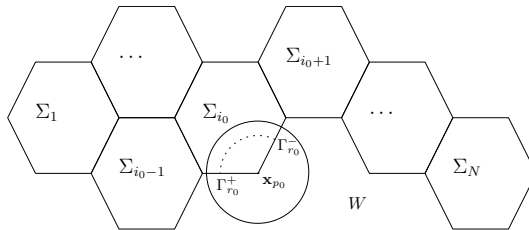


FIGURE 3. Schematic illustration of the polygonal-cell structure.

Recall that u_1 and u_2 be the total wave fields associated with the admissible conductive polygonal-cell medium scatterers $(\Omega; q_\ell, \eta_\ell), \ell = 1, 2$. Since $u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i)$ for all $\hat{\mathbf{x}} \in \mathbb{S}^1$, by Rellich lemma and the unique continuation principle, we have

$$u_1 = u_2 \text{ in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}} \subset W.$$

Utilizing the conductive transmission boundary conditions in (1.7), one can claim that

$$\begin{cases} u_1^+ = u_1^-, \ \partial_\nu u_1^- = \partial_\nu u_1^+ + \tilde{\eta}_1 u_1^+, \text{ on } \Gamma_{r_0}^\pm, \\ u_2^+ = u_2^-, \ \partial_\nu u_2^- = \partial_\nu u_2^+ + \tilde{\eta}_2 u_2^+, \text{ on } \Gamma_{r_0}^\pm. \end{cases}$$

Moreover, it holds that

$$\begin{cases} \Delta u_1^- + k^2 q_{i_0,1} u_1^- = 0, & \text{in } \mathcal{S}_{r_0}, \\ \Delta u_1^+ + k^2 u_1^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}, \\ \Delta u_2^- + k^2 q_{i_0,2} u_2^- = 0, & \text{in } \mathcal{S}_{r_0}, \\ \Delta u_2^+ + k^2 u_2^+ = 0, & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}. \end{cases}$$

Recall that Ω is an admissible conductive polygonal-cell medium scatterer. Then by virtue of Lemma 3.2, we have

$$q_{i_0,1} = q_{i_0,2} \text{ and } \tilde{\eta}_1 = \tilde{\eta}_2,$$

which is a contradiction.

The proof is completed. \square

The proof of Theorem 3.3. We prove this theorem by mathematical induction. By Theorem 3.1, we have $\partial\Omega_1 = \partial\Omega_2$, which indicates that $\partial\Sigma_{1,1} = \partial\Sigma_{1,2}$. Taking a similar argument as proving Theorem 3.2, it can be shown that $q_{1,1} = q_{1,2}$ and $\eta_{1,1} = \eta_{1,2}$. Suppose that there exists an index $n_0 \in \mathbb{N}_+ \setminus \{1\}$ such that

$$\partial\Sigma_{i,1} = \partial\Sigma_{i,2}, \quad q_{i,1} = q_{i,2}, \quad \eta_{i,1} = \eta_{i,2}, \quad i = 1, \dots, n_0 - 1.$$

With the help of Lemma 3.2, we can recursively obtain that

$$u_{i,1} = u_{i,2} \text{ in } \mathcal{D}_i = \Sigma_i \setminus \overline{\Sigma_{i+1}}, \quad i = 1, \dots, n_0 - 1 \quad (4.1)$$

by making use of $u_1^\infty(\hat{\mathbf{x}}; u^i) = u_2^\infty(\hat{\mathbf{x}}; u^i)$, where $u_{i,1} = u_1|_{\mathcal{D}_i}$ and $u_{i,2} = u_2|_{\mathcal{D}_i}$, with u_1 and u_2 being the total wave fields associated with the admissible conductive polygonal-nest medium scatterers $(\Omega_\ell; q_\ell, \eta_\ell)$, $\ell = 1, 2$. We divide the rest proof into two parts.

Part 1. We first prove that $\partial\Sigma_{n_0,1} = \partial\Sigma_{n_0,2}$. According to (4.1), using the similar argument in proving Theorem 3.1, one can prove $\partial\Sigma_{n_0,1} = \partial\Sigma_{n_0,2}$ directly by contradiction.

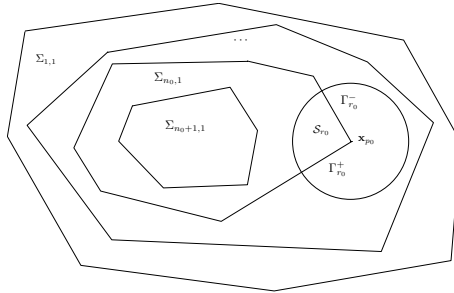


FIGURE 4. Schematic illustration of the polygonal-nest structure.

Part 2. In the following we prove that

$$q_{n_0,1} = q_{n_0,2}, \quad \eta_{n_0,1} = \eta_{n_0,2}. \quad (4.2)$$

Let \mathbf{x}_{p_0} be a vertex of $\Sigma_{n_0,1}$. Without loss of generality, we may assume that $\mathbf{x}_{p_0} = \mathbf{0}$ since $-\Delta$ is invariant under rigid motion. For sufficiently small $r_0 > 0$, assume that $\mathcal{S}_{r_0} \Subset \mathcal{D}_{n_0,1} = \Sigma_{n_0,1} \setminus \overline{\Sigma_{n_0+1,1}}$; refer to Figure 4 for a schematic illustration. Therefore, it yields

that

$$\begin{cases} \Delta u_{n_0,1}^- + k^2 q_{n_0,1} u_{n_0,1}^- = 0 & \text{in } \mathcal{S}_{r_0}, \\ \Delta u_{n_0-1,1}^+ + k^2 q_{n_0-1,1} u_{n_0-1,1}^+ = 0 & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}, \\ \Delta u_{n_0,2}^- + k^2 q_{n_0,2} u_{n_0,2}^- = 0 & \text{in } \mathcal{S}_{r_0}, \\ \Delta u_{n_0-1,2}^+ + k^2 q_{n_0-1,2} u_{n_0-1,2}^+ = 0 & \text{in } B_{r_0} \setminus \overline{\mathcal{S}_{r_0}}, \\ u_{n_0,1}^- = u_{n_0-1,1}^+, \partial_\nu u_{n_0,1}^- = \partial_\nu u_{n_0-1,1}^+ + \eta_{n_0,1} u_{n_0-1,1}^+, & \text{on } \Gamma_{r_0}^\pm, \\ u_{n_0,2}^- = u_{n_0-1,2}^+, \partial_\nu u_{n_0,2}^- = \partial_\nu u_{n_0-1,2}^+ + \eta_{n_0,2} u_{n_0-1,2}^+, & \text{on } \Gamma_{r_0}^\pm. \end{cases} \quad (4.3)$$

It is obvious that $u_{n_0-1,1}^+ = u_{n_0-1,2}^+$ by virtue of (4.1). In view of (4.3), by Lemma 3.2, one has (4.2).

Finally, we can prove $N_1 = N_2$ through a proof by contradiction. In fact, if $N_1 \neq N_2$, we assume, without loss of generality, that $N_1 > N_2$. Therefore, there exists a corner $\Sigma_{N_1+1,1}$ with a vertex \mathbf{x}_{p_0} inside $\Sigma_{N_2,2}$. Using a similar argument in proving Theorem 3.1, we can prove that either the total wave field or the gradient of the total wave field vanishes at the vertex of this corner, which contradicts to the admissible condition of a conductive polygonal-nest medium scatterer in Definition 3.5.

The proof is complete. \square

ACKNOWLEDGEMENTS

The work of H. Diao is supported by by National Natural Science Foundation of China (No. 12371422) and the Fundamental Research Funds for the Central Universities, JLU (No. 93Z172023Z01). The work of X. Fei is supported by NSFC/RGC Joint Research Grant No. 12161160314. The work of H. Liu is supported by the NSFC/RGC Joint Research Scheme, N_CityU101/21; ANR/RGC Joint Research Scheme, A_CityU203/19; and the Hong Kong RGC General Research Funds (projects 11311122, 12301420 and 11300821).

REFERENCES

- [1] R.A. Adams and J.F. Fournier, *Sobolev spaces*, Elsevier, 2003.
- [2] G. Alessandrini and L. Rondi, *Determining a sound-soft polyhedral scatterer by a single far-field measurement*, Proc. Amer. Math. Soc., **35** (2005), 1685–1691.
- [3] G. Alessandrini, L. Rondi L, E. Rosset and S. Vessella, *The stability for the Cauchy problem for elliptic equations*, Inverse problems, **25(12)**(2009), 123004.
- [4] S.N. Armstrong and L. Silvestre, *Unique continuation for fully nonlinear elliptic equations*, Math. Res. Lett. **18(5)** (2011), 921–926
- [5] T. S. Angell and A. Kirsch, *The conductive boundary condition for Maxwell's equations*, SIAM J. Appl. Math., **52(6)** (1992), 1597–1610.
- [6] E. Blåsten and H. Liu, *Scattering by curvatures, radiationless sources, transmission eigenfunctions, and inverse scattering problems*, SIAM Journal on Mathematical Analysis, **53**(2021), 3801–3837.
- [7] E. Blåsten and H. Liu, *Recovering piecewise constant refractive indices by a single far-field pattern*, Inverse Problems, **36(8)**(2020), 085005.
- [8] E. Blåsten, L. Päiväranta and J. Sylvester, *Corners always scatter*, Comm. Math. Phys., **331**(2014), 725–753.
- [9] O. Bondarenko, *The factorization method for conducting transmission conditions*, Dissertation, Karlsruhe, Karlsruher Institut für Technologie (KIT), 2016.
- [10] O. Bondarenko, I. Harris, and A. Kleefeld, *The interior transmission eigenvalue problem for an inhomogeneous media with a conductive boundary*, Appl. Anal., **96(1)** (2017), 2–22.
- [11] O. Bondarenko and X. Liu, *The factorization method for inverse obstacle scattering with conductive boundary condition*, Inverse problems, **29(9)**(2013), 095021.
- [12] F. Cakoni and J. Xiao, *On corner scattering for operators of divergence and applications to inverse scattering*, Communications in Partial Differential Equation, **46(3)**(2021), 413–441.
- [13] F. Cakoni and M. S. Vogelius, *Singularities almost always scatter: regularity results for non-scattering inhomogeneities*, Comm. Pure Appl. Math., **76** (2023), no. 12, 4022–4047.

- [14] F. Cakoni, M. S. Vogelius and J. Xiao, *On the regularity of non-scattering anisotropic inhomogeneities*, Arch. Ration. Mech. Anal., **247** (2023), no. 3, Paper No. 31, 15 pp.
- [15] X. Cao, H. Diao and H. Liu, *Determining a piecewise conductive medium body by a single far-field measurement*, CSIAM Trans. Appl. Math., **1(4)**(2020), 740–765.
- [16] T. Carleman, *Sur un problème d'unicité pur les systèmes d'équations aux dérivées partielles à deux variables indépendantes*, Ark. Mat., Astr. Fys., **26(17)** (1939), 9.
- [17] J. Cheng and M. Yamamoto, *Uniqueness in an inverse scattering problem within non-trapping polygonal obstacles with at most two incoming waves*, Inverse Problems, **19**(2003), 1361–1384.
- [18] D. Colton and R. Kress, *Inverse Acoustic and Electromagnetic Scattering Theory*, 3rd edition, Springer Verlag, Berlin, 2013.
- [19] D. Colton and R. Kress, *Looking back on inverse scattering theory*, SIAM Review, **60(4)**(2018), 779–807.
- [20] D. Colton and B. D. Sleeman, *Uniqueness theorems for the inverse problem of acoustic scattering*. IMA journal of applied mathematics, **31(3)**(1983), 253–259.
- [21] H. Diao, X. Cao and H. Liu, *On the geometric structures of conductive transmission eigenfunctions and their application*, Communications in Partial Differential Equations, **46(4)** (2021), 630–679.
- [22] H. Diao, X. Fei and H. Liu, *Local geometric properties of conductive transmission eigenfunctions and applications*, European Journal of Applied Mathematics, 2024, doi:10.1017/S0956792524000287.
- [23] H. Diao, X. Fei and H. Liu, *On a novel UCP result and its application to inverse conductive scattering*, arXiv:2409.12360, 2024.
- [24] J. Elschner and G. Hu, *Acoustic scattering from corners, edges and circular cones*, Arch. Ration. Mech. Anal., **228** (2018), 653–690.
- [25] N. Garofalo and F. Lin, *Monotonicity properties of variational integrals, A_p weights and unique continuation*, Indiana University Mathematics Journal, **35(2)**(1986), 245–268.
- [26] N. Garofalo and F. Lin, *Unique continuation for elliptic operators: a geometric-variational approach*, Communications on pure and applied mathematics, **40(3)** (1987), 347–366.
- [27] T. Ghosh, A. Rüländ, M. Salo and G. Uhlmann, *Uniqueness and reconstruction for the fractional Calderón problem with a single measurement*. Journal of Functional Analysis, **279(1)**(2020), 108505.
- [28] D. Gilbarg and N. S. Trudinger, *Elliptic partial differential equations of second order*, Berlin: springer, 1977.
- [29] I. Harris and A. Kleefeld, *The inverse scattering problem for a conductive boundary condition and transmission eigenvalues*, Appl. Anal., **99(3)** (2020), 508–529.
- [30] N. Honda, C.-L. Lin, G. Nakamura and S. Sasayama, *Unique continuation property of solutions to general second order elliptic systems*, Journal of Inverse and Ill-posed Problems, **30(1)** (2022), 5–21.
- [31] L. Hörmander, *The analysis of linear partial differential operators III: Pseudo-differential operators*, Springer Science and Business Media, 2007.
- [32] L. Hörmander, *The analysis of linear partial differential operators IV: Fourier integral operators*, Springer(Chapter 28).
- [33] D. Jerison and C. E. Kenig, *Unique continuation and absence of positive eigenvalues for Schrödinger operators*, Ann. of Math., **121(3)** (1985), 463–494. With an appendix by E. M. Stein.
- [34] H. Koch and D. Tataru, *Carleman estimates and unique continuation for second-order elliptic equations with nonsmooth coefficients*, Comm. Pure Appl. Math., **54** (2001), no. 3, 339–360.
- [35] P. Z. Kow, M. Salo and H. Shahgholian, *On scattering behavior of corner domains with anisotropic inhomogeneities*, SIAM J. Math. Anal., **56** (2024), no.4, 4834–4853.
- [36] D. P. Lax and S. R. Phillips, *Scattering Theory*. New York: Academic, 1967.
- [37] M. Lassas, T. Liimatainen, M. Salo, *The Calderón problem for the conformal Laplacian*. Comm. Anal. Geom. **30(5)**(2022), 1121–1184.
- [38] N. Lerner, *Strong Unique Continuation Properties for Elliptic Operators*. In: *Carleman Inequalities*. Grundlehren der mathematischen Wissenschaften, vol 353. Springer, Cham (2019).
- [39] H. Liu and J. Zou, *Uniqueness in an inverse acoustic obstacle scattering problem for both sound-hard and sound-soft polyhedral scatterers*, Inverse Problems, **22** (2006), 515–524.
- [40] Z. Mghazli, *Regularity of an elliptic problem with mixed Dirichlet-Robin boundary conditions in a polygonal domain*, Calcolo, **29(3-4)**(1992), 241–267.
- [41] L. Päivärinta, M. Salo and E. V. Vesalainen, *Strictly convex corners scatter*. Revista Matemática Iberoamericana, **33(4)**(2017), 1369–1396.
- [42] M. H. Protter, *Unique continuation for elliptic equations*, Transactions of the American Mathematical Society, **95** (1960), no. 1, 81–91
- [43] L. Rondi, *Stable determination of sound-soft polyhedral scatterers by a single measurement*, Indiana Univ. Math. J., **57** (2008), 1377–1408.

- [44] A. Saldana and H. Tavares, *Least energy nodal solutions of Hamiltonian elliptic systems with Neumann boundary conditions*, Journal of Differential Equations, **265(12)**(2018), 6127–6165.
- [45] M. Salo and H. Shahgholian, *Free boundary methods and non-scattering phenomena*, Res. Math. Sci., 8 (2021), Paper No. 58, 19 pp.
- [46] C.D. Sogge, *Fourier integrals in classical analysis* (Vol. 210), Cambridge University Press, 2017.
- [47] E.M. dos Santos, G. Nornberg and N. Soave, *On unique continuation principles for some elliptic systems*, Annales de l'Institut Henri Poincaré C, **38(5)** (2021), 1667–1680.
- [48] D. Tataru, *Unique continuation problems for partial differential equations*, Geometric methods in inverse problems and PDE control, New York, NY: Springer New York, (2004),239-255.

SCHOOL OF MATHEMATICS AND KEY LABORATORY OF SYMBOLIC COMPUTATION AND KNOWLEDGE ENGINEERING OF MINISTRY OF EDUCATION, JILIN UNIVERSITY, CHANGCHUN 130012, CHINA

Email address: diao@jlu.edu.cn

SCHOOL OF MATHEMATICS AND STATISTICS, CENTRAL SOUTH UNIVERSITY, CHANGSHA 410083, CHINA

AND

DEPARTMENT OF MATHEMATICS, CITY UNIVERSITY OF HONG KONG, KOWLOON, HONG KONG SAR, CHINA

Email address: feixx0921@163.com

DEPARTMENT OF MATHEMATICS, CITY UNIVERSITY OF HONG KONG, KOWLOON, HONG KONG SAR, CHINA

Email address: hongyu.liuip@gmail.com, hongyliu@cityu.edu.hk